
ATTWOOLLS


15m Clearspan

Specifications

- Span width: **15.0**
- Ridge height: **5.5m / 6.0m**
- Eave height: 3.10m / 3.6
- Peak height: **tbc**
- Bay distance: 5m / 3m
- Roof pitch: 18^0
- Gable uprights: 3
- Main Frame profile 210mm x 110mm x 3mm

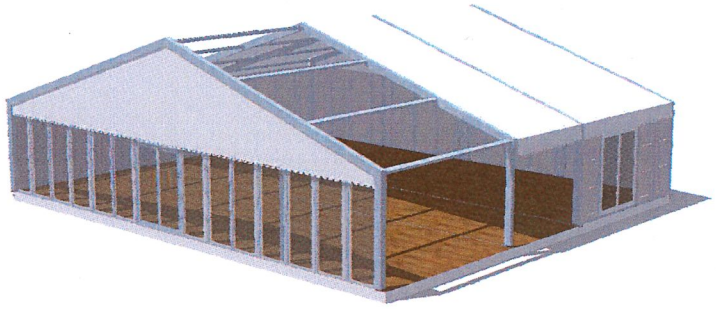

Maximum allowed windspeed:
26m/s or 57 MPH
Approved to BS CP.3 3ch. V Part 2 (1972 table 3

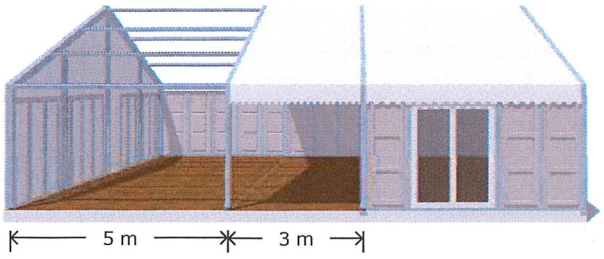


PVC covers flame retardant to:
BS7837/BS5438 2b.
NFP 92503/Classification M2

Max weight loadings:

Main frame
Max weight loading per A frame 40 kg

Suspended floor
Max weight loading on steel sub base floor 5Kn per m^2

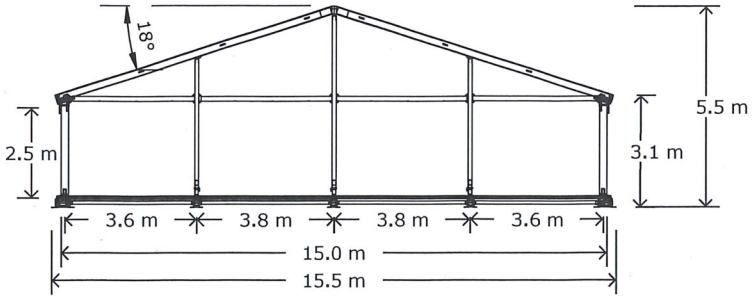

Accessories

- Suspended floor with steel sub base
- Heating & Aircon
- Tables, chairs & bars
- Interlocking plywood floor
- Matting / Carpet
- ABS solid wall panels 2.5m & 3m
- Glazed wall panels 2.5m & 3m
- Glazed doors
- Stock & tackoff linings
- Internal & external lighting
- Internal & external entrance ramps
- Peaked Roof

John Attwoolls & Co (tents) Ltd
Whitminster,
Gloucestershire,
GL2 7LX

Tel: 01452 742222 Fax: 01452 742244
Email: marquees@attwoolls.co.uk
www.attwoollsmarquees.co.uk

Drawn by J Holland
Issue Date 10/1/17
Issue No 1