SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

To supply and install a new bespoke non-turf cricket practice area to the specification and location resulting from the meetings in the latter half of 2022.



All excavated material is able to remain on site, and there are welfare facilities on site.

The working area will need to be defined by Heras fencing for the duration of the contract.

SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

Design & Specification Overview

The cricket coaches within the school are keen that the nets are not too fast and bouncy: therefore the preferred specification for the majority of the lanes is the Envelope System®.

The Envelope System® is a dynamic, porous base that mimics the performance of a natural pitch (i.e. slower/lower when wet, quicker after a light roll). The two key differences in the base between the Envelope System® and all other single shockpad systems are:

- An intermediate layer of mid-sized stone is used between any of the large 63mm-dust Type 1 sub-base aggregate and the fine upper performance layer, creating much increased mid-long term consistency of performance
- Each layer is individually wrapped (Enveloped®) with a non-degradable membrane to prevent migration of the larger stones into the smaller upper layers, again maximising long-term consistency of performance and reducing maintenance requirements
- **See specification overview on page 11 for full details**

Through more than 30 years' experience, we have found it to be critical particles larger than 10mm be used anywhere within the upper 100mm of construction. The use of a Type 1 or similar aggregate within the upper 100mm of a cricket system is a specification element that we will not consider in any circumstance.

However, the three lanes to the west are to be covered to enable use in the winter – the Envelope System® does require regular moisture to be effective, usually provided by the British climate. Therefore for the lanes that are required for winter use and will be covered, the Envelope System® is not the right specification.

Given the likely intensive winter use, the three lanes to the west are to be constructed using a **tarmac base**. Although this will provide a quicker pace and bounce (similar to an indoor school), the base does not require moisture and will provide the solution that the school requires.

The pace and bounce of a tarmac based system are not affected by ground moisture or weather conditions, and as a result is excellent for technique training and bowling machine use. A tarmac based system will also not need any inseason rolling at all.

SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

The proposed surface for the entire area is the **new NottsGrass Ultra**, which being the **first and only** surface within ECB Approved systems to move away from the traditional fibrillated fibres used in cricket surfaces since the 1990s, is **Bringing Cricket Into the 21st Century**.

In 2018 NottsGrass Ultra was **chosen by Lords** for their non-turf cricket pitch and the outdoor nets within the new **Cricket Ireland High Performance Centre**, and has been proven by LaboSport *(non-turf pitch advisors to the ECB)* to last up to six times as long in surface abrasion tests as the old Wilton woven surface technology *(tested against an 11mm thickness Wilton weave weighing 1520g/sqm)*.

The monofilament fibres of the NottsGrass Ultra ensure that the structural integrity of the surface does not deteriorate as the material wears. Therefore while fibrillated yarns gradually split along the length of the grass fibres creating finer and finer strands that provide less grip, resulting in a more skiddy surface and reduced turn, the NGU monofilament fibres do not split. This ensures that the grip level remains throughout the life of surface, ensuring medium-long term performance levels are maintained at original levels.

Therefore as well as being unique within ECB Approved systems, the monofilament NGU provides both increased wear resistance and superior performance.

Due to the use of finer aggregate within the upper 100mm of construction, and the use of non-degradable shockpads and membranes to separate the different aggregates, all Notts Sport systems have been proven in the ground to be able to be resurfaced for more than 30 years, continuing to maintain full ECB Approval even with retaining the original base materials.

When the surfaces do eventually require replacement, assuming that the shockpads and base have not become exposed through holes in the surface material, the base layers will not have depreciated or degraded at all. As part of the Notts Sport service, we renew the warranty on the shockpads and base layers on refurbishment as if it was a new-build.

Therefore the combination of lower maintenance (due to the segregation of each layer of stone) and proven ability to resurface rather than fully replace, Notts Sport systems are designed to minimise medium-long term costs.

SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

Other features included within the design proposal include *(* indicates that the item is priced as an optional extra)*

- Pre-cast concrete kerb perimeter edge detail
- Full width NottsGrass surfaces to the entire area, minimising the number of joins within the facility and eliminating all sand-dressing requirement, which helps minimise the risk of moss growth
- Crease Protector Pads to prevent craters at the blockholes and bowlers' front foot areas (Envelope System® lanes only)
- 4.00m high cage enables increased variation in flight for slower bowlers, and allows the younger cricketers to bowl without hitting the top of the netting.
- Individual tunnel nets to each lane, eliminating gaps between roof and vertical nets, and providing a double skin of netting between each lane
- White netting behind the batsmen to enable bowlers to more easily pick out straight drives coming back at them
- Locking collars under each roof clamp to prevent the weight of the roof pushing the clamps down the vertical posts, as has happened with the current cage
- Tensioned line wire to the base of the nets to prevent excessive net billowing
- Anti-vermin protection skirt to prevent animals chewing holes in the netting
- Internal dividing screens, fixed to a separate line wire, to prevent batsmen being distracted by movement in adjacent lanes or outside of the facility
- Protected entrance area into the nets to minimise player risk when entering the nets if in use
- White netting sightscreen behind bowler's arm
- Built-in power point between the two tarmac lanes to allow bowling machines to be plugged directly into the area
  (NB – client will need to employ a local electrical contractor to trench and connect the nets to a power supply: we provide the ducting and box from the outer edge of the nets to the power point to enable this)
- Lines permanently tufted into the NottsGrass surface along the lines of each of the three stumps to enhance coaching potential* *(NB – this is a zero cost item)*
- All steelwork polyester powder coated (PPC) green*

For clarification of the proposed layout, please refer to drawings NSMC007.

SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

Works Overview

Preliminaries

- Establish compound, working area and access route
- Define working area with Heras site fencing
- Transport all plant, machinery and welfare units to site
- Prepare site specific documentation as required *(Health & Safety details, Construction Phase Plan, insurances, O&M manuals, etc)*

Clearance & Preparation

- Clear existing four lane net structure and remove to landfill
- Level, excavate, grade and consolidate area such that it is suitable for the installation of a non-turf cricket facility

Perimeter Edge Detail

- Supply and install 150mm x 50mm pre-cast concrete kerbs, set in haunchings, to define the perimeter and the change from dynamic to tarmac base

Sub-Base *(up to 50mm below finished surface of tarmac lanes)*

- Import level and compact a minimum of 150mm depth MOT Type 1 sub-base aggregate to bring the area back up to 100mm below finished levels

Intermediate Base Layer *(up to 50mm below finished surface – dynamic lanes only)*

- Geogrid reinforcement layer to provide long-term stability and performance
- Supply and lay geotextile membrane to fully wrap the intermediate layer, preventing the larger sub-base aggregate mixing with and contaminating the upper performance base
- Import level and compact 10-6mm clean angular frost-resistant aggregate to bring the area back up to 50mm below finished levels

Envelope® System Playing Area (six lanes)

- ***Single shockpad system (aka dynamic base, or aggregate base)***
- ***Reacts like a natural pitch - pace and bounce reflects recent weather and ground conditions: slower and lower when wet, quicker and more bounce when rolled***
- ***All synthetic components fully separated by non-degradable membrane – no contamination possible of the upper performance aggregate, proven to ensure future resurface is possible rather than full/partial base replacement***
- ***No dynamic single-shockpad system requires less rolling***
- NottsFilm geotextile membrane to prevent aggregate layers mixing or becoming contaminated, thereby ensuring the consistency of the upper performance layer and thus allowing future refurbishment of the facility without necessarily requiring full replacement of the base
- 50mm consolidated depth of 4mm-dust hard porous to provide realistic, true, UK cricket performance levels
- New Notts Sport Crease Protector Pads to prevent depressions at the blockhole from bat tapping

SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

39.00m x 12.98m Twin-Layer Tarmac Performance Layer (three lanes)

- Supply and lay 25mm open textured 10mm nominal size tarmacadam base layer
- Supply and lay 25mm open textured 6mm nominal size tarmacadam surface layer

NottsPad Shockpads

- Full length, full width NottsPad shockpad to all nine lanes

NottsGrass Ultra Surface, Bringing Cricket Into the 21st Century

- Supply and lay new NottsGrass Ultra cricket surface, as chosen by Lords for their non-turf pitch in 2018 *(2.395kg/sqm, 12 year new-for-old manufacturer's warranty – i.e. no depreciating scale on the warranty. Proven to last approximately six times as long as an 11mm woven material weighing 1,520g/sqm)*

Extended 4.00m High Cage & Netting Facility

- ***Internally hung independent tunnel nets to each lane in order to eliminate gaps between roof netting and vertical netting, eliminating the risk of balls escaping from lane to the other***
- ***3mm heavy-duty knotted netting, with integral sewn-in anti-vermin skirt to the base***
- ***10% thicker steel than ECB recommendations, giving a more solid post***
- ***25 year warranty on the posts and structure, 5 year warranty on the netting***
- 21.96m long x 3.66m wide per lane x 4.00m high
- Manufactured from 3.2mm thick, 42.4mm outside diameter (OD) galvanised tubular steel *(3.2mm wall thickness is 10% greater than ECB recommendation, and therefore provides a more solid post. All posts within the cage framework come with a 25-year warranty)*
- Locking collars under each clamp to prevent roof structure slipping down vertical posts
- 4.00m height allows spin bowlers greater variation in flight for slower or younger bowlers, without deliveries hitting the top bars or roof netting
- 3mm heavy-duty 45mm mesh size knotted cricket netting (green or black) to wings, back and full length of roof, with an individual tunnel net to each lane, providing a double skin of netting between lanes
- S&C Slatter tensionable line-wire system to prevent balls escaping under netting and reducing net billowing
- Impact protection / anti-vermin skirt to the base of the netting to provide increased durability to the base of the netting and to prevent animals getting caught or chewing holes
- 7.32m x 2.0m white screens (aka batting blinkers) to the rear of each wing of the netting, to minimise distractions from adjacent lanes, or from outside the nets
- 1.5m high white screen material behind the batters to allow bowlers to pick straight drives coming back towards them

See section drawing on following page for further details on the cage & netting design

Two 3.0m High 868 Twin Bar Heavy Duty Rigid Panel Steel Fence Enclosures

- Supply and erect 868 rigid panel welded mesh steel fence, consisting of a single 6mm vertical and double 8mm horizontal wires
- Fence panels spot welded at each join to form a 200mm x 50mm mesh
- Panels hung on 60mm x 60mm x 2.5mm rectangular hollow section (RHS) interior posts set at 2.52m centres, and 80mm x 60mm x 3.0mm RHS corner posts
- All posts and mesh to be fully galvanised and polyester powdercoated (PPC) green
- Includes two single gates and three twin leaf double gate, clad in the same manner as the main fence
- White screen material to the rear wall to provide sight screen behind the bowlers' arm

SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

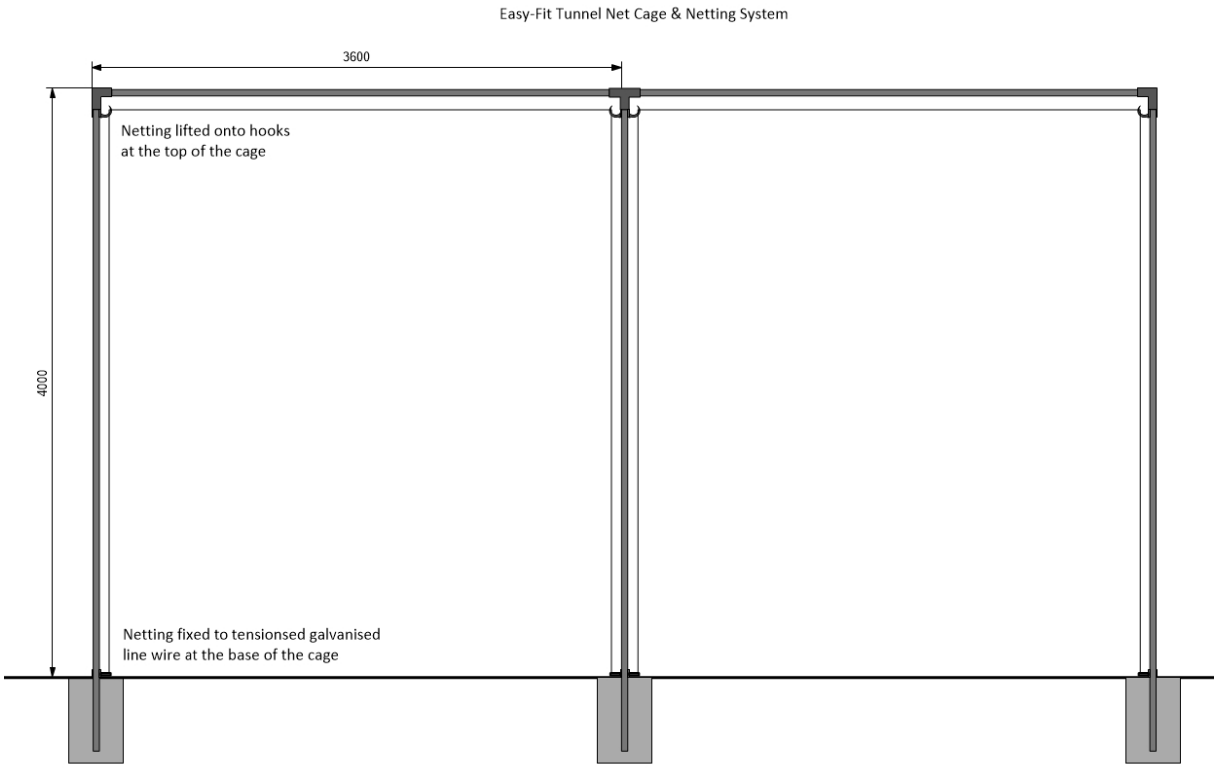

An independent, single section tunnel net is fitted to each lane in order to ensure that there are no gaps for balls to escape between lanes at the top, and to provide a double skin of netting between lanes.
When used in conjunction with internal screens (batting blinkers) the system provides a triple layer of protection between each lane

Entrance Area

- Additional vertical posts and netting to create a roofed 8.32m long x 2m wide x 3m high netted entrance
- Includes white screen material on the inside wing to complete the sight screen for the tarmac area

Steps From Pathway

- Construct 1.5m wide concrete staircase from the pathway to the pedestrian gate, with pre-cast concrete kerb edge perimeter, and Type 1 sub-base

Pathways Outside Fenced Areas

- Supply and install 20m x 2m access tarmac path to the front of the nets
- Supply and install 39m x 0.8m tarmac path between the two fenced sections

Ducting & Power Pillar *(for electricity for bowling machine)*

- Supply and install ducting for electrical cables and a covered power point in order to allow the club to employ an electrician to retrospectively wire and cable underground to a nearby power outlet *(enables the school to plug bowling machines directly into a power point next to the bowling crease, without cables lying across the field or practice facility)*



Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

Other Works

- Mark out as per the rules of the game *(see junior creases below – please advise those required)*
- Reinstate to the outside of the facility, and access route if required, using excavated topsoil, and seed
- Transport all remaining excavated material to a point elsewhere on site (exact location tbc)
- Remove all general waste from site to landfill
- Transport all plant and machinery from site
- Leave working area and access route clean and tidy

ECB Adjusted Junior Formats (2019)	Pitch Length	Maximum Boundary	
Under 9	15 yards	30m *(soft ball only)*	
Under 10 & 11	17 yards	35m *(soft ball)*	40m *(hard ball)*
Under 12	18 yards	45m *(girls)*	50m *(boys)*
Under 13	19 yards	45m *(girls)*	50m *(boys)*
Under 14 & 15 *(girls)*	20 yards	50m	
Under 14 *(boys)*	21 yards	55m	
Under 15 *(boys)*	22 yards	55m	
Under 17	22 yards	55m *(girls)*	60m *(boys)*

Cost Summary

To supply and install a new nine lane non-turf cricket surface as described above and as per drawing NSMC007 **£255,173 + VAT**

Additional cost if the internal cage & entrance area steelwork is to be Polyester Powder Coated (PPC) green to match the external fence, rather than be left in galvanised silver **£2,888 + VAT**

Additional cost to insert Marlborough Sport logos into the NottsGrass Ultra surface:

4.0m x 2.0m	(e.g. by double gates)	**£2,700 + VAT per logo**
1.5m x 1.5m	(e.g. by single gates)	**£760 + VAT per logo**

Note that these costs do not currently include for any ring beam or other reinforcement/support for the structure to be included over the three western lanes This can be included in the costs with a full works specification, including dimensions, depths and the concrete specification to be used

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

Quotation for: **Marlborough College** Ref: AS19-073/MARL221219

Site Address: Bath Rd, Marlborough SN8 1PA 20/12/2022

NottsGrass Surface Overview

In 2012 Notts Sport first introduced the NottsGrass NG range of cricket surfaces to replace the old Wilton woven technology originally developed in the 1970's, and still used by many companies today.

The NottsGrass Ultra was introduced in February 2018, and became the **first and only** monofilament surface used within ECB Approved systems. Through being the first surface within ECB Approved systems to move away from the fibrillated fibres from the 1990's, NottsGrass Ultra is **Bringing Cricket into the 21st Century**.

The much increased resistance to wear compared to the Wilton woven surfaces is why Notts Sport offer a 12 year new-for-old replacement manufacturer's warranty on the NottsGrass Ultra material, and 8 years for the NottsGrass NG7. We no longer offer the old Wilton woven technology surfaces.

Both materials have been laid at Lord's Cricket Ground – the MCC chose the NG7 for their net surface in 2016, and Ultra for their non-turf pitch in 2018, and the 2018 Cricket Ireland High Performance Centre also featured NottsGrass Ultra on their multi-lane outdoor nets.

Notts Sport Base System Overview

Notts Sport base systems are unique in that all components are non-degradable, and all are individually fully Enveloped®. This physical barrier prevents each aggregate layer from being contaminated by aggregates above/below, or by outside materials, from any direction.

As the synthetic materials do not deteriorate, and the aggregates do not shatter even if there is a ground frost, the full Enveloping® of each layer ensures that the base system will remain structurally as new as long as the surface itself does not become holed.

Only Notts Sport systems can fully Envelope® each layer, and therefore only by using a Notts Sport system can clients be sure that when the surface does eventually wear out, the original base system can be resurfaced without any need for base replacement.

This is borne out by the fact that many of the early Enveloped Notts Sport base systems from the 1980s are still going strong with their second or even third surface.

Notts Sport base systems never include stone particles larger than 10mm in the upper 100mm of construction in order to provide maximum medium & long-term consistency

SLATTER
CRICKET & PLAY

Notts Sport Cricket Facility Specification - Common Design Features & Benefits

(please check your specification for clarification of the options included in your design)

NottsGrass surfaces	8/12 year new-for-old manufacturing warranty *(NottsGrass NG7 / NottsGrass NGU respectively)* **Chosen by Lords & Cricket Ireland Performance Centre Bringing Cricket into the 21st Century** *NGU is the only monofilament surface used in ECB cricket systems – all others use the fibrillated style of yarns used since the 1990s*
Coaching Lines	Factory fitted lines along the length of the surfaces to indicate off, middle and leg stumps, in order to aid coaching
Notts Sport Base Systems	ECB Approved Each layer individually and fully wrapped in geotextile, no risk of contamination of the stone, ensuring maximum performance, minimum maintenance Non-degradable materials, ensure multiple resurfaces of original bases
Crease Protector Pads	Prevent depressions forming at blockholes & front foot areas
Bowlers Run-Up Extensions	Medium pace/spin bowlers have ample distance for nets even if grass behind the nets is too wet to start run-up
4.0m High Cage	Allows wide variety of flight/variation in delivery, especially for younger/slower bowlers
Individual Nets to Each Lane	No gaps in netting between roof and sides, double skin between each lane
White Netting to End of Nets	Helps bowlers pick straight drives coming back at them, and denser mesh increased resistance to repeated impact
Locking Collars To Cage	Prevents roof section of cage slipping
Line Wire To Base Of Nets	Prevents excessive net billowing, and balls escaping under the netting into adjacent lanes
Wheeled Netted Gates	Prevent balls being bowled between creases
Internal Dividing Screens	Prevent batsmen being distracted by movement outside nets
Sight Screen	Sight screen material fixed to fence behind bowler's arm to help batsmen pick the ball of the bowler's hand
Recessed Power Points	Allow bowling machines to be plugged in within the facility footprint, preventing leads causing trip hazards
ECB NTP Code of Practice	Notts Sport have achieved the ECB NTP Code of Practice Accreditation

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

ENVELOPE SYSTEM NG ULTRA

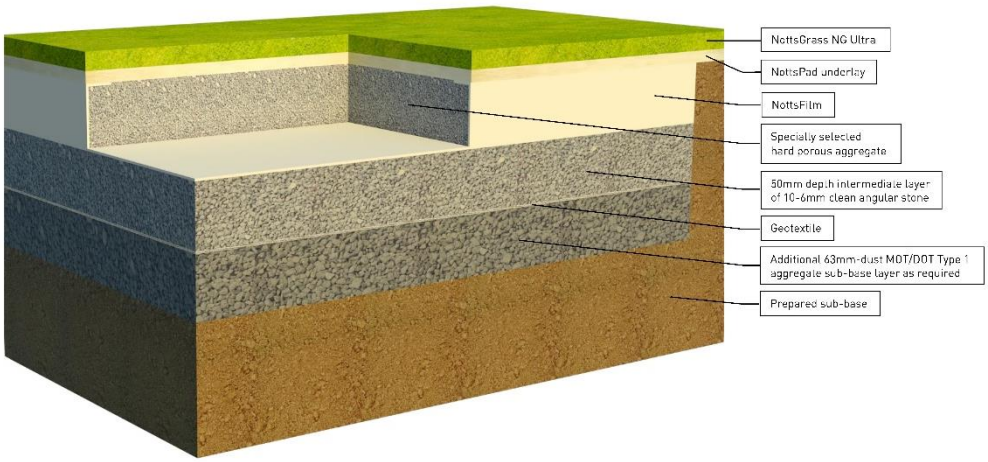

NB – Notts Sport systems never include 63mm-dust Type 1 aggregate in the upper 100mm depth that directly affects consistency of performance

Unlike other single shockpad systems, the Notts Sport Envelope System® uniquely uses the NottsFilm non-degradable porous geotextile membrane to individually and fully wrap each layer, physically and permanently preventing the larger sub-base and base aggregates from mixing with each other, and most importantly with the upper 50mm performance layer that provides 80% of the consistency of bounce. This ensures that when the surfaces do require replacing, as long as the bases have not been exposed through the surfaces becoming holed, everything underneath will be protected from deterioration, and only the top material will need replacing.

Furthermore, the individually wrapped aggregate layers within the Envelope System® mean that the rolling requirement is lower compared to other single shockpad options. While some companies advise that no rolling is required to single shockpad systems, the majority within the non-turf cricket sector agree there are three main reasons to roll such pitches in order to provide the best medium-long term performance:

- To maintain compaction of the base aggregates, preventing the stone layers from being able to mix, which would contaminate the fine upper performance layer (that provides 80% of the consistency) with the larger sub-base stones
- To tailor performance as required (i.e. increasing pace and bounce after rain/watering)
- To counter the effects of winter frosts decompacting the upper base (the process whereby water within the upper fine aggregate freezes and expands, causing movement in the aggregate)

If a pitch is not rolled after winter frosts, this movement of the aggregate will not be countered, which will lead to uneven levels and/or loss of compaction. In turn these lead to either inconsistent performance, or unseparated aggregates within the base mixing together, The former can be remedied by rolling, the latter will cause inconsistent or total loss of performance, and in unseparated systems will require a full base replacement.

Therefore while we believe that rolling single shockpad systems is extremely important, it is particularly the case if the separating membranes are removed.

The unique non-degradable NottsFilm geotextile removes the first of the above reasons to roll, meaning that maintenance is only required to tailor performance if/as required, or to counter any frost heave. As such best-practice dictates that for the best long-term performance and ability to resurface the existing base system, all single shockpad systems benefit from occasional rolling.

As the remaining 20% of the consistency of performance is provided by the layer 50-100mm below the surface, Notts Sport systems never use any aggregates with particles of more than 10mm in the upper 100mm of any pitch construction. *(Type 1 aggregate is an excellent sub-base material, but as the stone particles range from 63mm-dust in size, there is a wide variance of compaction levels, depending on the concentration of large stones to dust particles. Therefore in order to ensure long-term consistency and performance we never use this large a stone at a depth that could affect performance.)*

SLATTER
CRICKET & PLAY

The Key Notts Sport Cricket Pitch Design Principles

Developed over 30+ years' experience as the world's leading non-turf cricket specialists

1. The key to any cricket facility is how it plays:

All Notts Sport ECB Approved systems fully Envelope® each individual aggregate layer of the base, using the non-degradable NottsFilm geotextile to physically prevent the different stone types mixing. It is critical that the larger base stones do not mix with the fine upper performance aggregate layers.

Every synthetic component in a Notts Sport system is non-degradable, and each stone type is frost resistant. In conjunction with Enveloping each layer, this means that the original base remains structurally as-new, and can be resurfaced again and again. We even renew the performance warranties on our old systems when we resurface them.

The energy of a cricket ball penetrates up to 100mm into the ground, so the upper 100mm must be built to the most precise specification possible. Under the upper 50mm crushed limestone/granite, we use a 50mm intermediate layer with a maximum stone size of 10mm, and with no smaller particle than 6mm. This forms a very consistent, yet firm, layer at the 50-100mm depth which provides up to 20% of the consistency of performance.

We never use Type 1 roadstone or similar anywhere in the upper 100mm as the particle range is too great (63mm – dust) to provide the same level of consistency of firmness in a layer that directly affects how the cricket ball bounces.

2. Use the best surfaces possible:

Our premium NottsGrass Ultra surface has been proven to last up to six times as long as an 11mm Wilton woven cricket carpet weighing 1520g/sqm.

The NottsGrass Ultra has a texturised monofilament that maintains vertical stability and does not split into finer strands like other cricket carpets, therefore ensuring both vastly increased durability and prevents deterioration of performance.

NottsGrass Ultra is the **only** surface within ECB Approved systems to use the monofilament fibre style. By moving from the fibrillated yarns developed in the 1990s, NottsGrass Ultra is **Bringing Cricket Into the 21st Century**

The NottsGrass NG7 has a twisted KDK pile that also helps prevent the pile flattening, ensuring better medium-long term performance than materials that flatten over time. Even the NottsGrass NG7 surface lasted nearly twice as long as the woven material.

When selecting their new non-turf cricket facilities, Lords Cricket Ground selected the NottsGrass surfaces, given these clear benefits of the materials.

3. Keep clients' medium-long term costs as low as possible:

It is often less difficult to raise initial funds for a project than it is to cover on-costs, or refurbishment requirements. By using surfaces that last longer, refurbishment costs are deferred. By using fully Enveloped® base systems, when this resurface is required, as long as the base has not been holed, the costs will be limited to a new surface only: no base replacement should be required.

The Enveloped® bases also mean revenue costs (i.e. maintenance) can be reduced: there is no risk of the aggregate layers mixing and causing irreversible base contamination. Therefore in-season rolling is restricted only to tailoring performance as required. If the system includes the NottsBase D System, even this in-season rolling requirement is removed.

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

General Project Timeline

Initial Design Proposal & Costs
Pre-order site visits and design discussions with the client in order to confirm facility specification and site information *(location, access, welfare facilities, etc)*
Production of bespoke initial Design Proposal, facility drawings where applicable, and costs

Ongoing Project Assistance
Ongoing assistance with design amendments as required, general funding and planning advice
Production of OS Location Plans & Block Plans for planning (*additional cost if required)*

Order Confirmation
Completion and return of order form from client *(using the form on the following page, or using client's own official order form if local authority, school, etc)*
(Generally no deposit is required for supply and install works – please refer to individual agreements for variations)

Construction Planning
Arrange pre-start site meeting with Cricket Sales Director and Contracts Director, Project Manager, Site Supervisor/Foreman as required
Following pre-start meeting, adjust specifications/drawings as required
Confirm start date and Site Supervisor/Foreman contact details with client

Construction
On first morning of works, re-confirm exact location of new-build facilities with client before commencing excavation *(signature required)*
Construct facility in accordance with finalised working documents
On final day of the works, ensure all works finished to client's satisfaction

Post Installation
Send invoice, with payment method details, warranties and facility maintenance document
Acknowledge receipt of payment when received
In following years, full availability for advice via telephone, email or site visits as required in order to help client manage and maintain new facility to ensure maximum longevity

Project Contacts

Pre-Start Primary Contact **Alex Bennett, Cricket Sales Director**
More than 20 years industry experience, designed and specified cricket projects for all types of client from domestic gardens to the most prestigious private schools, of all values to more than £200,000

Primary Construction Contact **Philip Slatter, Contracts Director**
More than 15 years' experience working in and running family company, successfully delivering multiple projects of more than £500,000 value, including cricket, football, rugby and hockey pitches

Site Supervisor/Foreman **TBC**
We have five permanently employed cricket teams, all with supervisors who have more than eight years' experience, many with approximately 20 years.

SLATTER
CRICKET & PLAY

nottssport

Notts Sport Ltd is pleased to confirm that we have been awarded the

England & Wales Cricket Boards

"NTP Code of Practice Accreditation"

ECB
NTP CODE OF PRACTICE
NOTTS SPORT LTD

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

Non-Turf Cricket Facility - Order Form / Account Set-Up

Client Name	
Company Registration Number *(if applicable)*	
Client Invoice Address	

Client Invoice Contact Name	
Client Invoice Telephone	
Client Invoice E-Mail	

Project Site Address *(if different from above)*	

Works Contact Name	
Works Contact Telephone	
Works Contact E-Mail	

Quotation Reference		
General Description of Works		
Additional options to be included	Netting Colour:	Green / Black
(please delete as applicable)	Crease markings (yards):	22, 21, 19, 18, 17, 15
Additional client information / requests		

Total Order Value	**£**	**+ VAT**

Client Purchase Order Number *(if applicable)*	
Order Form Submitted By & Date	
Signed	

Standard Payment Terms *(Refer to quotation documentation for details of any variation)*

Supply & Install — No deposit, payment due 14 days from date of invoice (date of completion)

Supply & delivery only — Payment required with order / before despatch

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171