
SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023

To supply and install a new non-turf cricket practice area to the specification and location agreed with Ed Davies, and designed to maximise the length of each lane while ensuring all tracks on the square remain able to support the existing boundaries.

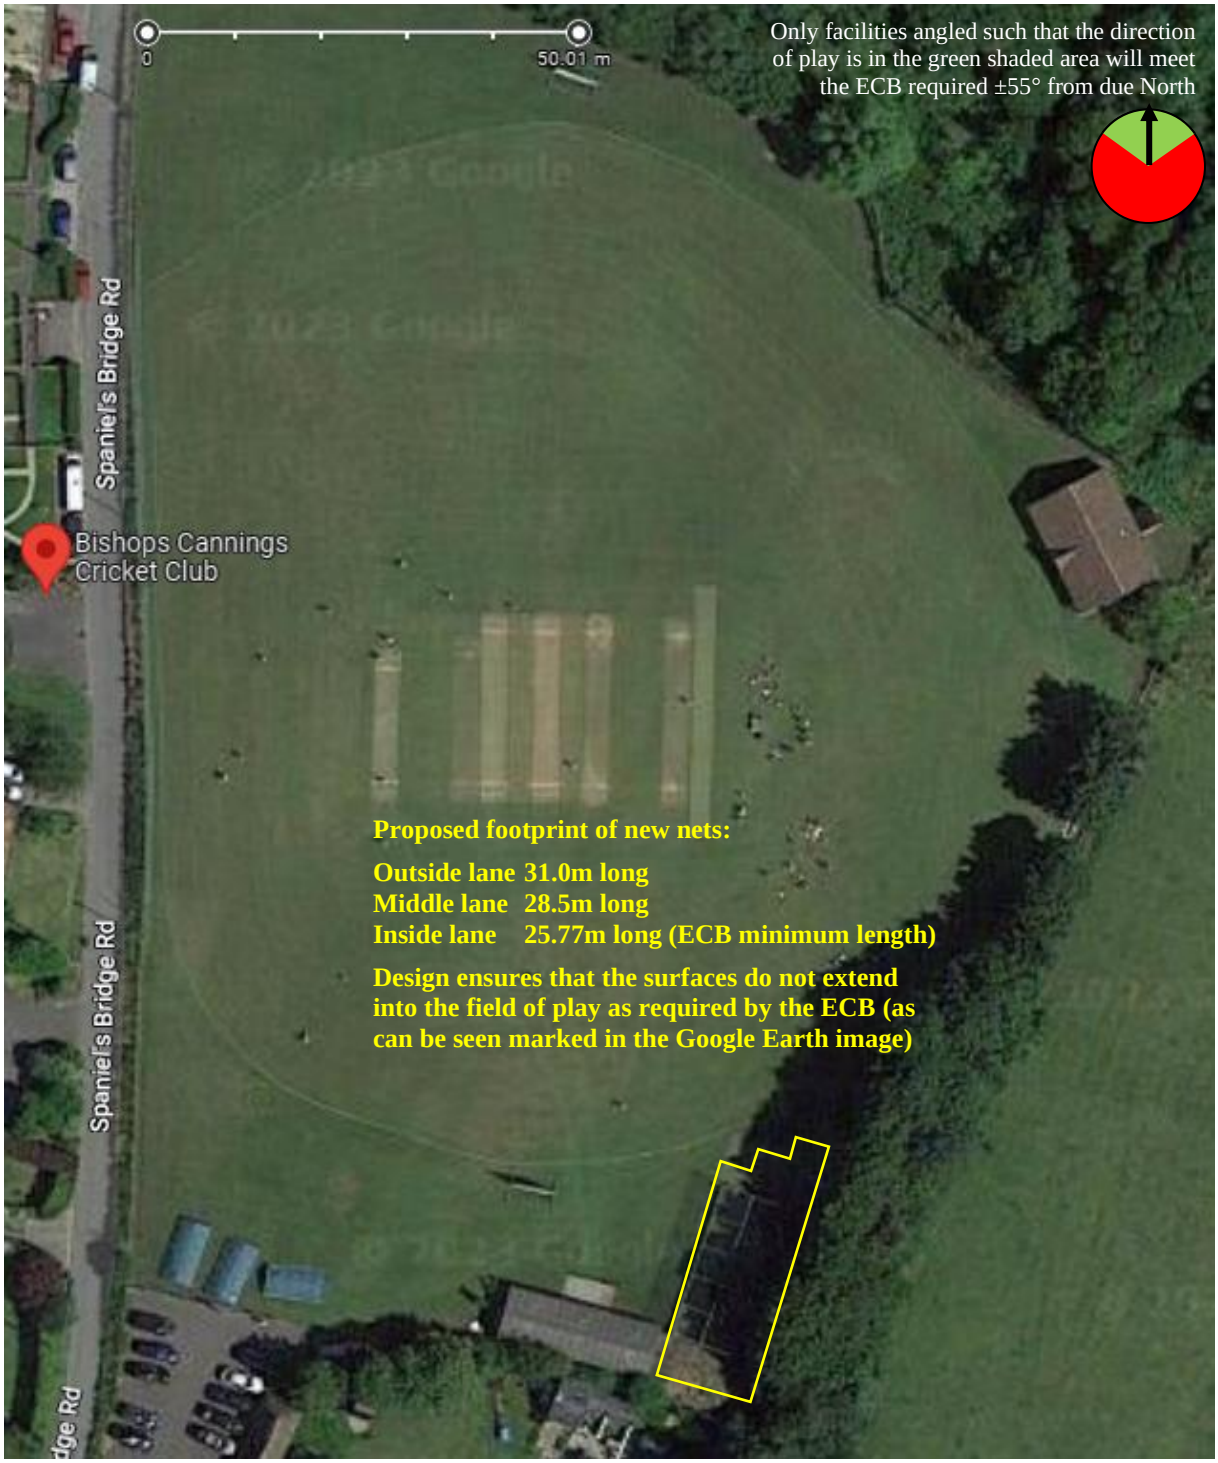

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023

Design & Specification Overview

The existing facility utilises a concrete base: as discussed there is no ECB Approved system that includes a concrete base, and therefore all of the existing area will need to be cleared.

As rebuilding the area will require a greater depth of stone than a standard cricket system, this extra depth will increase the level of pace & bounce. Therefore the NottsBase D System specification was discounted: the additional NottsBase performance pad (designed to increase pace & bounce) in conjunction with the greater stone depth will be too much.

The new nets are to be rebuilt further to the south to allow the ECB minimum length 25.77m facility to be built in the nearside lane, and the ECB preferred 30m length in the far lane (the middle lane can extend to 28.5m without encroaching into the outfield.

The current 48mm OD galvanised tubular steel is in very good condition, and can be salvaged and reused in the new facility, although new sockets, clamps & line-wires will be required.





The Envelope System® is a dynamic, porous base that mimics the performance of a natural pitch (i.e. slower/lower when wet, quicker after a light roll). The two key differences in the base between the Envelope System® and all other single shockpad systems are:

- An intermediate layer of mid-sized stone is used between any of the large 63mm-dust Type 1 sub-base aggregate and the fine upper performance layer, creating much increased mid-long term consistency of performance
- Each layer is individually wrapped (Enveloped®) with a non-degradable membrane to prevent migration of the larger stones into the smaller upper layers, again maximising long-term consistency of performance and reducing maintenance requirements
- **See specification overview on page 11 for full details**

Through more than 30 years' experience, we have found it to be critical that no stone particles larger than 10mm be used anywhere within the upper 100mm of construction. The use of a Type 1 or similar aggregate within the upper 100mm of a cricket system is a specification element that we will not consider in any circumstance.

SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023

The proposed surface is the **new NottsGrass Ultra**, which being the **first and only** surface within ECB Approved systems to move away from the traditional fibrillated fibres used in cricket surfaces since the 1990s, is **Bringing Cricket Into the 21st Century**.

In 2018 NottsGrass Ultra was **chosen by Lords** for their non-turf cricket pitch and the outdoor nets within the new **Cricket Ireland High Performance Centre**, and **a second pitch was installed at Lords in 2021**.

The surface has been proven by LaboSport *(non-turf pitch advisors to the ECB)* to last up to six times as long in surface abrasion tests as the old Wilton woven surface technology *(tested against an 11mm thickness Wilton weave weighing 1520g/sqm)*.

The monofilament fibres of the NottsGrass Ultra ensure that the structural integrity of the surface does not deteriorate as the material wears. Therefore while fibrillated yarns gradually split along the length of the grass fibres creating finer and finer strands that provide less grip, resulting in a more skiddy surface and reduced turn, the NGU monofilament fibres do not split. This ensures that the grip level remains throughout the life of surface, ensuring medium-long term performance levels are maintained at original levels.

Therefore as well as being unique within ECB Approved systems, the monofilament NGU provides both increased wear resistance and superior performance.

Due to the use of finer aggregate within the upper 100mm of construction, and the use of non-degradable shockpads and membranes to separate the different aggregates, all Notts Sport systems have been proven in the ground to be able to be resurfaced for more than 30 years, continuing to maintain full ECB Approval even with retaining the original base materials.

When the surfaces do eventually require replacement, assuming that the shockpads and base have not become exposed through holes in the surface material, the base layers will not have depreciated or degraded at all. As part of the Notts Sport service, we renew the warranty on the shockpads and base layers on refurbishment as if it was a new-build.

Therefore the combination of lower maintenance (due to the segregation of each layer of stone) and proven ability to resurface rather than fully replace, Notts Sport systems are designed to minimise medium-long term costs.

SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023

Other features included within the design proposal include *(* indicates that the item is priced as an optional extra)*

- Fully synthetic area, including 0.17m materials outside the cage/netting in order to allow grass cutting to be carried out to the perimeter only, avoiding the issues of cutting in between netting and materials
- Crease Protector Pads to prevent craters at the blockholes and bowlers' front foot areas
- 4.00m high cage enables increased variation in flight for slower bowlers, and allows the younger cricketers to bowl without hitting the top of the netting.
- Individual tunnel nets to each lane, eliminating gaps between roof and vertical nets, and providing a double skin of netting between each lane
- White netting behind the batters to enable bowlers to more easily pick out straight drives coming back at them
- Locking collars under each roof clamp to prevent the weight of the roof pushing the clamps down the vertical posts
- Tensioned line wire to the base of the nets to prevent excessive net billowing
- Anti-vermin protection skirt to prevent animals chewing holes in the netting
- Lines permanently tufted into the NottsGrass surface along the lines of each of the three stumps to enhance coaching potential* *(NB – this is a zero cost item)*
- Internal dividing screens, fixed to a separate line wire, to prevent batters being distracted by movement in adjacent lanes or outside of the facility*

For clarification of the proposed layout, please refer to drawing NSBCCC001

SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023

Works Overview

Preliminaries

- Establish compound, working area and access route
- Transport all plant, machinery and welfare units to site
- Prepare site specific documentation as required *(Health & Safety details, Construction Phase Plan, insurances, O&M manuals, etc)*

Clearance *(may be carried out by Bishops Cannings CC – priced as a separate item)*

- Dismantle existing cages (48mm OD steel), retaining all vertical and top posts for reuse
- Lift the existing synthetic components
- Break out the existing concrete bases
- Clear the area behind the nets of all clippings, compost, etc
- Remove all arisings to landfill

Preparation

- Excavate, grade and consolidate area such that it is suitable for the installation of a non-turf cricket facility

Sub-Base *(up to 100mm below finished surface)*

- Import level and compact a minimum of 100mm depth MOT Type 1 sub-base aggregate to bring the area back up to 100mm below finished levels
  NB – Notts Sport systems never include Type 1 or any other sub-base aggregate with particles larger than 10mm in the upper 100mm of construction: while the material forms an excellent stable base, the larger particles produce hard/soft spots in terms of cricket ball rebound, and therefore as the consistency of performance is entirely dictated by the upper 100mm depth, it is not a suitable material to be used in these upper layers

Intermediate Base Layer *(up to 50mm below finished surface)*

- Supply and lay geotextile membrane to fully wrap the intermediate layer, preventing the larger sub-base aggregate mixing with and contaminating the upper performance base
- Import level and compact 10-6mm clean angular frost-resistant aggregate to bring the area back up to 50mm below finished levels

ECB Approved Notts Sport Envelope System®

- ***Single shockpad system (aka dynamic base, or aggregate base)***
- ***Reacts like a natural pitch - pace and bounce reflects recent weather and ground conditions: slower and lower when wet, quicker and more bounce when rolled***
- ***All synthetic components fully separated by non-degradable membrane – no contamination possible of the upper performance aggregate, proven to ensure future resurface is possible rather than full/partial base replacement***
- ***No dynamic single-shockpad system requires less rolling***
- NottsFilm geotextile membrane to prevent aggregate layers mixing or becoming contaminated, thereby ensuring the consistency of the upper performance layer and thus allowing future refurbishment of the facility without necessarily requiring full replacement of the base
- 50mm consolidated depth of 4mm-dust hard porous to provide realistic, true, UK cricket performance levels
- Crease Protector Pads to prevent depressions at the blockholes or front foot creases from repeated impact
- 5mm thickness resin-bonded NottsPad shockpad to protect base levels and minimise maintenance

SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023


Three 24.1m x 2.74m NottsGrass Ultra Surface – Bringing Cricket into the 21st Century

- Supply and lay new NottsGrass Ultra cricket surface, as chosen by Lords for their non-turf pitch in 2018 *(2.395kg/sqm, 12 year new-for-old manufacturer's warranty – i.e. no depreciating scale on the warranty. Proven to last approximately six times as long as an 11mm fibrillated woven material weighing 1,520g/sqm in independent abrasion tests designed to indicate wear resistance)*

Triple Lane ECB Recommended 4.00m High Cage & Netting Facility

- ***Reusing existing 48mm OD steelwork retained from the current nets***
- ***Includes new sockets, clamps & line-wires***
- ***Internally hung independent tunnel nets to each lane in order to eliminate gaps between roof netting and vertical netting, eliminating the risk of balls escaping from lane to the other***
- ***3mm heavy-duty knotted netting with anti-vermin skirt***
- ***White netting behind the batters to help bowlers pick straight drives coming back***
- 18.30m long x 3.66m wide per lane (10.98m total width) x 4.00m high
- Locking collars under each clamp to prevent roof structure slipping down vertical posts
- 4.00m height allows spin bowlers greater variation in flight for slower or younger bowlers, without deliveries hitting the top bars or roof netting
- 3mm heavy-duty 45mm mesh size knotted cricket netting (green or black) to wings, back and full length of roof, with an individual tunnel net to each lane, providing a double skin of netting between lanes
- White high-tenacity 20mm mesh size knotless polypropylene netting to the end behind the batters
- S&C Slatter tensionable line-wire system to prevent balls escaping under netting and reducing net billowing
- Impact protection / anti-vermin skirt to the base of the netting to provide increased durability to the base of the netting and to prevent animals getting caught or chewing holes

Easy-Fit Tunnel Net Cage & Netting System

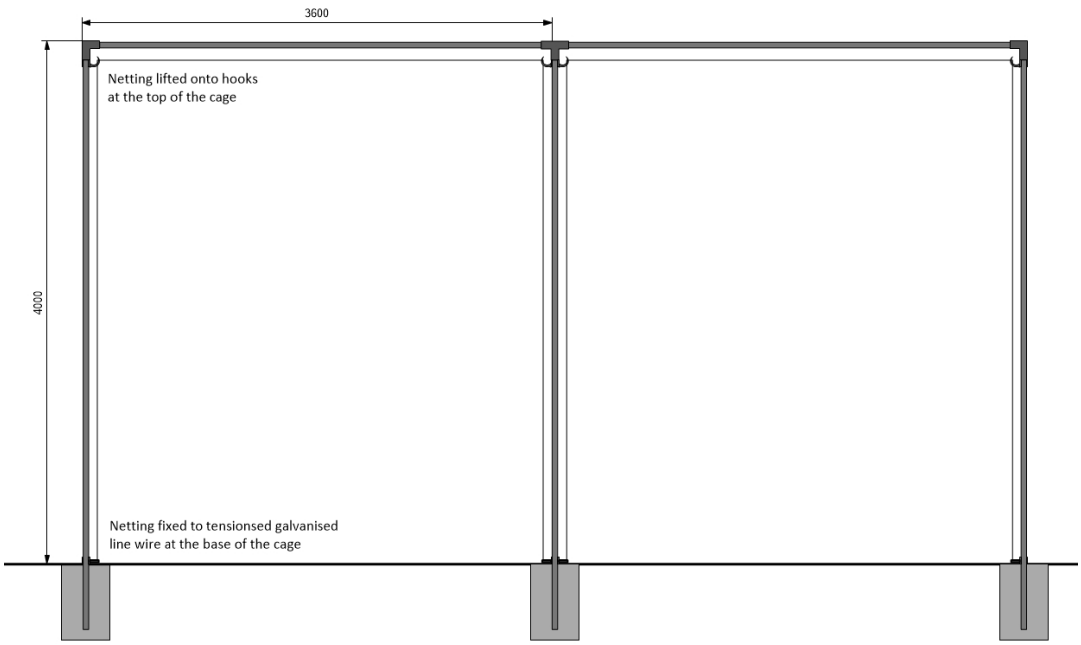

An independent, single section tunnel net is fitted to each lane in order to ensure that there are no gaps for balls to escape between lanes at the top, and to provide a double skin of netting between lanes.
When used in conjunction with internal screens (batting blinkers) the system provides a triple layer of protection between each lane

SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023

7.66m wide VHAF NottsSward Run-Up Material

- To create fully synthetic area sized 25.79m x 7.66m
- Geotextile membrane in order to prevent the aggregate mixing with the sub-soil, thus preventing the drainage from becoming clogged in later years, and also to prevent any future weed growth from under the aggregate
- Consolidated non frost susceptible aggregate to provide solid, free draining base
- 11mm open-pile, sand-dressed NottsSward to provide clean-standing area, replacing all grass areas in facility, removing requirement to mow in between cage and ends and preventing grooves developing from bowlers' follow-throughs.

Other Works

- Mark out as per the rules of the game *(see below for junior crease lengths – please advise those required)*
- Reinstate to the outside of the facility, and access route if required, using excavated topsoil, and seed
- Transport all excavated material to a point elsewhere on site (exact location TBC)
- Remove all general waste to landfill
- Transport all plant and machinery from site
- Leave working area and access route clean and tidy

ECB Adjusted Junior Formats (2019)	Pitch Length	Maximum Boundary	
Under 9	15 yards	30m *(soft ball only)*	
Under 10 & 11	17 yards	35m *(soft ball)*	40m *(hard ball)*
Under 12	18 yards	45m *(girls)*	50m *(boys)*
Under 13	19 yards	45m *(girls)*	50m *(boys)*
Under 14 & 15 *(girls)*	20 yards	50m	
Under 14 *(boys)*	21 yards	55m	
Under 15 *(boys)*	22 yards	55m	
Under 17	22 yards	55m *(girls)*	60m *(boys)*

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023

Cost Summary

To supply and install a new three-lane cricket as described above, and as per drawing NSBCCC001, based on reusing the existing anti-vermin skirt

Clearance Works	(as detailed on P5: may be carried out by the club)	£5,708 + VAT
All other works		£41,406 + VAT
Total cost if Slatter Cricket & Play carry out all works		**£47,114 + VAT**

Additional Options

1. To include new anti-vermin skirt (sewn into the netting) to replace the separate skirt material **£1,081 + VAT**

2. To change the Envelope System® pitch specification to the Notts Sport Tarmac specification *(at the time of writing this is not yet fully ECB Approved – however, it is anticipated that by the time of the planned works in Autumn 2023, this should be a fully ECB Approved system)* £8,915 + VAT

Terms & Conditions
Quotation valid for 42 days
All spoil to remain on site at agreed location, unless otherwise stated
Any reinstatement to the outside of the synthetic materials will be made with excavated topsoil and reseeded
Indicative works dates are only confirmed on receipt of official order & payment of deposit *(if applicable)*

Standard Payment Terms

Supply & Install	If works are to start within 3 months of the order, no deposit required If works are to start more than 3 months after order, a 10% deposit is required For projects estimated to take up to 4 weeks, full payment required 14 days after date of invoice (date of completion) Projects estimated to take over 4 weeks will include valuation invoices every four-weeks, with each invoice due for payment 14 days after date of invoice
Supply & delivery only	Payment required with order / before despatch

SLATTER
CRICKET & PLAY

Quotation for: **Bishops Cannings Cricket Club** Ref: AS23-132/BISH230504

Site Address: Spaniel's Bridge Road, Coate, Bishops Cannings, SN10 3LQ 04/05/2023

NottsGrass Surface Overview

In 2012 Notts Sport first introduced the NottsGrass NG range of cricket surfaces to replace the old Wilton woven technology originally developed in the 1970's, and still used by many companies today.

The NottsGrass Ultra was introduced in February 2018, and became the **first and only** monofilament surface used within ECB Approved systems. Through being the first surface within ECB Approved systems to move away from the fibrillated fibres from the 1990's, NottsGrass Ultra is **Bringing Cricket into the 21st Century**.

The much increased resistance to wear compared to the Wilton woven surfaces is why Notts Sport offer a 12 year new-for-old replacement manufacturer's warranty on the NottsGrass Ultra material, and 8 years for the NottsGrass NG7. We no longer offer the old Wilton woven technology surfaces.

Both materials have been laid at Lord's Cricket Ground – the MCC chose the NG7 for their net surface in 2016, and Ultra for their non-turf pitch in 2018, and the 2018 Cricket Ireland High Performance Centre also featured NottsGrass Ultra on their multi-lane outdoor nets.

Notts Sport Base System Overview

Notts Sport base systems are unique in that all components are non-degradable, and all are individually fully Enveloped®. This physical barrier prevents each aggregate layer from being contaminated by aggregates above/below, or by outside materials, from any direction.

As the synthetic materials do not deteriorate, and the aggregates do not shatter even if there is a ground frost, the full Enveloping® of each layer ensures that the base system will remain structurally as new as long as the surface itself does not become holed.

Only Notts Sport systems can fully Envelope® each layer, and therefore only by using a Notts Sport system can clients be sure that when the surface does eventually wear out, the original base system can be resurfaced without any need for base replacement.

This is borne out by the fact that many of the early Enveloped Notts Sport base systems from the 1980s are still going strong with their second or even third surface.

Notts Sport base systems never include stone particles larger than 10mm in the upper 100mm of construction in order to provide maximum medium & long-term consistency

SLATTER
CRICKET & PLAY

Notts Sport Cricket Facility Specification - Common Design Features & Benefits


(please check your specification for clarification of the options included in your design)

NottsGrass surfaces	8/12 year new-for-old manufacturing warranty *(NottsGrass NG7 / NottsGrass NGU respectively)* **Chosen by Lords & Cricket Ireland Performance Centre** **Bringing Cricket into the 21st Century** *NGU is the only monofilament surface used in ECB cricket systems – all others use the fibrillated style of yarns used since the 1990s*
Coaching Lines	Factory fitted lines along the length of the surfaces to indicate off, middle and leg stumps, in order to aid coaching
Notts Sport Base Systems	ECB Approved Each layer individually and fully wrapped in geotextile, no risk of contamination of the stone, ensuring maximum performance, minimum maintenance Non-degradable materials, ensure multiple resurfaces of original bases
Crease Protector Pads	Prevent depressions forming at blockholes & front foot areas
Bowlers Run-Up Extensions	Medium pace/spin bowlers have ample distance for nets even if grass behind the nets is too wet to start run-up
4.0m High Cage	Allows wide variety of flight/variation in delivery, especially for younger/slower bowlers
Individual Nets to Each Lane	No gaps in netting between roof and sides, double skin between each lane
White Netting to End of Nets	Helps bowlers pick straight drives coming back at them, and denser mesh increased resistance to repeated impact
Locking Collars To Cage	Prevents roof section of cage slipping
Line Wire To Base Of Nets	Prevents excessive net billowing, and balls escaping under the netting into adjacent lanes
Wheeled Netted Gates	Prevent balls being bowled between creases
Internal Dividing Screens	Prevent batsmen being distracted by movement outside nets
Sight Screen	Sight screen material fixed to fence behind bowler's arm to help batsmen pick the ball of the bowler's hand
Recessed Power Points	Allow bowling machines to be plugged in within the facility footprint, preventing leads causing trip hazards
ECB NTP Code of Practice	Notts Sport have achieved the ECB NTP Code of Practice Accreditation

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

ENVELOPE SYSTEM NG ULTRA

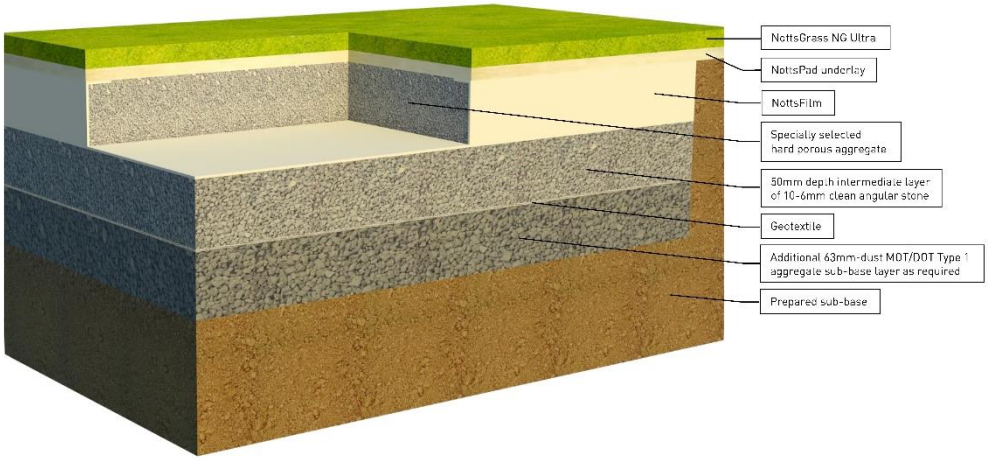

NB – Notts Sport systems never include 63mm-dust Type 1 aggregate in the upper 100mm depth that directly affects consistency of performance

Unlike other single shockpad systems, the Notts Sport Envelope System® uniquely uses the NottsFilm non-degradable porous geotextile membrane to individually and fully wrap each layer, physically and permanently preventing the larger sub-base and base aggregates from mixing with each other, and most importantly with the upper 50mm performance layer that provides 80% of the consistency of bounce. This ensures that when the surfaces do require replacing, as long as the bases have not been exposed through the surfaces becoming holed, everything underneath will be protected from deterioration, and only the top material will need replacing.

Furthermore, the individually wrapped aggregate layers within the Envelope System® mean that the rolling requirement is lower compared to other single shockpad options. While some companies advise that no rolling is required to single shockpad systems, the majority within the non-turf cricket sector agree there are three main reasons to roll such pitches in order to provide the best medium-long term performance:

- To maintain compaction of the base aggregates, preventing the stone layers from being able to mix, which would contaminate the fine upper performance layer (that provides 80% of the consistency) with the larger sub-base stones
- To tailor performance as required (i.e. increasing pace and bounce after rain/watering)
- To counter the effects of winter frosts decompacting the upper base (the process whereby water within the upper fine aggregate freezes and expands, causing movement in the aggregate)

If a pitch is not rolled after winter frosts, this movement of the aggregate will not be countered, which will lead to uneven levels and/or loss of compaction. In turn these lead to either inconsistent performance, or unseparated aggregates within the base mixing together, The former can be remedied by rolling, the latter will cause inconsistent or total loss of performance, and in unseparated systems will require a full base replacement.

Therefore while we believe that rolling single shockpad systems is extremely important, it is particularly the case if the separating membranes are removed.

The unique non-degradable NottsFilm geotextile removes the first of the above reasons to roll, meaning that maintenance is only required to tailor performance if/as required, or to counter any frost heave. As such best-practice dictates that for the best long-term performance and ability to resurface the existing base system, all single shockpad systems benefit from occasional rolling.

As the remaining 20% of the consistency of performance is provided by the layer 50-100mm below the surface, Notts Sport systems never use any aggregates with particles of more than 10mm in the upper 100mm of any pitch construction. *(Type 1 aggregate is an excellent sub-base material, but as the stone particles range from 63mm-dust in size, there is a wide variance of compaction levels, depending on the concentration of large stones to dust particles. Therefore in order to ensure long-term consistency and performance we never use this large a stone at a depth that could affect performance.)*

SLATTER
CRICKET & PLAY

The Key Notts Sport Cricket Pitch Design Principles

Developed over 30+ years' experience as the world's leading non-turf cricket specialists

1. The key to any cricket facility is how it plays:

All Notts Sport ECB Approved systems fully Envelope® each individual aggregate layer of the base, using the non-degradable NottsFilm geotextile to physically prevent the different stone types mixing. It is critical that the larger base stones do not mix with the fine upper performance aggregate layers.

Every synthetic component in a Notts Sport system is non-degradable, and each stone type is frost resistant. In conjunction with Enveloping each layer, this means that the original base remains structurally as-new, and can be resurfaced again and again. We even renew the performance warranties on our old systems when we resurface them.

The energy of a cricket ball penetrates up to 100mm into the ground, so the upper 100mm must be built to the most precise specification possible. Under the upper 50mm crushed limestone/granite, we use a 50mm intermediate layer with a maximum stone size of 10mm, and with no smaller particle than 6mm. This forms a very consistent, yet firm, layer at the 50-100mm depth which provides up to 20% of the consistency of performance.

We never use Type 1 roadstone or similar anywhere in the upper 100mm as the particle range is too great (63mm – dust) to provide the same level of consistency of firmness in a layer that directly affects how the cricket ball bounces.

2. Use the best surfaces possible:

Our premium NottsGrass Ultra surface has been proven to last up to six times as long as an 11mm Wilton woven cricket carpet weighing 1520g/sqm.

The NottsGrass Ultra has a texturised monofilament that maintains vertical stability and does not split into finer strands like other cricket carpets, therefore ensuring both vastly increased durability and prevents deterioration of performance.

NottsGrass Ultra is the **only** surface within ECB Approved systems to use the monofilament fibre style. By moving from the fibrillated yarns developed in the 1990s, NottsGrass Ultra is **Bringing Cricket Into the 21st Century**

The NottsGrass NG7 has a twisted KDK pile that also helps prevent the pile flattening, ensuring better medium-long term performance than materials that flatten over time. Even the NottsGrass NG7 surface lasted nearly twice as long as the woven material.

When selecting their new non-turf cricket facilities, Lords Cricket Ground selected the NottsGrass surfaces, given these clear benefits of the materials.

3. Keep clients' medium-long term costs as low as possible:

It is often less difficult to raise initial funds for a project than it is to cover on-costs, or refurbishment requirements. By using surfaces that last longer, refurbishment costs are deferred. By using fully Enveloped® base systems, when this resurface is required, as long as the base has not been holed, the costs will be limited to a new surface only: no base replacement should be required.

The Enveloped® bases also mean revenue costs (i.e. maintenance) can be reduced: there is no risk of the aggregate layers mixing and causing irreversible base contamination. Therefore in-season rolling is restricted only to tailoring performance as required. If the system includes the NottsBase D System, even this in-season rolling requirement is removed.

SLATTER
CRICKET & PLAY

General Project Timeline

Initial Design Proposal & Costs
Pre-order site visits and design discussions with the client in order to confirm facility specification and site information *(location, access, welfare facilities, etc)*
Production of bespoke initial Design Proposal, facility drawings where applicable, and costs

Ongoing Project Assistance
Ongoing assistance with design amendments as required, general funding and planning advice
Production of OS Location Plans & Block Plans for planning (*additional cost if required)*

Order Confirmation
Completion and return of order form from client *(using the form on the following page, or using client's own official order form if local authority, school, etc)*
(Generally no deposit is required for supply and install works – please refer to individual agreements for variations)

Construction Planning
Arrange pre-start site meeting with Cricket Sales Director and Contracts Director, Project Manager, Site Supervisor/Foreman as required
Following pre-start meeting, adjust specifications/drawings as required
Confirm start date and Site Supervisor/Foreman contact details with client

Construction
On first morning of works, re-confirm exact location of new-build facilities with client before commencing excavation *(signature required)*
Construct facility in accordance with finalised working documents
On final day of the works, ensure all works finished to client's satisfaction

Post Installation
Send invoice, with payment method details, warranties and facility maintenance document
Acknowledge receipt of payment when received
In following years, full availability for advice via telephone, email or site visits as required in order to help client manage and maintain new facility to ensure maximum longevity

Project Contacts

Pre-Start Primary Contact **Alex Bennett, Cricket Sales Director**
More than 20 years industry experience, designed and specified cricket projects for all types of client from domestic gardens to the most prestigious private schools, of all values to more than £200,000

Primary Construction Contact **Philip Slatter, Contracts Director**
More than 15 years' experience working in and running family company, successfully delivering multiple projects of more than £500,000 value, including cricket, football, rugby and hockey pitches

Site Supervisor/Foreman **TBC**
We have five permanently employed cricket teams, all with supervisors who have more than eight years' experience, many with approximately 20 years.

SLATTER
CRICKET & PLAY

Notts Sport System Warranty Summary

Manufacturers' Warranty Summary	
More than 30 years in-the-ground evidence on which to base system claims, durability and warranty	YES
NottsGrass NGU surface	12 years (new for old)
NottsGrass NG7 surface	8 years *(new for old)*
All new base synthetic materials (i.e. shockpads, performance pads, membranes)	10 years
Original base material warranties renewed as if new upon refurbishment *(if the original installation is a Notts Sport system)*	YES
Base Aggregate	Lifetime
Steelwork (42.4mm or 48.0mm)	25 years
3mm Netting	5 years
2.3mm Netting	3 years
Performance Warranty *(for new installations and refurbishments of old Notts Sport systems)*	5 years
System support	Lifetime

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

Notts Sport Ltd is pleased to confirm that we have been awarded the

England & Wales Cricket Boards

"NTP Code of Practice Accreditation"



Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171

SLATTER
CRICKET & PLAY

Non-Turf Cricket Facility - Order Form / Account Set-Up

Client Name	
Company Registration Number *(if applicable)*	
Client Invoice Address	

Client Invoice Contact Name	
Client Invoice Telephone	
Client Invoice E-Mail	

Project Site Address *(if different from above)*	

Works Contact Name	
Works Contact Telephone	
Works Contact E-Mail	

Quotation Reference	
General Description of Works	
Additional options to be included	Creases (yardages): **22 / 21 / 20 / 19 / 18 / 17 / 15**
	Green Coaching Lines?: All lanes / ☐ lanes / None
	Netting Colour: Green / Black
Additional client information / requests	

Total Order Value	**£ + VAT**

Client Purchase Order Number *(if applicable)*	
Order Form Submitted By & Date	
Signed	

Terms & Conditions

Quotation valid for 42 days
All spoil to remain on site at agreed location, unless otherwise stated
Any reinstatement to the outside of the synthetic materials will be made with excavated topsoil and reseeded
Indicative works dates are only confirmed on receipt of official order & payment of deposit (if applicable)

Standard Payment Terms

Supply & Install	If works are to start within 3 months of the order, no deposit required If works are to start more than 3 months after order, a 10% deposit is required For projects estimated to take up to 4 weeks, full payment required 14 days after date of invoice (date of completion) Projects estimated to take over 4 weeks will include valuation invoices every four-weeks, with each invoice due for payment 14 days after date of invoice
Supply & delivery only	Payment required with order / before despatch

Head Office Hell Corner Farm, Kintbury, Hungerford, Berkshire, RG17 9SX
T 01488 501052
E info@slattercp.com
slattercricketplay.com
slattersportsmaintain.com
VAT Registration No 400 5621 50 Company Registration No 13813171