
Product Overview

Status


BIFOLD

Max Individual Door Size 1.2m
Max Individual Door Height 2.7m
Max Individual Door Weight 125Kg


STANDARD CILL

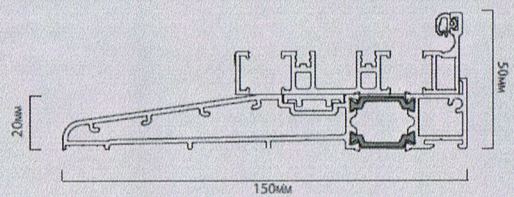

FRAME JAMBS L/R




FRAME HEAD

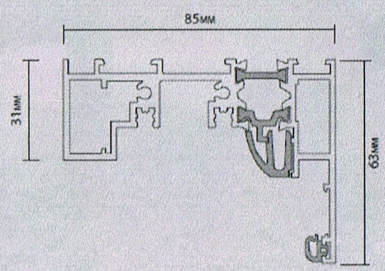

Tested to PAS24:2012 Enhanced Security, BS6375 Part 1 Weather, BS6375 Part 2 Operation & Strength, BS6375 Part 3 Annex A.
Other Cill options available - contact us for further details.

TECH SPEC	DOUBLE GLAZED	TRIPLE GLAZED
Frame depth	85mm	85mm
Typical sightline	123mm	123mm
Profile	Square	Square
Maximum panel width	1.2m	1.2m
Maximum panel height	2.7m	2.7m
Part L	Yes	Yes
U Value	1.4 W/m²K	1.1 W/m²K
Air permeability	Class 3 600Pa	Class 3-600Pa
Resistance to wind load	Class B3 1200Pa	Class B3 1200Pa
Water tightness	Class 4A 150Pa	Class 4A 150Pa

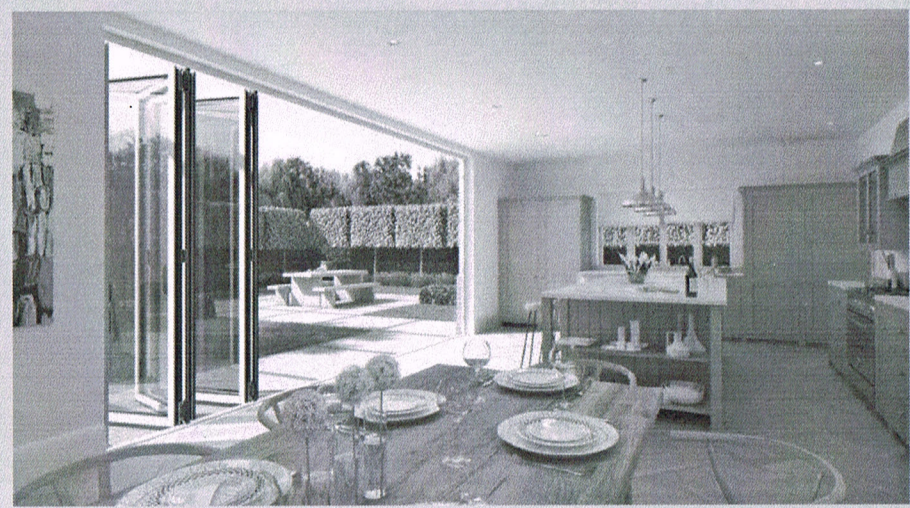

For more information:
01625 44 28 99 | sales@vufold.co.uk | vufold.co.uk

VUFOLD®
The difference is in the detail