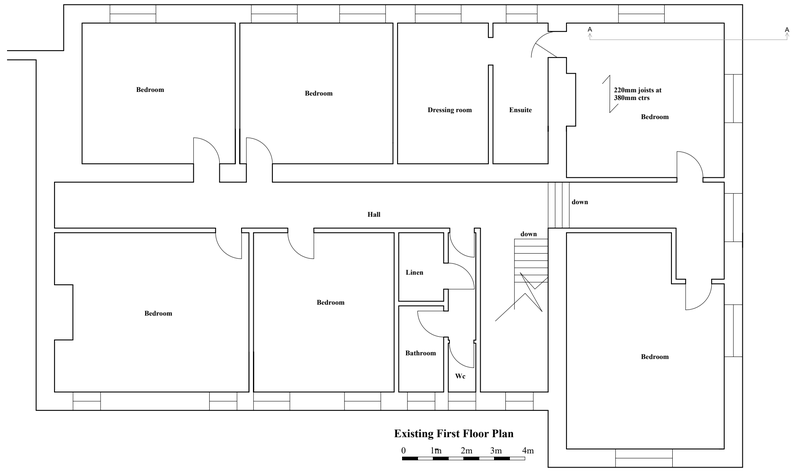
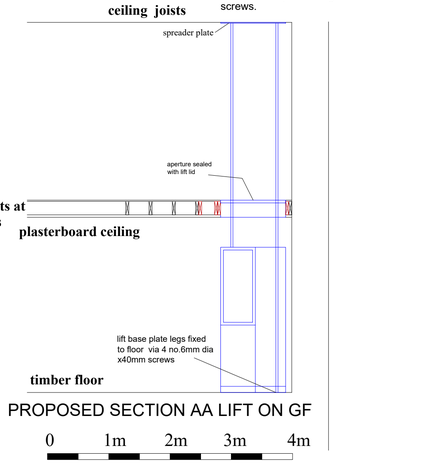
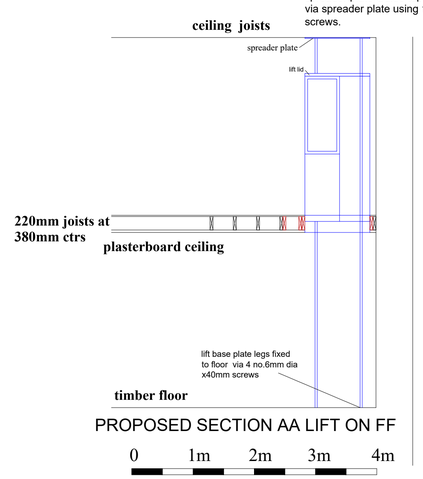
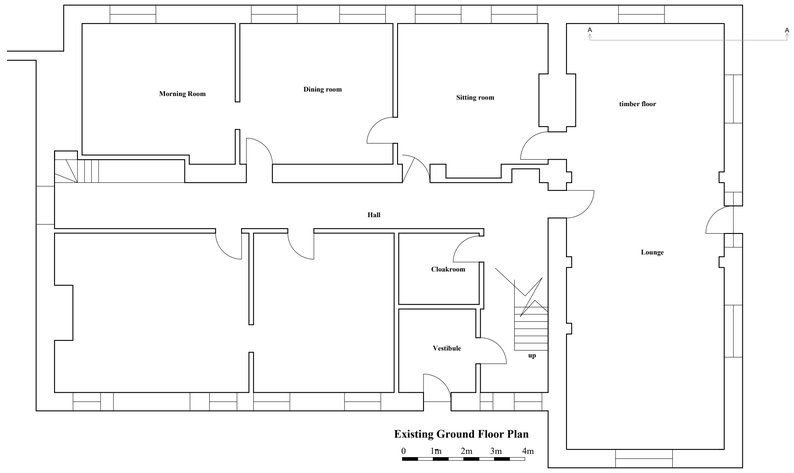




ELECTRICAL
All electrical work:-
Electrical installation should be designed. constructed, installed and tested in accordance with the recommendations of BS761:2018 as amended and submitted only by a person or company having membership to S.E.L.E.C.T or N.I.C.E.I.C or similar Electrical schemes recognised by rthe Scottish Building Standards to comply with Saftey 4.5.0


13amp spur unit
dedicated supply RCD protected conforming to BS 7671

Electrical Fixtures
Outlets and controls of electrical fixtures and systems should be positioned at least 350 mm from any internal corner, projecting wall or similar obstruction and, unless the need for a higher location can be demonstrated, not more than 1.2 m above floor level. This would include fixtures such as sockets, switches, fire alarm call points and timer controls or programmers. Within this height range: light switches should be positioned at a height of between 900 mm and 1.1 m above floor level.
standard switched or unswitched socket outlets and outlets for other services such as telephone or television should be positioned at least 400mm above floor level. Above an obstruction, such as a worktop, fixtures should be at least 150 mm above the projecting surface.
Where socket outlets are concealed, such as to the rear of white goods in a kitchen , separate switching should be provided in an accessible position, to allow appliances to be isolated.

STILTZ DUO PLUS CARRAIGE GUIDE RAILS TO BE FIXED PLUMB AS PER MANUFACTURERS DETAILS. COMMAND STATION IN CAR AND AT BOTH FLOORS WHICH INCLUDE DIRECTION STOP, KEY LOCKING CAR LIGHT AND DOOR OPEN/CLOSE CONTROLS. IN THE EVENT OF POWER FAILURE BATTERY BACK UP SYSTEM ALLOWS OPERATION OF CAR IN DOWNWARD DIRECTION BY NORMAL CONTROLS WITH ALL SAFETY SYSTEM IN OPERATION.

TRIMMING NOTES FIRST FLOOR APERTURE TRIMMED BY CUTTING OUT EXISTING JOISTS AS REQUIRED, ADDING NEW JOISTS BOLTED TO EXISTING JOISTS AND TRIMMING JOIST, ALL NEW JOISTS TO MATCH EXISTING AND TO BE INSTALLED AS PER ENGINEERS DESIGN

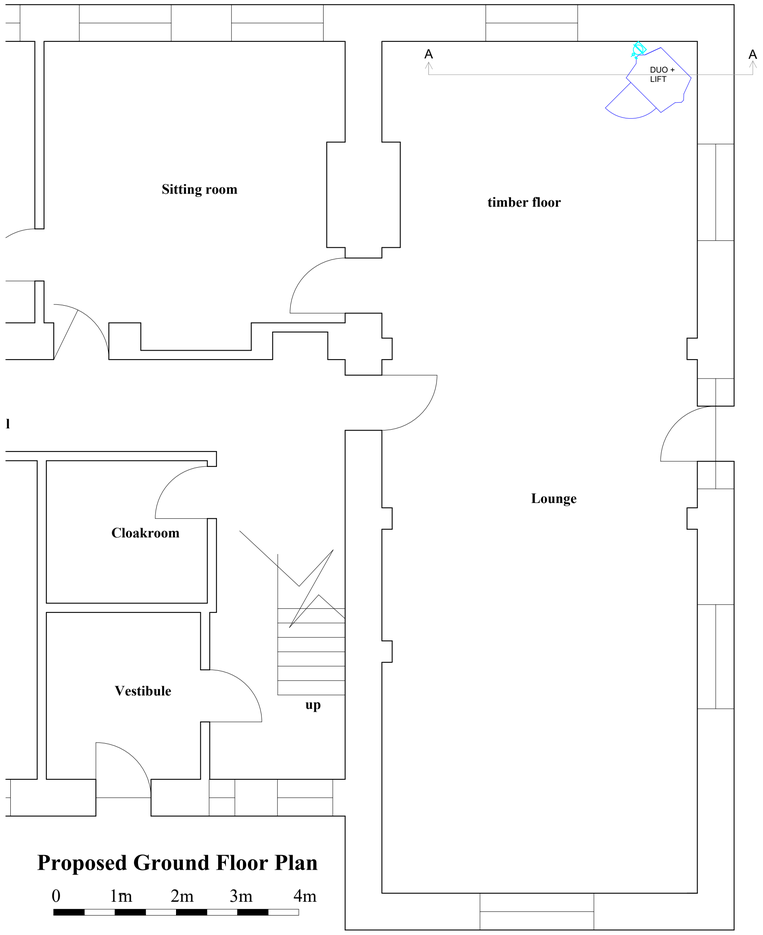

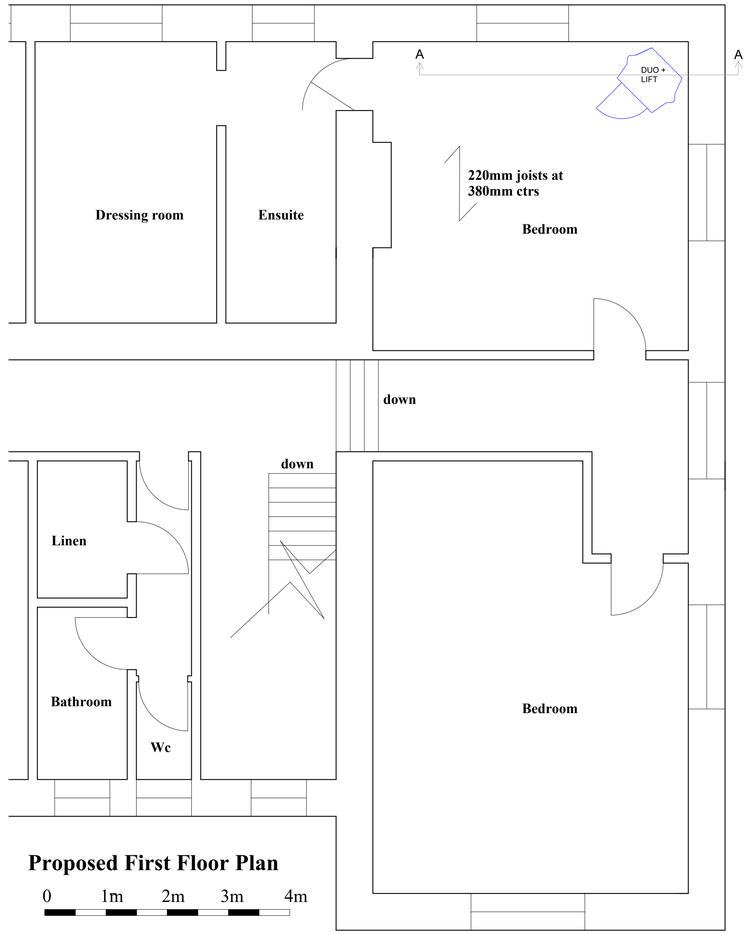
General Notes

PROPOSAL
Installation of Stiltz Duo Plus Lift from Ground floor Lounge to First Floor Bedroom, by forming aperture in floor ceiling. The reason for lift is to benefit disabled owner to be able to stay in own home independantly with the existing support network in place, the Lift can easily be removed and returned to original when no longer required.

| No. | Revision/Issue | Date |
|---|---|---|
| | | |

ARCHITECTURAL SERVICE
237 Baldridgeburn
Dunfermline
KY12 9EG
01383 729243
07710 797364
arch_services@hotmail.com

Project Name and Address
Stiltz Lifts
Client
Mr & Mrs GR Fox
Strode House
1 The Warf Laycock
Wiltshire
SN15 2PQ

| Project | Sheet |
|---|---|
| through floor lift | 1 |
| Date: 7th July 2023 | |
| Scale: 1/50 1/100 | |