GAELITE.COM

Moto

2mtr dia Logo

Project Manger

Gail Livesey

gail@gaelite.com

t.+353 (1) 294 0066

m. 44 (0) 7917 355538

release 00 - 12/07/23

ENTRANCE SIGN



SIGN DETAILS

Part 01: Fabricated aluminium extrusion circular unit painted RAL 6037 to perimeter

Part 02: Aluminium box section rear bracing support

Part 03: 2mm aluminium backs coated RAL 6037 green to external surfaces

Part 04: Digital print premium enhanced white flex skin with tension springs

Part 05: LED illumination

Part 06: New 50 x 50 x 5mm aluminium box section framework

SIGN SPEC

Dimensions

Installed Height:	Approx 3m to u/s
Sign Size:	2000mm
Depth:	190mm
Weight:	45kg

SUPPORT FRAME

Aluminium box section with 5mm thick angled end connector plates coated RAL 9006 silver


Size:	50 x 50 x 5mm x lengths to suit
Weight:	20kg

Colour Schedule

PMS 7715c	PMS 1235c	PMS 2423c RAL 6037	SIGNAL WHITE RAL 9003	SILVER RAL 9006



PROFILE DETAIL

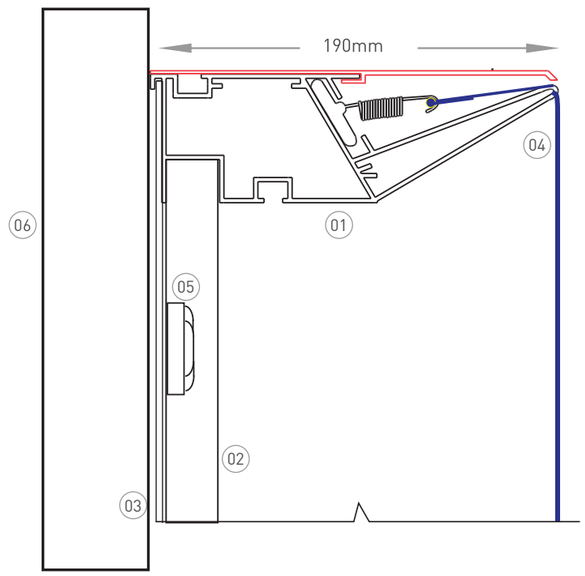

Illumination

Internally illuminated with 12v white LEDs and 12v convertor unit

Illumination Levels	Total 68 watt output Total 6414 lumens 100 cd/m²
2000mm Circular unit	

Technical Information

Nominal voltage	220-240 V
Frequency	0/50-60 Hz
Connecting cable	3 x 2.5mm²
Fuse protection	13 Amp

Installation

Mechanical fixed through rear of support bracing/ aluminium backing into mullions. Drawings available upon request. Sign wired to electrical supply by others.

GAELITE.COM

Moto
6.5m Totem

Project Manger

Gail Livesey


gail@gaelite.com

t.+353 (1) 294 0066


m. 44 (0) 7917 355538

release 00 - 12/07/23

6.5M TOTEM

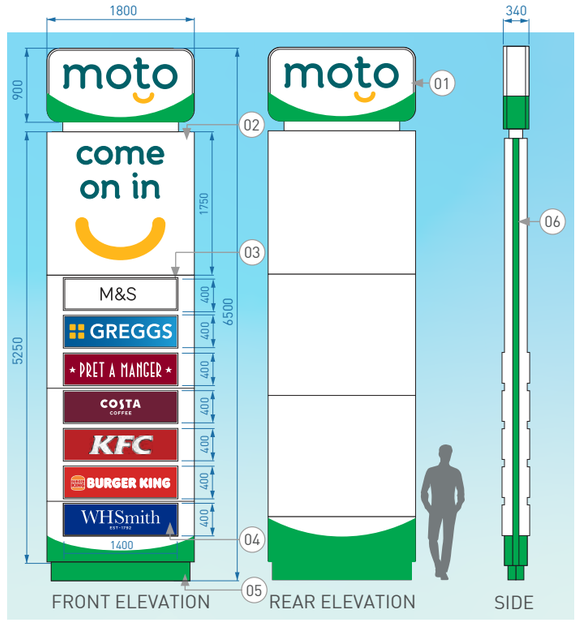



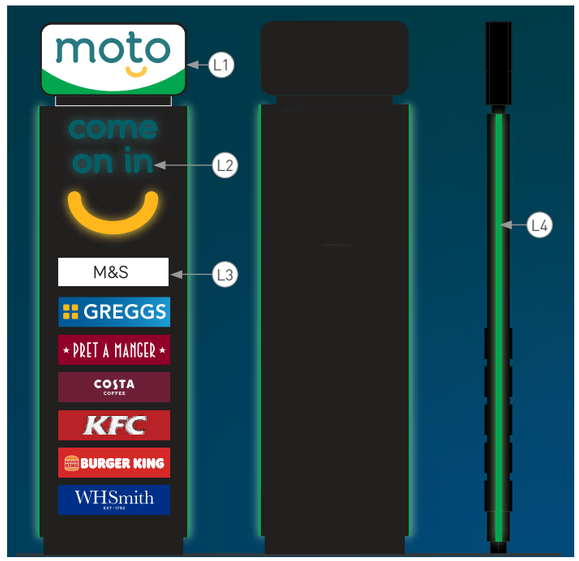

NIGHT TIME ILLUMINATION
Scale 1:75

COLOURS

PMS 7715c

PMS 1235c

PMS 2423c
RAL 6037

SIGNAL WHITE
RAL 9003





DETAILS

Part 01: Fabricated aluminium header box painted white RAL 9003 with vinyl decoration. Header box to have opal 050 acrylic face panels decorated to face with digital print vinyl graphic. Front internally illuminated with white LEDs.

Part 02: Aluminium face panels with stencil cut 'come on in' & smile graphic backed with opal acrylic, digital print vinyl logo to face.


Part 03: Aluminium totem face panels painted white RAL 9003 & RAL 6037 green & aperture cut for tenant panels.

Part 04: Aluminium tenant panels with aperture cut & backed with opal acrylic panel with digital print vinyl logo to face. Internally illuminated with white LEDs.


Part 05: Aluminium shroud finished RAL 6037 green.

Part 06: Light line down each side of totem from acrylic finished to match RAL 6037 green with white LED illumination.

PROFILE DETAIL

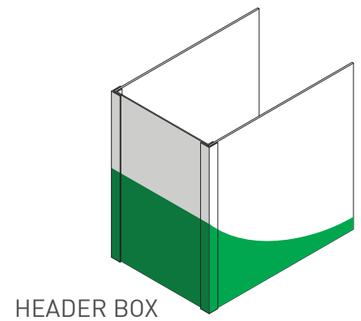

HEADER BOX



LIGHT LINE
PROFILE

SIGN SPEC

Dimensions

Installed Height:	6500mm
O/A Height:	6665mm
Width:	1800mm
Depth:	340mm
Weight:	1150kg

Design

Casing	Fabricated aluminium
Steelwork	Treated internal steel frame

Gaelite CE Structural Standards

Steel Framework: Steel Grade s355

Base Plates: Steel Grade s275

Connection Bolts: M24 grade 8.8

All Welds: Class 2 Execution

Coating Finish: Galvanising Spec: EN 1461

Illumination

Internally illuminated with white LEDs

Illumination Levels

L1 Header	200 cd/m²
L2 'Come on in' panel	150 cd/m²
L3 Tenant panel	100 cd/m²
L4 Light line	200 cd/m²

Technical Information

Nominal voltage	220-240 V
Frequency	0/50-60 Hz
Connecting cable	3 x 2.5mm²
Fuse protection	13 Amp

Installation

Freestanding sign mounted to root gages in suitable foundation. Foundation drawings available upon request. Sign wired to enter centrally to left hand leg & fed to safety switch within shroud.