

LEAD FLAT ROOF COVERINGS

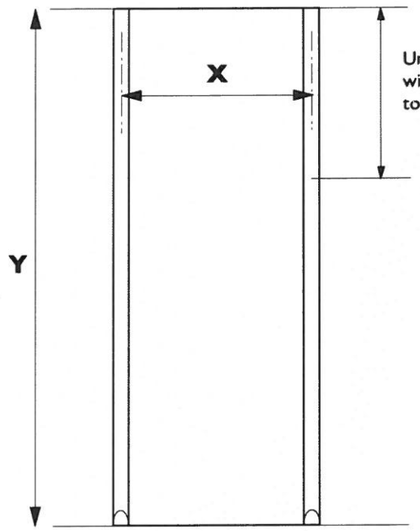

Roll ends to be splay-cut at 45°

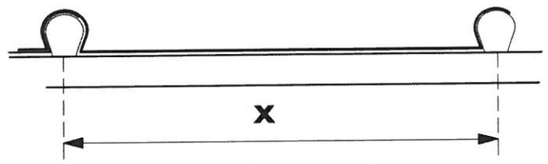

Note
Bay roll spacing dimension 'X' may be increased if length Y is shorter.
ie: max area ÷ shorter length Y = wider spacing X.
Bay length Y must not be increased beyond its max spacing.

Flat Roof - spacing of joints as follows:
(up to 10° pitch)

Code No.	X Max. spacing between joints (mm)	Y Max.spacing between drips (mm)	Max. Area m^2
6	675	2250	1.52
7	675	2500	1.69
8	750	3000	2.25


3 RODWELL HALL
TROWBRIDGE BA14 9AW

LEADWORK DETAILS 1


Drawing No. 601

Not to scale


Date: January 2023

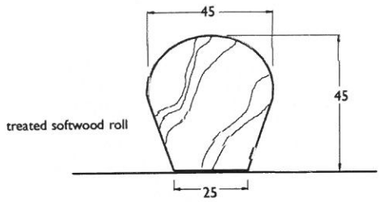


STANDARD ROLL PROFILE

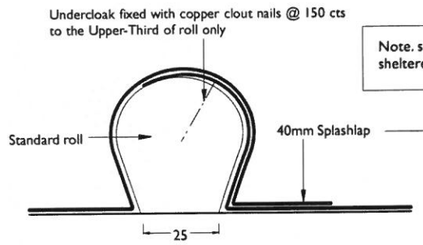

Note. splash backs not required on sheltered gutter linings

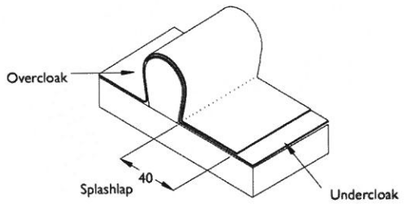


WOOD-CORED ROLL JOINT

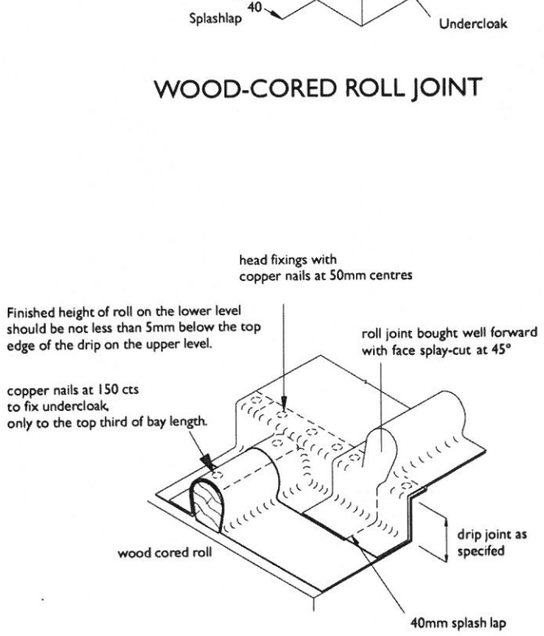


STAGGERED ROLL JOINT DETAIL (for Flat Roofs)

2500 Max.spacing
between drips for code 7. lead


3000 Max.spacing
between drips for code 8. lead

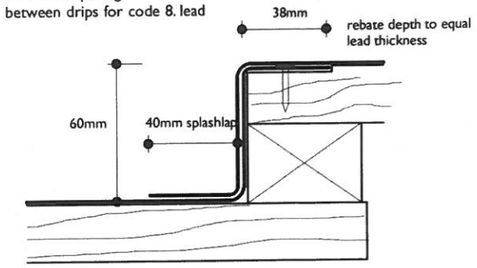

60mm DRIP JOINT DETAIL (up to 3°)

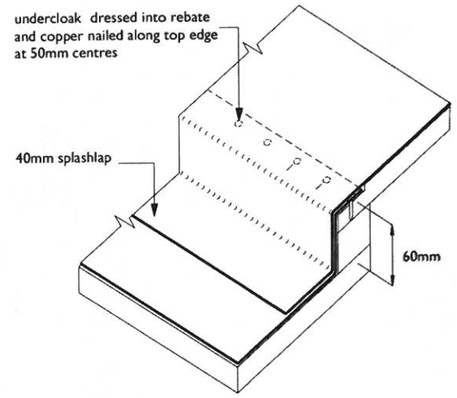

60mm DRIP WITH SPLASHLAP (up to 3°)

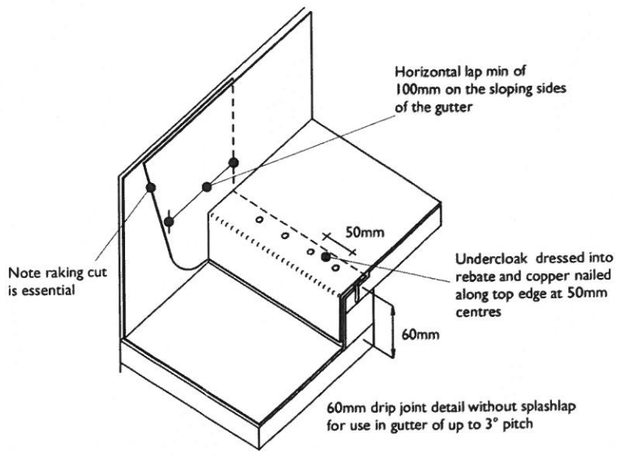

LEAD 60mm DRIP JOINT DETAIL (for Gutters)