
Cladding Specification for Front Lodge, Lackham

1. Machine finished british larch vertical cladding
2. Material will be left raw to silver in UV light
3. Width selection 95mm
4. VHL4 profile and timber chosen from local sawmill

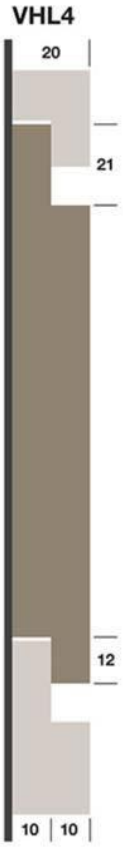

British larch cladding from Vastern Timber

- British larch
- Larix decidua
- Legal and well managed forests in England and Wales
- Supplied by Vastern Timber (sales@vastern.co.uk)
- Grade : Grade A BS1186-3 1990 Class 2 / EN942:2007 J30 Grade B BS1186-3 1990 Class 3 / EN942:2007 J50
- Finished thickness of 20mm
- Overall finished widths 70mm / 95mm / 145mm
- Random lengths 1.8mt – 3.6mt+, allowing small % down to 1.5mt
- Available in various profiles (Not t&g)
- Moisture content of 16 – 20%
- Durability EN350-2 Moderately Durable. Class 3
- Supplied uncoated. No treatment required.

Reference image below

