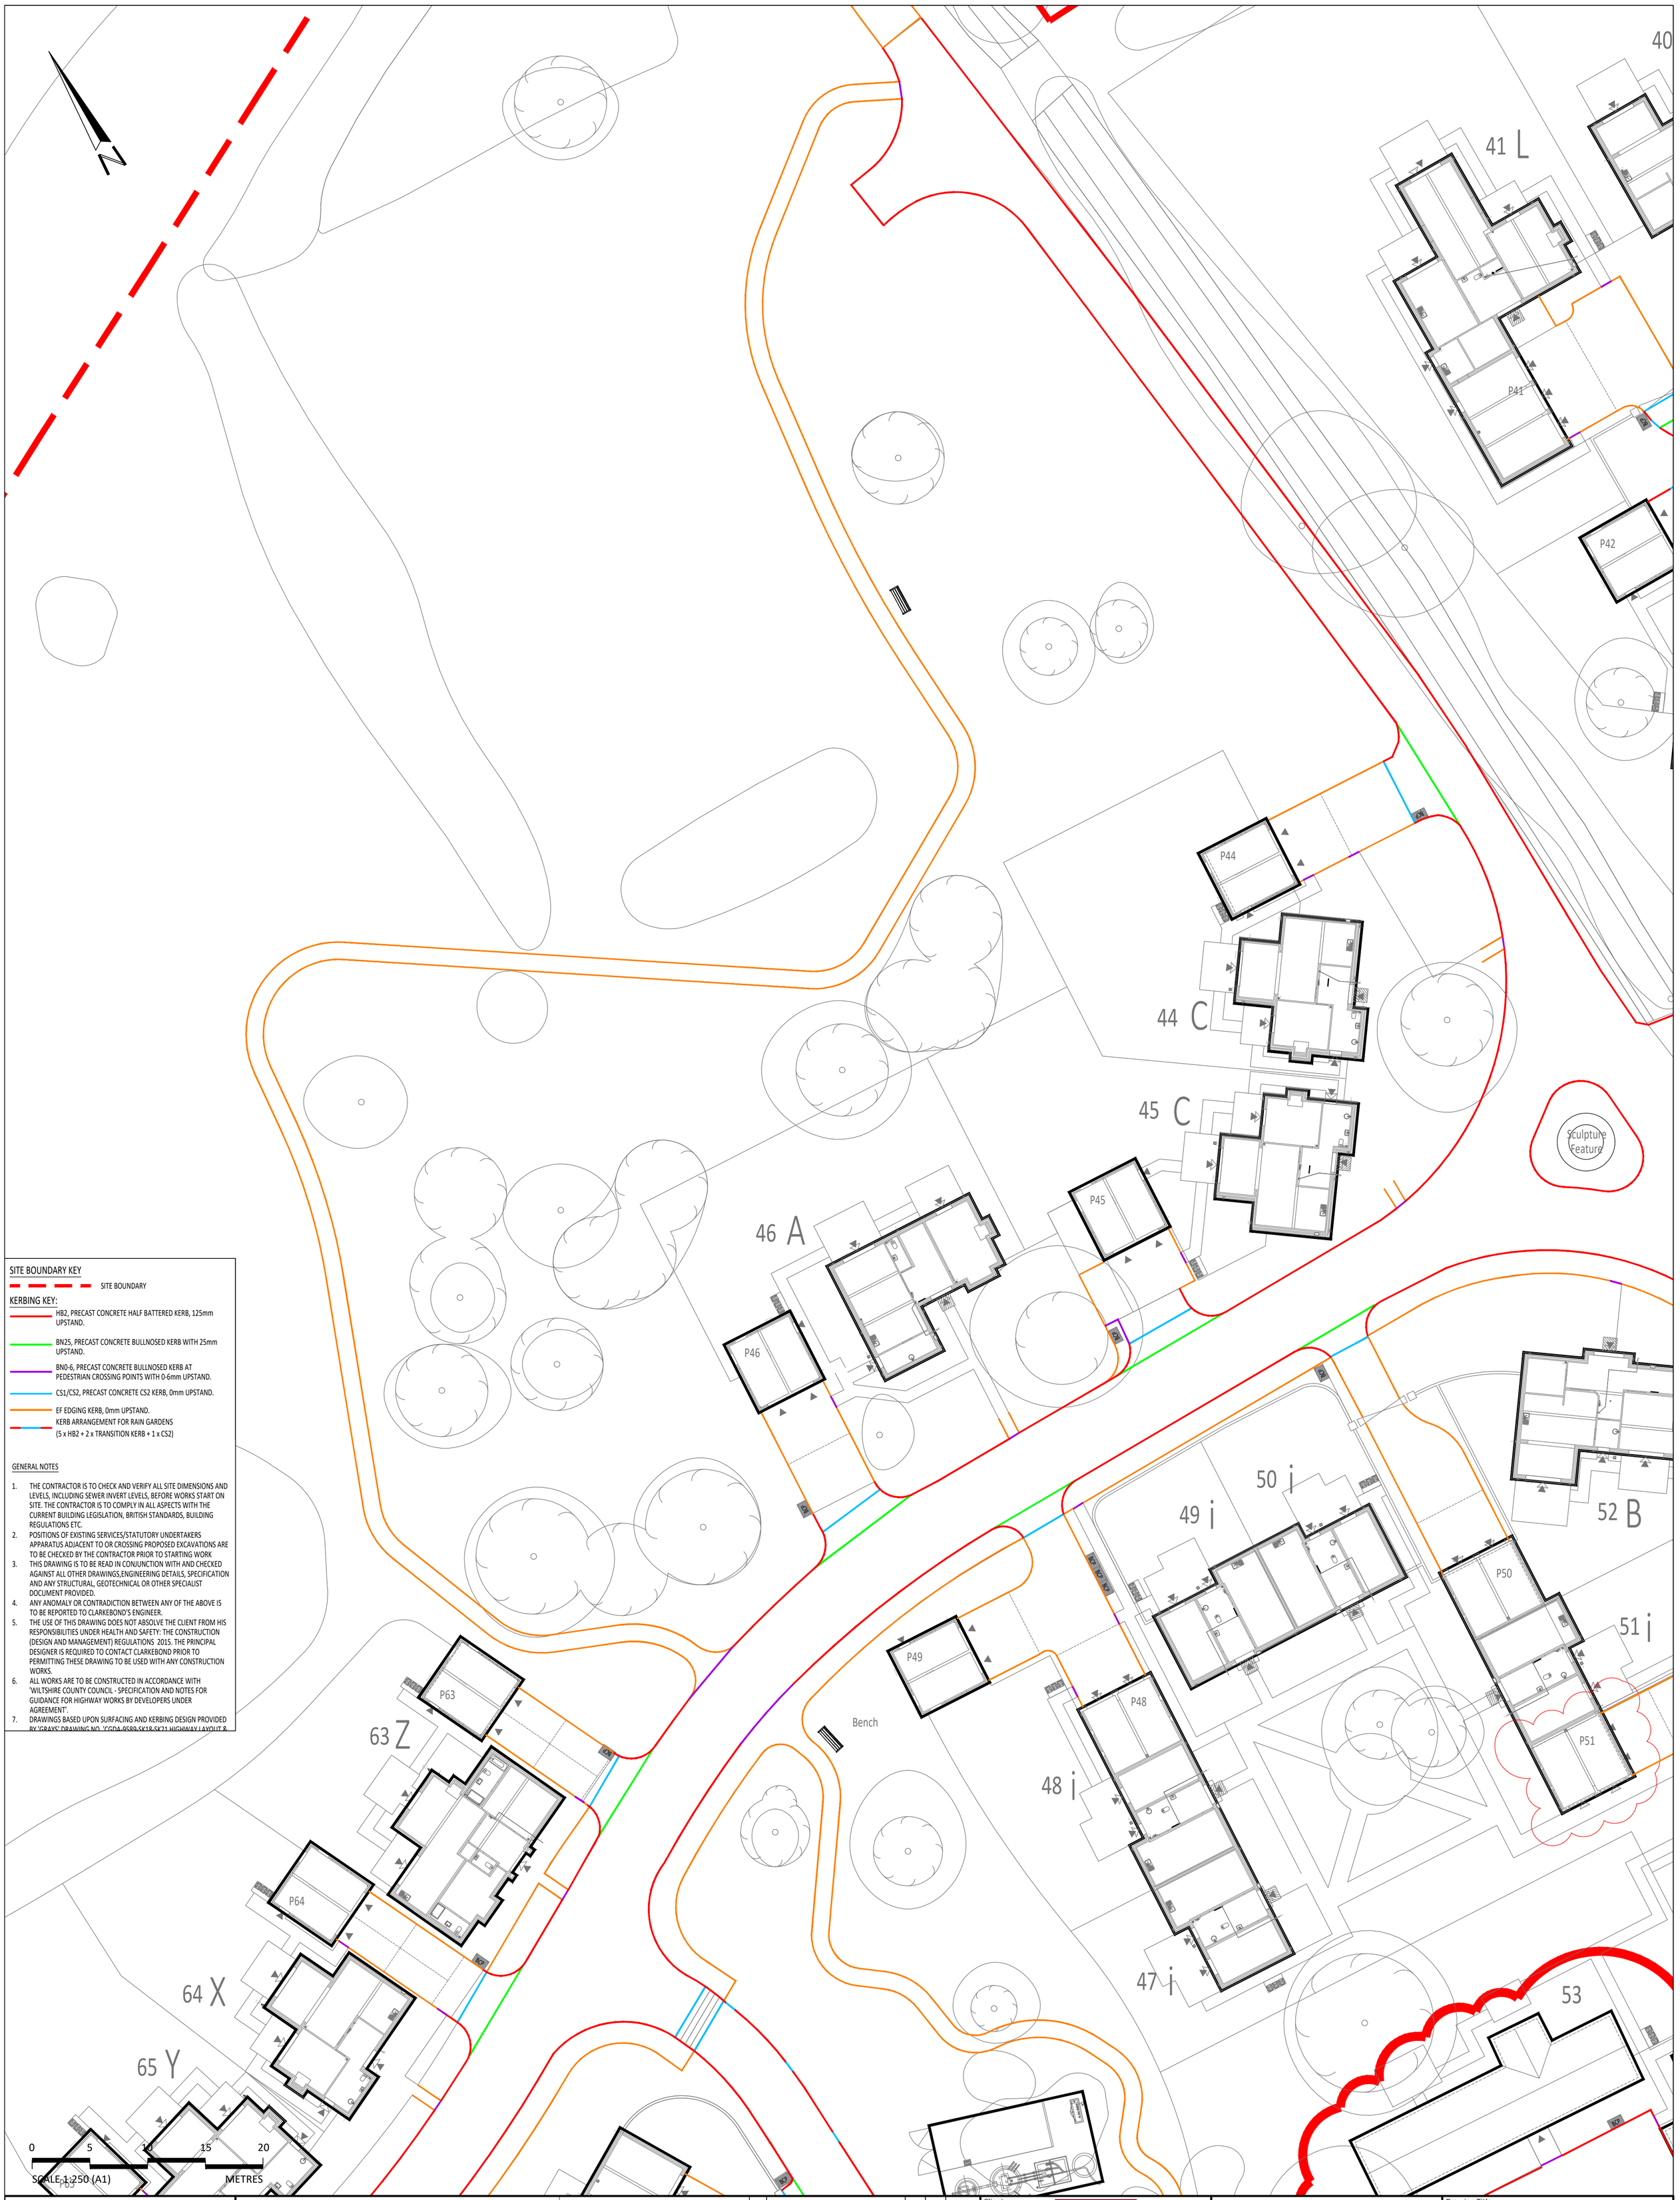

SITE BOUNDARY KEY

SITE BOUNDARY

KERBING KEY:

- HB2, PRECAST CONCRETE HALF BATTERED KERB, 125mm UPSTAND.
- BN25, PRECAST CONCRETE BULLNOSED KERB WITH 25mm UPSTAND.
- BN0-6, PRECAST CONCRETE BULLNOSED KERB AT PEDESTRIAN CROSSING POINTS WITH 0-6mm UPSTAND.
- CS1/CS2, PRECAST CONCRETE CS2 KERB, 0mm UPSTAND.
- EF EDGING KERB, 0mm UPSTAND.
- KERB ARRANGEMENT FOR RAIN GARDENS (5 x HB2 + 2 x TRANSITION KERB + 1 x CS2)

GENERAL NOTES

1. THE CONTRACTOR IS TO CHECK AND VERIFY ALL SITE DIMENSIONS AND LEVELS, INCLUDING SEWER INVERT LEVELS, BEFORE WORKS START ON SITE. THE CONTRACTOR IS TO COMPLY IN ALL ASPECTS WITH THE CURRENT BUILDING LEGISLATION, BRITISH STANDARDS, BUILDING REGULATIONS ETC.
2. POSITIONS OF EXISTING SERVICES/STATUTORY UNDERTAKERS APPARATUS ADJACENT TO OR CROSSING PROPOSED EXCAVATIONS ARE TO BE CHECKED BY THE CONTRACTOR PRIOR TO STARTING WORK
3. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH AND CHECKED AGAINST ALL OTHER DRAWINGS,ENGINEERING DETAILS, SPECIFICATION AND ANY STRUCTURAL, GEOTECHNICAL OR OTHER SPECIALIST DOCUMENT PROVIDED.
4. ANY ANOMALY OR CONTRADICTION BETWEEN ANY OF THE ABOVE IS TO BE REPORTED TO CLARKEBOND'S ENGINEER.
5. THE USE OF THIS DRAWING DOES NOT ABSOLVE THE CLIENT FROM HIS RESPONSIBILITIES UNDER HEALTH AND SAFETY: THE CONSTRUCTION (DESIGN AND MANAGEMENT) REGULATIONS 2015. THE PRINCIPAL DESIGNER IS REQUIRED TO CONTACT CLARKEBOND PRIOR TO PERMITTING THESE DRAWING TO BE USED WITH ANY CONSTRUCTION WORKS.
6. ALL WORKS ARE TO BE CONSTRUCTED IN ACCORDANCE WITH 'WILTSHIRE COUNTY COUNCIL - SPECIFICATION AND NOTES FOR GUIDANCE FOR HIGHWAY WORKS BY DEVELOPERS UNDER AGREEMENT'.
7. DRAWINGS BASED UPON SURFACING AND KERBING DESIGN PROVIDED BY 'GRAYS' DRAWING NO. 'CGDA-9589-SK18-SK21 HIGHWAY LAYOUT &

CDM RESIDUAL RISKS

The work shown on this drawing is both familiar to the designers and routinely safely built in similar circumstances by competent contractors.

Risks are not considered significant.

~~**Relevant data is included in the Pre-Construction Information Pack.**~~

Signed: D.HENSON **Date: 27/09/23**

DO NOT SCALE THIS DRAWING FOR CONSTRUCTION PURPOSES.

CONTRACTOR TO CHECK ALL DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO THE ENGINEER.

KERBING NOTES.

1. TRANSITIONS BETWEEN KERB HEIGHTS ARE SHOWN AS PART OF KERB WITH GREATER UPSTAND.
2. PROPRIETARY DROPPER, RADIUS, ANGLE AND QUADRANT KERBS ARE TO BE USED WHERE APPROPRIATE.
3. ALL WORKS FOR ADOPTION UNDER A SECTION 38 AGREEMENT SHALL BE CARRIED OUT IN ACCORDANCE WITH COUNCIL'S SPECIFICATION AND TO THE APPROVAL OF THE AREA HIGHWAY INSPECTOR.
4. DESIGN SUBJECT TO S38 APPROVAL. ANY WORKS UNDERTAKEN PRIOR TO TECHNICAL APPROVAL ARE AT DEVELOPER'S RISK.
5. PEDESTRIAN CROSSING POINTS TO HAVE TACTILE PAVING IN ACCORDANCE WITH 'GUIDANCE ON THE USE OF TACTILE PAVING SURFACES'. EXACT LOCATION OF TACTILE PAVING TO BE CONFIRMED BY HIGHWAYS INSPECTOR.
6. BULLNOSE KERBS WITH 0-6mm UPSTAND TO BE USED AT ALL DROPPED PEDESTRIAN CROSSINGS.
7. CS2 / EF KERBING WITH 6mm UPSTAND TO BE USED AT BACK OF FOOTWAY WHERE CONNECTING TO PRIVATE DRIVES
8. REFER TO CONSTRUCTION DETAILS ON DRAWINGS D0226-CLK-XX-XX-DR-C-140-141.
9. FOR CONTINUATION OF KERBING LAYOUT, REFER TO DRAWINGS D0226-CLK-XX-XX-DR-C-804-807.
10. FOR SURFACING LAYOUT, REFER TO DRAWINGS D0226-CLK-XX-XX-DR-C-800-803

Rev	Detail	By	Chk	Date
T01	TENDER ISSUE.	FM	DH	27.09.23

Revisions

ClarkeBond Project No. B06163

Status D2

Client: BEWLEY HOMES

Project: ASHTON KEYNES

Purpose of Issue: TENDER

clarkebond
MULTIDISCIPLINARY ENGINEERING CONSULTANTS
The Cocoa House
129 Cumberland Road
Bristol BS1 6UY
tel +44 (0) 117 929 2244
e-mail bristol@clarkebond.com
web www.clarkebond.com
Bristol Exeter London

Drawing Title: KERBING PLAN

SHEET 8

Project	Originator	Volume	Level	Type	Role	Drg No.
D0226	CLK	XX	XX	DR	C	798

Scale	Date	Revision
1:250	SEPT 2023	T01

Drawn	Checked	Sheet Size
FM	DH	A1

© This drawing may not be copied without prior written permission.