

2no new mushroom vent located on rear side of pitched roof, to minimise any visual impact. Provides ventilation to the new hygiene room

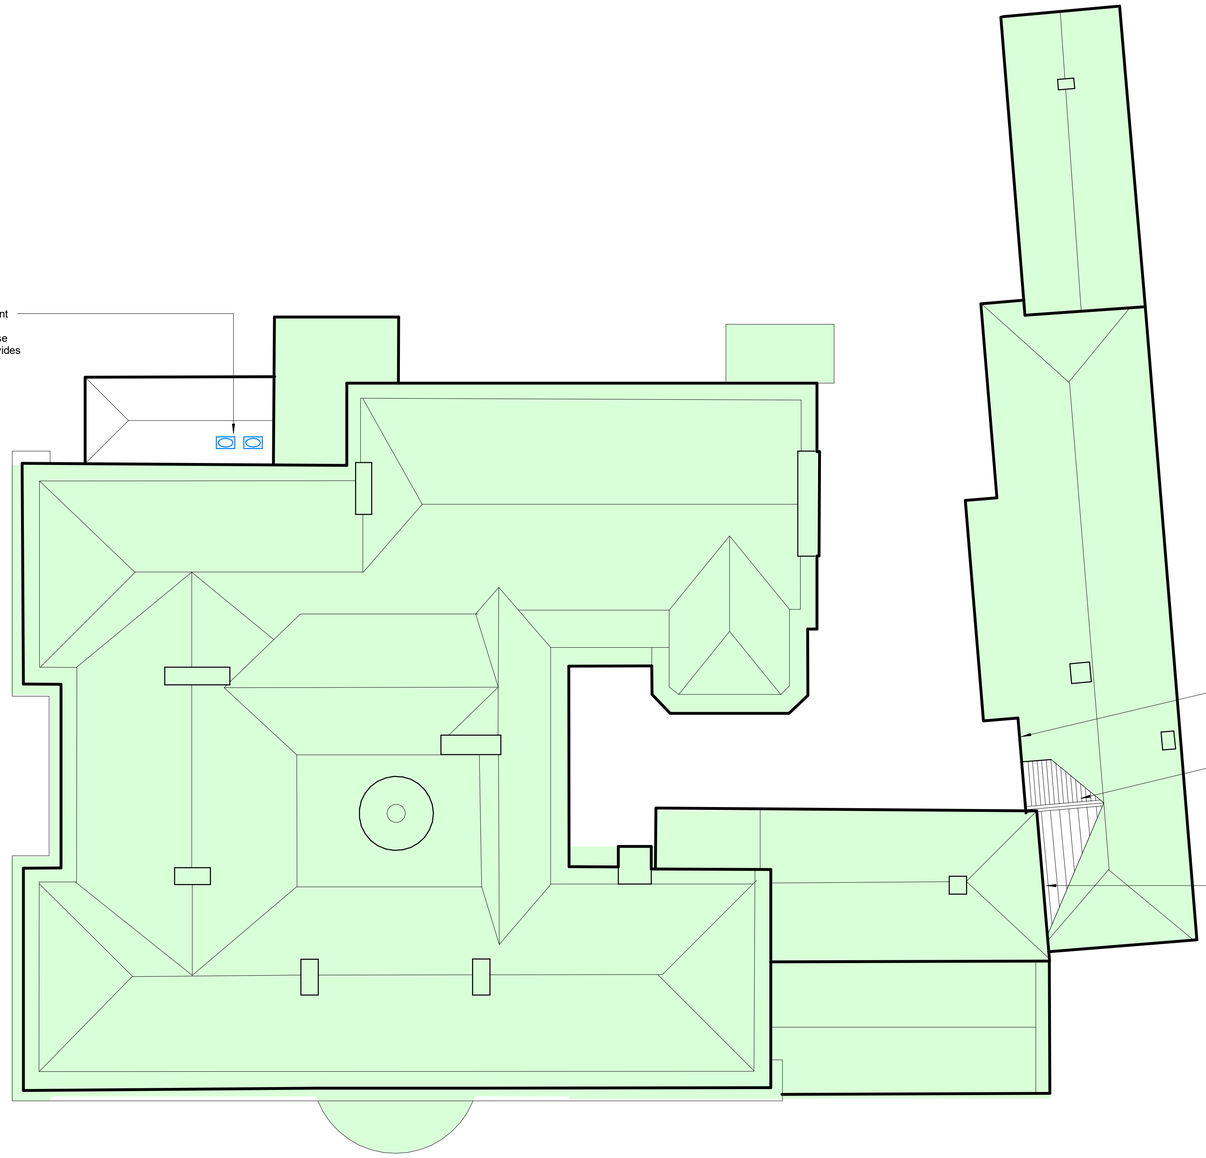

To be read in conjunction with drawings
SWS-AHR-EA-ZZ-DR-A-200100:
Proposed GA Elevations 01
SWS-AHR-EA-00-DR-A-200025:
Level 00 - Proposed Enterprise Space B Works

Section of eaves gutter to be adapted to drain into gutter on adjacent projecting "canopy"

Area of existing roof to be removed.
New "dormer" roof to be constructed to provide headroom above platform lift and raised floor below.
Existing slates to be carefully removed locally and retained for re-use.
Matching reclaimed slates to be obtained and mixed in to make up any deficiency.

Lead soakers and cover flashing cut into existing wall above new roof abutment.
Valley to drain into existing RWP

1. Roof Level Scope of Works Plan

1 : 100

0 1 2 3 4 5 10

28.04.2023 C01 Issued for Listed Building Consent:
Bubbles and associated notations indicate alterations to scope from LBC/PL/2021/06837

Rev	Description	Date	Dr by	App by
C01	Issued for Listed Building Consent	28 04 2023	NK	MC
P01	Issued for Costing	08 03 2023	MP	MC

original by	date created	approved by
NK	06/03/21	DS

AHR Architects Ltd
Vintry Building
Wine Street
Bristol
BS1 2BD
United Kingdom

T +44(0)117 929 9146
E bristol@ahr.co.uk
www.ahr.co.uk

client name
Wiltshire Council

project
Silverwood School Refurbishment

drawing
Rowdeford House
Level Roof - Construction Scope Plan

status
A3 - RIBA STAGE 3

project number	scale	
2022.00488.000	As indicated@A1	
drawing number	issue status	rev
SWS-AHR-EA-RF-DR-A-200010	A3	C01

This drawing is to be read in conjunction with all related drawings. All dimensions must be checked and verified on site before commencing any work or producing shop drawings. The originator should be notified immediately of any discrepancy.
This drawing is copyright and remains the property of AHR.