



Never stop moving!

Terra 360. The EV charger designed for users on the move, in busy urban locations and fleets of commercial vehicles.

—
At ABB, we have 130 years of heritage in accessible technology leadership and a world-leading AC and DC charging portfolio – for safe, smart and sustainable mobility.

That's why some of the world's biggest brands trust us to provide market-leading e-mobility solutions from home to highway to workplace.

Terra 360

Designed around the needs of urban spaces and today's EV driver

Municipalities are banning internal combustion vehicles from the city centers

Gas & oil companies are embracing electric car charging, electricity is a new type of fuel

Distributed fast charging in residential areas is an alternative to traditional refueling stations



Delivery and taxi companies are electrifying their fleets

Cities are investing into high power charging infrastructures for private and public transports

Retail chains are investing in fast charging offering customers a full charge in exchange of an extended visit to the store

Terra 360

The high-power charger for everyone

Designed around the needs of today's EV driver, the Terra 360 is powerful, flexible, user-friendly and designed for accessibility.


Key features

- "All-in-one" integrated design
- Up to 360 kW of charging power
- Serving multiple EVs at the same time
- Dynamic power allocation across the outlets
- Supporting the major charging standards
- CCS charging up to 500A
- Charging batteries up to 920 Vdc
- Integrated cable management system
- Almost 5m of cable reach on all sides of the charger
- 15" touchscreen user interface
- Optional advertisement screens
- Optional credit card payment terminals
- Native support to OCPP 1.6 JSON
- Easy and fast installation and commissioning
- Online and local service and configuration tools
- Native integration to ABB site and fleet power management solutions



A smart and sustainable investment

ABB's Terra 360 is one of the fastest chargers on the market, with up to 360 kW of power available. A compact all-in-one high power charging solution, helping charging network operators deploy fast-charging stations and accelerate the transition to future mobility.

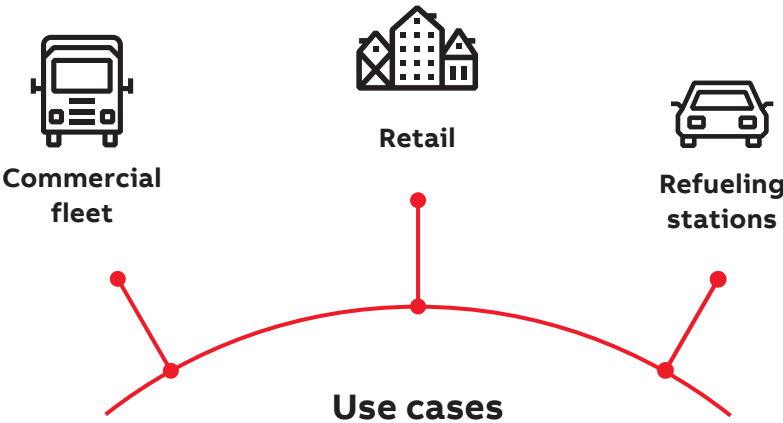

Commercial fleet	Delivery fleet depots, Taxi, EV fleet depots
Retail	Modern urban charging stations, convenience stores, supermarkets, shopping centers, parking structures, car dealerships, racetracks, car dealerships
Refueling stations	Highway refueling stations, high traffic roads



Terra 360 benefits



High performance charging

- Up to 100 km / 60 miles of range in 3 minutes
- Dynamic power allocation
- Sharing power across dual outlets
- Up to 500A on every outlet



Designed for flexibility

- Various parking configurations possible
- Wide range of customization options
- Power modularity from 180 kW up to 360 kW
- Supporting all charging standards




Accessible to everyone

- Start charging in seconds; Plug&Charge ready
- Serving all EV models due to long cable reach
- Cables always ready with integrated retraction system
- Designed to be wheelchair user friendly




User centric design

- Simple and intuitive user interface
- User guided by the innovative LED lighting system
- Entertainment and information with the optional advertisement screen
- Easy branding and colour customization

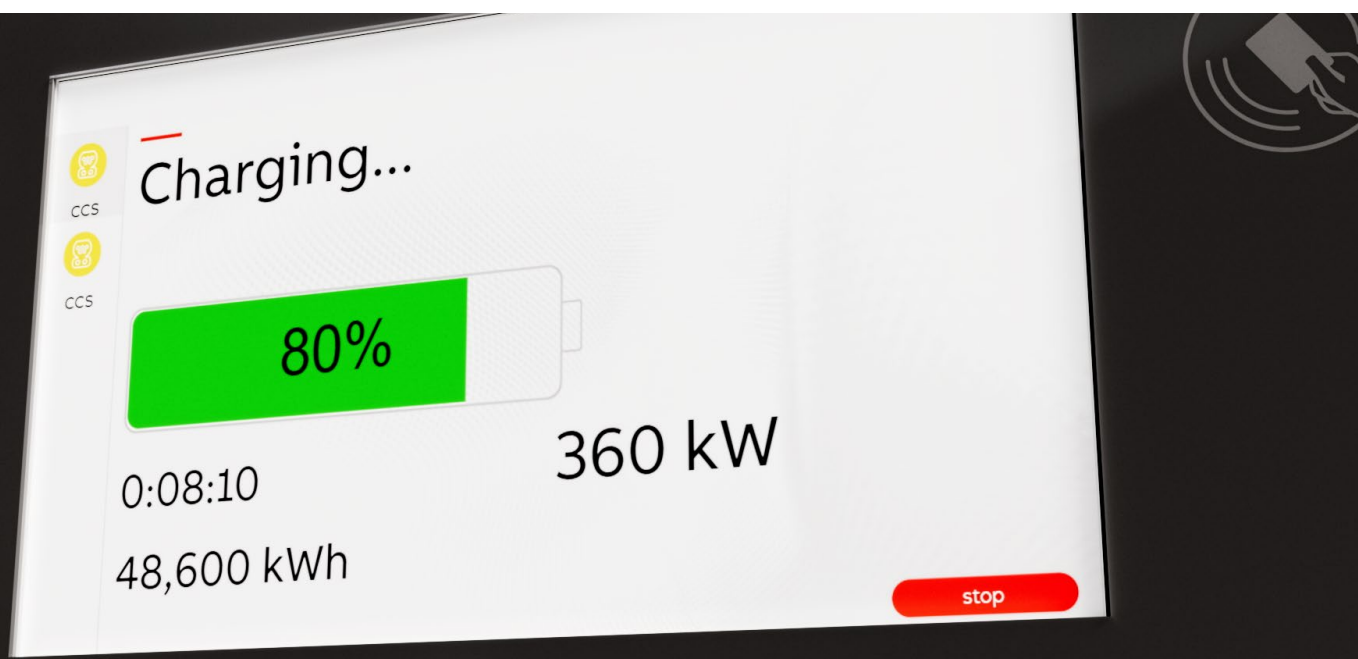

The Terra 360 all-in-one high-power charger

At a glance

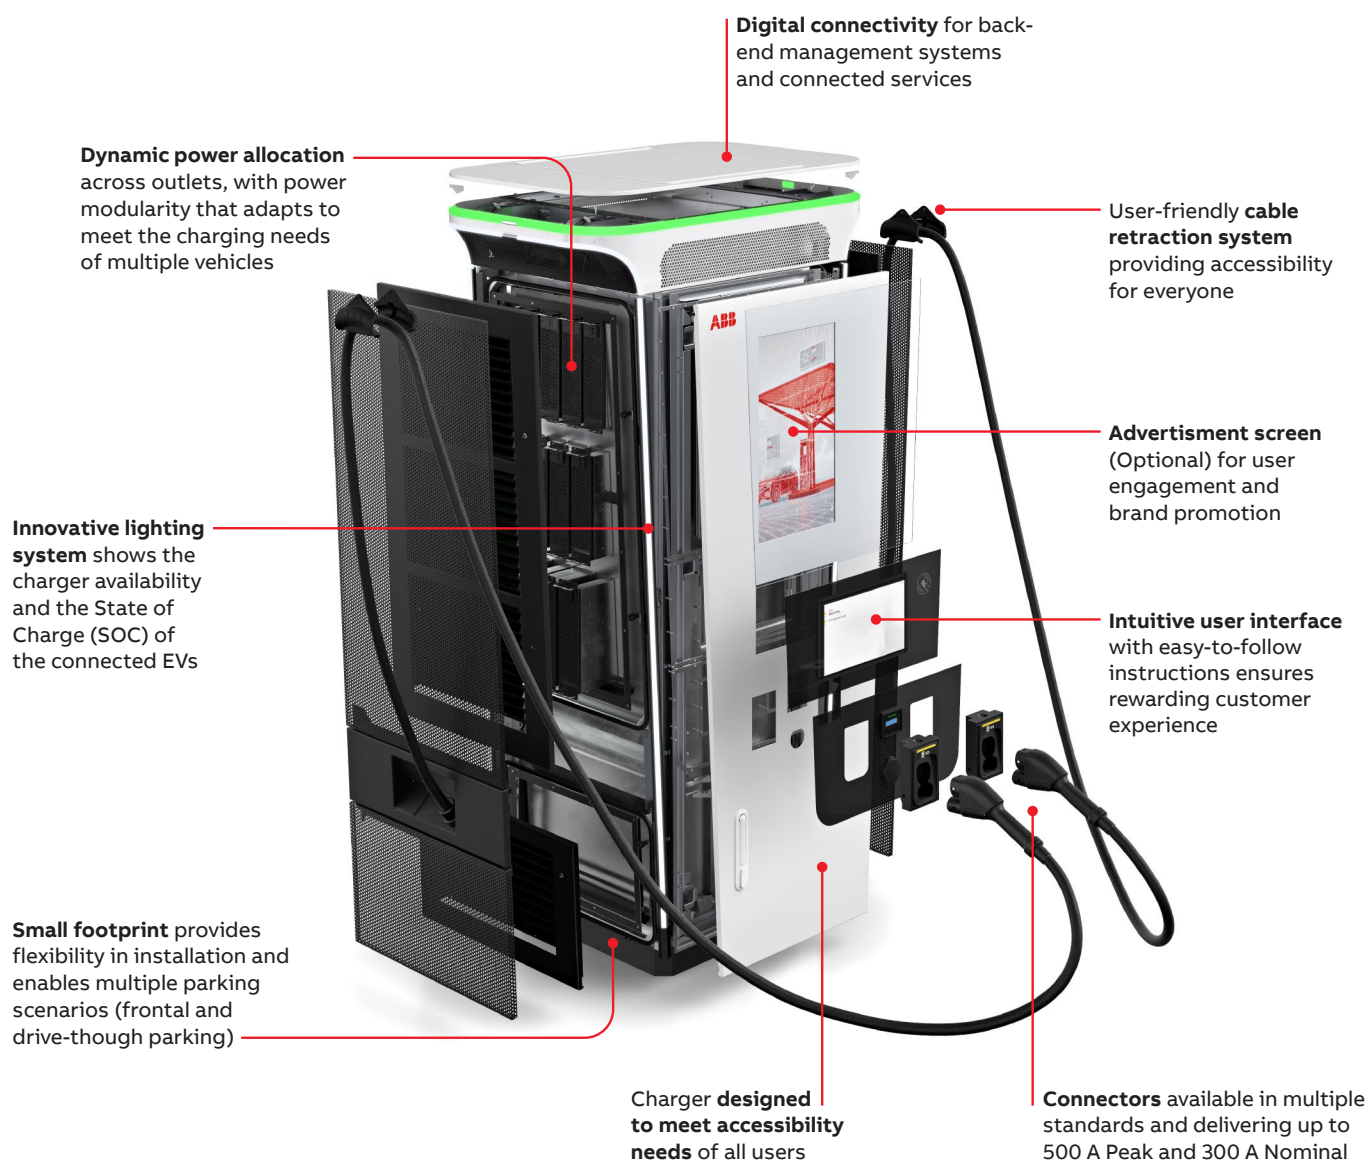

CHARGING POWER

CCS charging up to 360 kW
CHAdeMO charging up to 150 kW

Technical specification

	Terra 360 CC	Terra 360 CJ
Connector		
Charging standard	Mode 4	
Number of outputs	2	
Number of EV served	Up to two EV in parallel	
Output combinations	Cable with connector CCS 2	Cable with connector CCS 2 Cable with connector CHAdeMO
Cable type	Air cooled	
Cable Length	Standard: 4.7 m	
Efficiency	> 95% at nominal output power	
DC output		
DC output power	360 kW (peak)	360 kW (peak)
DC output voltage	CCS 150 - 920 VDC	CCS 150 - 920 VDC CHAdeMO 150 - 500 VDC
DC output current	Nominal 300 A DC / Peak 500 A DC	CCS: Nominal 300 A DC / Peak 500 A DC CHAdeMO: Nominal 200 A
AC input		
Input connection	3 Phases + PE	
Input voltage	400 V AC +/- 10% (50 Hz)	
Input frequency	50 Hz	
Input Current	560 A	
Input power	390 KVA	
Power Factor	> 0.96 (at full load)	
Harmonic Distortion (THDi)	4.5% at full output power	
Earthing systems	TN-S, TN-C, TN-C-S, TT (with upstream RCD)	
Standby power	80 W, excluding the heater	
Overvoltage category (1)	Type III	
Protection	Overcurrent, overvoltage, undervoltage, ground fault including DC leakage protection, overtemperature, integrated surge protection	
Short circuit current	25 kA	
Mechanical		
Dimensions (H x W x D)	2215 x 1210 x 764 mm	
Mounting Type	Floor mounted	
Weight	848 kg	
Enclosure type	Stainless steel 430 and Aluminium	
IK rating (2)	IK10 (HMI: IK08)	
Environmental		
IP rating	IP54	
Enclosure Type	Indoor and outdoor	
Maximum operating altitude	Up to 2000 m	
Temperature range	-35 °C to +55 °C (de-rating characteristic applies from 40 °C)	
Operating humidity	20-95 % Rh non-condensing	
Noise level	<75 dB(A) at 1m distance @ 25 °C on front door, at full power	
Interface		
Screen Type	15" LCD high-contrast touchscreen	
Languages	Standard Language English (Others available via Software upgrade)	
Cellular communication	GSM / 4G / LTE	
Communication Protocol	Open Charger Point Protocol (OCPP) 1.6 (and previous versions)	
Authentication methods	RFID (Standards, Cards..), On-screen PIN code authorization Option: payment terminal; Prepared for ISO 15118 - 2 PnC	
RFID system	ISO 14443 A+ B to part 4 and ISO/IEC 15693 Others available on request (NFC, Calypso, Ultralight, PayPass, HID; and more)	
Energy metering	Ready for Eichrecht/PTB compliancy for AC and DC outlets	
Standards and certification		
Declaration of Conformity	CE	
Low voltage Directive	EN 61851-1:2011, EN 61851-23:2014, EN 61851-1:2010, IEC 61851-1:2010, IEC 61851-23:2014, EN IEC 62311:2020	
EMC	EN IEC 61000-6-1: 2019, EN 61000-6-4:2007+A1, IEC 61851-21-2_2021, EN 301489-1 v1.9.2, EN 301489-34 V1.4.1	
RED	EN 300330 V2.1.1:2017, EN 301908-13 V13.1.1:2019, EN 301489-1 V2.2.3:2019, EN 50364:2010, EN 301489-3 V2.1.2:2021, EN 301489-52 V1.1.2:2020, EN IEC 62311:2020, EN 301908-2 V13.1.1:2020	
Additional compliance with standards	IEC 62196-2, IEC 62196-3, CHAdeMO 1.2	

(1) IEC 60664-1:2020

(2) According to IEC 62262



<https://emobility.abb.com/>