
TUCKER JOINERY

Apple Tree Cottage - S1

Client Mr & Mrs Salt
Job Number lee5900

Description Open out screen for 58mm doors.Frame to come complete with integral draft seals and mobility threshold
WOOD TYPE: Sapele
See glass schedule
FINISH TYPE: 2 coats of Teknos exterior water borne primer Followed by 1 top coat to a ccolour match of choice .Cost includes protective wrapping to all joinery prior to delivery . Please note this price is for one colour of choice to inside and outside elevations .If more than one coloiur is needed then a price can be supplied .Please note this cost is for 1 colour throughout

Type S
Width 2010
Height 1970
Qty. 1
Viewed from outside.

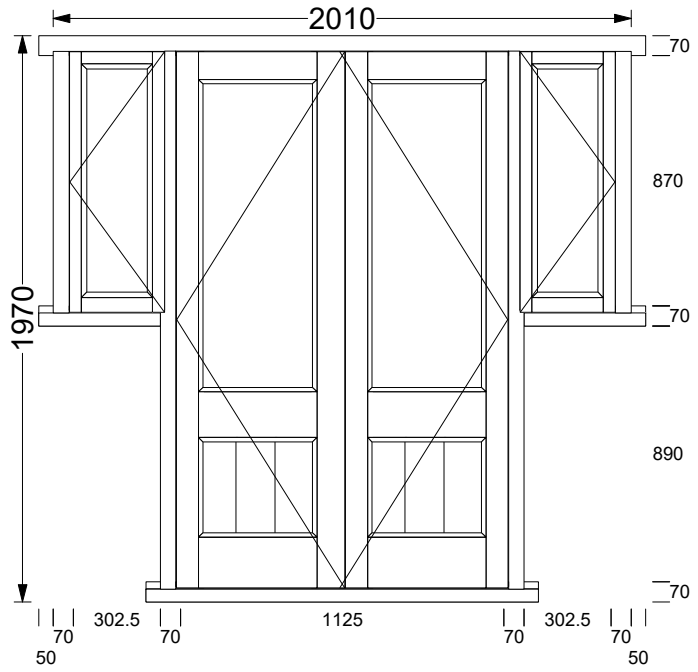

SCREEN FRAME COMPONENT LIST

Componen (Rebates 16 × 65)	Qty.	Rough cut length		Width	Thickness	S/L	T/L	
Head	1	2135	2110	96	70			
Cill	1	1390	1365	96	70	9 degrees		
Face mounted cill weathering	1	1390	1365	70	45			
Winglight Cill	1	517	492.5	96	70	9 degrees		
Face mounted cill weathering	2	447	422.5	70	45			
Jamb	2	1035	1010	95	70	909.7	55	55
Winglight Cill	1	517	492.5	96	70	9 degrees		
Mullion	1	1996	1971	96	70	1870.8	55	55
Mullion	1	1996	1971	96	70	1870.8	55	55
(WOOD TYPE:Acoya)	1	333	333					
(WOOD TYPE:Acoya)	1	2133	2133					
F16 Draught seal Door frames (WOOD TYPE:Utile)	1	1157	1157					
F16 Draught seal Door frames (WOOD TYPE:Utile)	1	4879	4879					
(WOOD TYPE:Acoya)	1	333	333					
(WOOD TYPE:Acoya)	1	2133	2133					

VERTICAL SETTING OUT

70	Head
940	
1010	Winglight Cill
1900	
1970	Cill

TUCKER JOINERY

Apple Tree Cottage - S1

Client Mr & Mrs Salt
Job Number lee5900

Description Open out screen for 58mm doors.Frame to come complete with integral draft seals and mobility threshold
WOOD TYPE: Sapele
See glass schedule
FINISH TYPE: 2 coats of Teknos exterior water borne primer Followed by 1 top coat to a ccolour match of choice .Cost includes protective wrapping to all joinery prior to delivery . Please note this price is for one colour of choice to inside and outside elevations .If more than one coloiur is needed then a price can be supplied .Please note this cost is for 1 colour throughout
.

HORIZONTAL SETTING OUT	
50	
120	Jamb
422.5	
492.5	Mullion
1617.5	
1687.5	Mullion
1990	
2060	Jamb
2110	

TUCKER JOINERY


Apple Tree Cottage - D1

Client Mr & Mrs Salt
Job Number lee5900

Description DOOR TYPE:57mm thick Pre hung using 5 lever multi pont security locks, Adjustable hinges and Black wrought furniture from the Anvill.
WOOD TYPE: Sapele
See glass schedule
FINISH TYPE: 2 coats of Teknos exterior water borne primer Followed by 1 top coat to a ccolour match of choice .Cost includes protective wrapping to all joinery prior to delivery . Please note this price is for one colour of choice to inside and outside elevations .If more than one coloiur is needed then a price can be supplied .Please note this cost is for 1 colour throughout


This item is
Double Doors

Doors opening out.
Viewed from outside.

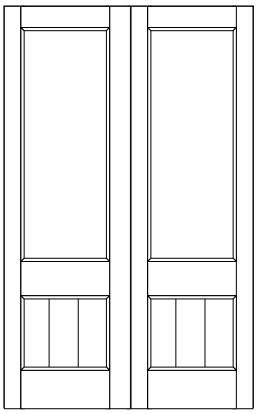

Qty. 1

LEFT HAND DOOR

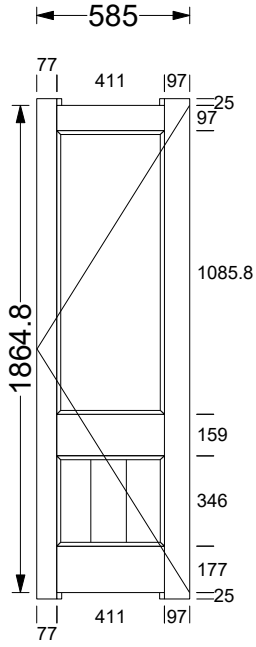

LEFT HAND DOOR COMPONENT LIST

Componen (Rebates 18 × 41)	Qty.	Rough cut length		Width	Thickness	S/L	T/L	
Stile (large)	1	1939	1914.8	95	58			
Left door meeting stile (large)	1	1939	1914.8	115	57			
Top rail (large)	1	630	605	115	58	411	97	97
Bottom rail (large)	1	630	605	195	58	411	97	97
Lock/Mid rail	1	630	605	195	58	411	97	97
Below lock/mid rail panel left or top outer board	1	371	346	135.7	57	Panel Width 407		
Left/top & Right/bottom Tongues, Cover Width, Board Gap		0	0	135.7	0			
Below lock/mid rail panel inner board	1	371	346	143.7	57			
Left/top & Right/bottom Tongues, Cover Width, Board Gap		8	0	135.7	0			
Below lock/mid rail panel right or bottom outer board	1	371	346	143.7	57	Panel Width 407		
Left/top & Right/bottom Tongues, Cover Width, Board Gap		8	0	135.7	0			

Total meterage	Rough cut length		Width	Thickness
Above lock/mid rail glazing bead (standard)	3.1	3	18	15
Below lock/mid rail glazing bead (standard)	1.6	1.5	18	15

TUCKER JOINERY

Apple Tree Cottage - D1

Client Mr & Mrs Salt
Job Number lee5900

Description DOOR TYPE:57mm thick Pre hung using 5 lever multi pont security locks, Adjustable hinges and Black wrought furniture from the Anvill.
WOOD TYPE: Sapele
See glass schedule
FINISH TYPE: 2 coats of Teknos exterior water borne primer Followed by 1 top coat to a ccolour match of choice .Cost includes protective wrapping to all joinery prior to delivery . Please note this price is for one colour of choice to inside and outside elevations .If more than one coloiur is needed then a price can be supplied .Please note this cost is for 1 colour throughout .

LEFT HAND DOOR VERTICAL SETTING OUT	
25	
122	Top rail (large)
1207.8	
1366.8	Lock/Mid rail
1712.8	
1889.8	Bottom rail (large)
1914.8	

LEFT HAND DOOR HORIZONTAL SETTING OUT	
77	Stile (large)
488	
585	Left door meeting stile (large)

TUCKER JOINERY


Apple Tree Cottage - D1

Client Mr & Mrs Salt
Job Number lee5900

Description DOOR TYPE:57mm thick Pre hung using 5 lever multi pont security locks, Adjustable hinges and Black wrought furniture from the Anvill.
WOOD TYPE: Sapele
See glass schedule
FINISH TYPE: 2 coats of Teknos exterior water borne primer Followed by 1 top coat to a ccolour match of choice .Cost includes protective wrapping to all joinery prior to delivery . Please note this price is for one colour of choice to inside and outside elevations .If more than one coloiur is needed then a price can be supplied .Please note this cost is for 1 colour throughout


This item is
Double Doors

Doors opening out.
Viewed from outside.

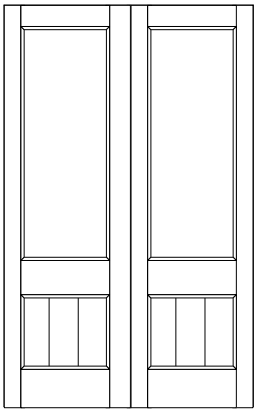

Qty. 1

RIGHT HAND DOOR

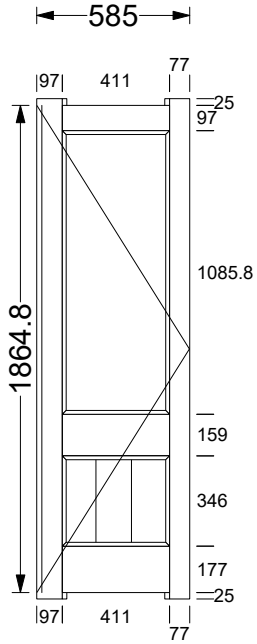

RIGHT HAND DOOR COMPONENT LIST

Componen (Rebates 18 × 41)	Qty.	Rough cut length		Width	Thickness	S/L		T/L
Right door meeting stile (large)	1	1939	1914.8	115	57			
Stile (large)	1	1939	1914.8	95	58			
Top rail (large)	1	630	605	115	58	411	97	97
Bottom rail (large)	1	630	605	195	58	411	97	97
Lock/Mid rail	1	630	605	195	58	411	97	97
Below lock/mid rail panel left or top outer board	1	371	346	135.7	57	Panel Width 407		
Left/top & Right/bottom Tongues, Cover Width, Board Gap		0	0	135.7	0			
Below lock/mid rail panel inner board	1	371	346	143.7	57			
Left/top & Right/bottom Tongues, Cover Width, Board Gap		8	0	135.7	0			
Below lock/mid rail panel right or bottom outer board	1	371	346	143.7	57	Panel Width 407		
Left/top & Right/bottom Tongues, Cover Width, Board Gap		8	0	135.7	0			

Total meterage	Rough cut length		Width	Thickness
Above lock/mid rail glazing bead (standard)	3.1	3	18	15
Below lock/mid rail glazing bead (standard)	1.6	1.5	18	15

TUCKER JOINERY

Apple Tree Cottage - D1

Client Mr & Mrs Salt
Job Number lee5900

Description DOOR TYPE:57mm thick Pre hung using 5 lever multi pont security locks, Adjustable hinges and Black wrought furniture from the Anvill.
WOOD TYPE: Sapele
See glass schedule
FINISH TYPE: 2 coats of Teknos exterior water borne primer Followed by 1 top coat to a ccolour match of choice .Cost includes protective wrapping to all joinery prior to delivery . Please note this price is for one colour of choice to inside and outside elevations .If more than one coloiur is needed then a price can be supplied .Please note this cost is for 1 colour throughout .

RIGHT HAND DOOR VERTICAL SETTING OUT	
25	
122	Top rail (large)
1207.8	
1366.8	Lock/Mid rail
1712.8	
1889.8	Bottom rail (large)
1914.8	

RIGHT HAND DOOR HORIZONTAL SETTING OUT	
97	Right door meeting stile (large)
508	
585	Stile (large)

TUCKER JOINERY


Apple Tree Cottage - C1

Client Mr & Mrs Salt
Job Number lee5900

Description Screen Casement 57mm thick
WOOD TYPE: Sapele
See glass schedule
FINISH TYPE: 2 coats of Teknos exterior water borne primer Followed by 1 top coat to a ccolour match of choice .Cost includes protective wrapping to all joinery prior to delivery . Please note this price is for one colour of choice to inside and outside elevations .If more than one coloiur is needed then a price can be supplied .Please note this cost is for 1 colour throughout


This item is
Single Screen Casement

Casements opening out.
Viewed from outside.

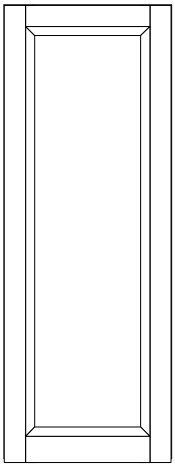

Qty. 2

SINGLE SCREEN CASEMENT

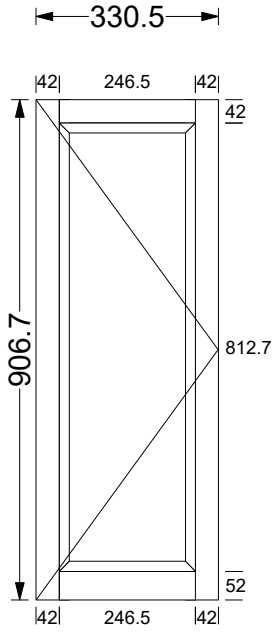

1x SIDE VENT LEFT + 1x SIDE VENT RIGHT CASEMENT COMPONENT LIST

Componen (Rebates 18 × 41)	Qty.	Rough cut length		Width	Thickness	S/L		T/L
Casement stile (large)	4	931	906.7	60	58			
Casement top rail (large)	2	355	330.5	60	58	266.5	42	42
Casement bottom rail (large)	2	355	330.5	70	58	266.5	42	42
(WOOD TYPE:Acoya)	2	2118	2118					
(WOOD TYPE:Acoya)	2	2118	2118					

Total meterage	Rough cut length		Width	Thickness
Glazing bead (standard)	4.4	4.2	18	15

SINGLE SCREEN CASEMENT VERTICAL SETTING OUT

42	Casement top rail (large)
854.7	
906.7	Casement bottom rail (large)

SINGLE SCREEN CASEMENT HORIZONTAL SETTING OUT

42	Casement stile (large)
288.5	
330.5	Casement stile (large)

TUCKER JOINERY

Apple Tree Cottage - B2

Client Mr & Mrs Salt
Job Number lee5900

Item Name Cost to supply the site fitting of the above joinery .Cost includes the following , Waste removal of existing joinery by means of a skip ,All Access equipment where needed , Internal plasterwork repairs up to 40mm from frame edges using a 6mm cover bead ,External Silicon sealing to all frames.Exclusions include making good of existing decorations ,Making good of external plasterwork or brickwork.Please note prior to Tucker Joinery fitting Joinery al relivent permisions will need to be granted.

Width	0
Height	0
Depth	0
Qty.	1

Type Fitting
Description Door Fitting



BOM COMPONENT LIST

Component Description	Timber	Qty.	Length	Width	Thickness

Client Mr & Mrs Salt
Job Number lee5900

GLASS / SHEET MATERIAL SIZES

Ref.	Type	Quantity	Width	Height
S1	Sash - GLASS TYPE:4/16/4 soft coat , argon gas filled warm edge spacer . Duplex Bar . Clear Touphuned	2	241	807
S1	Door - GLASS TYPE:4/16/4 soft coat , argon gas filled warm edge spacer . Duplex Bar . Clear Touphuned	1	405	1080
S1	Door - GLASS TYPE:4/16/4 soft coat , argon gas filled warm edge spacer . Clear Touphened	1	405	1080