




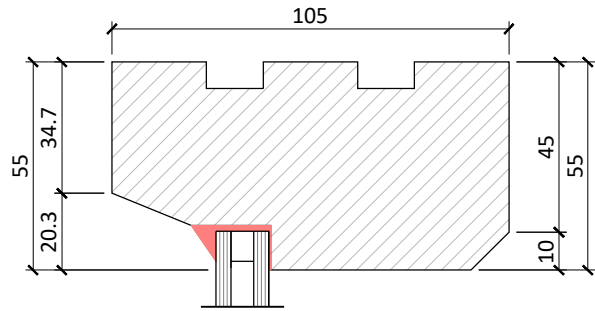


HEADER DETAIL

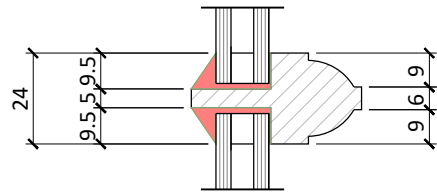

GLAZING BEAD DETAIL

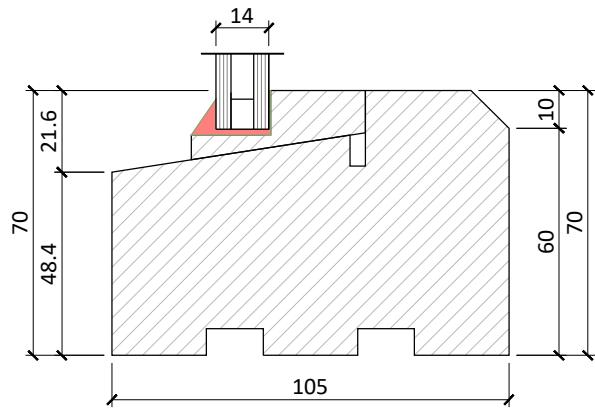

CILL DETAIL

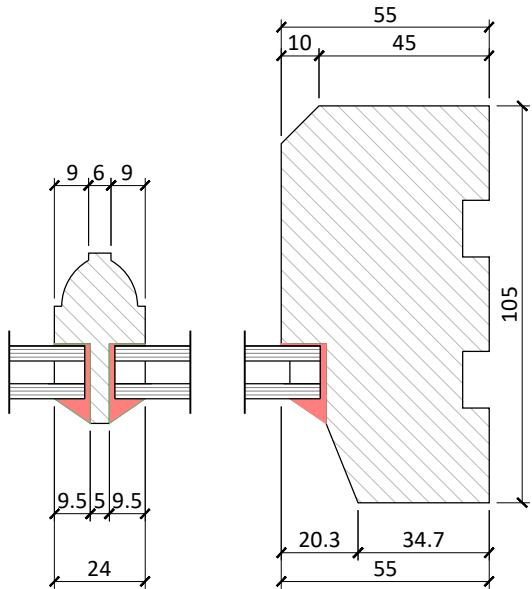


JAMB / BEAD DETAIL

Material	Manufactured in selected engineered laminated pine or hardwood, sourced from sustainable and managed forestry (FSC or PFEC certified)
Mechanism	Fixed light casement
Weatherseal	The window is fully weather sealed to BS EN 6375-1 2009
Glazing	Windows are glazed using Slim sealed units and traditionally sealed externally using a white glazing putty, to match existing
Glass	Slim dual sealed units complying with BS EN 1279 parts 1-6 up to 18mm thickness typically achieving a whole window Acoustic value up to 36dB noise reduction
Thermal Performance	Thermal performance is calculated by the standards of EN ISO 10077-1:2006 and typically this window achieves a U-value of 1.8 W/m²K or better
Glazing Bars	Solid traditional framed glazing bars with individual glass units
Cills	Manufactured in Hardwood
Factory Finishing	Glazing beads painted white to suit existing. Framing timber left natural finish.

NOTES:
1. Figured dimensions to be taken in preference to scaled dimensions.
2. Large scaled drawings to be taken in preference to small scale.
3. Critical dimensions to be taken from site.
4. If in doubt, the contractor must ask for clarification.
5. These drawings and designs are the copyright of James Slater & Co. and may not be reproduced or used without permission.

Rev.ID	Rev.date	Rev.by	Comment
--------	----------	--------	---------



CLIENT:
Mr James Hoffman

TITLE:
Proposed
Window Details

STAGE:
Planning

SITE:
Nuthills Farm
Sandy Lane
SN15 2PY



19 Dyer Street
Cirencester
Gloucestershire
GL7 2PP
Tel: 01285 650686
Fax: 01285 644212



www.jamesslater.co.uk

SCALES:
1:10 @ A3

DATE:
25/06/2024

DRAWN:
AI

CHECKED:
*

DRAWING NUMBER:
24-077-210

REV:
-