

1. Origin Log Steppers



2. Origin Duo Springer



3. Origin Springer





4. Origin Multiplay Unit



5. Bench



6. Litter Bin

SURFACING DETAIL

Not to Scale

CHASE CUT INTO GRASS & PCC EDGE - NEW SUBBASE - SURFACE LEVEL

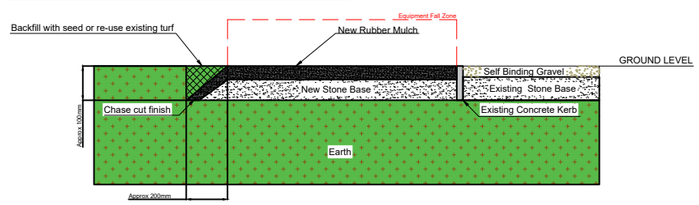

ITEMS LIST

Play Equipment

1.	Origin Log Steppers	Ref: J4904A
2.	Origin Duo Springer	Ref: J882A
3.	Origin Springer	Ref: J880A
4.	Origin Multiplay Unit (Z22-4908)	Ref: UKJ4931SP1400

Ancillaries

5.	Chaumont Bench	Ref: RBA8
6.	Broxap Derby Standard Litter Bin with fixing kit	120Ltr (Flat Top & Black) Ref: UKBX45G2550
7.	Broxap Sirius Dog Waste Bin 60Ltr inc. post (RED)	Ref: UKBX45G2591-PM
8.	Signs Express A2 STANDARD Play Area Notice Sign - Panel with protective trim, end caps & Gate Fixings inc. delivery	Ref: UKA2GS
9.	1.0m High Combination Gate (RH Opening Outward) - Yellow	Ref: UKN1104
10.	1.0m High Hydraulic Self Closing Gate (RH Opening Outward) - Yellow	Ref: UKN1101
11.	52LM Bowtop Fence 1m High Powdercoated Green	Ref: UKN1002

Safety Surfacing

Area to be surfaced with 107m² Green Bonded Rubber Mulch inc Yellow Wetpour wear pads. Max critical fall height 1.17m.

Colour breakdown:
102.5m² Green Bonded Rubber Mulch
4.5m² Yellow Wetpour

Includes 38LM Chase Cut Edges in to grass.

Groundworks

Rubber Mulch requires full groundworks, these equate to:
- 107m² Excavation into GRASS up to 200mm deep
- 107m² Supply & Lay MOT Type 1 Stone 100mm Deep

Miscellaneous
- Delivery & Off-loading of partnership & landscaping elements (not included in the Proludic delivery)
- Prelims
- Post Installation Inspection

Subject to full site survey from a Proludic Representative.

Based on a flat fully established grass site.

Rubber Mulch price based on a well draining site, any additional drainage required (french drains or soak aways) will be at an additional cost.

Rubber Mulch will follow the natural contours of the land.

Preliminaries have been included within your quotation, these equate to site setup, safety fencing, safety signage, welfare, offloading of equipment, storage & waste removal.

Measurements taken from client drawing Ref: DD562L20_LAP Design. Measurements correct at time of CAD drawing.

Topsoil & Turf/Seed to be done by others (watering is the responsibility of others and has not been costed for).

All pathways, furniture, planting, mounding and any other soft landscaping works not mentioned above are to be done by others.

Fencing will be made up from standard straight lengths and installed faceted. If rounded fencing is required this will incur additional costs.

Some images shown are for illustrative purposes only. The quote and items list will show the exact equipment used.

PRODUCT KEY

Grass
Spring bulb planting (by others)
Green Rubber Mulch
Chase Cut
Yellow Wetpour Wear Pad
Fencing
Tarmac (by others)
Self Binding Gravel (by others)
Free Fall
Free Space

Netherhampton North (LAP) - Wiltshire

Linden Homes Western

DATE: 07/11/2023 REF: 2311.40763(NetherhamptonNorthLAP_LindenHomesW)revA

REV: A DB: KA CB: AL SCALE: 1:100 @ A3

N

Proludic®
Designer of play and sports areas