

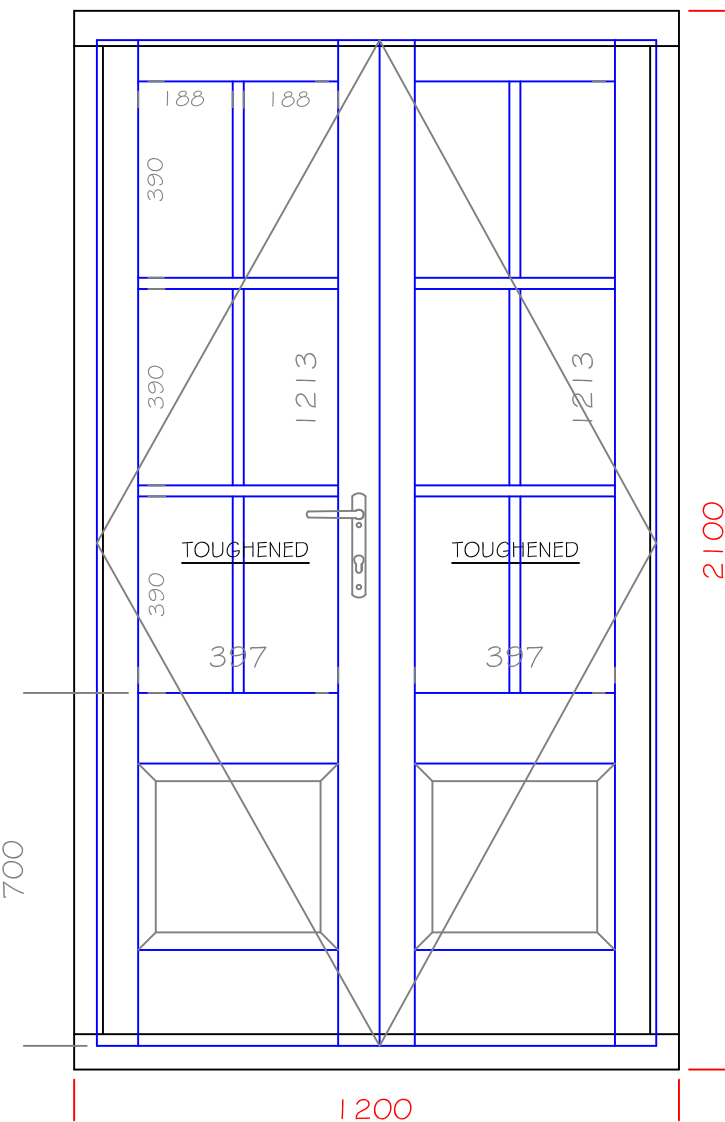


PFI - Outward opening CONSERVATION French doors

Version 1



Version 2

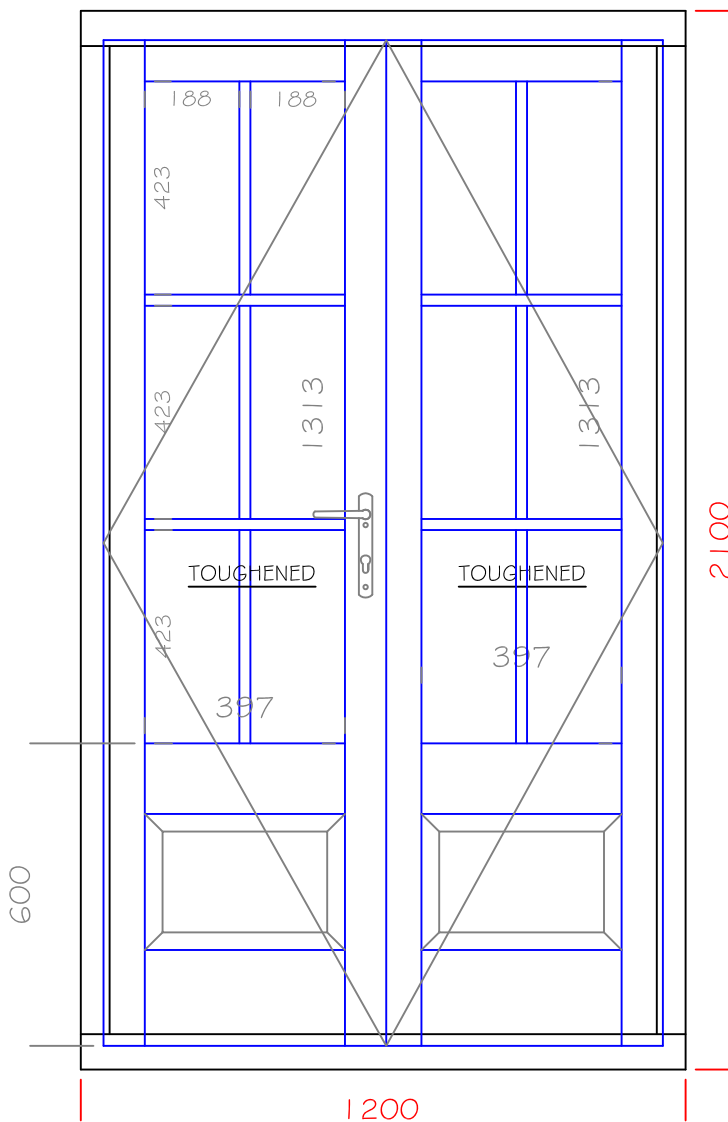

Outward opening
Viewed from outside

Specification:

Set- up - Conservation French doors closely replicating originally intended designs & detail. Doors and framework with traditional ovolo moulding detail internally, chamfered putty profile glazing beads externally. 24mm flat insulated Cosmo Therm panels with externally surrounding 35mm x 12mm panel moulding around each of the panels in the lower part of the doors. Depth of the framework 95mm , doors 52mm deep.

Timber - Accoya door leaves & framework, threshold Sapele hardwood

Glass - High performance SLIM SEAL 18mm (4-10-4 Low E Euroglass Silverstar Zero) KRYPTON gas filled CONSERVATION double glazed units, all toughened glass

Paint finish - All traditional white RAL 9016 internally and externally

Door fittings - Each of the doors with 3 no. ball bearing hinges & 2 no. hinge bolts, leading door with KfV multi - point espagnolette locking system, high security MP10 euro cylinder and period design espagnolette door handles from Carlisle Brass range. **Satin chrome fittings**

Installation - into existing openings by others



26 Kimble Road
LONDON SW19 2AS
t: 0208 286 9279 m: 07866 385 447
www.amodus.co.uk

Conservation French doors	
CLIENT:	James Wood
SITE ADDRESS:	Praters Farm, Sherston SN16 0PS
JOB NO/ DATE:	25798/ 16-12-2025
SCALE:	1/15 @A3 Drawing No 01