62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd

Tree No. or Group no	Species	Height (m)	Dai. at 1.5m (mm)	Crown clearance from base (m)	Crown spread (compass points) (m)	Age Class	Phys condition	Structural condition	Tree management recommendations	Remaining contribution (yrs)	Category grading (see footer)	RPA (Radius from centre of tree) (m)
H1	Mixed species of shrubs, apple & cypress	4	>120	0	2 all round	M	Good	Fair. Swamped by ivy and bramble.	Reduce to a 3m screen/boundary hedge and trim side to maintain as a screen.	10+	C2	1
H2	Western red cedar hedge	3	150 average	0	1 depth	M	Good	Good	Remove to accommodate development. (must be completed outside of nesting season)	10+	B2	N/A – to be removed

M/S – Multi stemmed
A – High quality tree
B – Moderate quality tree
C – Low quality tree
U – Remove
1 - Mainly arboricultural values
2 – Mainly landscape values
3 – Mainly cultural/conservation values

V - Veteran
M – Mature
EM – Early Mature
SM – Semi Mature
Y - Young
D - Dead

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**

62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd

T3	Apple sp	7	220	2	3 all round	M	Good	Good	Seasonal prune and thin	20+	A1,2	2.6
H4	Mixed species hedge dominated by cypress	4	150 av	0	1 depth	M	Good	Good	Annual maintenance as a 3m screen	20+	B2	1
T5	Lime	17	482	0	S 7 N 2 E&W 6	M	Good	Fair to good. Possible main union issues but unseen due to heavy ivy coverage.	Sever ivy in 6" swathe at base. Remove all basal growth and epicormic. Raise to 6m over neighbour's property to west.	20+	B1,2	5.7

M/S – Multi stemmed
A – High quality tree
B – Moderate quality tree
C – Low quality tree
U – Remove
1 - Mainly arboricultural values
2 – Mainly landscape values
3 – Mainly cultural/conservation values

V - Veteran
M – Mature
EM – Early Mature
SM – Semi Mature
Y - Young
D - Dead

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**

62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd

T6	Lime	21	2 stems: 615 630	4	6 all round	M	Good	Fair to good. Possible main union issues but unseen due to heavy ivy coverage.	Sever ivy in 6" swathe at base. Thin canopy by 20% and remove deadwood throughout.	20+	B1,2	7.4
T7	Lime	15	350	4	E & W 4 N & S 0	M	Good	Fair to good. Possible main union issues but unseen due to heavy ivy coverage.	Sever ivy in 6" swathe at base. Remove all basal growth and epicormic.	20+	B1,2	4.2
T8	Walnut	17	565	7	N & S 3 E & W 8	M	Good	Fair to good. Possible main union issues but unseen due to heavy ivy coverage.	Sever ivy in 6" swathe at base. Prune back laterals over neighbour's garden by 3m to minimise branch failure. Remove deadwood.	20+	B1,2	6.7

M/S – Multi stemmed
A – High quality tree
B – Moderate quality tree
C – Low quality tree
U – Remove
1 - Mainly arboricultural values
2 – Mainly landscape values
3 – Mainly cultural/conservation values

V - Veteran
M – Mature
EM – Early Mature
SM – Semi Mature
Y - Young
D - Dead

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**

62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd

T9	Lime	21	785	7	S 4 N 7 E & W 7	M	Good	Fair to good. Possible main union issues but unseen due to heavy ivy coverage.	Sever ivy in 6" swathe at base. Prune back over extended lateral at 8m on eastern side by 3m. Remove deadwood.	20+	B1,2	9.4
T10	Lime	17	480	3	3 all round	M	Good	Fair to good. Possible main union issues but unseen due to heavy ivy coverage.	Sever ivy in 6" swathe at base. Remove sub stem on western side and thin out growth on western side by 30%.	20+	B1,2	5.7

M/S – Multi stemmed
A – High quality tree
B – Moderate quality tree
C – Low quality tree
U – Remove
1 - Mainly arboricultural values
2 – Mainly landscape values
3 – Mainly cultural/conservation values

V - Veteran
M – Mature
EM – Early Mature
SM – Semi Mature
Y - Young
D - Dead

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**

62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd

T11	Lime	21	885	2	6 all round	M	Good	Number of compressed unions. Fair	Remove basal growth. Raise to 6m over western neighbouring property. Thin by 20% to relieve weight on unions. Remove deadwood.	20+	B1,2	10.6
T12 – T14	3 x apples sp	5	Trees in very poor state, swamped by ivy and better to be removed and replaced.								U	N/A

Tree location plan is shown below where the numbers relate to the table above.


M/S – Multi stemmed
A – High quality tree
B – Moderate quality tree
C – Low quality tree
U – Remove
1 - Mainly arboricultural values
2 – Mainly landscape values
3 – Mainly cultural/conservation values

V - Veteran
M – Mature
EM – Early Mature
SM – Semi Mature
Y - Young
D - Dead

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**

62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd

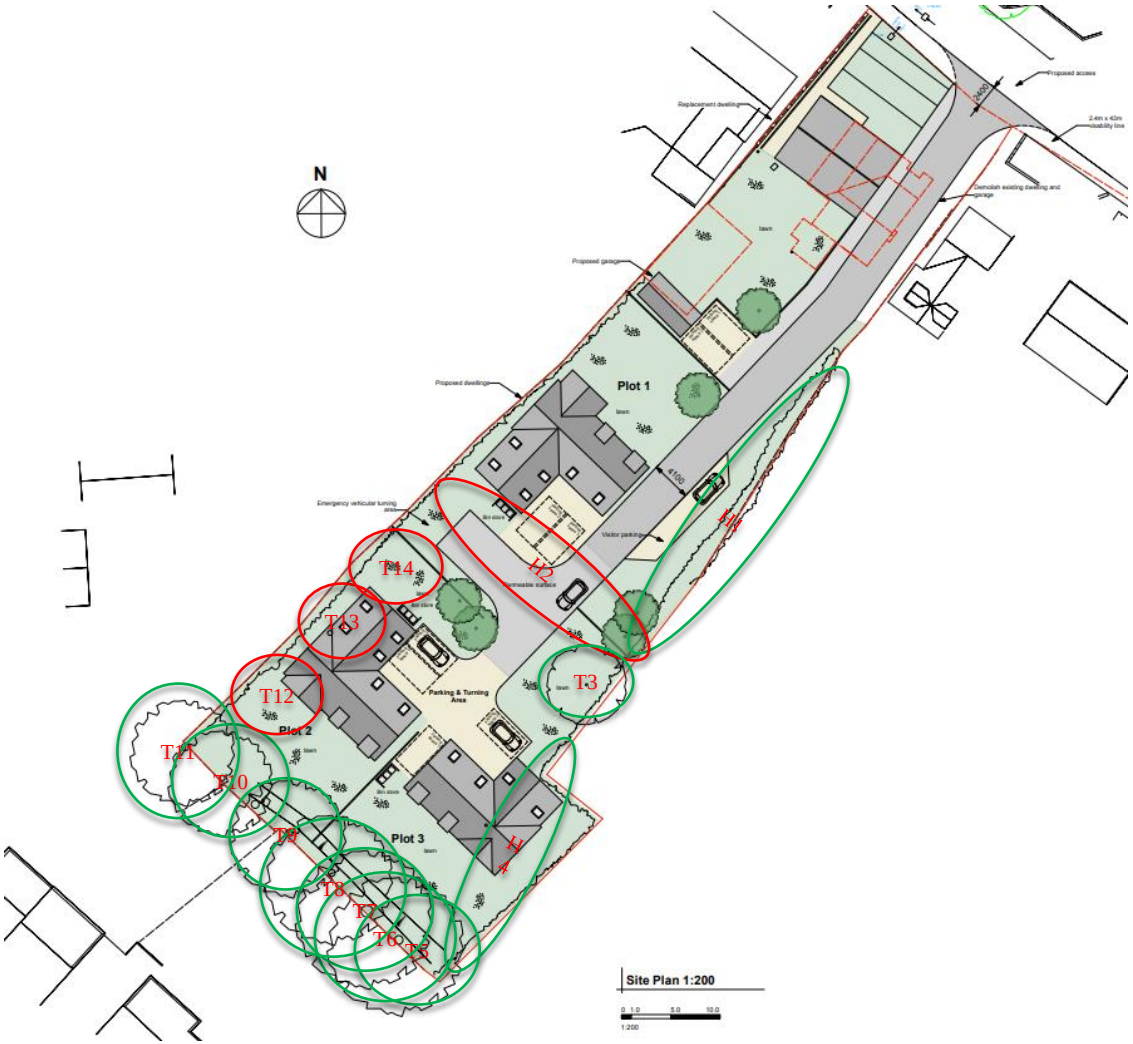

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**

62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd

Images:



H1 reduce to 3m and maintain as a screen.



H2 to be removed for development.



H4 maintain as 3m hedge/screen.

M/S – Multi stemmed
A – High quality tree
B – Moderate quality tree
C – Low quality tree
U – Remove
1 - Mainly arboricultural values
2 – Mainly landscape values
3 – Mainly cultural/conservation values

V - Veteran
M – Mature
EM – Early Mature
SM – Semi Mature
Y - Young
D - Dead

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**

62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd







T5 **T6** **T7** **T8** **T9** **T10** **T11**

Heavy ivy growth limits ability to inspect main unions and structure.

M/S – Multi stemmed
A – High quality tree
B – Moderate quality tree
C – Low quality tree
U – Remove
1 - Mainly arboricultural values
2 – Mainly landscape values
3 – Mainly cultural/conservation values

V - Veteran
M – Mature
EM – Early Mature
SM – Semi Mature
Y - Young
D - Dead

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**

62 Newtown, Westbury, Wiltshire
Arboricultural survey to BS 5837: 2012

Dated 23rd January 2024
Compiled by
Nick Cranston at Acer Tree Surgeons Ltd



T12 **T13** **T14 - all to remove**

M/S – Multi stemmed
A – High quality tree
B – Moderate quality tree
C – Low quality tree
U – Remove
1 - Mainly arboricultural values
2 – Mainly landscape values
3 – Mainly cultural/conservation values

V - Veteran
M – Mature
EM – Early Mature
SM – Semi Mature
Y - Young
D - Dead

For further information contact Nick Cranston
Acer Tree Surgeons Ltd on **07590986261**