
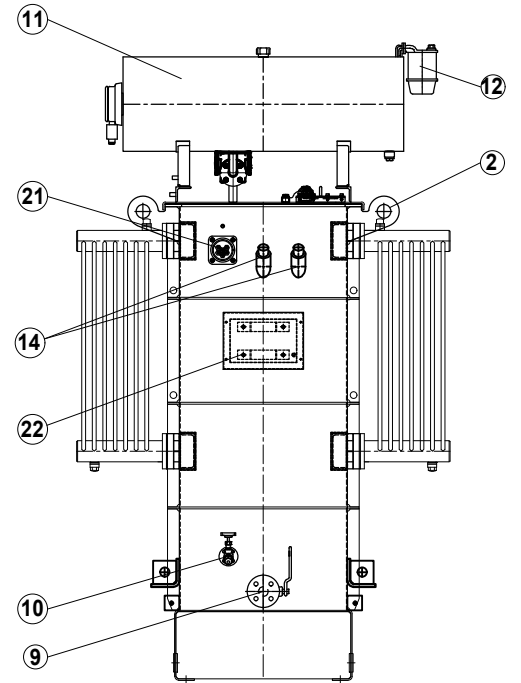
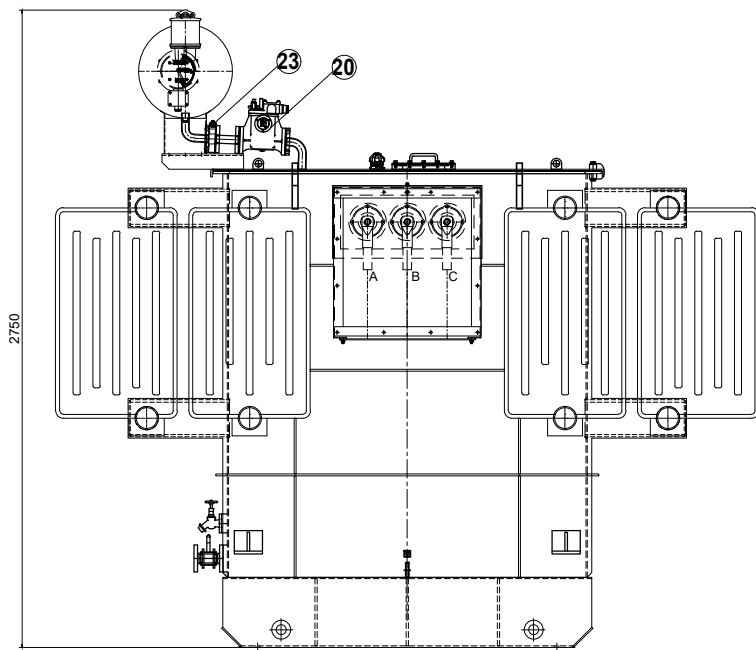




OUTPUT RATING	3000 kVA
VOLTAGE HV / LV	33000 / 800 V
TAPPINGS	+5% TO -5% IN STEPS OF 2.5%
AMPERES HV / LV	52,49 / 2165,06 Amps
PHASES	3
FREQUENCY	50 Hz
TEMP.RISE[Lqd./Wdn./Amb.](°C)	60°/65°/40°
CONNECTION HV / LV	DELTA / STAR
VECTOR SYMBOL	Dyn11
COOLING	ONAN
PAINT COLOR	DARK ADMIRALTY GREY

WEIGHT & VOLUME		
CORE AND WINDING	KG.	4100
TANK AND FITTING	KG.	1300
COOLING LIQUID MASS	KG.	1300
TOTAL WEIGHT	KG.	6700
COOLING LIQUID VOLUME	LTR.	1490

HV TAPPINGS:
TAP POSITION 1 = 34650V
TAP POSITION 2 = 33825V
TAP POSITION 3 = 33000V
TAP POSITION 4 = 32175V
TAP POSITION 5 = 31350V

NOTE: HEAT-SHRINK TERMINATIONS ARE REQUIRED FOR LV BUSHING CONNECTIONS.

00	19.07.2024	A.CAKRCA	T.GUNDGN	MN.NOgay
Revision	Date	Draw	Check	Approve

Project :

YT 3000-36
SLATERS / 52659

Project No.	Order No.	Serial No.
7999	2007936	86184..185

All dimensions in millimetres unless otherwise stated.

Dim. without tolerances according to ISO 1302

IF IN DOUBT - PLEASE ASK !

Definition :

DIMENSIONAL DRAWING

Drawing No :

4809521

Scale * / *		Pg.No 1	Total 1	Size A3
----------------	---	-------------------	-------------------	-------------------

CUSTOMER:		TITLE: DIMENSIONAL DRAWING		
SLATERS ELECTRICALS				
ORDER No:	WORKS No:	SCALE:	DRAWING No:	PROJECT No:
2007936			4809521	7999

Slaters Electricals Ltd
Scotswood Bridge Works
Tollbridge Road
Blaydon
Tyne & Wear
NE21 5TE
UK
t +44 (0) 191 414 2916
f +44 (0) 191 414 1349
sales@slaters-electricals.com
www.slaters-electricals.com



		4	
		3	
		2	
		1	
		REV	
		0	ISSUED FOR APPROVAL