


Flowstop Flood Door Barrier



Flowstop Flood Gate - Door Barrier. Inflates to fit tightly in door aperture to protect the likes of external doors, garage doors, patio, roller shutter and bi-folding doors from flood water. For standard sizes or to order bespoke see options drop down below.

Part Number: 001300

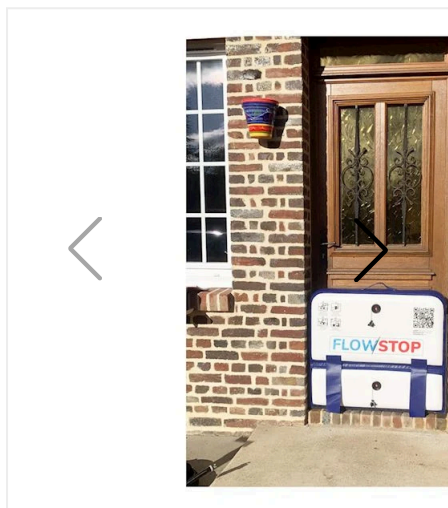

OUR PRICE
£906.00 (inc VAT)

£755.00 (ex VAT)
Each

SPECIAL ORDER
ALLOW 10 WORKING DAYS FOR DELIVERY



FLOWSTOP - DOOR ANTI-FLOOD FLOOD BARRIER

Floods are becoming more common. What was once in a lifetime phenomenon is now a seasonal trend that property owners have to face. Some 5.7 million properties were at risk of flooding in England in 2022 and 2023 and this number is expected to increase as climate breakdown brings more intense downpours more often. Don't leave it until it is too late. Take steps to protect your property now.

This flood barrier from Flowstop provides the first line of defense preventing flood water from entering doors, french windows, garage, patio and bi-folding doors in your home or business. When flooding happens, the ability to act quickly is critical. This anti-flooding device is very easy to install on all your openings. Flowstop flood gate barrier provides you with reliable flood

protection at your fingertips as it can be installed in minutes!

The Flowstop barrier consists of an inflatable panel made from heavy duty drop stitch material. They do not require fitment of an unsightly permanent frame. Flowstop is easy to install using the included dual action hand pump.

Sealing of the door opening is maintained by a rubber gasket arrangement, that surrounds the inflated gate panel. It is designed to fill any uneven surfaces to a depth of 0.4".

Specification:

- **Width: Extensive range of standard sizes see drop down.** Bespoke sizes available to special order. **Select relevant bespoke size range and enter your required size in drop down box. See below for measurement guide.**
- Standard sizes allow 5-7 days for delivery, **bespoke 8-10 weeks.**
- Standard Height: 800mm
- **Height:** Made-to-measure heights possible. Minimum height :80 cm for FlowStops with width < 199cm wide - 100 cm for FlowStops > 200 cm wide to ensure sufficient mechanical strength.

➤ Barrier Thickness:

7 cm → up to 80 cm wide

10 cm → up to 100 cm wide

12 cm → up to 120 cm wide

15 cm / 20 cm → beyond 121cm wide - Min 20 cm for FlowStops > 200 cm wide

NOTE: The reveal depth should be a minimum of 2/3rds of the barrier thickness. Ie for a 12cm thick barrier a reveal depth of 8cm.

- A flexible compressible gasket perfectly matches your concrete, render, or natural stone finish and offers a perfectly watertight result. This will cope with imperfections to a depth of around 1cm.
- Material: Heavy Duty PVC drop stitch material
- Double action hand pump (included) to inflate panel. Optional electric pump available. Especially suited for larger barriers.
- Carry handle helps position barrier

For information on how to measure your aperture. [click here](#)

Part Number: 001300

This product can be found in:

Flood Barriers

Aspli Value Products