



Cable management

for HYC_150 and HYC_300

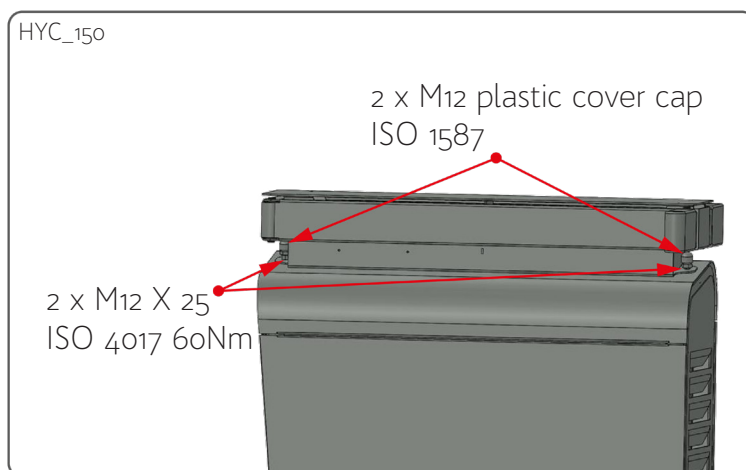


- 1 Attach the cable management system on top of the charger with the screws provided. (HYC_150: + add the plastic cover caps)

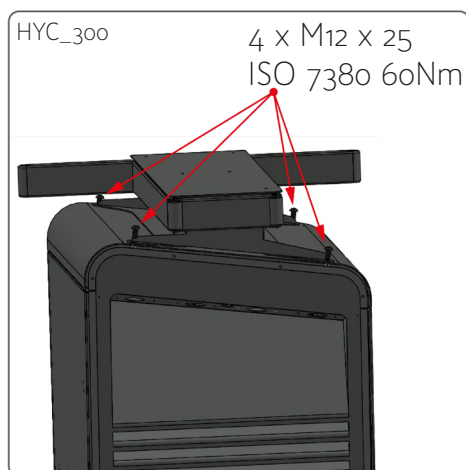


- 2 Place the washer together with the nut in the cable bracket shell.

- 3 Position the two parts of the bracket around the cable, leaving 1,5 m of cable to the charger.

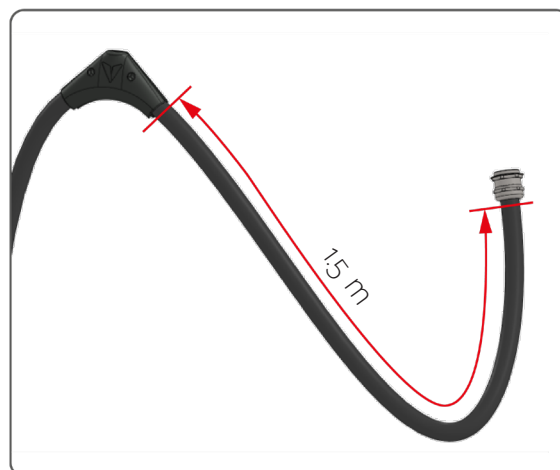

Cable management

for HYC_150 and HYC_300

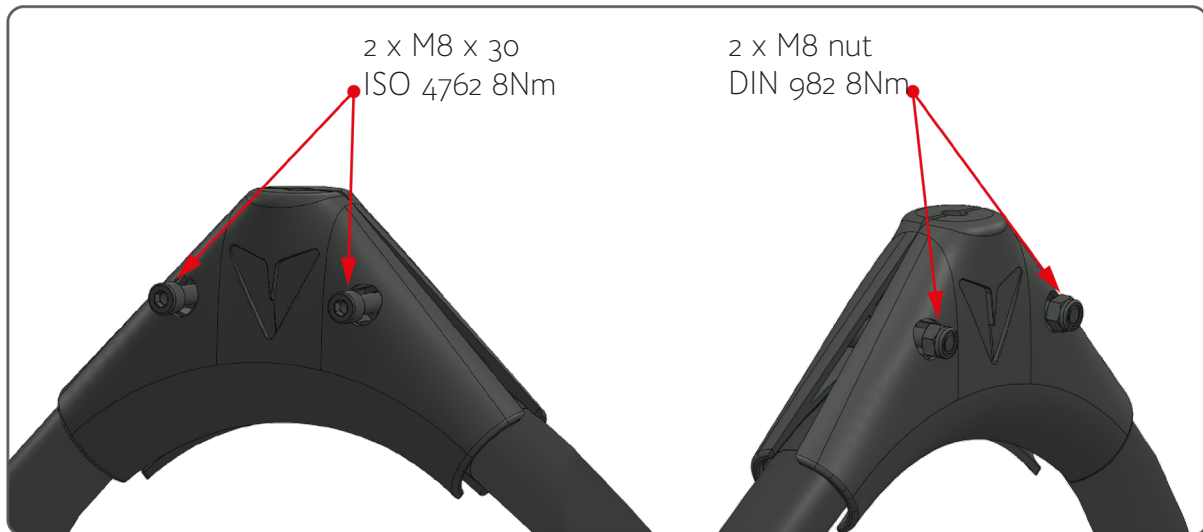

4 Close the cable bracket with two screws and nuts.

5 Then the cable bracket is mounted to the cable management with a screw and washer.

