
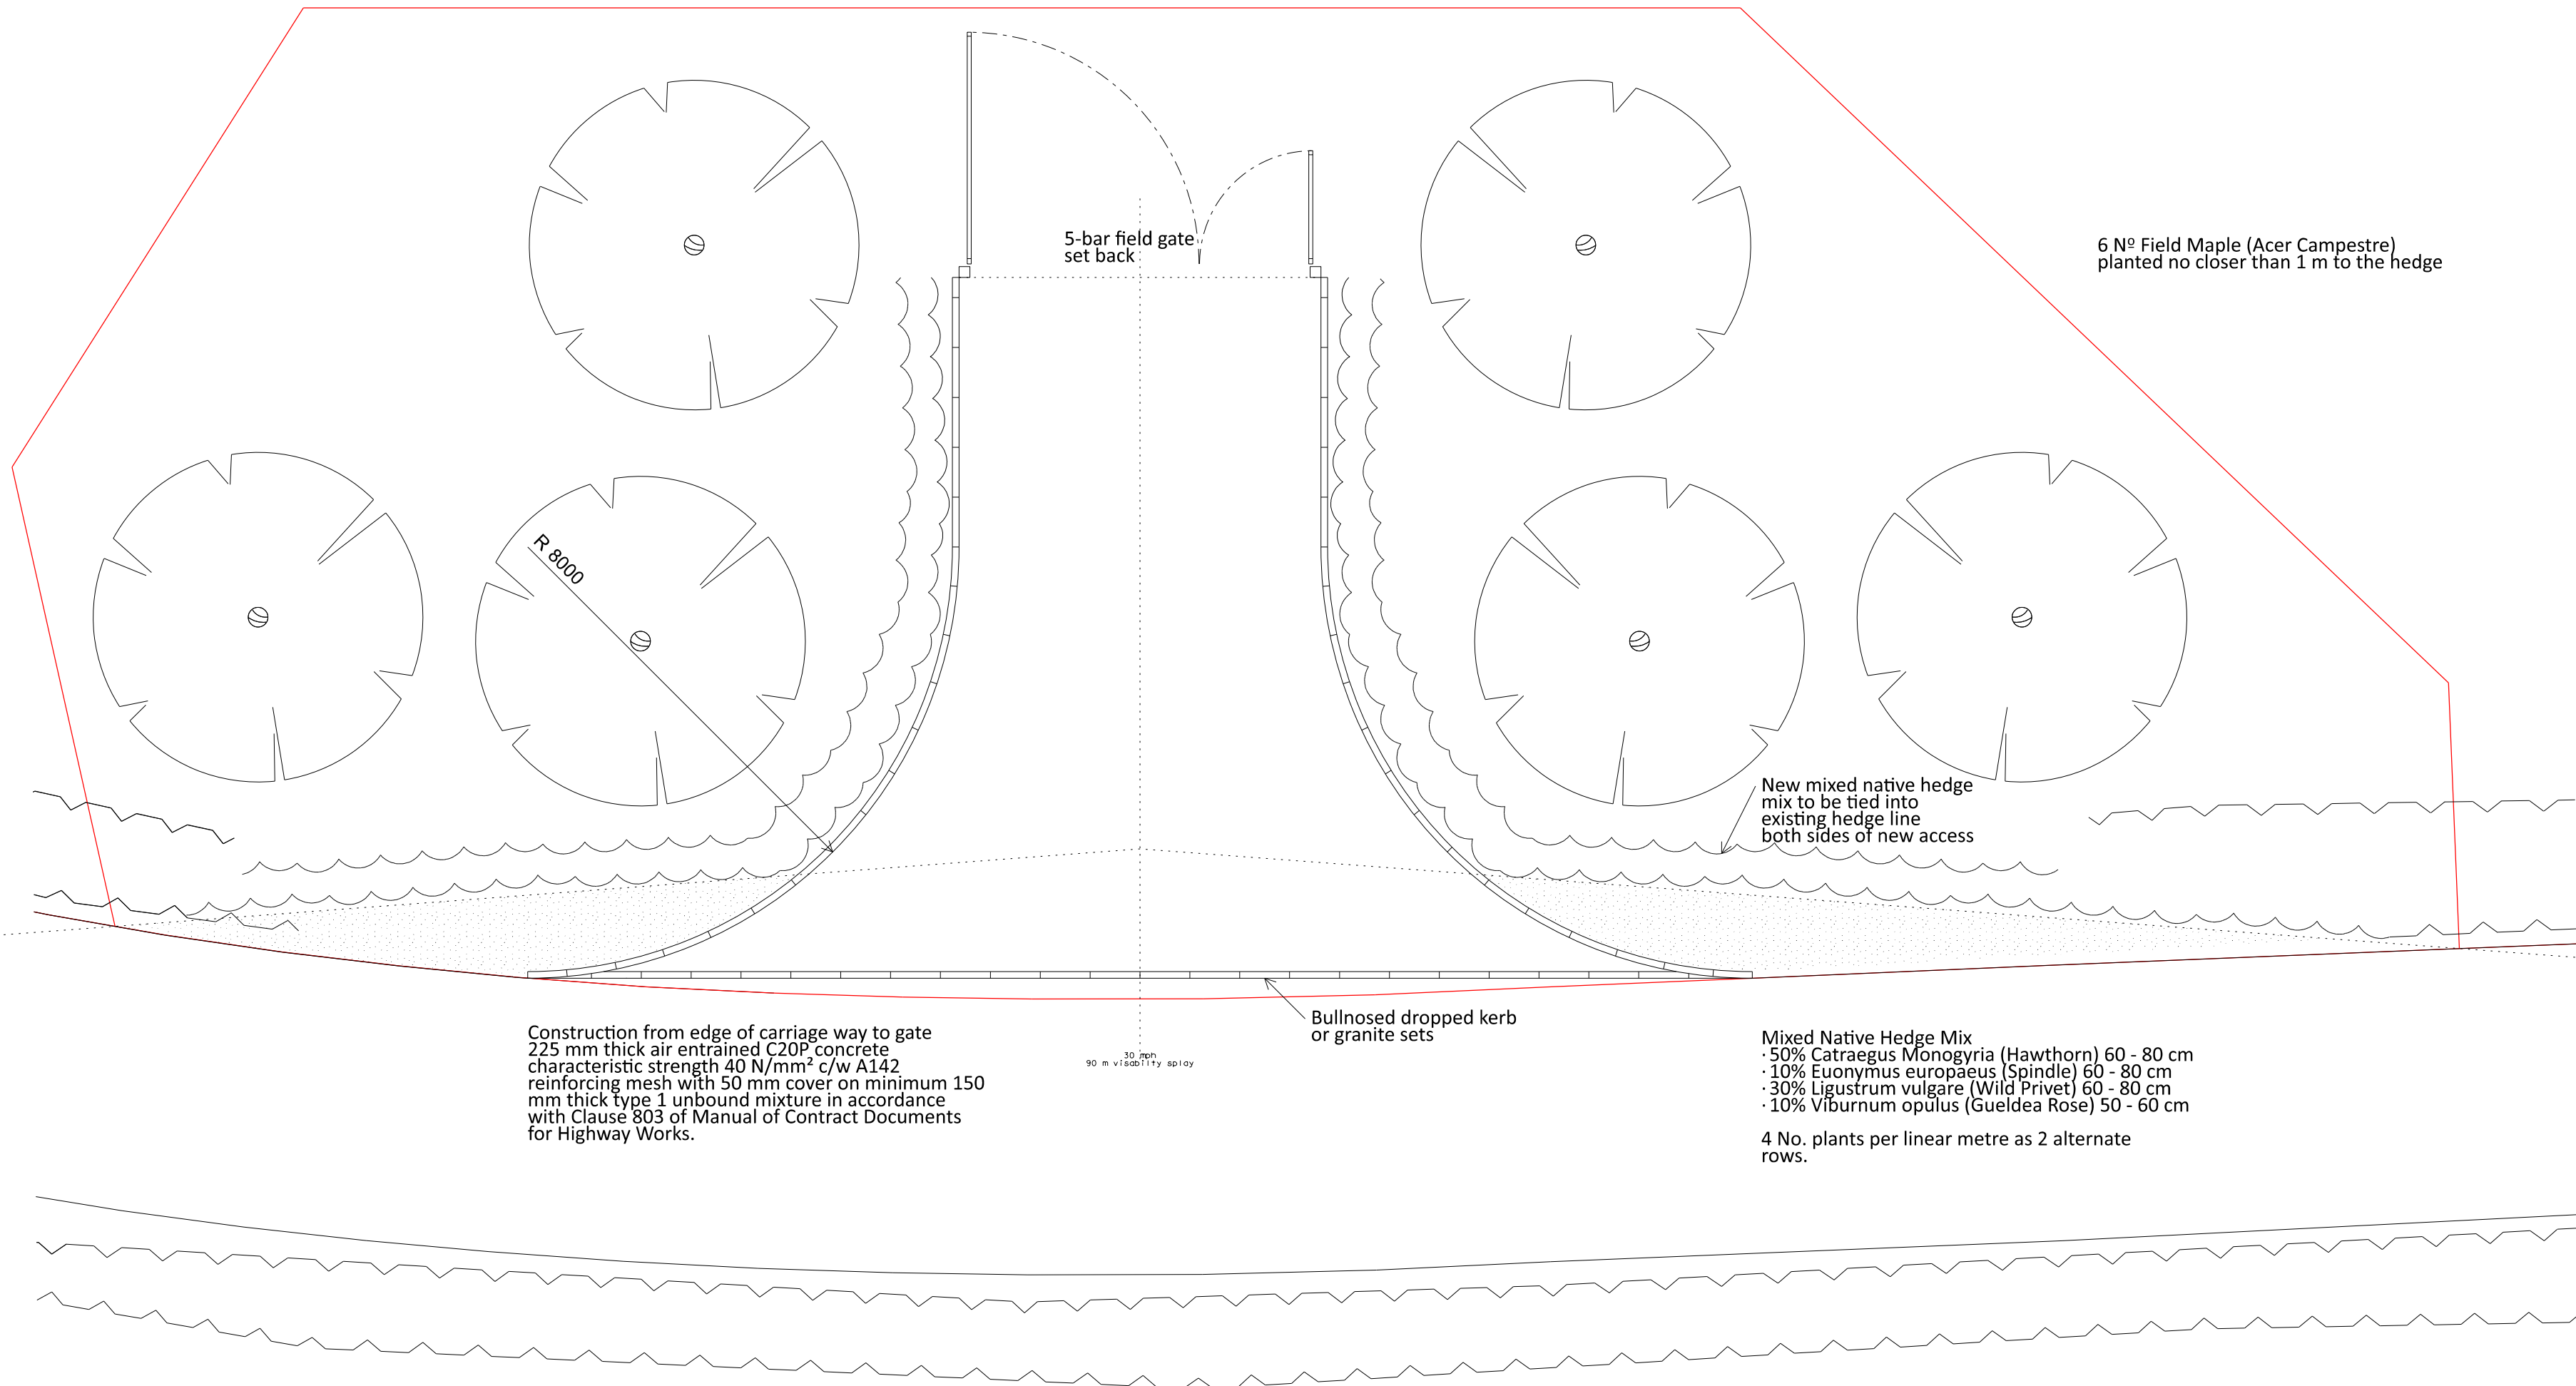


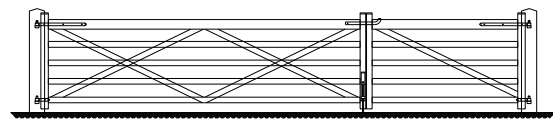

Construction from edge of carriage way to gate
225 mm thick air entrained C20P concrete
characteristic strength 40 N/mm² c/w A142
reinforcing mesh with 50 mm cover on minimum 150
mm thick type 1 unbound mixture in accordance
with Clause 803 of Manual of Contract Documents
for Highway Works.

50 mph
90 m visibility splay



Bullnosed dropped kerb
or granite sets

Mixed Native Hedge Mix
· 50% *Crataegus Monogyna* (Hawthorn) 60 - 80 cm
· 10% *Euonymus europaeus* (Spindle) 60 - 80 cm
· 30% *Ligustrum vulgare* (Wild Privet) 60 - 80 cm
· 10% *Viburnum opulus* (Guelder Rose) 50 - 60 cm

4 No. plants per linear metre as 2 alternate
rows.

6 No Field Maple (*Acer Campestre*)
planted no closer than 1 m to the hedge

New mixed native hedge
mix to be tied into
existing hedge line
both sides of new access

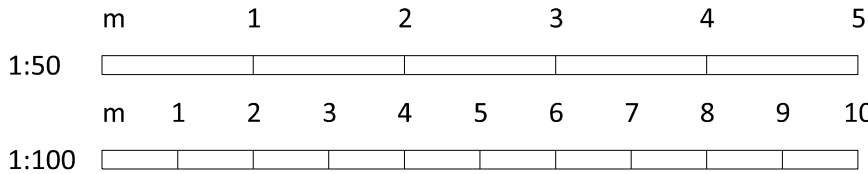

E
D
C
B
A

Rev Date Notes



TOWN AND
COUNTRY
PLANNING
DEVELOPMENT
CONSULTANTS

LPC (TRULL) LTD.
TRULL, TETBURY, GLOUCESTERSHIRE GL8 8SQ
Tel: 01285 841433 email: admin@lpcn.co.uk

Client
Russell Greenman

Project
Proposed Farm Access,
Gaston Farm,
Gaston,
H&L

Drawing
New Entrance Plan

Date
March 24

Scale
1:100 @ A2

Drawing Number
LPC 5287 PR 04