

Arboricultural Impact Assessment and Tree Protection Plan

for trees at

Stourhead Garden Pathway Improvement Project



On behalf of

The National Trust

Stourton
Near Mere
Warminster
BA12 6QD

Report prepared by

Ben Rose BSc (Hons) MSc DipArb (RFS) MICFor RCarborA VETcert
Chartered Arboriculturist
Arboricultural Association Registered Consultant

24th July 2025

SUMMARY

This Arboricultural Impact Assessment report supports a planning application, submitted by The National Trust, for footpath improvement works including associated engineering and landscaping works at Stourhead in Stourton, Wiltshire.

Arboricultural advice was taken early in the planning process with the aim of incorporating the best trees on the site. No trees will need to be removed to enable the proposed development to proceed. Some crown lifting works have been specified to a small number of trees but such works are minor and will not adversely impact their health or longevity.

The development proposal includes resurfacing footpaths adjacent to numerous trees. These trees are likely to be rooting in soil beneath the area to be surfaced, so a low-impact installation method has been devised for this project. Ground preparation works will be carried out with due care and all construction works will be carried out in accordance with the forthcoming Arboricultural Method Statement.

During construction, temporary fencing will be used to protect retained trees situated near works areas. For effective tree protection, fencing must be installed before any heavy plant machinery is used on the site and must remain in place until the construction works have been completed.

Vehicle use will be restricted to agreed transit routes and rigid ground guards will be laid down to when vehicles need to turn over soft ground.

There will be a pre-commencement meeting between the site manager and the project arboriculturist where the site manager will be made aware of the tree protection measures that will be required during construction.

Supervision by a suitably qualified arboriculturist will be required in the event of any unforeseen construction activity within the root protection area of retained trees at or near the development site. It is advised to inform the project arboriculturist and the local authority's arboricultural officer of necessary works near trees as soon as they become apparent.

This report details how trees are to be protected during construction works. The site manager must be provided with a copy of this report as well as the forthcoming Arboricultural Method Statements and it will be their responsibility to impart the information herein to all construction staff.

Contents

Summary	i
1 Introduction	1
1.1 Background	1
1.2 The assignment.....	1
1.3 Limitations	2
2 Tree Survey Information.....	2
2.1 Details of the site visit	2
2.2 Data collection	2
2.3 The tree protection plans	3
3 Arboricultural Implications and Proposed Mitigation	3
3.1 The general approach to installing new surfacing near trees	3
3.2 Trees for removal	4
3.3 New service runs	4
4 Arboricultural Impact Assessment	5
4.1 Evaluation of the proposed development’s arboricultural impact	5
5 General Method Statements for Construction Works	5
5.1 The production of specific Arboricultural Method Statements for each phase of works.....	5
5.2 Guidance on suitable working practices.....	5
5.3 Surface preparation	6
5.4 Edging	6
5.5 Site offices and storage areas.....	6
5.6 Vehicle use.....	6
5.7 Tree protection fencing	7
5.8 Agenda for arboricultural supervision.....	7
6 Recommendations	8
6.1 Tree work.....	8
6.2 Legal restrictions to tree works	8

Appendix 1: Tree schedule, group schedule, hedge schedule and schedule key

Appendix 2: Specification for tree protection fencing

Appendix 3: Proposed Path Construction Details

Appendix 4: The Tree Protection Plans (TPP-1 & TPP-2)

1 INTRODUCTION

1.1 Background

- 1.1.1 The National Trust proposes a new development at Stourhead in Stourton, Wiltshire (BA12 6QD). This land is hereafter referred to as the 'site'. This would involve footpath improvement works including associated engineering and landscaping works; these proposals are hereafter referred to as the 'proposed development'.
- 1.1.2 The following documents have been reviewed to inform this report:
- Topographical Survey - Dando Surveying Ltd - April 2022
 - Landscape General Arrangement - LUC - Drawing # 113000-LUC-XX-XX-DR-L-01203-01204
 - Proposed Path Construction Details - SFK Consulting - Drawing # 24058-SFK-XX-XX-DR-C-0010 P3
- 1.1.3 An initial tree constraints plan was produced in July 2024 and this has informed the design of the proposed site layout.
- 1.1.4 A check of the Wiltshire Council online mapping system confirms that the whole of the site is within a Conservation Area and that none of the trees at the property are protected by a tree preservation order (TPO).

1.2 The assignment

- 1.2.1 Instructed by the National Trust, Bosky Trees conducted a site visit, surveyed the trees that might be affected by the proposed development and specified suitable tree protection measures in the event of a successful planning application. The information compiled in this report is in accordance with the British Standard *BS5837:2012 – Trees in relation to design, demolition and construction – Recommendations*¹.
- 1.2.2 This report includes the following to accompany a planning application for the proposed development:
- A tree survey plan based on the topographical survey provided, with any additional trees indicatively plotted.
 - An arboricultural impact assessment of the proposed development, identifying trees that will be lost, as well as trees that can be retained and protected during development works.
 - A Tree Protection Plan, including information on the location of tree protection fencing and ground protection measures.
 - Recommendations for remedial works for retained trees to be undertaken before site clearance and construction.
 - General method statements for works near trees.

¹ British Standards Institution (2012). *BS5837 Trees in relation to design, demolition and construction – Recommendations*. BSI: London.

1.3 Limitations

- 1.3.1 The assessment and works recommendations relate to conditions found at the time of inspection. Any significant alteration to the site that may affect present trees, or have implications for planning (including level changes, hydrological changes, storms, extreme climatic events or site works) will necessitate re-assessment of the trees.
- 1.3.2 Note that this survey is not a tree safety inspection; it has been carried out to inform the planning process. Where clear and obvious hazards have been observed, these have been addressed in the works recommendations. A full assessment of the risks posed by trees would be informed by consideration of site use together with hazards present within a tree. Changes in site use are likely to occur during, and result from, the proposed development. Given these factors, regular tree risk assessments are advised.
- 1.3.3 This report does not consider tree-related building subsidence. If shrinkable clay soils are present on site, then guidance given in the National House Building Council (NHBC) Standards, chapter 4.2² should be used to avert the risk of future subsidence of new buildings.
- 1.3.4 No detailed assessment of the potential conflict between future site use and the shade cast by trees has been undertaken within this report.

2 TREE SURVEY INFORMATION

2.1 Details of the site visit

- 2.1.1 Nick Baxter of Bosky Trees visited the site and carried out tree survey in July 2024 and additional trees were surveyed by myself in February 2025. The survey considered all the trees in and around the expected works areas.
- 2.1.2 The proposed development site is currently an operational visitor attraction. It is a Grade I registered park and garden and the trees make a significant contribution to the landscape appeal. The ground at Stourhead is generally undulating and in parts hilly. There are trees throughout the gardens and many of them are adjacent to the path network.

2.2 Data collection

- 2.2.1 Trees, tree groups and hedgerows were allocated a unique identifying number, used throughout this report. ID numbers are listed in the tree schedule and are used on the tree plans.
- 2.2.2 Trees were inspected at ground level using the visual tree assessment method.³ As described in table 1 of BS5837,⁴ each tree was placed into one of four retention categories:

² National House Building Council (2008). *NHBC Standards Chapter 4.2 - Building near trees*. NHBC: Milton Keynes.

³ Mattheck, C. and Breloer, H. (1995). *The body language of trees: a handbook for failure analysis*. Research for Amenity Trees 4. HMSO: London.

⁴ British Standards Institution (2012). *BS5837 Trees in relation to design, demolition and construction – Recommendations*. BSI: London.

A, B, C or U. Stem diameter was used to calculate the root protection area (RPA)⁵ required by each tree during construction. Information on each tree, tree group and hedgerow is given in Appendix 1.

- 2.2.3 A total of 658 individual trees, 55 groups of trees and 31 hedges were surveyed (see table 1).

Table 1: Summary of the retentive worth of trees, groups and hedges included in the survey.

BS5837 Category	Quality	Number of trees	Number of groups	Number of hedges
A	High	107	4	0
B	Moderate	352	8	0
C	Low	193	43	31
U	Very poor	6	0	0
	Total	658	55	31

2.3 The tree protection plans

- 2.3.1 The Tree Protection Plans (TPP-1 & TPP-2) shows the locations of the trees and where fencing and ground protection will be installed in order to protect them during construction. These plans are provided at the rear of the report.
- 2.3.2 All involved should be aware that these Tree Protection Plans may be updated, and that relevant Tree Protection Plans will accompany the detailed Arboricultural Method Statements that will accompany each phase of works.

3 ARBORICULTURAL IMPLICATIONS AND PROPOSED MITIGATION

3.1 The general approach to installing new surfacing near trees

- 3.1.1 Right from the beginning, the project arboriculturist has worked with the project engineer and the landscape architect to devise a methodology for resurfacing the path network without damaging the trees in the gardens. As such, the designs for the path build-up and the widths of the paths specified have been devised with the need for protecting adjacent trees in mind. The drainage strategy has also been designed to avoid pipework/trenching adjacent to paths in order to avoid damaging tree roots that we expect are present in the upper 600mm of soil.
- 3.1.2 Any new surface needs to be installed onto a hard base. Since the footpaths are already installed onto compacted stone sub-bases it is intended to reuse these. Therefore, there will not be the need for installing geocell sub-bases. Instead, it is proposed that the new surfacing is built up on top of the old surfacing so that the requirement for excavations, and the risk of damage to the roots of adjacent trees, is minimised. This approach has been specially devised to have a low impact on adjacent trees.

⁵ The root protection area (RPA) is a layout design tool indicating the minimum area around a tree deemed to contain sufficient roots and rooting volume to maintain the tree's viability, and where the protection of roots and soil structure is treated as a priority.

- 3.1.3 In most locations some of the old wearing course will need to be removed in order to prepare the ground for the new surface courses. This will be carried out care and in accordance with an agreed Arboricultural Method Statement. Where there are obvious tree roots visible at the surface of the old path these will be left in place and worked around.
- 3.1.4 The new surfacing will require edging so that the surface courses can be compacted and properly laid. The edging will be of either steel or treated timber. There is a risk that the roots of adjacent trees could be damaged during the edging operations and so all edging will be installed in accordance with an agreed Arboricultural Method Statement (see section 5.4 for further guidance).
- 3.1.5 Site offices and materials storage areas will be allocated for each phase of works. At this stage the precise locations of these storage areas have not been set, although an initial exercise has been undertaken with the Client and project team to identify viable locations, with consideration made for necessary tree protection measures in each area. The precise locations for these storage areas will be selected in agreement with the chosen contractor in advance of each phase. Detailed tree protection measures will be provided in the Arboricultural Method Statement that will be submitted and agreed in advance of works starting in each part of the park.
- 3.1.6 Vehicle use will be strictly controlled to ensure that soil compaction near trees is avoided (see section 5.6 for further guidance).
- 3.1.7 Before each phase of works the project arboriculturist will meet with the construction site manager and explain the agreed working methodology and explain the tree protection measures that will be required. Sensitive works near trees will be carried out under arboricultural supervision. It will be the construction site manager's responsibility to pass on the information in the agreed Arboricultural Method Statement to all construction staff and site contractors.

3.2 Trees for removal

- 3.2.1 No trees will need to be removed to enable the pathway improvement works to be carried out.

3.3 New service runs

- 3.3.1 Typical 'open trench' installation of underground services near trees is likely to sever roots; this will harm the tree's physiological condition, provide an opportunity for fungal infection, and could leave them prone to windthrow. Therefore, new underground services will be located and designed to avoid retained trees' root protection areas.
- 3.3.2 There are some events such as the annual Festival of Light that require cabling to be installed. Since the path height is to be increased it is proposed that ducting be installed beneath the path in selected areas where tree roots are not expected to be present. Installing this ducting should relieve the pressure on trees in future years.
- 3.3.3 If any additional underground services are required it will be necessary for suitable members of the project team, including an arboricultural consultant, to design their routes. An appropriate specification and method statement are required for their installation and

guidance provided in Volume 4 of the National Joint Utilities Guidelines (NJUG4)⁶ must be followed.

4 ARBORICULTURAL IMPACT ASSESSMENT

4.1 Evaluation of the proposed development's arboricultural impact

- 4.1.1 No trees will need to be removed to enable the Proposed Development. Overall, provided that the tree protection measures detailed in this report and the forthcoming Arboricultural Method Statements are followed, I consider that the proposed development can be constructed without causing significant damage to any of the trees in the gardens. Therefore, I am satisfied that the proposed development will have an acceptable impact on local tree cover.

5 GENERAL METHOD STATEMENTS FOR CONSTRUCTION WORKS

5.1 The production of specific Arboricultural Method Statements for each phase of works

- 5.1.1 At present it is expected that the resurfacing works will be carried out in a minimum of three different phases (including a section that will be undertaken as part of planned repair works associated with the Lake dam) to ensure that visitors can still visit and walk around the gardens whilst resurfacing works are carried out. It is expected that there will be a planning condition that requires detailed Arboricultural Method Statements to be submitted and agreed in advance of each phase of works.
- 5.1.2 I expect that each Arboricultural Method Statement will provide guidance on the following:
- Guidance on suitable working practices
 - Surface preparation
 - Edging
 - Site offices and storage areas
 - Vehicle use and transit routes
 - Tree protection fencing
 - Agendas for arboricultural supervision

5.2 Guidance on suitable working practices

- 5.2.1 Trees are vulnerable to root damage caused by ground disturbance, direct injury of the trunk or branches, environmental change, pests and diseases. Construction work often exerts pressures on existing trees. A tree that has taken many decades to reach maturity can be irreparably damaged in just a few minutes by unwitting or negligent actions.

⁶ National Joint Utilities Group (2007). *Guidelines for the planning, installation, and maintenance of utility apparatus in the proximity to trees*. Volume 4 (NJUG4). National Joint Utilities Group: Eastleigh.

- 5.2.2 The detailed Arboricultural Method Statement will give guidance on potentially damaging operations and how they shall need to be carried out to minimise damage to trees at the site.

5.3 Surface preparation

- 5.3.1 The levels of the paths will generally need to be increased so that digging down into the soil profile is avoided however the levels of the paths will also be influenced by the drainage strategy. The project engineer will identify areas for cut and fill, however these will be minor level changes and significant tree roots will be retained where cut outs are required and the level of fill will also be minor (generally less than 100mm).
- 5.3.2 Level changes or slopes must comply with the constraints attached to the construction exclusion zones. This means that any soil excavations must take place outside of the fenced areas identified on the Tree Protection Plans.
- 5.3.3 In most locations some of the old wearing course will need to be removed in order to prepare the ground for the new surface courses. This operation will be carefully carried out under the supervision of a banksman and where there are obvious tree roots visible at the surface of the old path these will be left in place and worked around.

5.4 Edging

- 5.4.1 The edging will be mainly treated timber boards approximately 45mm thick however steel edging will be used in the more formal parts of the garden.
- 5.4.2 The edging will need to be set at an appropriate level to allow the new surfacing to be laid up to it and in some cases this will require excavations. Excavating at the edge of any of the paths will need to be carried out with care to avoid damaging significant tree roots (roots $\geq$ 25mm). Where such roots are encountered the wooden board may need to be cut so that it can be installed around the root. Where the board or metal edging cannot be cut to avoid the root flare or the root there may need to be a break in the edging.
- 5.4.3 The installation of edging will be covered during the initial toolbox talk by the project arboriculturist and an effective way of overcoming such constraints will be agreed with the contractor.

5.5 Site offices and storage areas

- 5.5.1 At this stage it is unclear where the precise locations of site offices and materials storage will be during the construction of each phase however options have been considered. The precise locations of site offices and storage areas will be agreed in advance of each phase and appropriate tree protection measures will be included in the Tree Protection Plans for each phase.

5.6 Vehicle use

- 5.6.1 Soil compaction can occur quickly by vehicles passing over an area of soil. Compaction may cause reduced infiltration rates of water, poor drainage, reduced availability of water and reduced air and oxygen supply to roots. This leads to reduced root growth and, as a result, the health of the tree is affected. To avoid soil compaction, no vehicles should enter the fenced-off areas during construction operations.

- 5.6.2 Vehicle use will need to be restricted to designated routes and a transit plan agreed in advance of each phase of works.
- 5.6.3 Loaded dumper trucks have the highest potential to cause ground compaction and so their use must be restricted to existing hard surfaces. The skid steering of tracked vehicles can cause surface smearing which reduces gas permeability and water infiltration rates and thus causes harm to the living soil. Therefore, if any vehicle needs to turn it is advised that thick plywood boards or plastic ground guards/metal sheeting are put down so that the vehicle can turn on top of them.

5.7 Tree protection fencing

- 5.7.1 Temporary fencing and/or barriers must be used during construction to protect retained trees situated near works areas. The locations of such fencing/barriers is indicated on Tree Protection Plans at the rear of the report (TPP-1 & TPP-2). For effective tree protection, protective fencing must be installed before any heavy plant machinery is used on the site and must remain in place until completion of construction works (unless under arboricultural supervision). The fenced off areas will be designated as 'construction exclusion zones'.
- 5.7.2 Tree protection fencing will only be required in the areas where construction works and construction access is required. In some parts of the site tree protection fencing will not be required due to topography (i.e. where there are steep banks at the edge of the path that will prevent vehicle use off the existing trackway).
- 5.7.3 It would be impractical and excessively expensive to use standard tree protection fencing as specified in BS5837:2012 alongside all sides of every path, instead temporary rope or tape fencing is proposed. A specification for suitable tree protection fencing is provided in Appendix 2.

5.8 Agenda for arboricultural supervision

- 5.8.1 Before each phase of works there will be a pre-commencement site meeting between the project arboriculturist and the construction site manager. During this 'toolbox talk' the arboriculturist will explain how trees could potentially be damaged by construction works and discuss how such damage can be avoided, and the agreed methodology for the works will be fully explained. The toolbox talk will also provide an opportunity for the contractor to raise and issues with working methods or features that they think could potentially impact the retained trees. At this point the location and suitability of the tree protection fencing will be checked by the project arboriculturist. A record of each meeting will be produced by the arboriculturist.
- 5.8.2 Supervision by a suitably qualified arboriculturist will also be required if any unforeseen construction activity is to take place within the root protection area of any trees retained on or near the site. The project arboriculturist and the local authority's arboricultural officer should be informed of necessary works near trees as soon as they become apparent.

6 RECOMMENDATIONS

6.1 Tree work

- 6.1.1 Crown lifting or the cutting back of foliage has been specified for six trees (T38, T93, T94, T102, T170 & T493). All tree works necessary for the proposed development are listed in the schedule in Appendix 1.
- 6.1.2 All permitted and approved tree work must be undertaken in accordance with BS3998:2010 *Recommendations for tree work*,⁷ ideally at the beginning of the construction phase before protective fencing is erected. Only qualified and insured tree surgeons should be employed.

6.2 Legal restrictions to tree works

- 6.2.1 The *Town and Country Planning (Tree Preservation) (England) Regulations 2012*⁸ and the accompanying *Guide to tree preservation procedures* make clear that it is an offence to deliberately destroy a tree subject to a tree preservation order (TPO), or to damage it in a manner that is likely to destroy it, without the permission of the local planning authority. To do so is punishable by an unlimited fine and a replacement tree would normally need to be planted. Trees standing within a conservation area protected in the same way as a tree protected by a tree preservation order.
- 6.2.2 If this report is submitted with a full planning application that is subsequently approved, any tree works listed in this report may be carried out before construction work begins without further permission from the local planning authority. However, since the trees are situated in a conservation area, any arboricultural works taking place before planning permission has been approved must be granted by application for tree works to the local planning authority. Permission for arboricultural works to trees owned by a third party must be sought from and granted by the owner in advance of the works.
- 6.2.3 Works may be constrained between March and August because it is illegal to disturb an active bird's nest. Bat roosts are also protected, so tree works might be delayed if roosting bats are encountered. A tree surgeon or ecologist will advise on this matter.

⁷ British Standards Institution (2010). *BS3998 Recommendations for tree work*. BSI: London.

⁸ Town and Country Planning, England. *The town and country planning (tree preservation) (England) regulations 2012*. Town and Country Planning, England: London. Available at: https://www.legislation.gov.uk/uksi/2012/605/pdfs/uksi_20120605_en.pdf.

Appendix 1: Tree Schedule

Site: **Stourhead Garden Pathway Improvement Project**

Surveyor: **Nick Baxter**

Date of Survey: **July 2024**



Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T1	Common lime	20	1	111	9	9	9	9	5	FM	G	40+	Past crown lift. No obvious significant defects. Further limes are located to the south east. Tag no. 830	No action required at present.	A2
T2	Beech	17	1	82	11	12	10	12	3	M	G	40+	An attractive tree beside the drive. Past crown lift. No obvious significant defects.	No action required at present.	A1
T3	Variegated sycamore	17	1	74	9	8	10	4	8	M	G	20+	Crown leans east away from the path. High crown.	No action required at present.	B2
T4	Yew	16	1	70	3.5	6	3	3	3	M	G	20+	Av secondary stem extends from base. Crown leans south.	No action required at present.	B2
T5	Copper beech	23	1	129	11	12	12	11	7	FM	G	40+	A prominent tree at the entrance to the gardens. High crown.	No action required at present.	A1
T6	Dogwood	4	3	12	2	2	2	2	1	EM	G	10+	No obvious significant defects.	No action required at present.	C1
T7	Ulmo	8	1	15	2	2	2	2	1	EM	G	10+	No obvious significant defects. Tag no. 36353	No action required at present.	C1
T8	Yew	12	1	75	11	5	8	8	4	FM	G	20+	Wide spreading canopy with a slightly thin upper crown.	No action required at present.	B2
T9	Japanese maple	4	1	17	3.5	4.5	4	3	2	M	G	20+	Small basal wound on the south side. Past crown lift.	No action required at present.	B1
T10	Walnut	12	1	31	5	5	5	5	2	M	G	20+	Symmetrical crown. Past crown lift.	No action required at present.	B1
T11	Dogwood	10	1	18	4	4	4	4	1	EM	G	10+	Symmetrical crown. Past crown lift.	No action required at present.	C1
T12	Magnolia	6	3	17	4.5	4.5	4.5	4.5	1	EM	G	10+	Three stems extend from base.	No action required at present.	C1
T13	Silver fir	14	1	28	4	4	2	4.5	2	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T14	Yew	8	1	25	3.5	3.5	3.5	3.5	2	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T15	Large leaf lime	21	1	52	8	5	6	7	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T16	Tulip tree	5	1	11	2	2	1	3	1	EM	G	20+	No obvious significant defects.	No action required at present.	B1

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T17	Dogwood	5	1	12	3	1	1.5	1.5	0.5	EM	G	10+	No obvious significant defects.	No action required at present.	C1
T18	Bay	7	5	16	2	2	2	2	2	EM	G	10+	Five stems extend from base.	No action required at present.	C1
T19	Beech	25	1	92	9	3	7	10	5	FM	G	40+	Slight trunk lean to the north. Past crown lift. Base immediately beside footpath.	No action required at present.	A2
T20	Bay	5	2	10	1.5	1.5	1.5	1.5	1	EM	G	10+	Two stems extend from base.	No action required at present.	C1
T21	Variegated sycamore	23	1	71	8	7	11	2	5	M	G	20+	A secondary stem extends from 3.5m. High crown. Surface roots in footpath.	No action required at present.	B2
T22	Beech	25	1	104	6	10	3	11	5	FM	G	40+	Slight trunk lean to the south. Past crown lift. Base immediately beside footpath.	No action required at present.	A2
T23	Variegated sycamore	24	1	70	1	10	5	8	5	M	G	20+	Trunk leans south. No obvious significant defects.	No action required at present.	B2
T24	Bay	5	1	8	1.5	1.5	1.5	1.5	1	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T25	Cherry	10	1	25	2	5	3	3	2	EM	G	10+	A suppressed crown leans south.	No action required at present.	C2
T26	Cherry plum	11	1	36	4	4	1	4.5	1	FM	D	<10	Numerous trunk scars. A standing dead tree.	No action required at present.	U
T27	Eucryphia sp.	11	1	28	4	4	4	4	2	M	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C1
T28	Rhododendron	4	1	25	1	2	2	1	1	M	G	10+	An old shrub beside the path which has been pruned on numerous occasions.	No action required at present.	C2
T29	Tulip tree	9	1	25	3	3	3	3	2	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T30	Rhododendron	4	2	21	3	1	2	2	2	M	G	10+	An old shrub beside the path.	No action required at present.	C2
T31	Rhododendron	4	1	25	1	2	2	1	1	M	G	10+	An old shrub beside the path.	No action required at present.	C2
T32	Whitebeam	13	1	49	7	8	7	6	2	M	G	20+	Crown stems extend from 2m. Past crown lift. Tag no. 233	No action required at present.	B2
T33	Silver birch	15	3	52	5	2	2	2	2	M	G	20+	No obvious significant defects. Tag no. 231	No action required at present.	B2
T34	Whitebeam	13	1	39	4	4	4	4	2	M	G	20+	No obvious significant defects. Tag no. 232	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T35	English oak	15	1	30	5	5	5	3	3	EM	G	20+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T36	Eucryphia sp.	10	1	22	1.5	1.5	1.5	1.5	2	EM	G	10+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	C2
T37	Eucryphia sp.	10	1	22	1.5	1.5	1.5	1.5	2	EM	G	10+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	C2
T38	Japanese maple	6	MS	27	4.5	6	3	5	2	M	G	20+	Multiple stems extend from 0.5m. Crown extends south-west over the path.	Crown lift by removing branches below 2.5m that overhang the path.	B1
T39	English oak	17	1	55	7	6	9	7	6	M	G	20+	Arboreal ivy. No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T40	Ash	17	1	55	6	4	9	3	7	M	G	20+	Arboreal ivy. No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T41	Sweet chestnut	17	1	138	4	7	8	6	3	FM	G	40+	A long end-loaded limb extends east over the path. Numerous small scars and holes throughout the crown.	No action required at present.	A2
T42	English oak	20	1	104	11	12	11	11	2	M	F	20+	Thin upper crown. Tag no. 494a	No action required at present.	B1
T43	Coastal redwood	38	1	205	5	5	5	5	4	M	G	40+	A particularly tall and narrow crown. High crown over the path. No obvious significant defects.	No action required at present.	A1
T44	Coastal redwood	32	1	170	6	6	6	6	4	M	G	40+	A particularly tall and narrow crown. No obvious significant defects.	No action required at present.	A2
T45	Coastal redwood	32	1	163	6	6	6	6	4	M	G	40+	A particularly tall and narrow crown. No obvious significant defects.	No action required at present.	A2
T46	Coastal redwood	30	1	132	6	6	6	6	4	M	G	40+	A particularly tall and narrow crown. No obvious significant defects.	No action required at present.	A2
T47	Sweet chestnut	17	1	180	7	8	10	11	3	V	G	40+	Hole at base with associated decay. Numerous cavities between 2-4m. Two scars in the upper crown.	No action required at present.	A3
T48	Tulip tree	25	1	173	14	12	11	10	5	FM	G	40+	A secondary stem extends from 2m. Numerous braces located between stems. Past height reduction and crown lift.	No action required at present.	A1
T49	English oak	14	1	166	11	13	11	9	4	FM	F	40+	Large cavity at 2m. Loose bark on the whole of the eastern side up to 2m. Past crown reduction. Upper crown dieback. Tag no. 401b	No action required at present.	A1

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T50	Cedar of Lebanon	4	1	9	1.5	1.5	1.5	1.5	0.5	SM	G	10+	A recently planted tree.	No action required at present.	C1
T51	Whitebeam	13	1	29	8	7	7.5	7.5	2	M	G	20+	No obvious significant defects.	No action required at present.	B2
T52	Yew	14	4	60	11	11	4	8.5	2	M	G	20+	Four stems extend from base. All four stems have grown from a fallen limb of T53.	No action required at present.	B2
T53	Yew	16	2	78	5	12	7	13	2	M	G	20+	Two stems extend from base. Numerous low branches have layered to the west and continued to grow almost as separate trees.	No action required at present.	B2
T54	Katsura	18	1	72	6	4	3	6	3	M	G	20+	No obvious significant defects.	No action required at present.	B1
T55	Turkey oak	27	1	68	7	7	7	7	8	M	G	20+	A tall tree at the edge of the copse. High crown.	No action required at present.	B2
T56	Hornbeam	8	1	56	4	5	5	5	4	M	G	20+	The crown has once been reduced and since re-grown.	No action required at present.	B2
T57	Katsura	2	1	8	1	1	1	1	1	Y	G	10+	A recently planted tree.	No action required at present.	C1
T58	Beech	29	1	122	10	9	10	8	5	M	G	40+	A tall tree at the edge of the copse. High crown.	No action required at present.	A2
T59	Rhododendron	3	3	12	2	3	2	2	1	EM	G	10+	A tall shrub near the path.	No action required at present.	C2
T60	Beech	23	1	113	10	11	9.5	9	2	FM	G	40+	A tall tree at the edge of the copse.	No action required at present.	A2
T61	Black oak	14	1	37	5	3	5	4	8	EM	G	20+	High crown. No obvious significant defects.	No action required at present.	B1
T62	Black oak	14	1	36	3	6	4	3	6	EM	G	20+	High crown. No obvious significant defects.	No action required at present.	B1
T63	Beech	22	1	95	8	9	8	8	5	M	G	40+	A tall tree with a high crown over the path.	No action required at present.	A2
T64	Beech	22	1	90	8	8	8	8	3	M	G	20+	Minor upper crown dieback.	No action required at present.	B2
T65	Beech	25	1	146	9	9	9	9	4	FM	G	40+	Fruiting body of Ganoderma australe at base but the use of a sounding hammer indicates healthy buttressing.	No action required at present.	A2
T66	Holly	13	1	55	5	6	7	2	1	FM	G	20+	Trunk leans east. No obvious significant defects.	No action required at present.	C2
T67	Turkey oak	20	1	66	6	7	7	5	7	M	G	20+	High crown over the path. No obvious significant defects.	No action required at present.	B2
T68	Sweet chestnut	20	1	70	6.6	8	8	6.5	6	M	G	20+	No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T69	Cherry	5	1	30	1	5	6	3	2	M	P	10+	Suppressed crown with dieback.	No action required at present.	C2
T70	English oak	18	1	88	8	9	8	6	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T71	Katsura	22	1	80	9	6	9	7	7	M	G	20+	High crown over the path. No obvious significant defects.	No action required at present.	B2
T72	Beech	22	1	78	9	6	9	7	7	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T73	Beech	23	1	140	10	12	10	15	7	FM	G	40+	An old woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	A2
T74	Sycamore	23	1	69	3	7	6	7	7	M	G	20+	No obvious significant defects.	No action required at present.	B2
T75	Beech	28	1	168	8.5	15	12	9	3	FM	G	40+	Fruiting body of Ganoderma australe at base but the use of a sounding hammer indicates healthy buttressing. Crown stems extend from 3-4m. Slight lean to the south.	No action required at present.	A2
T76	Red oak	16	1	70	3	3	3	3	8	M	G	20+	The crown has once been reduced and since re-grown.	No action required at present.	B2
T77	Large leaf lime	28	1	85	8	8	9.5	7	8	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T78	Copper beech	25	1	77	3	8	6	6	8	M	G	20+	Co-dominant stems extend from 4m. A woodland tree with a high crown over the path. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T79	Beech	28	1	75	9	11	10	5	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T80	Beech	28	1	75	9	11	5	10	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T81	Beech	25	1	50	5	5	5	5	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T82	Beech	28	1	59	7	4	2	8	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T83	Beech	28	1	65	3	9	12	8	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T84	Douglas fir	32	1	82	7	7	7	7	15	M	G	20+	A tall forest tree.	No action required at present.	B2
T85	Large leaf lime	25	1	128	13	6	8	8	5	FM	G	40+	Basal shoots. Trunk leans north. Past crown lift. Tag no. 252	No action required at present.	A2
T86	Beech	22	1	50	3	7	4	2	12	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T87	Beech	25	1	68	3	7	7	5	8	M	G	20+	A tall woodland tree.	No action required at present.	B2
T88	Large leaf lime	25	1	88	4	14	11	8	4	M	G	20+	Trunk leans south. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T89	Beech	16	1	81	5	3	4	4	3	M	G	20+	The upper crown has been removed. Base immediately beside footpath.	No action required at present.	B2
T90	Beech	28	1	85	4	12	9	7	8	M	G	20+	Trunk leans south. No obvious significant defects.	No action required at present.	B2
T91	Beech	14	1	18	3	3	3	3	4	EM	G	20+	A self-sown tree.	No action required at present.	C2
T92	Beech	14	1	20	3	3	3	3	3	EM	G	20+	A self-sown tree.	No action required at present.	C2
T93	Yew	5	1	28	5	5	5	5	2	EM	G	20+	No obvious significant defects.	Crown lift by removing branches below 2.5m that overhang the path.	B2
T94	Yew	5	1	15	3	4	4.5	4.5	2	EM	G	20+	No obvious significant defects.	Crown lift by removing branches below 2.5m that overhang the path.	B2
T95	Beech	25	1	75	7	7	7	7	7	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T96	Beech	25	1	65	5	4	6	6	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T97	Beech	20	1	40	5	5	5	5	9	EM	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T98	Beech	23	1	35	7	4	5	5	3	EM	G	20+	No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T99	Beech	23	1	73	8	6	5	6	3	M	G	20+	The trunk leans north. Base immediately beside footpath.	No action required at present.	B2
T100	Beech	23	1	70	8	8	8	8	5	M	G	20+	No obvious significant defects.	No action required at present.	B2
T101	Large leaf lime	25	1	52	4	5	4	7	7	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T102	Beech	30	1	97	7	10	6.5	8	2	FM	G	40+	A prominent tree beside the path. Low crown. Base immediately beside footpath.	Crown lift by removing branches below 2.5m that overhang the path.	A2
T103	Large leaf lime	16	1	32	8	3	3	5	4	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T104	Sweet chestnut	9	MS	22	5	6	6	4	3	EM	G	20+	Multi-stemmed from base.	No action required at present.	C2
T105	Large leaf lime	28	1	56	7	4	6	5	5	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T106	Beech	6	1	9	3	3	3	3	2	SM	G	20+	No obvious significant defects.	No action required at present.	C1
T107	Small leaf lime	25	1	58	7	4	6	5	5	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T108	Beech	25	1	63	7	7	7	7	10	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T109	Yew	6	2	14	4	4	4	4	1	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T110	Large leaf lime	21	1	55	9	7	3	11	7	M	G	20+	Crown extends north.	No action required at present.	B2
T111	Large leaf lime	21	1	55	8	8	7	8	3	M	G	20+	No obvious significant defects. Surface roots in footpath.	No action required at present.	B2
T112	Large leaf lime	17	1	42	7.5	5	5	5	4	M	G	20+	No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T113	Japanese maple	7	1	36	4	6	6	6	2	M	G	20+	Crown extends south east.	No action required at present.	B2
T114	Beech	27	1	89	9.5	9.5	9.5	9.5	2	FM	G	40+	A tall woodland tree.	No action required at present.	A2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T115	Large leaf lime	30	1	78	10	9	10	7	8	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T116	Rhododendron	8	3	26	6	3	5	6	3	M	G	10+	No obvious significant defects.	No action required at present.	C2
T117	Beech	27	1	70	8	8	8	8	5	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T118	Beech	17	1	35	5	4	4	6	7	EM	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T119	Sweet chestnut	15	1	85	10	8	7	9	6	FM	G	40+	The upper crown has shed from 15m but new growth has now developed.	No action required at present.	A2
T120	Beech	20	1	54	5	7	6	7	7	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T121	Beech	27	1	70	5	10	8	8	6	M	G	20+	Trunk leans south. No obvious significant defects.	No action required at present.	B2
T122	Beech	15	1	24	4	5	5	5	4	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T123	Beech	28	1	68	7	7	7	7	4	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T124	Beech	15	1	26	4	5	5	5	4	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T125	Beech	28	1	65	8	8	6	7	4	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T126	Beech	28	1	58	5	7	8	5	4	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T127	Beech	15	1	30	3	5	1	4	4	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T128	Beech	20	1	65	8	7	7	9	5	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T129	Beech	18	1	45	0	9	0	9	7	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T130	Beech	21	1	35	4	4	4	4	8	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T131	Beech	21	1	40	6	4	5	4	8	EM	G	20+	No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T132	Silver birch	11	1	18	4.5	4.5	4.5	4.5	3	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T133	Silver birch	11	2	17	4.5	4.5	4.5	4.5	3	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T134	Beech	30	1	75	7	9	9	9	12	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T135	Beech	26	1	70	7	4	6	9	5	M	G	20+	No obvious significant defects.	No action required at present.	B2
T136	Beech	28	1	70	7	4	6	9	5	M	G	20+	No obvious significant defects.	No action required at present.	B2
T137	Beech	30	1	85	8	8	8	8	5	M	G	20+	Symmetrical crown. No obvious significant defects.	No action required at present.	B2
T138	Beech	28	1	46	7	5	6	5	6	M	G	20+	Co-dominant stems extend from 2m. A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T139	Beech	25	1	29	6	3	4	5	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T140	Copper beech	30	1	60	7.5	9	9	7	8	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T141	Rhododendron	5	1	15	1	2	3	2	2	M	D	<10	A standing dead tree.	No action required at present.	U
T142	Large leaf lime	30	1	94	7	8	7	8	8	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T143	Beech	32	1	115	7	11	6	14	7	M	G	40+	A large woodland tree with a lean to the west.	No action required at present.	A2
T144	Beech	25	1	42	7	2	3	6	6	M	G	20+	No obvious significant defects.	No action required at present.	B2
T145	Beech	28	1	79	9	8	9	8.5	7	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T146	Beech	28	1	75	1	10	9	8	7	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T147	Rhododendron	4	4	14	2	4	3	3	2	M	G	10+	No obvious significant defects.	No action required at present.	C2
T148	Silver birch	16	1	19	0	3	2	2	9	EM	G	10+	A self-sown tree.	No action required at present.	C2
T149	Rhododendron	6	MS	29	3.5	3.5	3.5	3.5	1	M	G	10+	No obvious significant defects.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T150	Variegated sycamore	23	1	72	9	9	5	10	8	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T151	Beech	16	1	13	1	2	2	2	6	SM	F	10+	Crown dieback. A self-sown tree.	No action required at present.	C2
T152	Beech	17	1	50	8	6	8	5	5	M	G	20+	No obvious significant defects.	No action required at present.	B2
T153	Foxglove tree	15	1	55	0	9	1	7	5	M	G	20+	Trunk leans south. No obvious significant defects. Tag no. 805a	No action required at present.	B2
T154	Western red cedar	28	1	189	6	11	5	12	5	M	G	20+	Slight trunk lean away from the path. Tag no. 379. Base immediately beside footpath.	No action required at present.	B2
T155	Yew	4	3	26	1.5	4	2	4	1	EM	G	10+	Suppressed crown with dieback.	No action required at present.	C2
T156	Sycamore	23	1	67	3	11	4	9	3	M	G	20+	Co-dominant stems extend from 3m. Crown leans west.	No action required at present.	B2
T157	Beech	23	1	55	5	5	3	7	4	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T158	Beech	16	1	39	6	6	6	6	6	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T159	Magnolia	10	4	43	5.5	11	6	4	2	M	G	20+	Crown leans south.	No action required at present.	B1
T160	Handkerchief tree	14	1	68	6	11	5	11	2	M	G	20+	Crown leans south-west.	No action required at present.	B1
T161	Copper beech	22	1	107	7	13	9	12	3	M	G	40+	A prominent tree.	No action required at present.	A2
T162	Norway maple	25	1	98	6	12	9	10	3	FM	G	20+	Crown leans east. Past crown lift. Tag no. 708	No action required at present.	B2
T163	Beech	17	1	79	7	8	7.5	8	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B1
T164	Beech	17	1	75	9	8	7	8	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B1
T165	Blue atlas cedar	18	1	72	6.5	7	8.5	8	3	M	F	20+	Very minor crown dieback throughout.	No action required at present.	B1
T166	Sweet gum	9	1	27	4	4	4	4	2	EM	G	20+	Symmetrical crown.	No action required at present.	B2
T167	Walnut	3	1	12	1.5	1.5	1.5	1.5	1	SM	G	10+	No obvious significant defects.	No action required at present.	C1
T168	Walnut	3	1	12	1.5	1.5	1.5	1.5	1	SM	G	10+	No obvious significant defects.	No action required at present.	C1

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T169	Walnut	3	1	12	1.5	1.5	1.5	1.5	1	SM	G	10+	No obvious significant defects.	No action required at present.	C1
T170	Silver lime	22	1	90	8	10	8	8	2	FM	G	40+	Three small wounds to the trunk which have begun to occlude. Past crown lift. Base immediately beside footpath and roots visible on the far side of the track.	Crown lift by removing branches below 2.5m that overhang the path.	A2
T171	Italian maple	9	1	33	5	8	5	7	3	M	G	20+	No obvious significant defects.	No action required at present.	B1
T172	Field maple	14	2	32	3	6	5	5.5	2	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T173	Field maple	14	1	49	6	3	5	5.5	2	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T174	English oak	14	1	58	4	8	2	10	3	M	G	20+	Crown leans west over the lake.	No action required at present.	B2
T175	Yew	14	1	106	8	8	8	8	4	FM	G	40+	A large yew beside the temple. It has recently been thinned and lifted. Tag no. 1359.	No action required at present.	A2
T176	Western hemlock	20	1	65	7	7	7	7	5	M	G	20+	A tall woodland tree.	No action required at present.	B2
T177	Rhododendron	5	2	17	1	1	0	2	2	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T178	English oak	16	1	65	9	8	5	11	4	M	G	20+	Crown leans west. Past crown lift.	No action required at present.	B2
T179	Rhododendron	2	MS	13	1	1.5	1.5	1.5	1	SM	P	<10	Major crown dieback. Multi-stemmed from base.	No action required at present.	U
T180	Beech	25	1	75	4	9	8	8	5	M	G	20+	A tall woodland tree.	No action required at present.	B2
T181	Beech	25	1	68	5	5	7	9	5	M	G	20+	A tall woodland tree.	No action required at present.	B2
T182	Beech	25	1	80	11	6	7	9	5	M	G	20+	A tall woodland tree.	No action required at present.	B2
T183	Beech	20	1	90	3	14	8	12	2	M	G	40+	Trunk leans over the lake. An attractive feature.	No action required at present.	A2
T184	Beech	27	1	111	9.5	9.5	9.5	9.5	2	FM	G	40+	A perfect specimen beech beside the lake.	No action required at present.	A1
T185	Beech	20	1	78	9	7	4	10	3	M	G	40+	Trunk leans over the lake. An attractive feature.	No action required at present.	A2
T186	Yew	16	1	69	7	7	7	7	4	M	F	10+	Crown dieback.	No action required at present.	C2
T187	Holly	14	3	45	4	2	5	5	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T188	Noble fir	34	1	121	2	6	5	6	3	FM	G	40+	Slight crown lean to the south. No obvious significant defects. Tag no. 387	No action required at present.	A1
T189	English oak	15	1	31	6	6	5	5	4	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T190	Tulip tree	23	1	117	11	11	12	12	2	FM	G	40+	Trunk scar up to 2m. A prominent tree beside the path. Tag no. 458. Base immediately beside footpath.	No action required at present.	A1
T191	Sweet buckeye	20	1	73	7	8	8	8	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B1
T192	Enkianthus campanulatus	5	MS	33	6	6	6	5	2	M	G	20+	An attractive multi-stemmed tree.	No action required at present.	B1
T193	Indian horse chestnut	16	1	55	6.5	6.5	7	7	4	M	G	20+	No obvious significant defects. Base immediately beside footpath.	No action required at present.	B1
T194	Rhododendron	9	MS	53	5	7	7	8	3	M	G	20+	Multi-stemmed from base. Past crown lift. Base immediately beside footpath.	No action required at present.	B2
T195	Rhododendron	9	4	44	4	8	4	6	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T196	Variegated sycamore	22	1	73	6	7	1	10	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T197	Variegated sycamore	22	1	72	2	9	3	9	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T198	Walnut	15	1	48	2	5	1	6	3	M	P	<10	Thin crown. Little long-term future.	No action required at present.	U
T199	Beech	14	1	40	5	8	4	6	3	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T200	Sweet chestnut	25	1	78	7	7	9	9	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T201	Beech	16	1	42	7	3	7	8	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T202	Rhododendron	6	3	24	1	1	0	7	3	M	G	20+	The whole crown leans over the path.	No action required at present.	B2
T203	Rhododendron	6	1	26	3	2	1	6	3	M	G	20+	The whole crown leans over the path.	No action required at present.	B2
T204	Beech	16	1	55	6	6	6	6	5	M	G	20+	No obvious significant defects.	No action required at present.	B2
T205	False acacia	17	1	33	6	6	6	6	5	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T206	Beech	28	1	88	10	8	9	8	5	FM	G	20+	A large woodland tree. No access to base, surveyed from a distance.	No action required at present.	B2
T207	Cockspur thorn	6	1	29	5	6	5	3	2	M	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C1
T208	Rhododendron	6	4	18	3	5	2	4	1	M	F	10+	Crown dieback.	No action required at present.	C1
T209	Noble fir	35	1	153	8	8	8	8	5	FM	G	40+	A specimen tree. Symmetrical crown. Tag no. 395/36	No action required at present.	A1
T210	Copper beech	9	1	85	9	8	9	9	5	M	G	40+	A specimen tree. Symmetrical crown.	No action required at present.	A1
T211	English oak	25	1	95	7	9	9	8	15	FM	G	40+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	A2
T212	Sycamore	18	1	56	3	6	2	8	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T213	Sycamore	18	1	79	3	5	1	9	5	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T214	Sycamore	18	1	42	5	1	1	5	5	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T215	Sycamore	18	1	47	5	1	4	1	5	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T216	Sycamore	19	1	56	4	6	5	2	5	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T217	Carolina silverbell	5	1	32	7	7	4	5	0.5	M	G	20+	Low, wide spreading crown.	No action required at present.	B1
T218	Sitka spruce	29	1	124	9	9	7	9	3	FM	G	20+	A tall prominent specimen tree. No obvious significant defects. Tag no. 408	No action required at present.	A2
T219	Zelkova	6	3	16	2	2	2	2	2	EM	G	10+	No obvious significant defects. Base immediately beside footpath.	No action required at present.	C2
T220	Zelkova	6	1	12	1	3	0.5	3	1	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T221	Zelkova	6	MS	17	2	2	2	2	2	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T222	Zelkova	6	MS	17	2	2	2	2	2	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T223	Zelkova	6	MS	17	3	1	3	1	2	EM	G	20+	No obvious significant defects. Base immediately beside footpath.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T224	Silver lime	25	1	77	6	6	6	6	3	M	G	20+	Numerous bleeding lesions on the trunk up to 4m. A secondary stem extends from 5m. Tag no. 521	No action required at present.	B2
T225	English oak	23	1	69	5	7	5.5	7	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T226	Horse chestnut	26	1	84	5	8	7	9	6	FM	G	20+	Slight trunk lean to the south. Past crown lift.	No action required at present.	B2
T227	Cherry	14	1	32	4.5	3	3	4	7	EM	G	10+	High crown. No obvious significant defects.	No action required at present.	C2
T228	Pin oak	15	1	37	6.5	6.5	3	6.5	4	EM	G	20+	Past crown lift. No obvious significant defects. Tag no. 741	No action required at present.	B2
T229	Corylopsis glabrescens	4	4	14	3	0	1.6	3	2	EM	G	10+	A multi-stemmed shrub.	No action required at present.	C2
T230	Corylopsis glabrescens	4	MS	21	1.5	1	0	3	2	EM	G	10+	A multi-stemmed shrub.	No action required at present.	C2
T231	Rhododendron	5	3	26	4	2	4	0	2	M	G	10+	The whole crown leans over the path.	No action required at present.	C1
T232	Dawn redwood	11	1	23	3	3	3	3	2	EM	G	20+	Symmetrical crown.	No action required at present.	B1
T233	Dawn redwood	17	1	78	3.5	3.5	3.5	3.5	5	M	G	20+	The upper crown has once been removed and a new leader has re-grown. Tag no. 416	No action required at present.	B1
T234	Lantern tree	5	MS	17	1.5	1.5	1.5	1.5	1	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T235	Lantern tree	5	MS	17	1.5	1.5	1.5	1.5	1	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T236	Magnolia	6	MS	53	6	6.5	5	7	2	M	G	20+	Multi-stemmed from 1m. Tag no. 494	No action required at present.	B1
T237	Rhododendron	4	MS	15	2	2	2	2	0.5	SM	G	10+	A multi-stemmed shrub.	No action required at present.	C2
T238	Yew	5	2	14	2.5	2.5	2.5	2.5	1	EM	G	10+	Symmetrical crown.	No action required at present.	C1
T239	Dogwood	5	3	14	3	2	2.5	2	1	EM	G	10+	No obvious significant defects.	No action required at present.	C1
T240	English oak	23	1	87	11	6	2	11	5	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T241	Yew	16	1	152	7	6	6	9	3	FM	G	40+	A particularly large specimen yew. Crown extends west. Numerous large pruning wounds up to 6m. Tag no. 423	No action required at present.	A1
T242	Douglas fir	35	1	155	8	8	11	7	8	FM	G	40+	A tall specimen tree.	No action required at present.	A2
T243	Beech	24	1	71	7	3	3	6	5	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T244	Sycamore	22	1	54	4	4	4	5	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T245	Sycamore	22	1	65	6	5	3	6	9	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T246	Beech	23	1	80	9	9	9	9	5	M	G	40+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	A1
T247	English oak	30	1	123	9	9	9	9	8	FM	G	40+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	A2
T248	Small leaf lime	30	1	96	10	8	7	9	9	M	G	40+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	A2
T249	Sweet chestnut	16	1	178	8	8	3	8	5	V	G	40+	Flaking bark at base. Trunk cavities at 3m and 4m. Large scar on the underside of a large limb at 7m. The whole upper crown has been removed and since begun to re-grow.	No action required at present.	A3
T250	Elm sp.	12	1	35	5	7	4	7	3	M	G	20+	Trunk leans away from the path.	No action required at present.	B2
T251	Sitka spruce	19	1	73	7	9	1	7	2	M	G	20+	No obvious significant defects.	No action required at present.	B2
T252	Red oak	18	1	43	7	7	6	8	2	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T253	English oak	27	1	134	10	9	9	10	6	FM	F	20+	Large pruning wounds on the lower trunk. Upper crown dieback.	No action required at present.	B2
T254	Evergreen magnolia	7	2	18	2	6.5	0.5	7	2	M	G	10+	Both stems lean south-west.	No action required at present.	C1
T255	Rhododendron	4	MS	25	3	3	2	4	2	M	G	10+	No obvious significant defects.	No action required at present.	C1
T256	Nutmeg	5	1	20	3	4	3	3.5	2	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T257	Sycamore	25	1	102	9	9	7	10	4	FM	G	40+	Trunk scar up to 2m. A prominent tree beside the path.	No action required at present.	A2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T258	English oak	30	1	124	8	8	8	11	7	FM	G	40+	Crown extends west. Past crown lift.	No action required at present.	A2
T259	Japanese maple	7	2	34	6	5	3.5	5	3	M	G	20+	Trunk scars. Crown extends west. Past crown lift.	No action required at present.	B1
T260	Coastal redwood	28	1	185	5	5	5	5	6	FM	G	40+	A tall prominent specimen tree. No obvious significant defects.	No action required at present.	A2
T261	Magnolia	16	1	54	7	4	5	6	3	M	G	20+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T262	Tree of heaven	23	1	109	8	8	3	8	3	FM	F	20+	Large trunk scar up to 2m. High crown. Tag no. 635	No action required at present.	B2
T263	Forrest's fir	19	1	71	5	5	3	7	7	M	F	10+	The upper crown has once been removed and a new leader has re-grown. Obvious crown dieback. Tag no. 411a	No action required at present.	C1
T264	Silver fir	17	1	44	5	5	5	1	2	EM	G	20+	Crown extends east.	No action required at present.	B2
T265	Rhododendron	2	1	9	1	1	1	1	1	EM	G	10+	A small shrub beside the path.	No action required at present.	C2
T266	Rhododendron	5	3	31	3	3	3	3	3	M	G	10+	Two stems extend from base with trunk decay.	No action required at present.	C2
T267	Rhododendron	4	4	17	1	5	3	3	3	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T268	Rhododendron	3	3	16	0	2	2	1	2	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T269	Turkey oak	32	1	144	11	17	10	15	3	FM	G	40+	Numerous large pruning wounds on the lower trunk which have occluded. Slight lean over the path.	No action required at present.	A2
T270	Katsura	8	1	15	3	2	3	3	3	EM	G	20+	No obvious significant defects.	No action required at present.	C1
T271	Copper beech	27	1	102	9	9	9	10	4	FM	G	40+	A specimen tree. Symmetrical crown.	No action required at present.	A2
T272	Western hemlock	32	1	154	7	7	9	7	5	FM	G	40+	A tall specimen tree. Tag no. 1851	No action required at present.	A2
T273	English oak	18	1	72	11	13	10	11	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T274	Katsura	3	1	8	1.5	1.5	1.5	1.5	1	SM	G	10+	A recently planted tree.	No action required at present.	C1
T275	Giant sequoia	17	1	55	4	4	4	4	3	EM	P	<10	Major crown dieback. Only a few signs of live foliage visible in the upper canopy.	No action required at present.	U

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T276	Giant sequoia	30	1	200	6	6	6	6	3	FM	G	40+	A tall specimen tree. Symmetrical crown.	No action required at present.	A2
T277	Yew	15	1	162	7	7	7	7	2	FM	G	40+	Four stems extend from 2m. Symmetrical crown. Large pruning wound at 2m. All four stems have once been topped.	No action required at present.	A2
T278	Giant sequoia	17	1	87	5	5	5	5	2	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T279	Giant sequoia	17	1	65	5	5	5	5	2	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T280	Giant sequoia	17	1	79	5	5	5	5	2	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T281	Magnolia	5	1	28	4	6	7	7	3	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T282	White poplar	20	1	49	5	2	5	3	4	EM	G	20+	Slight trunk lean to the north. Past crown lift.	No action required at present.	B2
T283	Japanese maple	6	1	43	4.5	8	7	7	2	M	G	20+	The whole crown leans over the path.	No action required at present.	B2
T284	Red oak	27	1	121	11	9	11	10	4	FM	G	40+	A large specimen tree near the path. The joining path has visible surface roots.	No action required at present.	A2
T285	Fuzzy deutzia	4	MS	19	3	3	3	3	1	M	G	10+	A multi-stemmed shrub.	No action required at present.	C2
T286	Rhododendron	8	MS	80	9	9	9	7	2	FM	G	20+	Multi-stemmed from base. Past crown lift.	No action required at present.	B1
T287	Lawson cypress	14	2	49	5	5	5	5	2	M	F	10+	Co-dominant stems extend from base. Thin crown.	No action required at present.	C2
T288	Western red cedar	20	1	122	8	7	7	7	3	FM	G	20+	Basal decay. Past crown lift.	No action required at present.	B1
T289	Copper beech	25	1	103	9	7	7	8	3	M	G	40+	Slight trunk lean to the west. No obvious significant defects.	No action required at present.	A1
T290	Western red cedar	17	1	40	2.5	2.5	2.5	2.5	4	M	G	20+	No obvious significant defects.	No action required at present.	B2
T291	Cypress sp.	19	1	68	6	6	6	6	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T292	Catalpa sp.	7	1	16	2.5	4	4	4	2	EM	G	20+	No obvious significant defects. Base immediately beside footpath.	No action required at present.	B1
T293	English oak	11	1	99	8	6	5	6.5	3	M	G	20+	Pruning wounds throughout the crown from pruning away from the path. Crown dieback.	No action required at present.	B2
T294	Rhododendron	3	1	13	1.5	1.5	1.5	1.5	2	M	G	10+	No obvious significant defects.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T295	Rhododendron	3	1	13	1.5	1.5	1.5	1.5	2	M	G	10+	No obvious significant defects.	No action required at present.	C2
T296	Japanese red cedar	20	1	79	3	4	3	4	3	M	G	20+	No obvious significant defects. Tag no.454	No action required at present.	B1
T297	Copper beech	8	1	16	4	3	4	3	3	EM	G	10+	Squirrel damage at 2m.	No action required at present.	C1
T298	Rhododendron	3	1	13	1.5	1.5	1.5	1.5	2	M	G	10+	No obvious significant defects.	No action required at present.	C2
T299	Horse chestnut	17	1	62	7	7	7	7	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T300	Japanese maple	6	4	50	10	8	7	6	3	M	G	20+	No obvious significant defects.	No action required at present.	B1
T301	Magnolia	14	1	39	5	4	6	4	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T302	Leyland cypress	30	1	104	7	5	7	6	4	M	G	20+	Past crown lift. No obvious significant defects. Tag no. 512	No action required at present.	B2
T303	Leyland cypress	30	1	87	7	7	5	7	4	M	G	20+	Past crown lift. No obvious significant defects. Tag no. 512	No action required at present.	B2
T304	Leyland cypress	30	1	94	5	7	7	6	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T305	Arolia pine	18	1	45	3.5	4.5	4	3	3	EM	F	20+	Minor upper crown dieback. Tag no. 448	No action required at present.	B2
T306	Arolia pine	8	1	14	1.5	1.5	1.5	1.5	1	SM	G	20+	No obvious significant defects. Tag no. 449	No action required at present.	B2
T307	Momin fir	35	1	111	5	8	5	7	5	FM	F	20+	A particularly tall specimen. Crown dieback. Tag no. 451. Surface roots in footpath.	No action required at present.	B2
T308	Colorado spruce	18	1	23	1	2	2	2	8	EM	F	10+	Suppressed crown with dieback. Tag no. 513	No action required at present.	C2
T309	Coastal redwood	35	1	215	6	5	5	5	6	FM	G	20+	A specimen tree. Symmetrical crown. Tag no. 228	No action required at present.	A1
T310	Caucasian wing nut	17	1	79	5	9	9	8	3	M	G	20+	Crown extends south. Surface roots in footpath.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T311	English oak	15	1	49	9	7	9	7	4	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T312	English oak	18	1	159	5	12	8.5	8.5	6	FM	G	40+	Large pruning wound with associated decay at 3.m. Past crown lift. Arboreal ivy.	No action required at present.	A2
T313	Black oak	5	1	8	2	2	2	2	2	SM	G	10+	No obvious significant defects.	No action required at present.	C1
T314	Black oak	5	1	8	2	2	2	2	2	SM	G	10+	No obvious significant defects.	No action required at present.	C1
T315	Black oak	5	1	8	2	2	2	2	2	SM	G	10+	No obvious significant defects.	No action required at present.	C1
T316	Sweet gum	12	1	25	4	2	4	3	4	EM	G	20+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T317	English oak	16	1	38	6	6	6	6	3	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T318	English oak	16	1	50	6	6	6	6	3	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T319	Sweet gum	17	1	50	8	8	8	8	4	M	G	20+	Symmetrical crown.	No action required at present.	B1
T320	Beech	18	1	59	6	6	6	6	4	M	G	40+	Symmetrical crown. Past crown lift. Surface roots in footpath.	No action required at present.	A1
T321	Ulmo	15	MS	46	7	4	5	7	2	M	G	20+	Multi-stemmed from base.	No action required at present.	B2
T322	English oak	16	1	48	7	8	7.5	7	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T323	Alder	20	1	63	4	4	5	4	5	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T324	Tree of heaven	9	1	22	7	2	6	5	2	EM	G	10+	Suppressed crown.	No action required at present.	C1
T325	Red oak	8	1	26	7	1	7	4	4	EM	F	10+	Suppressed crown with dieback.	No action required at present.	C1
T326	Alder	20	1	51	5	2	5	5	7	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T327	Alder	20	1	53	2	3	5	2	8	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T328	Alder	20	1	64	5	7	7	2	5	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T329	Alder	20	1	55	6	4	6	5	6	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T330	Alder	20	1	48	3	5	6	2	6	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T331	Alder	20	1	55	2	5	5	4	6	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T332	Alder	20	1	65	4	2	4	4	6	M	G	20+	Past crown lift. No obvious significant defects. Surface roots in footpath.	No action required at present.	B2
T333	Lawson cypress	17	1	96	2	4	4	4	2	M	G	20+	No obvious significant defects. Tag no. 520a	No action required at present.	B2
T334	Lawson cypress	20	1	63	5	5	5	5	3	M	G	20+	No obvious significant defects. Tag no. 519	No action required at present.	B2
T335	Turkey oak	27	1	110	10	9	9	9	4	FM	G	40+	No obvious significant defects. Tag no. 592	No action required at present.	A2
T336	Noble fir	40	1	131	6	6	6	6	4	FM	G	40+	An exceptionally tall tree. No obvious significant defects.	No action required at present.	A1
T337	English oak	19	1	58	11	11	9	11	5	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T338	Dawn redwood	27	1	131	4	5	5	5	2	M	G	20+	No obvious significant defects. Tag no. 458a. Base immediately beside footpath.	No action required at present.	B1
T339	English oak	24	1	45	10	8	8	8	5	EM	G	20+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T340	Magnolia	14	1	37	7	3	8	3	2	M	G	20+	Crown extends east.	No action required at present.	B2
T341	Viburnum	4	MS	12	1	2	2	2	0.5	EM	F	10+	No obvious significant defects.	No action required at present.	C2
T342	Viburnum	4	MS	12	1	1	1	1	0.5	EM	P	<10	Few signs of live growth remaining.	No action required at present.	U
T343	Copper beech	24	1	99	9	10	11	8	4	M	G	40+	A specimen tree. No obvious significant defects.	No action required at present.	A1
T344	Lawson cypress	18	1	65	4	4	4	4	7	M	G	20+	Three stems extend from 2m.	No action required at present.	B2
T345	Lawson cypress	18	1	65	4	4	4	4	7	M	G	20+	Two stems extend from 2m.n	No action required at present.	B3
T346	Rhododendron	8	2	39	6.5	2	5	4	4	M	G	10+	No obvious significant defects.	No action required at present.	C2
T347	Rhododendron	8	2	31	4	3	7.5	1	3	M	G	10+	Crown leans east towards the path.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T348	Common lime	20	1	68	6	5	7	2	1	M	G	20+	A tall tree at the edge of the woodland.	No action required at present.	B2
T349	Common lime	20	1	68	1	6	1	4	3	M	G	20+	A tall tree at the edge of the woodland.	No action required at present.	B2
T350	Common lime	20	1	68	7	1	4	5	2	M	G	20+	A tall tree at the edge of the woodland.	No action required at present.	B2
T351	Common lime	15	1	70	3	3	6	2	1	FM	F	20+	The main leader has shed from the base leaving a large hollow trunk with only two columns remaining. Suppressed crown.	No action required at present.	B2
T352	Common lime	25	1	68	6	6	8	2	4	M	G	20+	No obvious significant defects.	No action required at present.	B2
T353	Common lime	25	1	59	4	6	5	5	4	M	G	20+	No obvious significant defects.	No action required at present.	B2
T354	Dawn redwood	8	1	15	3	2	3.5	1	1	EM	G	20+	Crown extends east.	No action required at present.	C1
T355	Dawn redwood	9	1	15	3	2	3.5	1	1	EM	G	20+	Crown extends east.	No action required at present.	C1
T356	Rhododendron	6	2	15	3	1	2	1	2	M	G	10+	This is a layered branch which almost grows as an individual.	No action required at present.	C2
T357	Rhododendron	6	4	29	3	4	3	1	2	M	G	10+	This is a layered branch which extends east.	No action required at present.	C2
T358	Rhododendron	6	2	28	3	4	3	1	2	M	G	10+	The original shrub of two other layered branches.	No action required at present.	C2
T359	Copper beech	25	1	112	9	12	11	8	6	FM	G	40+	A tall tree at the edge of the woodland.	No action required at present.	A2
T360	Rhododendron	7	1	20	6	2	5	4	1	M	G	10+	No obvious significant defects.	No action required at present.	C1
T361	Sitka spruce	26	1	76	9	7	9	8	7	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects. Tag no. 199	No action required at present.	B2
T362	Western red cedar	30	1	110	7	7	7	7	2	FM	G	40+	A particularly tall specimen.	No action required at present.	A1
T363	Sargent's spruce	30	1	91	5	7	7	7	3	FM	G	40+	A particularly tall specimen. Tag no. 523. Surface roots in footpath.	No action required at present.	A1
T364	Western red cedar	27	3	100	12	0	8	7	3	FM	G	40+	Three stems extend north which have layered from T368.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T365	Western red cedar	27	1	71	5	1	2	4	2	FM	G	40+	This is a single stem which will have once layered from T368. The base is immediately beside footpath and surface roots are also present in the path.	No action required at present.	B2
T366	Western red cedar	27	2	50	3	1	0	5	3	M	G	40+	Two stems extend from base which have layered from T368. The base is immediately beside footpath and surface roots are also present in the path.	No action required at present.	B2
T367	Western red cedar	27	1	76	7	0	3	2	2	FM	G	40+	This is a single stem which will have once layered from T368.	No action required at present.	B2
T368	Western red cedar	27	1	126	4	4	4	4	5	FM	G	40+	This is the original tree in the centre of numerous layered stems. Symmetrical crown. The base is immediately beside footpath and surface roots are also present in the path.	No action required at present.	A2
T369	Western red cedar	27	2	68	1	5	1	4	5	M	G	40+	Two stems extend from base which have layered from T368. The base is immediately beside footpath and surface roots are also present in the path.	No action required at present.	B2
T370	Western red cedar	27	2	75	3	7	5	6	3	M	G	40+	Two stems extend from base which have layered from T368.	No action required at present.	B2
T371	Western red cedar	27	2	37	0	8	3	4	2	FM	G	20+	Two stems extend south which have layered from T368. The base is immediately beside footpath and surface roots are also present in the path.	No action required at present.	B2
T372	English oak	22	1	246	4	7	8	5	5	V	G	40+	A large oak with numerous burrs throughout the trunk. Ganoderma sp fruiting body at base. Pruning wounds in the lower crown. Hole at 5m. Deadwood in the crown. Surface roots in footpath.	No action required at present.	A1
T373	Silver birch	15	1	31	3	4	4	3	5	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T374	White poplar	20	1	40	6	4	3	8	6	M	G	20+	High crown. No obvious significant defects.	No action required at present.	B2
T375	Alder	22	1	78	6	6	6	6	6	M	G	20+	High crown. No obvious significant defects.	No action required at present.	B2
T376	Yew	14	1	41	5	1	3	4	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T377	Yew	14	3	49	1	5	4	2	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T378	Silver maple	25	1	90	8	10	9	7	4	FM	G	40+	Located at the edge of the lake. No access to base, surveyed from a distance.	No action required at present.	A2
T379	Holly	11	1	49	2	4	4	2	2	M	G	20+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T380	Yew	10	1	45	4	6	5.5	1	4	M	G	20+	Crown extends east.	No action required at present.	B2
T381	Yew	10	1	40	3	4	2	3	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T382	Yew	10	1	40	2	1	7	1	3	M	G	20+	Past crown lift. No obvious significant defects. Surface roots in footpath.	No action required at present.	B2
T383	Common lime	20	1	73	6	6	6	6	6	M	G	20+	Basal shoots. Symmetrical crown.	No action required at present.	B2
T384	Rhododendron	6	4	25	3	2	5	0	2	M	G	10+	Crown leans over the path. Located beyond a low stone retaining wall.	No action required at present.	C2
T385	Rhododendron	6	2	16	3	2	5	0	2	M	G	10+	Crown leans over the path. Located beyond a low stone retaining wall.	No action required at present.	C2
T386	Rhododendron	6	4	22	3	1	3	1	2	M	G	10+	Crown leans over the path. Located beyond a low stone retaining wall.	No action required at present.	C2
T387	Yew	7	1	35	2	1	4	2	3	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T388	Yew	7	1	35	2	2	5	2	2	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T389	Western red cedar	25	1	49	1	4	3	3	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T390	Western red cedar	25	1	82	4	4	4	4	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T391	Western red cedar	25	1	50	3	3	2	4	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T392	Western red cedar	25	1	84	4	4	4	4	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T393	Magnolia	8	1	17	5	1	2	5	2	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C1
T394	Japanese red cedar	25	1	78	5	6	3	6	4	M	G	20+	Past crown lift. No obvious significant defects. Tag no. 524	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T395	Holly	4	MS	27	3	2	5	5	3	M	G	10+	No obvious significant defects.	No action required at present.	C2
T396	Copper beech	28	1	101	8.5	8.5	8.5	7	4	FM	G	40+	Slight trunk lean to the east. Past crown lift. Surface roots in footpath.	No action required at present.	A1
T397	Sweet buckeye	15	1	55	6	6	6	2	5	M	G	20+	No obvious significant defects. Tag no. 582	No action required at present.	B2
T398	Dogwood	5	1	10	3	1	2	2	1	EM	G	10+	No obvious significant defects.	No action required at present.	C1
T399	Sycamore	27	1	105	10	10	10	10	5	M	G	40+	Two stems extend from 6m. Past crown lift. Surface roots in footpath.	No action required at present.	A2
T400	Yew	5	1	15	2	2	2	2	2	SM	G	10+	An understorey tree.	No action required at present.	C2
T401	Hazel	5	1	15	1	3	2	1	2	SM	G	10+	An understorey tree.	No action required at present.	C2
T402	Hazel	3	1	12	2	2	1	1	2	SM	G	10+	An understorey tree.	No action required at present.	C2
T403	American lime	28	1	63	6	6	6	6	4	FM	G	40+	A tall specimen beside the path. Past crown lift. Tag no. 620	No action required at present.	A1
T404	Yew	20	1	95	8	8	8	8	5	FM	G	40+	Symmetrical crown.	No action required at present.	A2
T405	Sycamore	18	1	68	7	7	7	7	7	M	G	20+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T406	Sycamore	18	1	68	7	7	7	7	7	M	G	20+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T407	Portuguese laurel	7	1	58	1	7	5	5	3	M	G	10+	No obvious significant defects.	No action required at present.	C2
T408	Kentucky coffee tree	5	MS	20	5	5	5	5	3	EM	G	10+	A multi-stemmed shrub.	No action required at present.	C2
T409	London plane	19	1	75	8	8	9	5	6	M	G	40+	Trunk leans east. No obvious significant defects. Surface roots in footpath.	No action required at present.	A2
T410	Western hemlock	30	1	159	6.5	6.5	6.5	6.5	4	FM	G	40+	A specimen tree with a symmetrical crown.	No action required at present.	A1

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T411	Cut leaved beech	25	1	76	8.5	8.5	9	8	2	M	G	40+	Past crown lift. No obvious significant defects. The base is immediately beside footpath and surface roots are also present in the path.	No action required at present.	A2
T412	Rhododendron	5	MS	20	1.5	1.5	2	1.5	1	SM	G	10+	A multi-stemmed shrub.	No action required at present.	C2
T413	Rhododendron	5	4	16	1.5	1.5	2	1.5	1	SM	G	10+	A multi-stemmed shrub.	No action required at present.	C2
T414	Holly	9	1	20	2	3	3	3	2	EM	F	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T415	Holly	9	1	10	3	1	2	1	2	EM	F	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T416	Holly	9	1	18	2	2	2	2	2	EM	F	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T417	Wych elm	12	3	18	2	2	2	2	4	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T418	Wych elm	12	1	18	1	1	3.5	0	3	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T419	Wych elm	12	1	18	2	2	3	1	3	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T420	Wych elm	12	1	24	2	2	5	0	2	EM	G	10+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	C2
T421	Wych elm	12	1	20	2	2	4	0	2	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T422	Sycamore	30	1	128	13	10	12	8	6	FM	G	40+	Tall crown stems extend from 4m. Slight natural lean to the east. Surface roots in footpath.	No action required at present.	A1
T423	English oak	27	1	120	10	12	11	7	6	FM	G	40+	Crown extends over the lake. No access to base, surveyed from a distance.	No action required at present.	A1
T424	Dogwood	7	1	15	3	1	3	1	2	EM	G	10+	No obvious significant defects.	No action required at present.	C1
T425	Wild cherry	15	1	30	6	5	4	4	4	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T426	Magnolia	19	1	80	8	9	9	8	6	FM	G	40+	A specimen tree at the edge of the woodland.	No action required at present.	A2
T427	Snake bark maple	9	1	38	5	2	8	1	2	M	G	10+	Suppressed crown.	No action required at present.	C1
T428	Snake bark maple	9	2	38	2	5	7	1	2	M	G	10+	Suppressed crown.	No action required at present.	C1

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T429	Beech	28	1	60	6	6	7	4	5	M	G	20+	A mature woodland tree.	No action required at present.	B2
T430	Sweet chestnut	9	MS	17	3.5	3.5	3.5	3.5	2	SM	G	10+	No obvious significant defects.	No action required at present.	C1
T431	Chinese fir	30	1	81	5	5	6	2	3	M	G	20+	Slight trunk lean towards the path.	No action required at present.	B1
T432	Yew	5	1	15	3	3	3	3	1	SM	G	10+	An understorey tree.	No action required at present.	C1
T433	London plane	27	1	75	6	6	8	5	5	M	G	20+	A mature woodland tree. No access to base, surveyed from a distance.	No action required at present.	B2
T434	Rhododendron	7	MS	40	4	5	4	4	4	M	F	10+	Multi-stemmed from base. Past crown lift.	No action required at present.	C2
T435	Wild cherry	18	1	35	4	4	6	4	10	M	G	20+	A mature woodland tree.	No action required at present.	B2
T436	Wild cherry	18	1	40	3	5	5	3	10	M	G	20+	A mature woodland tree.	No action required at present.	B2
T437	Yew	5	2	15	3	3	3	3	1	SM	G	10+	An understorey tree.	No action required at present.	C1
T438	Sweet chestnut	15	1	20	4	4	4	4	4	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T439	Sweet chestnut	15	1	20	4	4	4	4	4	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T440	Sweet chestnut	15	1	20	4	4	4	4	4	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T441	London plane	28	1	80	9	10	12	5	8	M	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T442	Dwarf buckeye	3	MS	20	5	3	4	4	2	EM	G	10+	No obvious significant defects.	No action required at present.	C1
T443	Rhododendron	5	2	21	4	1	2	3	2	M	G	10+	No obvious significant defects.	No action required at present.	C1
T444	Rhododendron	5	MS	20	3	3	3	3	2	M	G	10+	No obvious significant defects.	No action required at present.	C1
T445	Beech	30	1	108	6	6	11	10	3	FM	G	40+	A prominent tree beside the path. Base immediately beside footpath.	No action required at present.	A1
T446	Beech	30	1	113	6	10	9	9	3	FM	G	40+	A prominent tree beside the path.	No action required at present.	A1
T447	Cherry	5	1	9	3	3	3	3	2	SM	G	10+	No obvious significant defects.	No action required at present.	C1

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T448	Western red cedar	17	MS	99	2	7	8	4	2	M	G	20+	Multi-stemmed from base. No access to base, surveyed from a distance.	No action required at present.	B2
T449	Red oak	20	1	69	11	11	9	7	5	M	G	40+	A prominent tree beside the lake.	No action required at present.	A2
T450	Box elder	11	1	39	5.5	5.5	5.5	5	2	M	G	20+	Symmetrical crown. Past crown lift. Tag no. 634	No action required at present.	B2
T451	Box elder	8	1	28	5	5	5	5	2	M	G	20+	No obvious significant defects.	No action required at present.	B2
T452	Box elder	8	1	35	7	3	5	4	2	M	G	20+	No obvious significant defects.	No action required at present.	B2
T453	Japanese maple	6	MS	22	6	2	6.5	3	2	M	G	20+	Crown leans north.	No action required at present.	B1
T454	Katsura	17	1	59	8	7	7.5	6	2	M	G	20+	A mature tree at the edge of the woodland.	No action required at present.	B1
T455	Beech	28	1	106	8	8	8	8	8	FM	G	20+	Numerous bleeding lesions on the north side of the trunk. A tall woodland tree.	No action required at present.	B1
T456	Yew	15	1	104	3	9	5	5	1	FM	G	20+	Crown leans south,	No action required at present.	B1
T457	Manna ash	12	1	42	6	6	6	2	3	M	G	20+	Crown leans over the lake.	No action required at present.	B1
T458	London plane	19	1	88	9	11	9	7	3	M	G	20+	Crown leans over the lake. Past crown lift. Base immediately beside footpath.	No action required at present.	A1
T459	Manna ash	12	1	42	2	6	6	6	3	M	G	20+	Crown leans over the lake.	No action required at present.	B1
T460	Manna ash	6	1	32	4	4	4	1	3	M	F	10+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	C1
T461	Japanese maple	4	3	16	1	3.5	4	1	2	M	G	10+	Asymmetric crown leans over the path.	No action required at present.	C1
T462	Sycamore	15	1	35	6	4	6	4	4	EM	G	20+	A woodland tree with a high crown over the path. No obvious significant defects.	No action required at present.	B2
T463	Manna ash	11	1	32	3	4.5	5	2	2	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T464	Manna ash	7	1	25	4.5	4.5	4.5	1	3	EM	F	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T465	Large leaf lime	18	1	52	6.5	6.5	7.5	5	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B1

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T466	Large leaf lime	18	1	64	5	8	8	5	5	M	G	20+	Crown extends from 3m. Past crown lift.	No action required at present.	B2
T467	Large leaf lime	18	1	40	5	6	6	3	5	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T468	Large leaf lime	18	1	40	5	6	6	3	5	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T469	Sweet buckeye	9	MS	35	6	5	6	5	2	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B1
T470	Yew	8	2	36	3	5	5	4	3	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T471	Sweet buckeye	9	1	36	5	4	5	3	4	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T472	Yew	9	1	38	5	5	5	5	3	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T473	Field maple	14	1	42	5.5	5.5	6	5	4	M	G	20+	Past crown lift. No obvious significant defects. The surface roots are immediately beside footpath.	No action required at present.	B2
T474	Large leaf lime	17	1	80	5	5	5	5	5	M	G	20+	Once pollarded to 8m but it has since re-grown.	No action required at present.	B2
T475	Beech	25	1	72	7	3	7.5	4	3	M	G	20+	Crown leans east over the path.	No action required at present.	B2
T476	Common lime	25	1	75	3	7	7.5	5	3	M	G	20+	Once pollarded to 6m but it has since re-grown.	No action required at present.	B2
T477	Beech	25	1	75	4	5	5	5	8	M	G	20+	A tall woodland tree.	No action required at present.	B2
T478	Beech	16	1	25	3	3	3	3	7	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T479	Beech	16	1	25	3	3	3	3	7	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T480	Beech	22	1	68	5	5	5	5	5	M	G	20+	A tall woodland tree.	No action required at present.	B2
T481	Common lime	17	1	78	2	5	5	5	3	M	G	20+	Once pollarded to 6m but it has since re-grown. Base immediately beside footpath.	No action required at present.	B2
T482	Field maple	12	1	36	4	5	5	5	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T483	Holly	9	MS	33	3	3	3	3	2	EM	G	10+	Multi-stemmed from base.	No action required at present.	C2
T484	Holly	9	1	54	3.5	3.5	3.5	4	2	M	G	10+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T485	Holly	10	2	18	2	2	2	2	2	EM	F	10+	Sparse crown.	No action required at present.	C2
T486	Yew	6	2	42	3.5	4	4	5	2	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T487	Holly	3	1	9	1	1	1	1	1	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T488	Holly	4	1	9	1	1	1	1	1	EM	G	10+	No obvious significant defects.	No action required at present.	C2
T489	Yew	12	3	109	10	10	8	8	2	FM	G	40+	Crown extends north away from the beech. Past crown lift.	No action required at present.	A2
T490	Beech	27	1	115	11	12	11	8	6	FM	G	40+	The whole tree leans south. High crown over the path. Tag no. 131. Base immediately beside footpath.	No action required at present.	A2
T491	Holly	3	1	25	1	1.5	1.5	1.5	2	M	P	<10	Once pollarded to 1.5m. It now has crown dieback with little aesthetic value. Base immediately beside footpath.	No action required at present.	B2
T492	Holly	6	3	70	2	4	4	4	2	FM	F	10+	Once pollarded to 2.5m and it has since re-grown. Minor crown dieback. Base immediately beside footpath.	No action required at present.	C2
T493	Yew	4	1	25	3	2	3.5	3.5	2	EM	G	10+	Past crown lift. No obvious significant defects.	Prune back to 0.5m from the path edge.	C1
T494	Japanese maple	5	1	25	5	0	5	1	2	M	G	20+	The whole crown leans north-east over the lake.	No action required at present.	B1
T495	Holly	6	4	50	2.5	2.5	2.5	2.5	2	FM	G	10+	Four stems extend from base. Arboreal ivy.	No action required at present.	C2
T496	Holly	10	4	50	2.5	2.5	2.5	2.5	2	FM	G	10+	Four stems extend from base. Arboreal ivy.	No action required at present.	C2
T497	Holly	4	MS	44	2.5	2.5	2.5	2.5	2	M	G	10+	Multi-stemmed from base.	No action required at present.	C2
T498	Alpine laburnum	6	1	36	5.5	1	5	5	3	M	G	20+	Past crown lift. No obvious significant defects. Surface roots in footpath.	No action required at present.	B2
T499	Alpine laburnum	6	MS	34	5	0	4	4	3	M	G	20+	Eight stems extend from 0.5m. The whole crown leans north.	No action required at present.	B2
T500	Alpine laburnum	4	4	15	7	0.5	7	0.5	3	EM	G	20+	A suppressed crown leans over the lake.	No action required at present.	C2
T501	Alpine laburnum	7	4	36	3	3	3	3	4	M	G	20+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T502	Alpine laburnum	7	1	19	4	4	2.5	4	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T503	Alpine laburnum	7	2	23	4	0	2	2	3	M	G	20+	Scar at base. A suppressed crown leans over the path. Base immediately beside footpath.	No action required at present.	C2
T504	Alpine laburnum	4	3	9	0.5	2	3	0	3	SM	F	10+	Suppressed crown. Crown dieback.	No action required at present.	C2
T505	Alpine laburnum	7	3	19	7	0	1	5	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T506	Beech	22	1	70	7	7	7	7	5	M	G	20+	Symmetrical crown. Past crown lift. No access to base, surveyed from a distance.	No action required at present.	B1
T507	Hornbeam	15	1	60	8.5	5.5	8	8	3	M	G	40+	A wide spreading crown which leans over the lake. Past crown lift.	No action required at present.	A2
T508	Portuguese laurel	12	5	45	6.5	4	4	6	2	M	G	20+	No obvious significant defects.	No action required at present.	B2
T509	Hornbeam	15	1	42	2	5	5.5	4	3	M	G	20+	Past crown lift. No obvious significant defects. Situating beyond the stone wall.	No action required at present.	B2
T510	Alpine laburnum	7	2	14	2.5	0	0	2	4	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T511	Hornbeam	18	1	46	7	7	7	7	4	M	G	20+	Symmetrical crown. Past crown lift.	No action required at present.	B2
T512	Hornbeam	13	1	30	6	5	5	5	3	M	G	20+	Past crown lift. No obvious significant defects. Situating beyond the stone wall.	No action required at present.	B2
T513	Laburnum	2	1	8	1.5	0.5	1	1	2	SM	G	10+	A small tree beside the path.	No action required at present.	C1
T514	Laburnum	2	1	8	1.5	0.5	1	1	2	SM	G	10+	A small tree beside the path.	No action required at present.	C1
T515	Katsura	3	MS	8	1.5	0.5	1.5	1.5	1	SM	G	10+	A small tree beside the path.	No action required at present.	C1
T516	Katsura	4	1	10	2	1	2	2	1	SM	G	10+	A small tree beside the path.	No action required at present.	C1
T517	Katsura	4	2	10	2	1	2	2	1	SM	G	10+	A small tree beside the path.	No action required at present.	C1
T518	Katsura	4	3	10	2	1	2	2	1	SM	G	10+	A small tree beside the path.	No action required at present.	C1
T519	Katsura	4	3	10	2	1	2	2	1	SM	G	10+	A small tree beside the path.	No action required at present.	C1
T520	Katsura	4	3	10	2	1	2	2	1	SM	G	10+	A small tree beside the path.	No action required at present.	C1
T521	Laburnum	12	1	55	5	3	4	4	3	FM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B1

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T522	Sycamore	23	1	85	11	7	8	9.5	3	FM	G	20+	Crown extends over the path. Past crown lift.	No action required at present.	B2
T523	Giant sequoia	35	1	192	7	7	7	7	7	M	G	40+	A tall specimen tree.	No action required at present.	A2
T524	Wild cherry	11	1	28	6	2	5	5	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T525	Tulip tree	32	1	213	13	10	13	10	4	V	G	40+	A large cavity is located at 3m. The whole crown has once been reduced but since re-grown a full crown. A prominent tree beside the path. Most of the crown extends north over the lake. Surface roots in footpath.	No action required at present.	A3
T526	Western hemlock	35	1	120	7	8	8	7	10	FM	G	40+	A tall specimen tree.	No action required at present.	A2
T527	Arctic beech	12	1	33	4.5	3	4.5	3	3	EM	F	10+	Upper crown dieback.	No action required at present.	C2
T528	Downy birch	15	1	30	2	1	2	2	3	EM	G	20+	No obvious significant defects.	No action required at present.	B2
T529	Sycamore	16	1	75	8	6.5	8	8	5	M	G	20+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T530	Bald cypress	30	1	71	7	7	7	7	4	M	G	40+	A tall specimen tree. Tag no. 556	No action required at present.	A2
T531	Large leaf lime	16	1	67	7	7	8	6	2	FM	G	20+	No obvious significant defects.	No action required at present.	B2
T532	Rhododendron	7	1	22	4	0	3	1	2	M	G	10+	The whole crown leans over the path.	No action required at present.	C2
T533	Rhododendron	7	1	25	4	0	3	1	2	M	G	10+	The whole crown leans over the path.	No action required at present.	C2
T534	Rhododendron	9	MS	71	7	8	8	8	2	FM	G	20+	A large multi-stemmed specimen.	No action required at present.	B2
T535	Rhododendron	5	MS	44	3	5	6	4	2	M	G	20+	Multi-stemmed from base.	No action required at present.	C2
T536	Tiger-tail spruce	30	1	92	6	6	6	6	5	FM	G	40+	A tall specimen tree. Tag no. 558	No action required at present.	A2
T537	Magnolia	11	1	44	6	5	5	5	3	M	G	20+	Past crown lift. No obvious significant defects. Tag no. 1880	No action required at present.	B1
T538	Water-ash	3	1	25	5	0	4	4	1	M	G	10+	A windblown tree which continues to live.	No action required at present.	C2
T539	Magnolia	6	2	32	5	4.5	6	6	2	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T540	Lawson cypress cv.	15	MS	74	7	7	7	7	1	M	G	20+	Multi-stemmed from base.	No action required at present.	B2
T541	Cedar of Lebanon	29	1	159	11	9	8	8	6	FM	G	40+	Basal cavities with associated trunk decay. Two large scars at the main union at 7m. Further cavities and deadwood in the upper crown.	No action required at present.	A1
T542	Monkey puzzle	23	1	75	5.5	5.5	5.5	5.5	14	M	G	20+	High crown. No obvious significant defects. Tag no. 562	No action required at present.	B1
T543	Rhododendron	7	1	18	3	2	2	3	3	M	G	10+	No obvious significant defects.	No action required at present.	C1
T544	English oak	24	1	103	6.5	5	6.5	6.5	5	M	G	40+	Past crown lift. No obvious significant defects.	No action required at present.	A2
T545	Sycamore	22	1	70	8	7	6	8	3	M	G	20+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T546	Sycamore	20	1	92	4	6	6	6	8	FM	G	20+	Recent crown reduction. No access to base, surveyed from a distance.	No action required at present.	B2
T547	Rhododendron	7	3	31	5	3	3	5	3	M	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T548	Rhododendron	6	1	15	5	1	3	1	3	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T549	Copper beech	25	1	106	8.5	8.5	8.5	8.5	4	M	G	40+	Symmetrical crown. Past crown lift. Base immediately beside footpath.	No action required at present.	A2
T550	Tulip tree	25	1	109	9	9	9	9	1	M	G	40+	A prominent tree beside the lake. Symmetrical crown. Past crown lift.	No action required at present.	A1
T551	Japanese red cedar	20	1	53	4	4	4	4	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T552	Handkerchief tree	18	1	72	8	5	6	7	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B1
T553	Magnolia	6	2	31	7.5	2	1	7	1	M	G	20+	Suppressed crown leans north.	No action required at present.	C2
T554	London plane	23	1	96	8	6.5	7.5	7	2	M	G	40+	Slight trunk lean to the north. No obvious significant defects. Tag no. 719	No action required at present.	A1
T555	Black walnut	20	1	54	7	7	7	7	4	M	G	20+	Past crown lift. No obvious significant defects. Tag no. 717	No action required at present.	B2
T556	Lawson cypress cv.	28	1	125	5	5	5	5	2	M	G	20+	No obvious significant defects.	No action required at present.	B1
T557	Magnolia	5	3	21	2	5	6	2	2	EM	G	10+	Suppressed crown leans over the path.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T558	Weeping silver birch	9	1	25	4.5	1	3	2	3	M	G	10+	Past crown lift. No obvious significant defects. Tag no. 714	No action required at present.	C2
T559	Magnolia	9	1	39	7	1	4	4	3	M	G	20+	Past crown lift. No obvious significant defects. Tag no. 713	No action required at present.	B2
T560	Magnolia	5	1	9	3	3	3	3	2	SM	G	20+	No obvious significant defects.	No action required at present.	C1
T561	Coastal redwood	35	1	187	3	7	6	4	5	FM	G	40+	A tall specimen tree. Tag no.564	No action required at present.	A1
T562	Silver lime	23	1	65	8	5	8	4	5	M	G	20+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T563	Japanese red cedar	25	1	68	4	4	4	4	6	M	G	20+	No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T564	Beech	22	1	70	7.5	7.5	7.5	7.5	7	M	G	40+	Symmetrical crown. No obvious significant defects.	No action required at present.	A2
T565	Western hemlock	30	1	66	5.5	4	3	5	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T566	Western hemlock	25	1	69	5.5	4	3	3	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T567	Western hemlock	22	1	50	5	4	3	3	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T568	Magnolia	8	1	46	8	3	5	6.5	3	M	G	20+	Crown overhangs the path. Past crown lift. No obvious significant defects.	No action required at present.	B2
T569	English oak	15	1	44	6	4	6	5.5	3	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T570	Handkerchief tree	13	1	55	7	7	5	8.5	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T571	Sycamore	24	1	70	7	7	7	7	6	M	G	20+	Past crown lift. No obvious significant defects. No access to base, surveyed from a distance.	No action required at present.	B2
T572	Paper bark maple	5	2	23	1	3.5	4	3	2	EM	G	20+	No obvious significant defects.	No action required at present.	B1
T573	Hawthorn	5	1	20	3	2	3	1	2	M	G	10+	Suppressed crown.	No action required at present.	C1
T574	Laburnum	12	1	30	1	4	2	4.5	3	M	G	20+	Suppressed crown. Tag no. 403	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T575	Japanese maple	9	3	28	1	5	5	5	3	M	G	20+	Suppressed crown.	No action required at present.	B2
T576	Paper bark maple	14	1	50	2	6	6.5	1	2	M	G	20+	Crown extends east. Tag no. 401	No action required at present.	B1
T577	Sycamore	14	1	28	1	3	3	3	4	EM	G	20+	No obvious significant defects. Retaining wall to south.	No action required at present.	C2
T578	Sycamore	20	1	81	7	9	8	4	5	M	G	20+	A tall woodland tree.	No action required at present.	B2
T579	Sycamore	17	1	58	4	6	5	5	7	M	G	20+	A tall woodland tree.	No action required at present.	B2
T580	Beech	17	1	61	8	9.5	9.5	9	3	M	G	20+	Four stems extend from 2m. Past crown lift.	No action required at present.	B2
T581	Portuguese laurel	6	1	27	4	4	4.5	2	3	EM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C1
T582	Hornbeam	13	2	74	8	8	5	5	3	M	G	20+	Once pollarded to 2.5m and it has since re-grown. Past crown lift over the path.	No action required at present.	B2
T583	Sycamore	17	1	58	5	7	8	6	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T584	Hornbeam	15	1	58	7	5	7	5	4	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T585	Hornbeam	9	1	55	5.5	4	5.5	5.5	3	M	G	20+	Once pollarded to 2.5m and it has since re-grown. Past crown lift over the path.	No action required at present.	B2
T586	Sycamore	15	1	48	3	5	5	3	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T587	Sycamore	22	1	60	2	7	6	5	3	M	G	20+	A tall woodland tree.	No action required at present.	B2
T588	Ash	20	1	60	5	5	5	5	5	M	G	20+	A tall woodland tree.	No action required at present.	B2
T589	Beech	20	1	60	7	4	5	6	5	M	G	20+	A tall woodland tree.	No action required at present.	B2
T590	Holly	5	1	8	1.5	1.5	1.5	1.5	1.5	SM	G	10+	A small understorey tree.	No action required at present.	C2
T591	Holly	5	1	8	1.5	1.5	1.5	1.5	1.5	SM	G	10+	A small understorey tree.	No action required at present.	C2
T592	Hornbeam	13	1	40	7	6	6	6	3	M	G	20+	No obvious significant defects.	No action required at present.	B2
T593	Hawthorn	7	1	15	1	2	2	2	4	EM	G	10+	No obvious significant defects.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T594	Hornbeam	17	1	41	6	4.5	5	5	3	EM	G	20+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T595	Hornbeam	18	1	33	5	5	4	4	3	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T596	Sycamore	27	1	80	9	5	7	8	5	FM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T597	Hawthorn	5	1	15	3	1	2	2	2	EM	G	10+	No obvious significant defects. Situating directly next to a retaining peg and board edge of the path.	No action required at present.	C2
T598	Beech	17	1	30	5	3	4	3	4	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T599	Sycamore	27	1	98	9	8	7	7	9	FM	G	20+	Numerous large pruning wounds on the trunk. Past crown reduction	No action required at present.	B2
T600	Sycamore	20	1	65	6	3	4	4	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T601	Silver birch	7	1	10	3	1	3	1	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T602	Silver birch	7	1	13	3	3	2	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T603	Silver birch	7	1	11	2	2	2	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T604	Silver birch	7	1	11	3	2	2	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T605	Silver birch	7	1	11	2	2	2	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T606	Silver birch	7	1	9	2	2	2	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T607	Silver birch	7	1	9	1.5	1.5	1.5	1.5	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T608	Silver birch	7	1	9	1.5	1.5	1.5	1.5	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T609	Silver birch	7	1	9	1.5	1.5	1.5	1.5	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T610	Silver birch	7	1	9	1.5	1.5	1.5	1.5	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T611	Himalayan birch	7	1	10	2	2	1	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T612	Himalayan birch	7	1	10	2	1	1	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T613	Himalayan birch	7	1	10	1	2	2	1	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T614	Himalayan birch	7	1	10	1.5	1.5	1.5	1.5	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T615	Himalayan birch	7	1	10	2	1	2	1	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T616	Himalayan birch	7	1	9	1	1	1	1	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T617	Himalayan birch	7	1	9	1	1	1	1	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T618	Himalayan birch	7	1	9	1.5	1.5	1.5	1.5	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T619	Himalayan birch	7	1	9	1.5	1.5	1.5	1.5	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T620	Himalayan birch	7	1	9	2	1.5	2	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C2
T621	English oak	8	1	10	1	1	2	2	2	SM	G	10+	Past crown lift. No obvious significant defects.	No action required at present.	C3
T622	Beech	17	1	62	7	6.5	6.5	6	3	M	G	20+	Arboreal ivy. Past crown lift. No obvious significant defects.	No action required at present.	B2
T623	Field maple	12	2	53	6	7.5	8	7	3	M	G	20+	Past crown lift. No obvious significant defects. Base immediately beside footpath.	No action required at present.	B2
T624	Beech	20	1	59	8	8.5	8	7	5	M	G	20+	Arboreal ivy. Past crown lift. No obvious significant defects.	No action required at present.	B2
T625	Sycamore	17	1	52	5	5	5	5	5	M	G	20+	Symmetrical crown. Past crown lift.	No action required at present.	B2
T626	Holly	7	MS	61	3.5	3.5	3.5	3.5	2	M	G	20+	Symmetrical crown. Past crown lift.	No action required at present.	B2
T627	Sycamore	22	1	60	7	7	7	7	5	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T628	Hawthorn	7	MS	33	3.5	4	4	3.5	3	M	G	20+	Multi-stemmed from base. Past crown lift.	No action required at present.	C1
T629	Hawthorn	8	4	25	2	2.5	2.5	2	2	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	C1
T630	Ash	28	1	73	10	3	7	10	5	M	G	20+	Slight trunk lean to the north. High crown.	No action required at present.	B2
T631	Rhododendron	4	MS	17	1	3	2	3	2	EM	G	10+	No obvious significant defects.	No action required at present.	C1
T632	English oak	20	1	35	5	5	6	4	4	EM	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B2
T633	Beech	20	1	87	9.5	7	7	7	3	FM	G	20+	Past crown lift. No obvious significant defects. Located beside the gravel car park.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Tree Number	Tree Species	Height (m)	Number of Stems	Stem Ø (cm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch (m)	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
T634	English oak	25	1	123	7	11	8.5	9	2	FM	G	40+	Numerous scars in the middle of the crown. Slight trunk lean to the south.	No action required at present.	A2
T635	Walnut	16	1	58	7.5	7.5	7.5	7.5	3	M	G	20+	Past crown lift. No obvious significant defects.	No action required at present.	B1
T636	English oak	24	1	163	10	16	11	15	12	V	G	40+	Large old veteran tree with numerous dead stubs and limb cavities.	No action required at present.	A3
T637	Beech	26	1	144	9	15	6	13	0	FM	G	20+	Tall tree situated at the woodland edge. Large scar at 4m where a major limb has been shed. Low crown to the west within the field.	No action required at present.	B2
T638	Sweet chestnut	9	1	186	2	7.5	6	6	3	V	G	40+	Large veteran tree on the corner. Previously topped at 6m. Some branches hang low over the driveway. No obvious significant defects.	No action required at present.	A3
T639	Ash	19	1	56	6	7	5	7	6	M	F	10+	Symptoms of Chalara dieback.	No action required at present.	C1
T640	Sweet chestnut	6	1	42	5	4	4	4	5	M	G	40+	Basal trunk cavity. Deadwood in the crown. No obvious significant defects.	No action required at present.	B3
T641	Beech	22	1	130	11	9.5	6	8	5	FM	G	40+	Set back 4m from the track. Trunk cavity at 5m. Past height reduction. No obvious significant defects. Tag 236.	No action required at present.	B1
T642	Wild cherry	17	1	69	6	8	5.5	7	6	M	G	20+	No obvious significant defects. 10.4m from the wall.	No action required at present.	B2
T643	Holm oak	6	1	100	2	5	2	3	1	FM	G	20+	Large Ganoderma bracket on trunk at 1m. New stems developing from basal shoot growth. Previously topped at 6m. 1.5m from the wall. 9.6m from cherry.	No action required at present.	C1
T644	Hungarian oak	16	1	73	8	7	8	7	2	M	G	40+	A fine specimen situated on the edge of a woodland belt. Tag 798.	No action required at present.	A1
T645	Horse chestnut	14	1	68	5.5	6	4.5	5	2.5	M	G	40+	Basal shoot growth. No obvious significant defects. Situated at the edge of the yard with hard standing 1m from base.	No action required at present.	B1

A key explaining each category is provided at the rear of the schedule

Appendix 1: Group Schedule

Site: **Stourhead Garden Pathway Improvement Project**

Surveyor: **Nick Baxter**

Date of Survey: **July 2024**



Group Number	Tree Species	Number in Group	Height (m)	Number of stems	Stem ϕ (mm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
G1	Common lime	5	20	1	100	9	9	9	9	5	FM	G	40+	A linear group of lime beside the drive. They have all been crown lifted.	No action required at present.	A2
G2	Box, Rhododendron and hawthorn	4	4	1	10	2	2	2	2	1	EM	G	10+	A group of small trees and mature shrubs.	No action required at present.	C2
G3	Rhododendron	6	1	1	10	1	1	1	1	1	M	F	10+	All of these shrubs have recently been coppiced.	No action required at present.	C2
G4	Rhododendron	10	4	1	15	2	2	2	2	1	M	G	10+	A group of mature shrubs beside the path.	No action required at present.	C2
G5	Japanese maple and London plane	5	5	1	15	3	3	3	3	1	EM	G	20+	A group of well spaced established trees near the path. No obvious significant defects.	No action required at present.	B2
G6	Rhododendron	5	5	1	13	3	3	3	3	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G7	Rhododendron	3	4	1	15	3	3	3	3	1	M	G	10+	A group of mature shrubs beside the path.	No action required at present.	C2
G8	Rhododendron	10	4	1	9	2	2	2	2	1	EM	G	10+	A dense group of shrubs beside the path.	No action required at present.	C2
G9	Rhododendron and holly	7	4	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G10	Rhododendron	10	4	1	9	2	2	2	2	1	EM	G	10+	A dense group of shrubs beside the path.	No action required at present.	C2
G11	Rhododendron	5	4	1	9	2	2	2	2	1	EM	G	10+	A dense group of shrubs beside the path.	No action required at present.	C2
G12	Rhododendron and Japanese maple	10	4	1	9	2	2	2	2	1	EM	G	10+	A dense group of small trees/shrubs beside the path.	No action required at present.	C2
G13	Rhododendron and silver birch	15	9	1	15	3	3	3	3	2	EM	G	10+	A dense group of small trees/shrubs beside the path.	No action required at present.	C2
G14	Rhododendron	10	4	1	9	2	2	2	2	1	EM	G	10+	A dense group of shrubs beside the path.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Group Number	Tree Species	Number in Group	Height (m)	Number of stems	Stem Ø (mm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
G15	Japanese maple	3	4	1	15	3	3	3	3	1	EM	G	10+	No obvious significant defects.	No action required at present.	C2
G16	Rhododendron	10	6	1	20	3	3	3	3	1	M	G	10+	A group of mature shrubs beside the path.	No action required at present.	C2
G17	Rhododendron	8	4	1	9	2	2	2	2	1	EM	G	10+	A dense group of shrubs beside the path.	No action required at present.	C2
G18	Rhododendron and Corylopsis glabrescens	8	4	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G19	Rhododendron	8	4	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G20	Rhododendron	20	4	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G21	Rhododendron, dogwood and maple	10	4	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G22	Rhododendron	4	2	1	12	1	1	1	1	1	EM	G	10+	A group of shrubs beside the path which have once been coppiced.	No action required at present.	C2
G23	Rhododendron	14	4	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G24	Cherry	4	14	1	18	4	4	4	4	4	EM	G	20+	A group of trees which have all been crown lifted.	No action required at present.	B2
G25	Western red cedar	5	11	1	20	3	3	3	3	2	EM	G	10+	Small conifers that surround the larger individual (T290).	No action required at present.	C2
G26	Rhododendron	5	6	1	20	3	3	3	3	1	M	G	10+	A group of mature shrubs beside the path.	No action required at present.	C2
G27	Rhododendron	5	6	1	20	3	3	3	3	1	M	G	10+	A group of mature shrubs beside the path.	No action required at present.	C2
G28	Western red cedar	12	35	1	100	10	10	10	10	3	FM	G	40+	A circular group of western red cedar which I expect was originally one tree that has layered.	No action required at present.	A2
G29	Common lime	30	10	1	10	2	2	2	2	2	SM	G	10+	A group of dense self-sown trees at the edge of the woodland.	No action required at present.	C2
G30	Western red cedar	10	28	1	65	5	5	5	2	3	M	G	40+	A group of layered stems which all lean east.	No action required at present.	B2
G31	Silver birch, oak and alder	14	15	1	30	3	3	3	3	3	EM	G	20+	A group of early-mature trees at the edge of the lake.	No action required at present.	B2
G32	Aspen and white poplar	10	18	1	60	5	5	5	5	5	M	G	20+	A group of mature trees at the edge of the lake.	No action required at present.	B2

A key explaining each category is provided at the rear of the schedule

Group Number	Tree Species	Number in Group	Height (m)	Number of stems	Stem Ø (mm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
G33	Rhododendron and yew	15	6	1	20	3	3	3	3	1	M	G	10+	A group of mature shrubs on the slope between the paths.	No action required at present.	C2
G34	Silver birch	3	15	1	18	2	2	2	2	4	EM	G	10+	No obvious significant defects.	No action required at present.	C2
G35	Rhododendron and holly	5	8	1	15	2	2	2	2	4	EM	G	10+	A group of small trees and mature shrubs on the slope between the paths.	No action required at present.	C2
G36	Rhododendron	10	5	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G37	Rhododendron	10	5	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G38	Rhododendron	4	7	1	30	3	3	5	2	2	M	G	10+	A group of mature multi-stemmed shrubs with suppressed crowns.	No action required at present.	C2
G39	Rhododendron	10	5	1	12	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G40	Rhododendron and Osmanthus	4	3	1	15	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G41	Rhododendron, cherry, cypress	10	3	1	15	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G42	Rhododendron and Camellia	18	3	1	15	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G43	Rhododendron	10	3	1	12	1	1	1	1	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G44	Rhododendron	7	3	1	12	1	1	1	1	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G45	Silver birch and bird cherry	10	10	1	15	2	2	2	2	2	EM	G	10+	A group of small trees beside the path.	No action required at present.	C2
G46	Rhododendron	20	3	1	15	2	2	2	2	1	EM	G	10+	A group of shrubs beside the path.	No action required at present.	C2
G47	Western red cedar	8	25	1	75	5	5	5	5	1	M	G	40+	A circular group of western red cedar which I expect was originally one tree that has layered.	No action required at present.	A2
G48	Hornbeam and sycamore	12	17	1	35	5	5	5	5	3	M	G	20+	A group of woodland trees at the edge of the tarmac path.	No action required at present.	B2
G49	Hawthorn, hazel and silver birch	12	5	1	12	2	2	2	2	2	EM	G	10+	A group of small trees beside the path.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Group Number	Tree Species	Number in Group	Height (m)	Number of stems	Stem Ø (mm)	N - Radius (m)	S - Radius (m)	E - Radius (m)	W - Radius (m)	1st Branch	Age Class	Overall Health	ULE (Years)	Tree Structural Condition & Site Notes	Recommended Management	Category
G50	Himalayan birch	7	7	1	10	3	3	3	3	2	SM	G	10+	A group of small trees beside the path.	No action required at present.	C2
G51	Silver birch	6	7	1	12	2	2	2	2	2	SM	G	10+	A row of birch beside the path.	No action required at present.	C2
G52	Common lime	4	15	1	70	3	3	3	3	3	M	G	20+	A group of lapsed pollards beside the old track.	No action required at present.	B2
G53	Common lime	4	15	1	70	3	3	3	3	3	SM	G	20+	A group of lapsed pollards beside the old track.	No action required at present.	B2
G54	Beech and holly	11	26	1	65	6	6	6	6	6	M	G	40+	Group of tall trees set back from the track.	No action required at present.	A2
G55	Beech, sycamore and hazel	8	16	1	22	2	2	2	2	4	M	G	40+	Relatively young trees at the edge of the woodland growing close together.	No action required at present.	C1

A key explaining each category is provided at the rear of the schedule

Appendix 1: Hedge Schedule

Site: **Stourhead Garden Pathway Improvement Project**

Surveyor: **Nick Baxter**

Date of Survey: **July 2024**



Hedge Number	Tree Species	Height (m)	No. of Stems	Stem Ø (cm)	Width (m)	Length (m)	Age Class	Overall Health	ULE (Years)	Condition & Notes	Recommended Management	Category
H1	Box	2	MS	8	3	10	M	G	10+	An area of box hedging that has been regularly pruned into a formative shape.	No action required at present.	C2
H2	Box	2	MS	8	1	5	M	G	10+	A short section of box hedging that has been regularly pruned into a formative shape.	No action required at present.	C2
H3	Cherry laurel	1	MS	8	5	10	EM	G	10+	A low area of cherry laurel hedge beside the path. It appears to be regularly trimmed.	No action required at present.	C2
H4	Cherry laurel	1	MS	8	5	10	EM	G	10+	A low area of cherry laurel hedge beside the path. It appears to be regularly trimmed.	No action required at present.	C2
H5	Cherry laurel	2	MS	8	2	35	EM	G	10+	A well trimmed hedge at the edge of the path.	No action required at present.	C2
H6	Box , cherry laurel and Rhododendron	2	MS	8	3	30	M	G	10+	A well trimmed hedge at the edge of the path.	No action required at present.	C2
H7	Box and Cherry laurel	2	MS	8	3	30	M	G	10+	A well trimmed hedge at the edge of the path.	No action required at present.	C2
H8	Box and Cherry laurel	2	MS	8	3	30	M	G	10+	A well trimmed hedge at the edge of the path.	No action required at present.	C2
H9	Box	1	MS	9	1	30	M	G	10+	A well trimmed hedge at the edge of the path.	No action required at present.	C2
H10	Cherry laurel	2	MS	9	8	30	M	G	10+	A wide section of hedge at the edge of both paths.	No action required at present.	C2
H11	Box	1	MS	8	4	30	EM	G	10+	A wide section individual box plants at the edge of the path.	No action required at present.	C2
H12	Cherry laurel	1	MS	8	3	40	EM	G	10+	A low area of cherry laurel hedge beside the path. It appears to be regularly trimmed.	No action required at present.	C2
H13	Cherry laurel	6	MS	12	6	30	M	G	10+	A tall section of hedging. The side seems to be regularly trimmed away from the path.	No action required at present.	C2
H14	Box	1	MS	7	2	20	M	G	10+	A well trimmed hedge at the edge of the path.	No action required at present.	C2
H15	Cherry laurel	1	MS	8	2	20	M	G	10+	A well trimmed hedge at the edge of the path.	No action required at present.	C2
H16	Cherry laurel	2	MS	8	2	35	EM	G	10+	A wide hedge at the edge of the path. The sides seem to be regularly trimmed.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Hedge Number	Tree Species	Height (m)	No. of Stems	Stem Ø (cm)	Width (m)	Length (m)	Age Class	Overall Health	ULE (Years)	Condition & Notes	Recommended Management	Category
H17	Cherry laurel	2	MS	8	2	15	EM	G	10+	A wide hedge at the edge of the path.	No action required at present.	C2
H18	Cherry laurel	1	MS	8	2	100	EM	G	10+	A low, neatly trimmed hedge at the edge of the path.	No action required at present.	C2
H19	Rhododendron and cherry laurel	2	MS	9	4	25	M	G	10+	An area of shrubs which seem to be regularly trimmed.	No action required at present.	C2
H20	Cherry laurel	1	MS	8	5	15	M	G	10+	A low section of hedge beside the path. It seems to be regularly trimmed.	No action required at present.	C2
H21	Box	2	MS	8	1	15	M	G	10+	A short section of beside the path.	No action required at present.	C2
H22	Box	2	MS	8	2	15	M	G	10+	A short section of beside the path.	No action required at present.	C2
H23	Hazel and dogwood	3	MS	8	2	20	EM	G	10+	A tall section of hedging. The side seems to be regularly trimmed away from the path.	No action required at present.	C2
H24	Box, Portuguese laurel and holly	4	MS	8	2	15	EM	G	10+	A row of evergreen shrubs beside the path.	No action required at present.	C2
H25	Hazel, dogwood and hawthorn	4	MS	8	3	15	EM	G	10+	Mixed shrubs beside the path.	No action required at present.	C2
H26	Hazel and dogwood	3	MS	8	2	20	EM	G	10+	Mixed shrubs beside the path.	No action required at present.	C2
H27	Hazel and dogwood	3	MS	8	2	20	EM	G	10+	Mixed shrubs beside the path.	No action required at present.	C2
H28	Hazel and dogwood	4	MS	9	3	20	EM	G	10+	A tall section of hedging. Few signs of recent management.	No action required at present.	C2
H29	Hornbeam	2	MS	5	1	5	Y	G	10+	A short section of young hedgerow.	No action required at present.	C2
H30	Hornbeam	2	MS	5	1	8	Y	G	10+	A short section of young hedgerow.	No action required at present.	C2
H31	Hornbeam	2	MS	5	1	8	Y	G	10+	A short section of young hedgerow.	No action required at present.	C2

A key explaining each category is provided at the rear of the schedule

Tree Schedule - KEY

Tree/Group/Hedge Number

Tree, tree-groups or hedges have been allocated a number for the purpose of this survey. Numbers within the Tree Schedule relate to those marked on the Tree Removal Plan and Tree Protection Plan drawings.

Trees protected by a tree preservation order (TPO) are highlighted by grey colouration in the tree schedule.

Species

Common names are listed.

Number in Group

Number of trees within a group. A group of trees may comprise of more than one species.

Height (m)

All heights are estimated in metres.

Number of Stems

The number of stems is either 1, 2, 3, 4, 5 or MS (multi-stemmed). This feature influences how the area of the recommended root protection area is calculated.

Stem or Combined Diameter (cm)

Single stem diameters are measured at 1.5m with a diameter tape. The combined stem diameters for trees with up to five stems and trees with more than five stems (MS) trees are calculated in accordance with the guidance.

Crown Spread Radius (m)

The crown radius from tree trunk to crown limit identified at the four cardinal points (N, S, E and W) in order to allow presentation of the above ground constraints on the Tree Protection Plan.

Measurements are approximate and recorded to the nearest half metre.

1st Branch (m)

This is a record of the height of the lowest branch. This is useful when planning access routes or considering if pruning will be required to site new features under a tree crown.

Age Class

(Y) Young, (SM) Semi-Mature, (EM) Early-Mature, (M) Mature, (FM) Fully-Mature or (V) Veteran.

Overall Health

An overall assessment of the physiological condition of the tree recorded as (G) Good, (F) Fair, (P) Poor, (D) Dead.

ULE (Years)

Useful Life Expectancy. Anticipated future contribution to amenity, in years.

Tree Structural Condition & Site Notes

Observations on the form of the tree, condition and structural integrity.

Site notes are detailed when relevant to the growth conditions or rooting constraints.

Management Recommendations

Recommended tree surgery works to be carried out prior to construction. Terminology used is based on guidance detailed in BS3998:2010 – Recommendations for tree work¹.

Category

Tree category as defined within BS5837:2012. Categories A (high quality), B (moderate quality) and C (low quality) are trees that should be considered for retention. Category U trees are unsuitable for retention.

¹ British Standards Institution (2010). BS3998 - Recommendations for Tree Work. BSI, London.

APPENDIX 2

SPECIFICATION FOR TREE PROTECTION FENCING

The location of the tree protection fencing that will be required is shown on the tree protection plan, (this is provided at the rear of this document). **For effective tree protection it is crucial that the protective fencing is installed before any heavy plant machinery is used on the site.** The tree protection fencing must remain in place until the construction works have been completed (unless under arboricultural supervision). The fenced off areas will be construction exclusion zones.


Fencing (or other forms of barrier) must be fit for the purpose of excluding construction activity and appropriate to the degree and proximity of work taking place around the retained trees. Since this is a relatively small and short-term project it will not be necessary to install metal fencing supported by a scaffold framework (as detailed in in Figure 2 of BS5837). Instead, it is proposed that Heras panels, cleft chestnut fencing, wire stock fencing, coloured plastic 'snow guard' fencing or simply coloured rope nailed to the top of wooden fence posts that have been driven into the ground would be suitable. In general fences of this nature are about 1.2m high, and they can be installed on standard fenceposts that are hammered into the ground. Whatever fencing method is used it is crucial that the fence is pinned to the ground so that the fenceline cannot be moved by contractors during construction.




Figure 1: The tree protection fencing for this project could be as simple as coloured rope nailed to wooden fenceposts as shown in this image.

Once the barriers have been erected the areas of land within the construction exclusion zone should be regarded as sacrosanct, and should not be removed or altered without prior consultation with the project arboriculturist and, where necessary, approval from the local planning authority. All-weather notices should be attached to the fencing with words such as: 'Construction Exclusion Zone - No Access'. Throughout the construction period attention should be paid to ensure that barriers remain rigid and complete.

Arboricultural supervision will be required whenever construction and development activity is to take place within a construction exclusion zone. This supervision must be carried out by a suitably qualified arboriculturist.

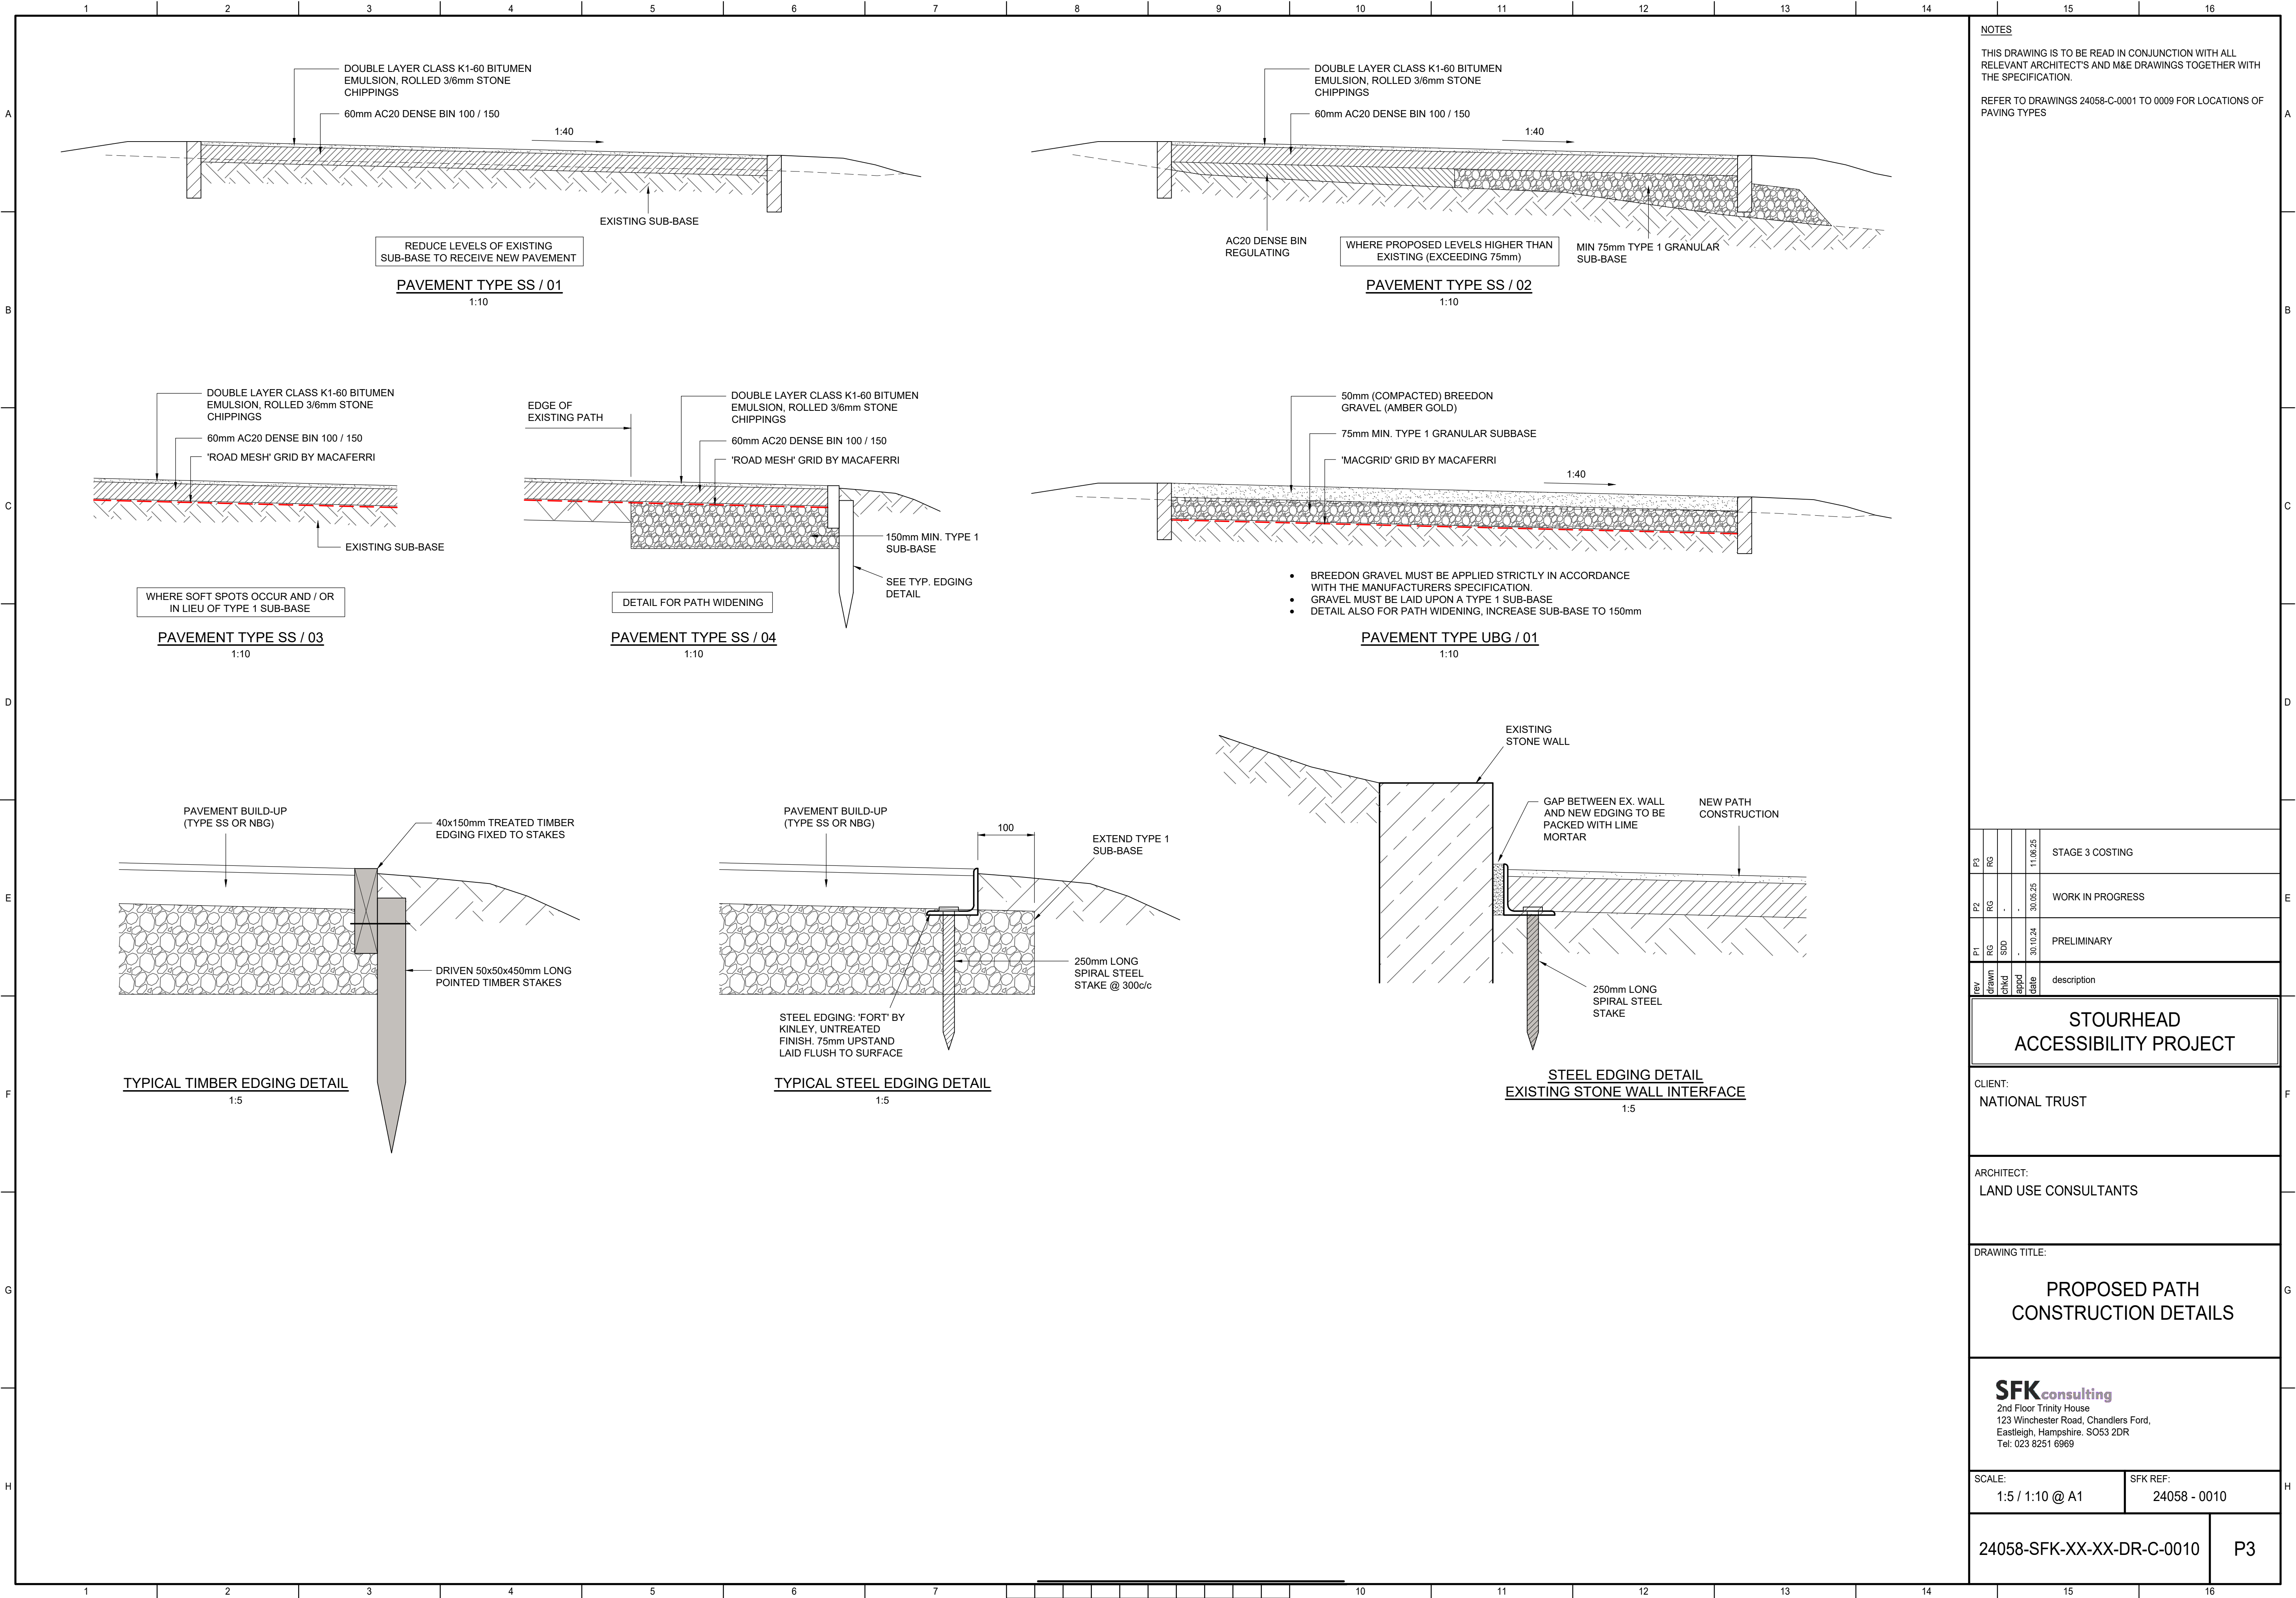

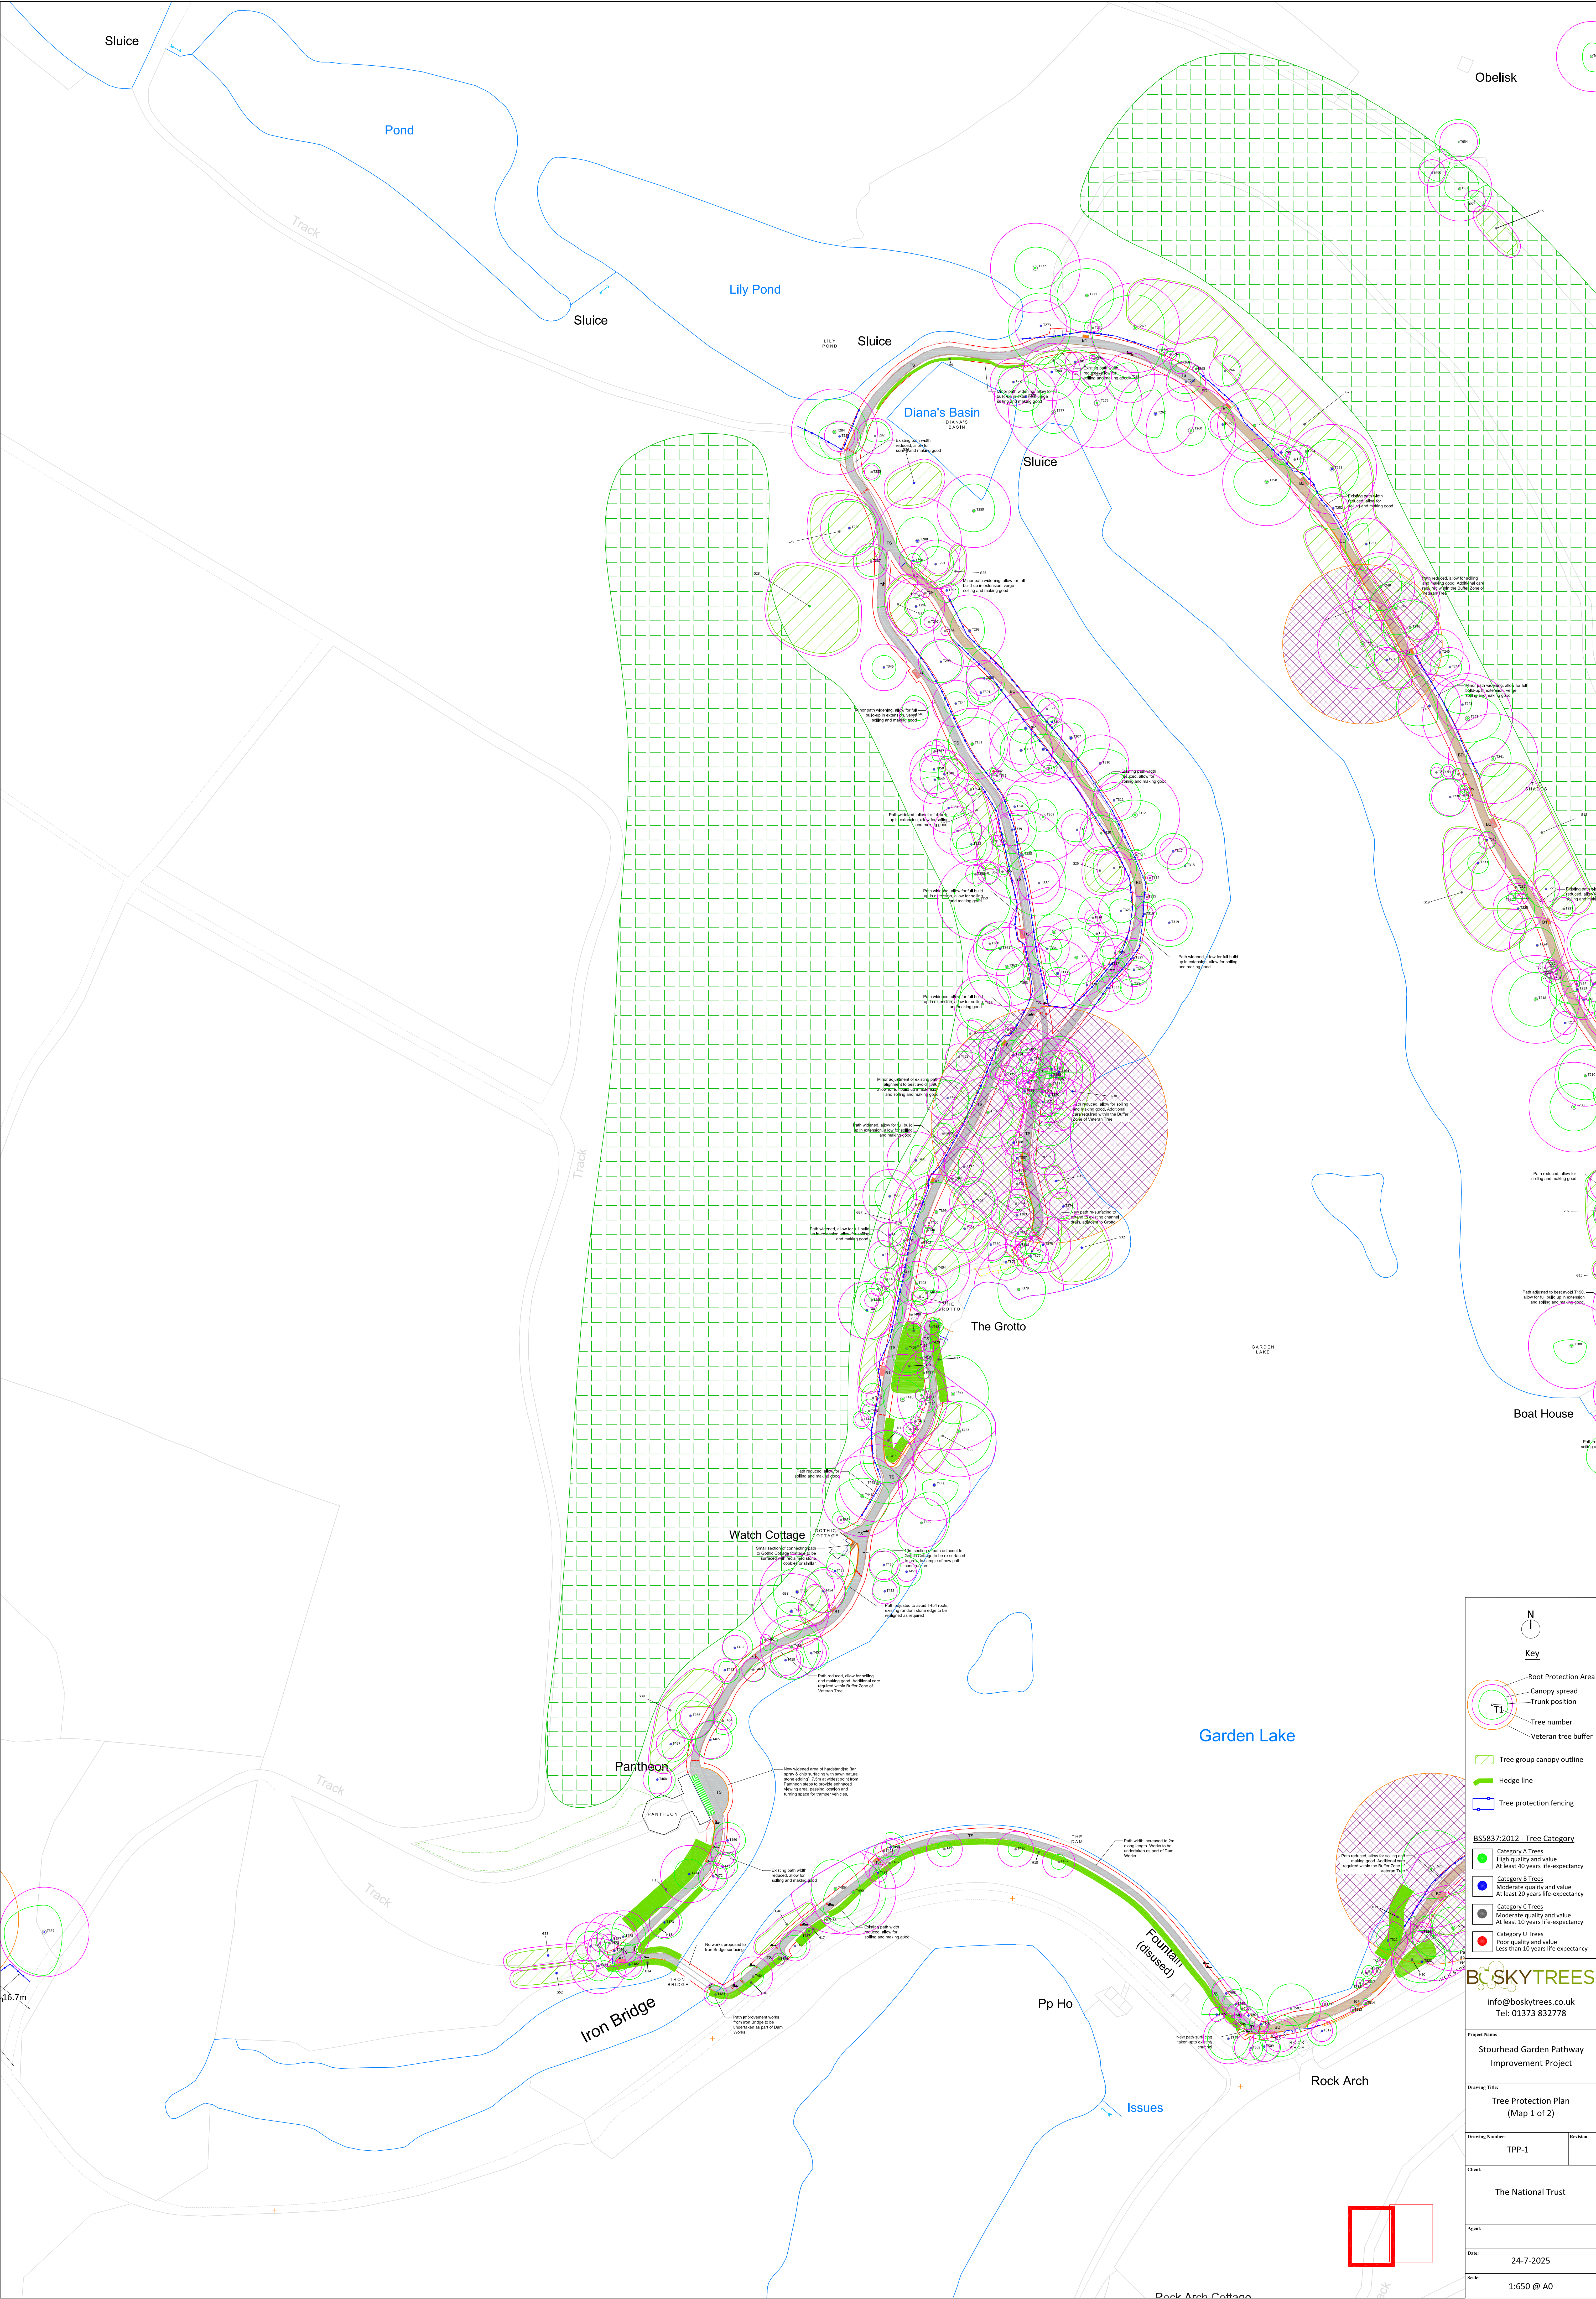

N

Key

Root Protection Area

Canopy spread

Trunk position

Tree number

Veteran tree buffer

Tree group canopy outline

Hedge line

Tree protection fencing

BS5837:2012 - Tree Category

Category A Trees

High quality and value

At least 40 years life-expectancy

Category B Trees

Moderate quality and value

At least 30 years life-expectancy

Category C Trees

Moderate quality and value

At least 20 years life-expectancy

Category U Trees

Poor quality and value

Less than 10 years life-expectancy

BC SKYTREES

info@boskytrees.co.uk

Tel: 01373 832778

Project Name:

Stourhead Garden Pathway Improvement Project

Drawing Title:

Tree Protection Plan (Map 1 of 2)

Drawing Number:

TPP-1

Revision

Client:

The National Trust

Agent:


Date:

24-7-2025

Scale:

1:650 @ A0

Stourhead Park

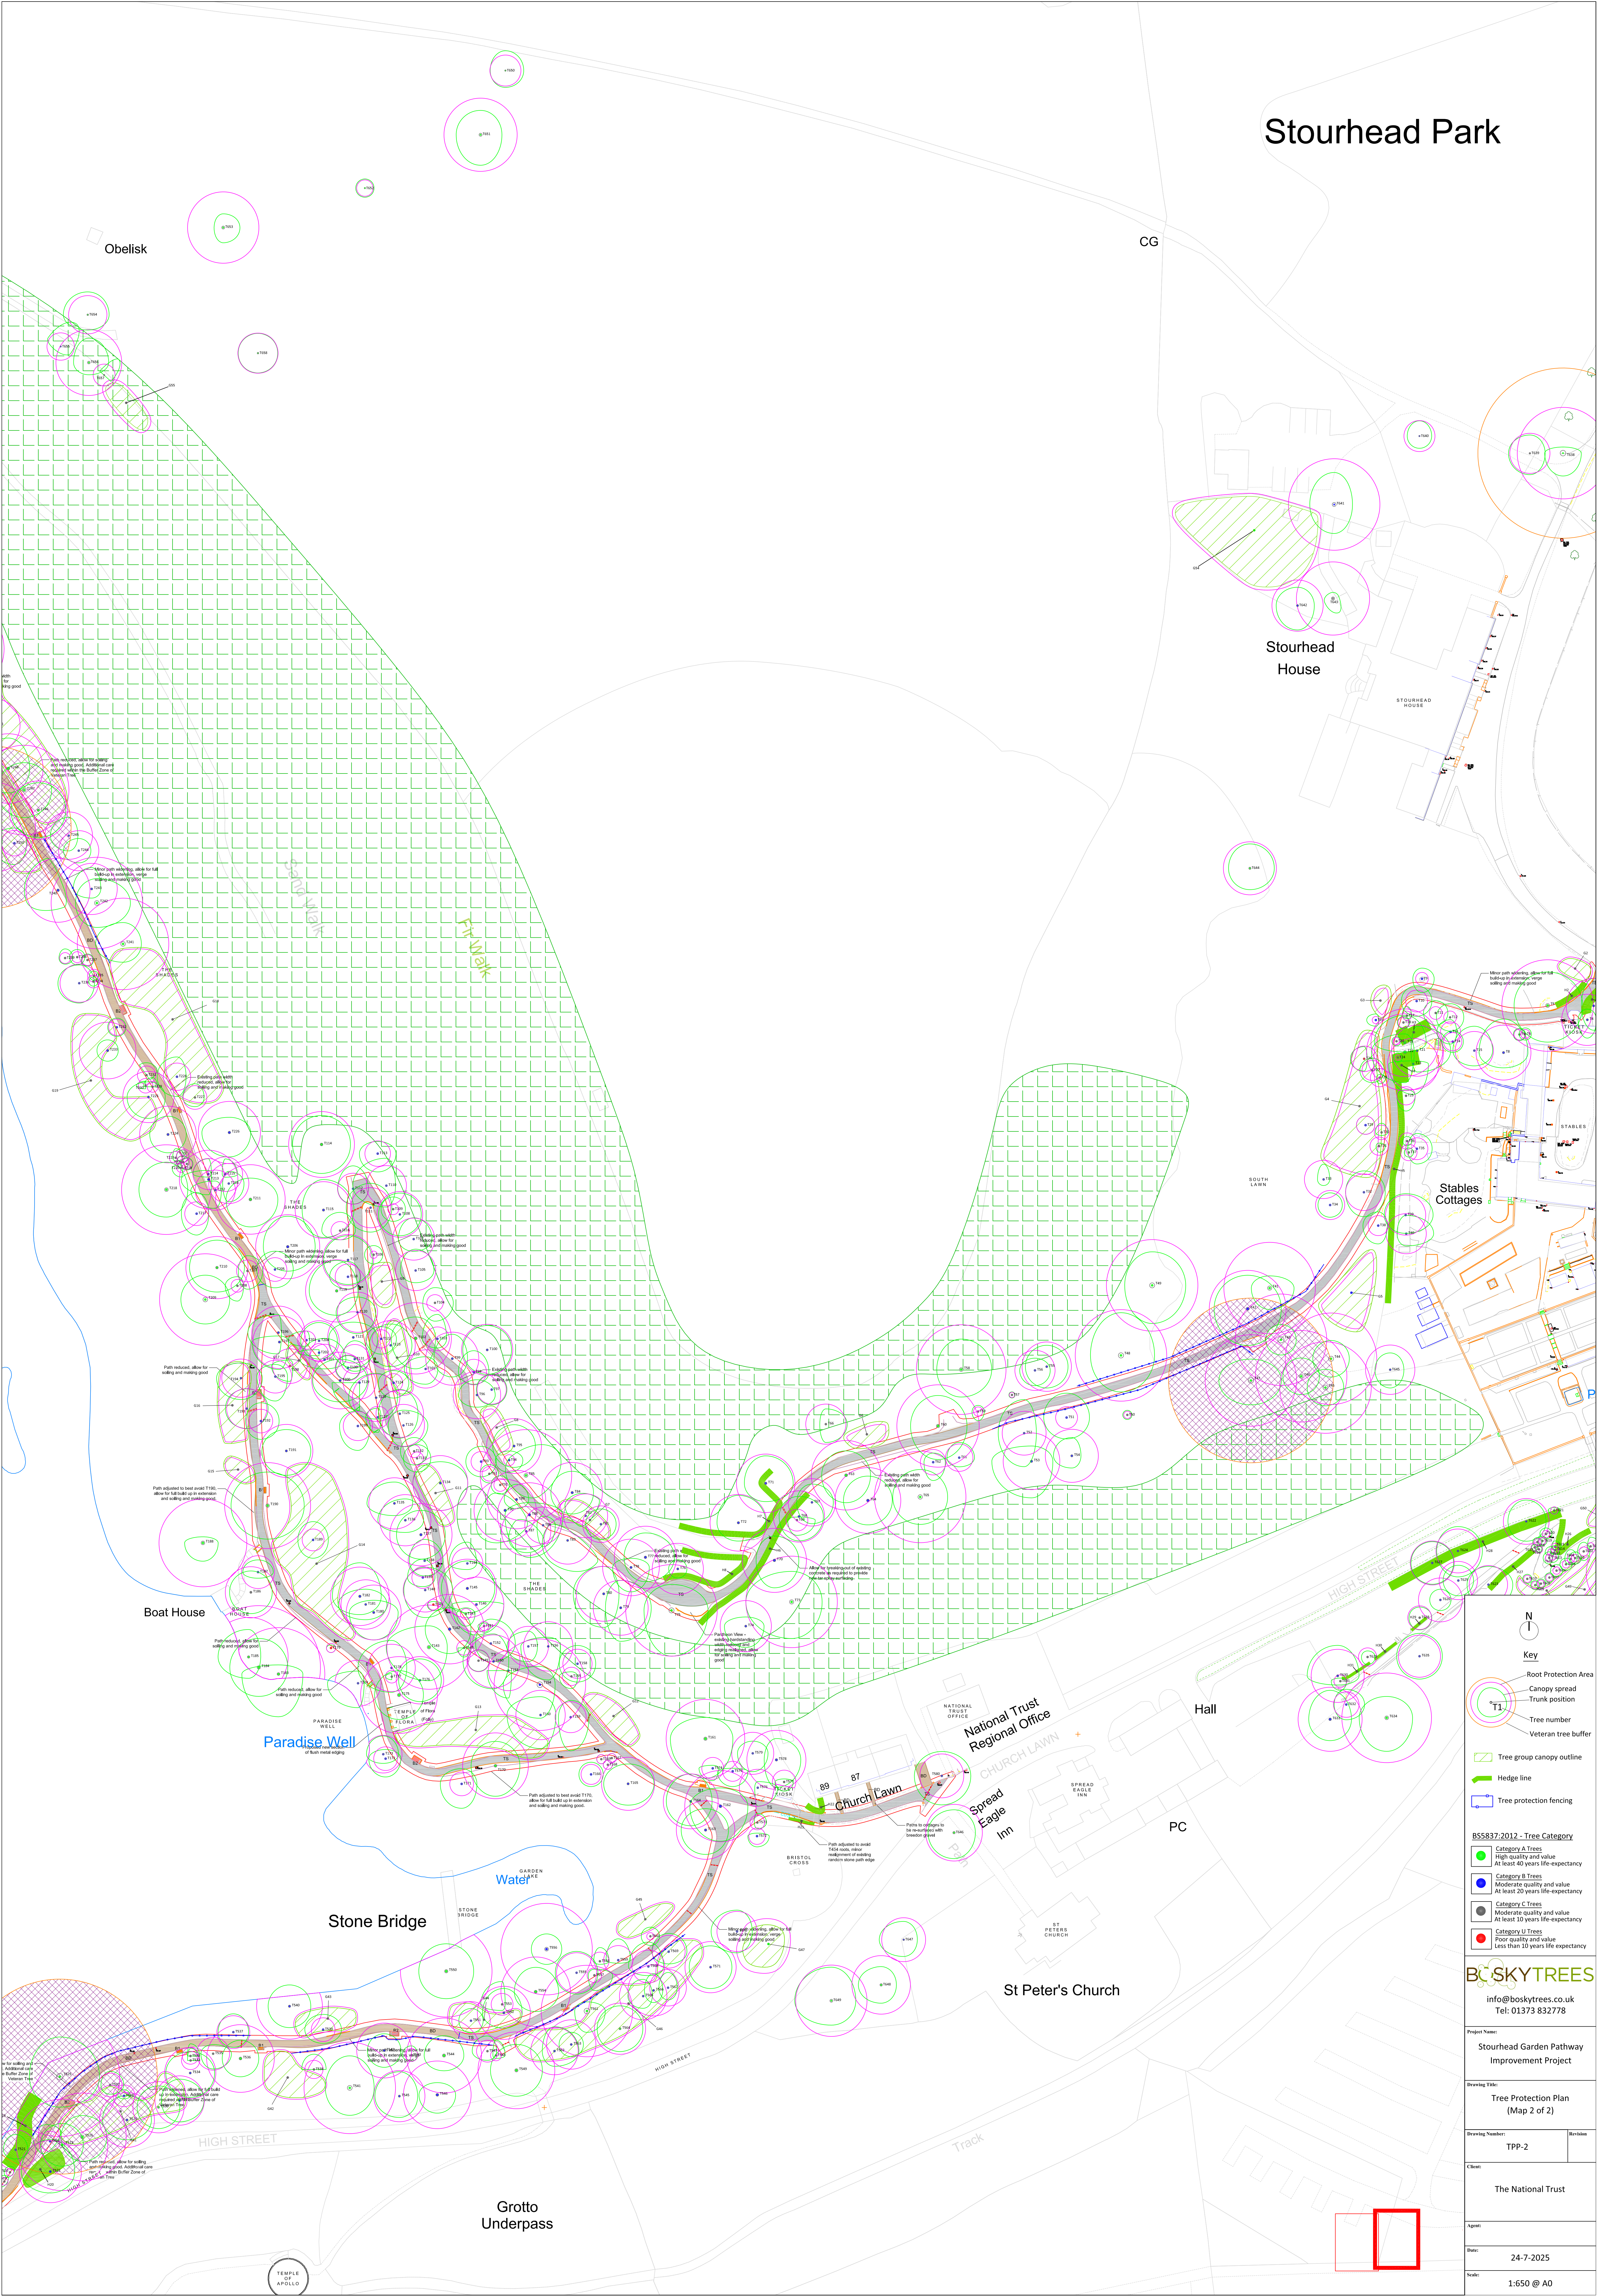

N

Key

Root Protection Area

Canopy spread

Trunk position

Tree number

Veteran tree buffer

Tree group canopy outline

Hedge line

Tree protection fencing

BS5837:2012 - Tree Category

Category A Trees

High quality and value

At least 40 years life-expectancy

Category B Trees

Moderate quality and value

At least 20 years life-expectancy

Category C Trees

Moderate quality and value

At least 10 years life-expectancy

Category U Trees

Poor quality and value

Less than 10 years life-expectancy

BC SKYTREES

info@boskytrees.co.uk

Tel: 01373 832778

Project Name:

Stourhead Garden Pathway Improvement Project

Drawing Title:

Tree Protection Plan (Map 2 of 2)

Drawing Number:

TPP-2

Revision:

Client:

The National Trust

Agent:

Date:

24-7-2025

Scale:

1:650 @ A0