

Ingleton Wood LLP shall have no liability to the Employer arising out of any unauthorised modification or amendment to, or any transmission, copy or use of the material, or any proprietary work contained therein, by the Employer, Other Project Team Member, or any other third party. All dimensions are to be checked and verified on-site by the Main Contractor prior to commencement, any discrepancies are to be reported to the Contract Administrator. This drawing is to be read in conjunction with all other relevant drawings and specifications. Do Not Scale © Ingleton Wood LLP

Key:

- Forbo Tervot Carpet Tiles. Spec No: 7150 Colour: TBC by end user.
- Forbo Coral Duo Barrier Matting. Spec No: 7220 (Duo) Colour: TBC by end user
- Forbo Safeslip R11. Spec No: 7760. Colour: TBC by end user. Covered sealed skirting
- Flowcrete - Flowcoat SF41 - a coloured 2-component epoxy thin layer, high build coating Colour: Mid Grey (280)
- Flowcrete - Flowcoat SF41 - a coloured 2-component epoxy thin layer, high build coating Colour: Goosewing Grey (Ref: 222)
- Flowcrete - Flowcoat SF41 - a coloured 2-component epoxy thin layer, high build coating Colour: Traffic Blue (Ref: 466)
- Flowcrete - Flowcoat SF41 - a coloured 2-component epoxy thin layer, high build coating Colour: Mid Grey (280)
- Flowcrete - Yellow Line Marking Deckshield Linemarker QD - 100mm wide Colour: Traffic Yellow
- Flowcrete - Red Line Marking Deckshield Linemarker QD - 100mm wide Colour: RAL 3020 Traffic Red
- Flowcrete - Escape Route Pedestrian marking Deckshield Linemarker QD Colour: Traffic Yellow
- Flowcrete - Traffic direction arrow Deckshield Linemarker QD Colour: White

Notes


- Prepare floor to areas to receive new floor covering as required.
- Contractor is to ensure that all preparatory works are carried out prior to laying new finishes.
- All floors to be supplied and fitted in accordance with manufacturers guidelines.
- Entrance matting to be installed to present flush surface with transition profile and adjoining floor finish. To form matt well around primary entrance matting use Gradus UMFAT18 or equal approved. For junctions between carpet & vinyl flooring use Gradus ETR302UPD or equal approved.
- Stair nosings/trim for use, with vertical risers - Supply & install Gradus RXT771 - single insert with concealed fixing OR with angled risers - Supply & install Gradus RXT751, single insert with concealed fixing. Install Interior insert, colour ref: TBC, into channel, painted - to match colour insert, to ALL steps. Nosing to be fitted in accordance with manufacturers printed instructions.
- New vinyl flooring to abutments to be lapped into floor gullies during installation. Installed to manufacturers recommendations.

Note - Flowcrete Substrate Preparation.

If the substrate is contaminated with oil the Flowprime EP Oil Tolerant Primer should be specified as shot blasting will only remove the uppermost contamination and not any deep penetrated oil contamination. Flooring contractor to determine if a suitable test shot blast is required as the normal preparation for use of the Oil Tolerant Primer is to shot blast the substrate as part of the approved normal substrate preparation requirements to be suitably primed and then over coated.

Substrate preparation and application of Flowcrete products to be undertaken in full accordance with manufacturers Specifications.

Manufacturer: Flowcrete UK Ltd, Booth Lane, Moston, Sandbach, CW11 3QF. Telephone: 01270 753753. Fax: 01270 753333. E-mail: uk@flowcrete.com Web: www.flowcrete.co.uk

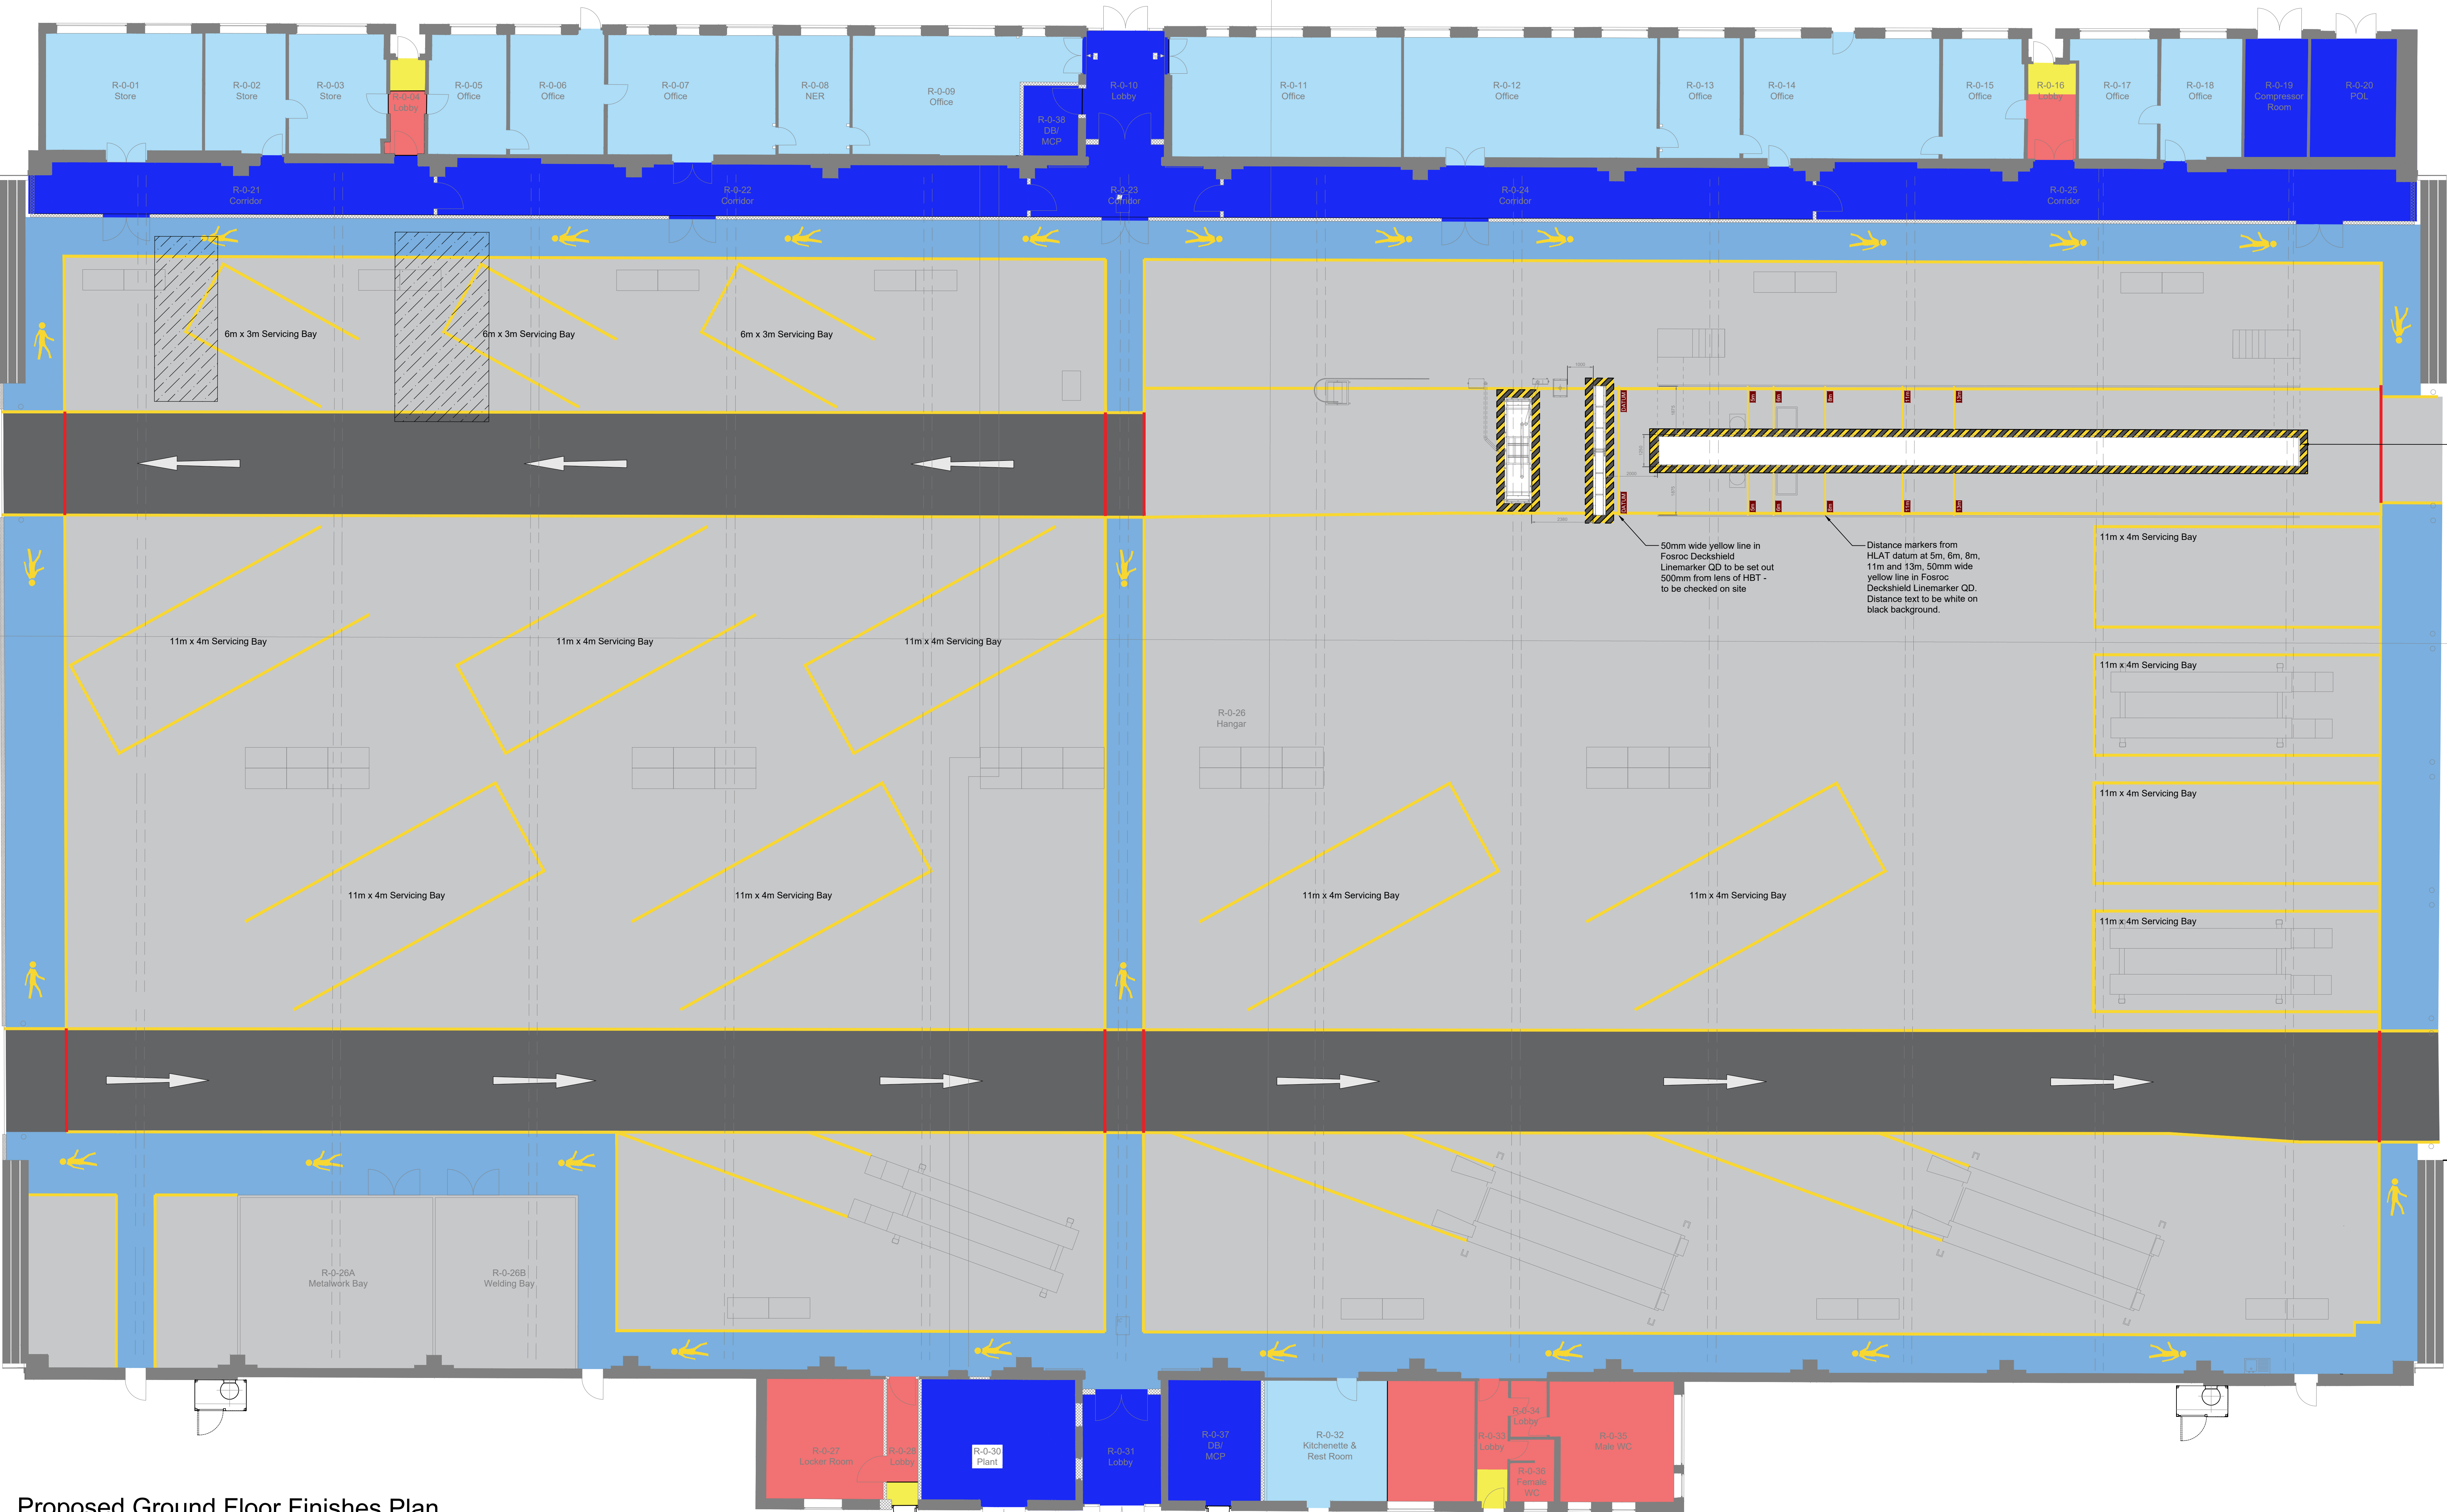

Proposed Ground Floor Finishes Plan
1:100 @ A0

C09	DISTANCE MARKERS FROM HLAT TESTER ADDED	15/10/23	JF	BB
C08	50mm YELLOW LINE ADDED 500mm FROM LEHS OF HBT	06/08/23	JF	BB
C07	REVISED CONTRACT ISSUE INCLUDE DIRECTION ARROW ADDED TO LEGEND	18/08/23	JF	BB
C06	REVISED CONTRACT ISSUE INCLUDE MARKINGS ADDED TO HBT & HBT	06/08/23	JF	BB
C05	REVISED CONTRACT ISSUE UPDATED TO SIM4 WORKS	08/08/23	JF	BB
C04	REVISED CONTRACT ISSUE FINISHES REINSTATED TO R-0-33, R-0-34 & R-0-36	13/07/23	JF	BB
C03	REVISED CONTRACT ISSUE FINISHES REINSTATED TO NORTH BERN ANNEX	14/02/23	JF	BB
C02	REVISED CONTRACT ISSUE INCLUDE HAZARD MARKINGS TO PERIMETER OF VEHICLE INT	17/01/23	JF	BB
C01	CONTRACT ISSUE	04/10/24	JF	BB
Rev	Description	Date	Chk	Azt
Project No:	4000034	Scale @ A0: 1:100	Drawn By:	PS

Property and Construction Consultants
Rising Place, Northgton
T 01536 565075
E 01536 565076
W www.ingletonwood.co.uk

Vision, form and function
Project:
HANGAR REFURBISHMENTS
BUCKLEY BARRACKS

Client:
VIVO DEFENCE

Title:
HANGAR 3 - PROPOSED FLOOR
FINISHES PLAN
Security Classification:
OFFICIAL

Drawing Number:
4000034-IWD-Z1-00-DR-A-3002
Status: Purpose: Issue
S4 CONTRACT ISSUE C09