




Foundations to sections C-C D-D and E-E to be 500mm-300mm taken down to firm ground, a minimum 100mm below the invert level of the sewer drain pipe.

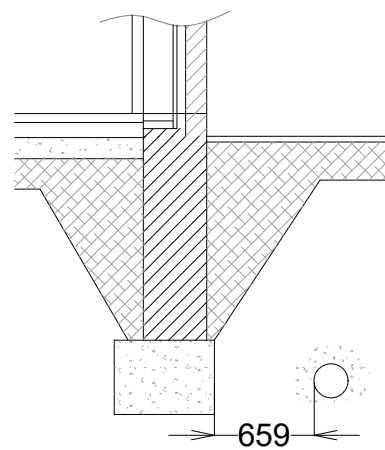

SECTION C-C

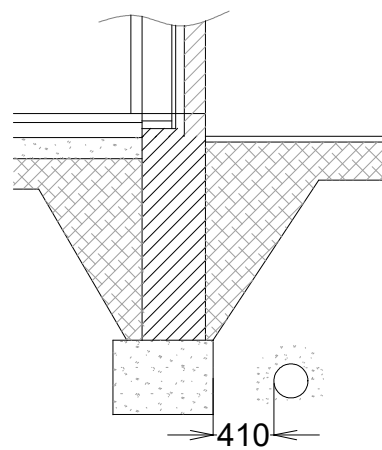


SECTION D-D

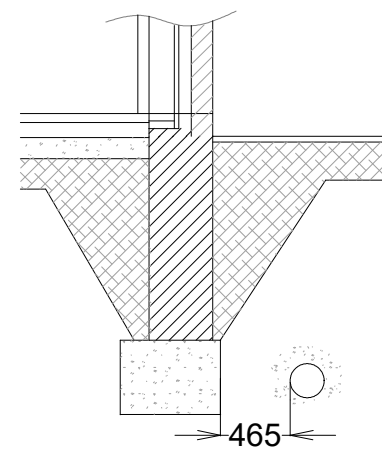


SECTION E-E

Foundations to sections F-F and G-G to be 500mm-300mm taken down to firm ground, a minimum 100mm below the invert level of the Culvert drain.

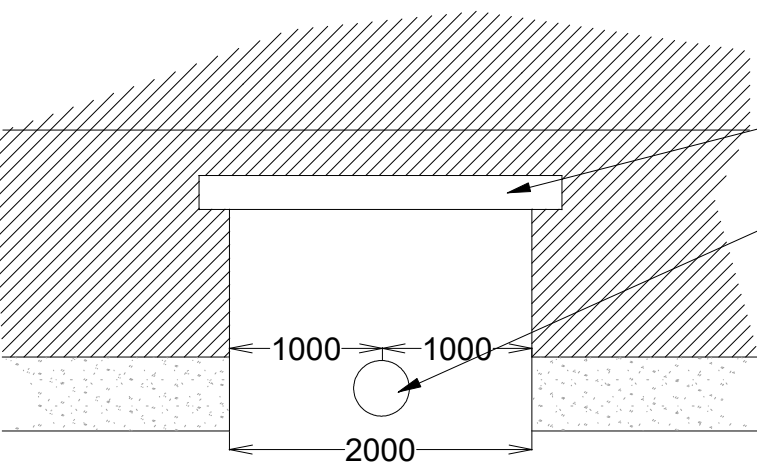

SECTION F-F

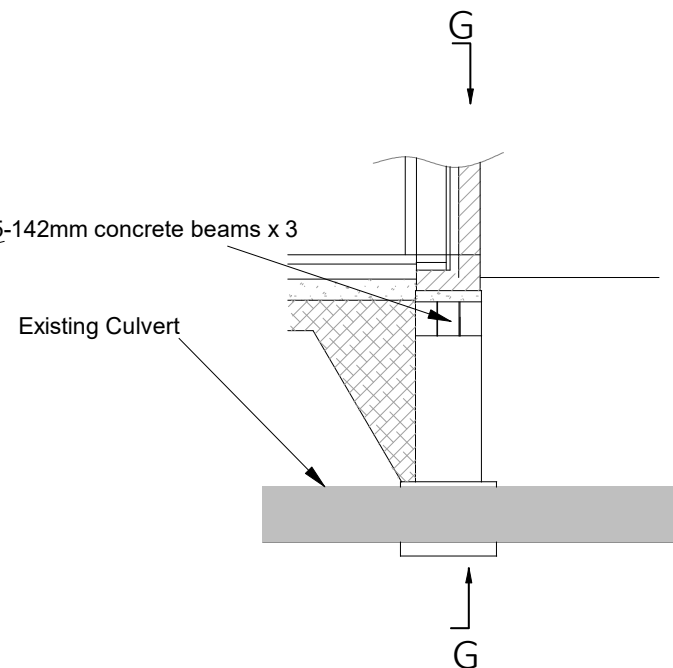

SECTION G-G

Note:- the invert levels of the Culvert drain and sewer drain are to be confired and agreed prior to laying foundations

0	1	2	3	4
JJ SIGA LTD				
49 Westpark Road Corsham Wiltshire SN13 9LW				
Sections				
Dr no. LB/26/010A				
Scale 1/50 @ A3				