Manual Excavations (Hand Dig) within RPA to be carried out under Arboricultural supervision.

CONSTRUCTION EXCLUSION ZONE

Notes:

BS5837 Tree Retention Categories

CATEGORY A	Trees of a high quality with an estimated remaining life expectancy of at least 40 years
CATEGORY B	Trees of a moderate quality with an estimated remaining life expectancy of at least 20 years.
CATEGORY C	Trees of a low quality with an estimated remaining life expectancy of at least 10 years
CATEGORY U	Tree of poor condition that cannot be realistically retained as living trees in the context of the current land use for longer than 10 years
ROOT PROTECION AREA	T### TREES / GROUPS TO REMOVE
TREE PROTECTION FENCING	GROUND PROTECTION
CONSTRUCTION EXCLUSION ZONE	MANUAL EXCAVATION HAND DIG
	TREE SHADOW

The Warning sign below is to be attached to the Tree protective fencing once erected

TREE PROTECTION AREA

TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS AND ARE SUBJECTS OF A TREE PRESERVATION ORDER (TOWN & COUNTRY PLANNING ACT 1990)

CONTRAVENTION OF TREE PRESERVATION ORDERS MAY LEAD TO **CRIMINAL PROSECUTION**

THE FOLLOWING **MUST** BE OBSERVED BY ALL PERSONS:-

- THE PROTECTIVE FENCING MUST NOT BE REMOVED
- NO PERSON SHALL ENTER THE PROTECTED AREA
- NO MACHINE OR PLANT SHALL ENTER THE PROTECTED AREA
- NO MATERIALS SHALL BE STORED IN THE PROTECTED AREA
- NO SPOIL SHALL BE DEPOSITED IN THE PROTECTED AREA
- NO EXCAVATION SHALL OCCUR IN THE PROTECTED AREA

ANY INCURSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN PERMISSON OF THE LOCAL PLANNING AUTHORITY

KEEP OUT!


General Site precautions

The following points will be observed at all times:

- No mechanical digging or scraping is allowed within defined RPAs.
- No fires to be lit on site.
- No access permitted inside the CEZ or TPF.
- No materials, equipment or debris to be stored within the CEZ or RPAs of retained trees.
- Notice boards, telephone cables or other services will not be attached to retained trees.
- Materials that may contaminate the soil (cement mixer, fuel, vehicle washings) will not be permitted to operate or allow run off into the RPAs of retained trees or soils.
- Site operations will avoid damage to the aerial part of the tree.


TREE PROTECTION FENCING (TPF)

Secondary Specification - Protective fencing shall consist of a heras fencing framework in accordance with figure 3 of British Standard 5837 (2012), comprising 2m tall welded mesh (heras fencing) panels on rubber or concrete feet. The weldmesh panels shall be securely fixed and joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence. The distance between the fence couplers shall be at least 1m and shall be uniform throughout the fence. The panels shall be supported on the inner side by stabilizer struts, attached to a base plate secured with ground pins



GROUND PROTECTION

For pedestrian and vehicle weights up to 2000KG within the RPA the installation of ground protection shall be in the form of a single thickness of scaffold boards or ply board on top of a compressible layer of woodchip (100 - 200mm deep) laid onto a geotextile, or supported by scaffold. For heavier traffic a proprietary system such as GreenTek Ground-Guards (heavy duty plastic ground protection mats clipped together) laid above 150mm deep layer of compressible woodchip. Or, pre-cast reinforced concrete slabs. No storage or mixing of potentially hazadous materials within these areas; such as diesel fueling or cement mixing (unless specific precautions have been made that prevents runoff / contamination into the ground from any spillage).

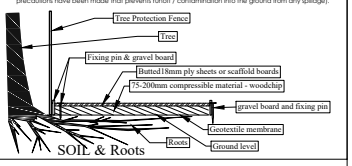

Title:	Tree Protection Plan (AIA)		
Site:	Wheatlands, Rivar Road, Shalbourne, Marlborough, SN8 3RL		
Client:	Nicky & Jasmine Dunne		
Project No:	TGB464.V1.0		
Drawing No:	TGB464.V1.0-A3-TPP(AIA)-1-350		
Scale @ A3:	2.857141	Date:	06/05/2026
Drawn By:	Tom B	Revision:	1.0

TGB Tree Consulting
Tom Butterfield
TGB Tree Consulting
Dunsfold,
Surrey,
GU8
07459906047
www.tgbtrees.co.uk
info@tgbtrees.co.uk

Scale Bar: 0m 5m 10m 15m 20m