


NOTES:
1. ALTERNATIVE BAGWORK HEADWALLS TO BE APPROVED.

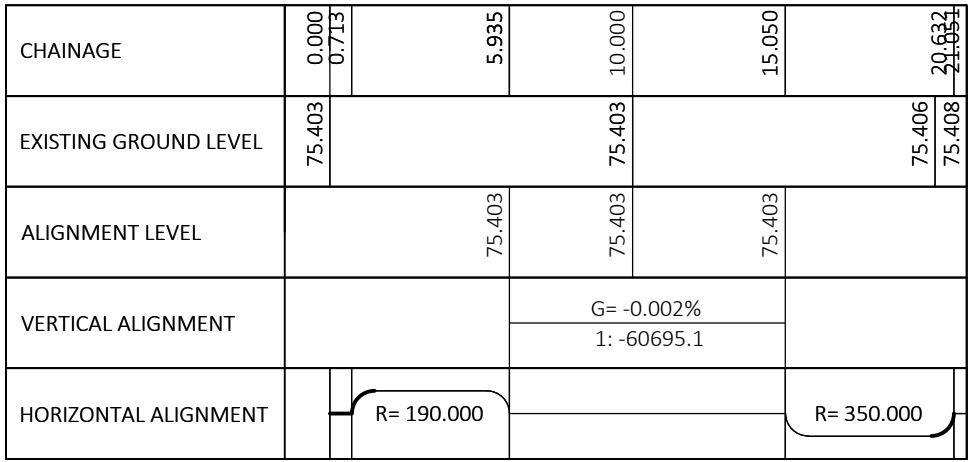

SECTION B-B

NEW CARRIAGEWAY

440mm

365mm

HW03

HW04

Dia 300

IL 75.504

75.000

74.000

n	m
0	0
1	0
2	1
3	3
4	6
5	10
6	15
7	21
8	28
9	36
10	45

75.000

OFFSET	0.000		
GROUND LEVEL	75.649	75.507	75.831

OFFSET		0.000		
GROUND LEVEL	75.821	75.403	76.086	



HEADWALL ELEVATION

NTS

1. ST4 CONCRETE IN COMPLIANCE WITH CLAUSE 2602 SHALL BE USED THROUGHOUT. THE CONCRETE FILLING TO THE BAGS SHALL HAVE A LOW WORKABILITY WITH A SLUMP OF 25 mm.
2. THE BAGS SHALL BE HESSIAN SAND BAGS COMPLYING WITH BS 1214. THE SIZE OF THE BAGS SHALL BE SUCH THAT WHEN FILLED, THE DIMENSIONS SHALL BE 700 mm X 300 mm X 150 mm. THE BAGS SHALL BE PLACED IN POSITION AND SHAPED TO THE PROFILE SHOWN ON THE DRAWINGS BY STRIKING WITH A FLAT TIMBER BOARD UNTIL ALL FACES ARE FLAT AND ALL EDGES SQUARE.
3. THE FINISHED EXPOSED FACES OF THE BAGWORK SHALL NOT BE PUNCTURED OR TORN AND NO TUCKED ENDS SHALL BE VISIBLE.
4. EACH CONCRETE BAG IS TO BE SPIKED TO THE ONE BELOW AND THE BOTTOM ROW SPIKED TO THE FOUNDATION WITH 10 mm X 200 mm MILD STEEL DOWEL BARS. WHERE THE CONCRETE BAGS HAVE A CONCRETE BACKING, ALTERNATE ROWS OF BAGS SHALL BE SPIKED TO THE BACKING CONCRETE WITH 10 mm X 200 mm MILD STEEL DOWEL BARS AT 45 DEGREES TO THE HORIZONTAL WITH ONE DOWEL PER BAG IN THE ROW.
5. WHERE BAGWORK FORMS A HEADWALL, HEADWALL FOUNDATIONS ARE TO BE CAST AGAINST THE EXCAVATED FACE AND ANY OVERDIG FILLED WITH ST4 CONCRETE.
6. FORMED CONCRETE SURFACES SHALL BE TO CLASS F1 FINISH AND UNFORMED SURFACES TO CLASS U1 FINISH IN ACCORDANCE WITH CLAUSE 1708.
7. WHERE BAGWORK IS PROVIDED TO PROTECT WATERCOURSES, BEFORE PLACING THE BAGS, THE BANKS SHALL BE CUT INTO HORIZONTAL STEPS TO PROVIDE A SUITABLE FOUNDATION AND SHALL BE COVERED IN GEOTEXTILE TO THE REQUIREMENTS OF CLAUSE 609. THE BOTTOM COURSE OF BAGS SHALL BE AT LEAST 450 mm BELOW THE STREAM BED AND ALL SUCCEEDING COURSES SHALL BE HORIZONTAL AND ALL VERTICAL JOINTS SHALL BE STAGGERED IN ALTERNATE COURSES. HEADERS SHALL BE PLACED AT EVERY THIRD BAG IN ALTERNATE COURSES.
8. THE BAGWORK SHALL BE THOROUGHLY SOAKED WITH WATER UPON COMPLETION OF THE CONSTRUCTION TO SATURATE THE HESSIAN BAGS.

KEY

EXISTING LEVELS

PROPOSED LEVELS

CONCRETE BAG WORK

DRAINAGE - 300 DIA PIPE

REVISIONS

P02	CROSS SECTIONS ADDED	16/10/25	RJP	RJP RJP
P01	FIRST ISSUE	06/06/25	WG	RJP RJP
Rev.	Revision Notes	Date	Drawn By	Checked Approved

Hydrock 
now
 **Stantec**

Over Court Barns
Over Lane, Almondsbury
Bristol
BS32 4DF
t: +44(0)1454 619533
e: bristol@hydrock.com

CLIENT

EARTHLINE LTD

PROJECT

BLACKBURR FARM QUARRY

TITLE

TEMPORARY SOUTHERN ROAD CROSSING
CULVERT LONG SECTION & DETAILS

STANTEC PROJECT NO. 333800456	SCALE @ A2 1:250
STATUS DESCRIPTION SUITABLE FOR STAGE APPROVAL	STATUS S4
DRAWING NO. 38342-HYD-XX-XX-DR-D-0305	REVISION P02