

Proposed Motorway Rest Area
M4 Junction 16, Swindon, Wiltshire

November 2025

TRANSPORT ASSESSMENT



Eddisons

REPORT

DOCUMENT:	Transport Assessment
PROJECT:	Proposed Motorway Rest Area, M4 Junction 16, Swindon, Wiltshire
CLIENT:	MOTO Hospitality Ltd
JOB NUMBER:	3136
FILE ORIGIN:	Z:\projects\3728 MOTO Swindon\Docs\Reports\3728.TA.04.docx

DOCUMENT CHECKING:

Primary Author:	MTC	Initialled:	MTC
Contributor	SM	Initialled:	SM
Review By:	PJW	Initialled:	PJW

Issue	Date	Status	Checked for Issue
1	08-09-23	First Draft	MTC
2	28-09-23	V2	MTC
3	03-10-23	V3	MTC
4	04-11-25	V4	MTC

CONTENTS

1	INTRODUCTION	1
1.1	Introduction.....	1
1.2	Report Structure	1
2	THE NEED FOR A MOTORWAY REST AREA	3
2.1	Introduction.....	3
2.2	Department for Transport (DfT) Circular 01/2022.....	3
2.3	Electric Vehicle (EV) Revolution	5
2.4	Department for Transport - The Future of Freight – a Long-Term Plan.....	6
2.5	Department for Transport – National Survey of Lorry Parking 2022 (Part one and two)...	7
2.6	Existing Motorway Service Areas and Capacity	9
2.7	HGV Layby Surveys	11
3	DEVELOPMENT SITE AND PROPOSALS	16
3.1	Existing Site	16
3.2	Existing Highway Network	16
3.3	Development Proposals	16
3.4	Proposed Vehicular Access	17
3.5	Parking Provision	17
3.6	Access by Non Car Modes	19
3.7	Signage Proposals	20
3.8	Servicing and Deliveries	20
4	TRANSPORT PLANNING POLICY	21
4.1	Introduction.....	21
4.2	National Planning Policy	21
4.3	Local Planning Policy	27
5	ACCESSIBILITY BY NON CAR MODES	29
5.1	Introduction.....	29
5.2	Access on Foot.....	29
5.3	Access by Cycle	32
5.4	Access by Bus	33
5.5	Accessibility by Rail.....	34
5.6	Accessibility Summary	35
6	PROMOTING SMARTER CHOICES VIA TRAVEL PLANS	36
6.1	Introduction.....	36
6.2	Travel Plan	36
7	TRAFFIC IMPACT ANALYSIS	37
7.1	Introduction.....	37
7.2	Scope of Assessment	37

7.3	Reference Case Traffic Flows	37
7.4	Assessment Periods	38
7.5	Committed Development	39
7.6	Base Flows	42
7.7	Trip Distribution.....	42
7.8	Proposed Development	42
7.9	Trip Types	47
7.10	Capacity Assessments	49
7.11	Slip Road Assessments.....	52
7.12	Traffic Impact Summary	52
8	ACCIDENT ANALYSIS.....	54
9	CONCLUSIONS	57

PLANS

Plan 1 – Site Location

Plan 2 – Proposed Site Layout

Plan 3 – Proposed Site Access

Plan 4 – Potential New Footway Link

Plan 5 - 7 – Swept Path Analysis

FIGURES – 1 to 28

APPENDICES

Appendix 1 – HGV Parking Survey Data

Appendix 2 – Stage 1 Road Safety Audit – Proposed Site Access

Appendix 3 – Parking Calculations

Appendix 4 - Framework Travel Plan

Appendix 5 – Local Model Validation Report

Appendix 6 – Automatic Traffic Count Data

Appendix 7 – TEMPRO Outputs

Appendix 8 – ARCADY Output – B4005 / Proposed Site Access

Appendix 9 – M4 Junction 16 – VISSIM Model Results and Forecasting Report

Appendix 10 – Merge / Diverge Diagrams

Appendix 11 – Accident Data

1 INTRODUCTION

1.1 Introduction

1.1.1 Eddisons have been instructed by Moto Hospitality Ltd to advise on the traffic and transport issues relating to an outline planning application for a new motorway rest area (MRA) on land adjacent to Junction 16 of the M4 in Swindon, Wiltshire.

1.1.2 Moto Hospitality Ltd is bringing forward plans to extend the electric vehicle charging network and address the critical local need for new HGV parking, through a new market-leading, low-carbon motorway rest area in this strategic location at Junction 16 of the M4.

1.1.3 Junction 16 is an ideal site for a highly sustainable new rest area, midway between Bristol (c.30 miles to the west) and Reading (c.40 miles to the east).

1.1.4 The report provides information on the traffic and transport planning aspects of the development proposals to assist the local planning authority in the positive determination of the forthcoming planning application. The report has been updated following extensive post application discussions with Wiltshire County Council's (WCC), National Highways (NH) and Swindon Borough Council (SBC) in their respective roles as overseeing authorities.

1.2 Report Structure

1.2.1 Following this introduction, Section 2 provides a consideration of the need for the Motorway Service Area.

1.2.2 Section 3 provides a description of the existing site and the development proposals, whilst Section 4 considers relevant planning policy.

1.2.3 Section 5 provides an assessment of the accessibility of the site by non-car modes whilst Section 6 presents details of the Travel Plan Framework.

- 1.2.4 Section 7 discusses the traffic impact of the proposed development, whilst Section 8 provides an analysis of Road Accident Data. Lastly, Section 9 draws together the conclusions to this report.

2 THE NEED FOR A MOTORWAY REST AREA

2.1 Introduction

2.1.1 Before considering the details of the planning application, consideration has first been given to the need to provide a new facility in this location.

2.2 Department for Transport (DfT) Circular 01/2022

2.2.1 Guidance on the provision of roadside facilities for road users on motorways and all-purpose trunks roads in England is set out in the Department for Transport Circular 01/2022 'Strategic Road Network and the Delivery of Sustainable Development'. The document replaced the policies in the Department for Transport circular 02/2013 of the same title in December 2022.

2.2.2 On the matter of spacing, the document states at paras 74 and 75 that:

'74. Roadside facilities perform an important safety function by providing opportunities for the travelling public to stop and take a break during their journey. Government advice is that motorists should stop and take a break of at least 15 minutes every 2 hours.'

'75. The network of signed roadside facilities on the SRN is intended to provide opportunities to stop at intervals of approximately half an hour. However, the timing is not prescriptive as travel between services may take longer on congested parts of the SRN.'

2.2.3 Para 80 goes on to state that:

'80. It is recognised that on certain parts of the SRN and at certain times a shortage of parking facilities for HGVs can make it difficult for drivers to find safe space to stop and adhere to requirements for mandatory breaks and rests. To alleviate the shortage, the expansion of existing facilities on the SRN is likely to be needed alongside the creation of new parking sites.'

2.2.4 The document continues to provide additional guidance on freight facilities in paras 81 and 82, as below:

'81. In areas where there is an identified need ^{footnote 26}, the Company will work with relevant local planning authorities to ensure that local plan allocations and planning application decisions address the shortage of HGV parking on or near to the SRN. In these circumstances, local planning authorities should have regard to the following spacing requirements:

(i) the maximum distance between motorway facilities providing HGV parking (being service areas, rest areas or truckstops) should be no more than 14 miles; and

(ii) the maximum distance between APTR facilities providing HGV parking (being service areas or truckstops) should be the equivalent of 20 minutes driving time for HGVs.

82. Where the general spacing distances above are met but a need for HGV parking still arises, the company will support the case to address unmet demand, subject to an assessment of the safety of the proposed access or egress arrangements.'

2.2.5 As will be discussed later in this report, a critical level of need for HGV parking has been identified and the maximum distance between facilities should be no more than 14 miles. Given the current spacing on this section of the M4 between Leigh Delamere and Membury is currently 28 miles, and there is no minimum distance, the need to reduce this gap to meet HGV parking demands is paramount.

2.2.6 In relation to location, paras 86 and 87, goes on to state:

'86. However, where an on-line service area cannot be delivered due to planning, safety, operational or environmental constraints, the development of a site that shares a common boundary with the highway at a junction with the SRN, and which provides the mandatory requirements to be eligible for signing as set out in Table 1 of Annex A, is to be preferred to the continued absence of facilities.

87. The company will not support proposals for roadside facilities adjacent to a junction with a motorway that would not meet the minimum requirements for signing as shown in Table 1, as these can prevent or reduce the provision of more appropriate facilities.'

2.2.7 In this regard, the proposals will meet the minimum requirements for signing, whilst the site shares a common boundary with the Strategic Road Network (SRN).

2.3 Electric Vehicle (EV) Revolution

2.3.1 Moto Hospitality Limited are looking to bring forward an industry leading rest area which will provide 50 new EV charging spaces from Day 1, with the remaining spaces EV-ready with infrastructure in place to expand provision as demand and grid capacity grows. All HGV spaces have also been designed to accommodate electric charging infrastructure, should electric HGVs be rolled out in the future.

2.3.2 Paragraph 109 of the Circular states:

'The Rapid Charging Fund was announced in the March 2020 Budget as part of the government's commitment to roll out EV charging infrastructure. By 2035, government expects around 6,000 high-powered, open-access charge points (150-350 kW capable) to be installed across the SRN^[footnote 28]. The purpose of this programme is to ensure that there is a high-powered and open-access charging network ready to meet consumer demand for EVs ahead of need, and to enable the phase out of new conventional petrol and diesel cars/vans by 2030 and HGVs by 2040.'

2.3.3 Under current Government plans, the ban on the sale of new petrol and diesel cars has been moved back to 2035 with an aim to reach Net Zero by 2050.

2.3.4 The development proposals will provide an industry leading provision of EV charging points, fulfilling a key need on this section of the SRN. The site lies at a strategic midpoint between Bristol (c.30 miles to the west) and Reading (c.40 miles to the east) so it is considered that this site will be a particularly effective location for EV provision and will assist in reducing EV vehicle 'range anxiety' for motorists travelling on the M4 and, subsequently, fast tracking peoples transition to EV vehicles and assist with decarbonisation and net zero ambitions within Wiltshire.

2.4 Department for Transport - The Future of Freight – a Long-Term Plan

2.4.1 This document was published in June 2022 and sets out a starting point for government-industry collaboration going forward and states their shared vision for the sector. The plan establishes government and the sectors joint ambition and commitment to a long-term, cross-government and cross-modal approach to delivering the vision of the UK's freight sector.

2.4.2 Paragraph 5.10 of the document states the following in terms of overnight parking facilities:

'Planning policies should also provide for large scale transport facilities, located in areas of need, which include interchanges for rail freight. The NPPF also makes clear we already expect planning policies and decisions to recognise the importance of providing adequate overnight lorry parking facilities, taking into account any local shortages.'

2.4.3 Paragraph 5.16 of the document continues on the theme of HGV parking as follows:

'As set out in our response to the National Infrastructure Commission and in the 'Lorry Parking' joint Written Ministerial Statement published in 2021, government will take forward work to review and where appropriate amend planning practice guidance to better support freight and logistics.'

- 2.4.4** The document continues in Paragraph 5.24 to cover a number of elements which includes a 'programme of changes to the planning system'. This includes the following:

'Options to ensure sufficient land is allocated to service the needs of freight and logistics including ensuring we deliver a resilient network of lorry parking facilities and ensure planning authorities recognise the land use requirements to support each stage of the supply chain.'

2.5 Department for Transport – National Survey of Lorry Parking 2022 (Part one and two)

- 2.5.1** In March 2022, DfT commissioned AECOM to undertake an audit of lorry parking within five kilometres of the strategic road network (SRN) in England. The study aims to help DfT and other public bodies understand user experience to inform and provide an evidence base for policy development on HGV parking and welfare needs of drivers.
- 2.5.2** The headline figures presented in Part one of the Study on Page 1 of the document confirms that lorry parking at on-site facilities is nearly at critical level, having reached 83 per cent utilisation level across the network.
- 2.5.3** Differences in utilisation rates from 2017 to 2022 show a 21% increase in truck stop HGV parking demand and 27% increase in demand within industrial estates. In that time the Truck Stop parking capacity has increased by 12% with an increase in utilisation from 2017 (76%) and 2022 (83%).
- 2.5.4** Page 9 sets out a utilisation categorisations, agreed with DfT in 2017, which states that an acceptable level of utilisations is less than 69%, critical is more than 85%, and serious is 70% to 84%.
- 2.5.5** The document shows that on-site truck stop capacity in the south-west is currently operating with a 64% utilisation rate, however, there is also a high amount of observed lay-by parking in the south-west. In fact, the south-west is listed as the region with the highest amount of lay-by parking, as shown in the below extract.



Figure 2.1 – National Lorry Parking Survey Extract (Figure 5.1) – Number of sites by parking site type by region

2.5.6 Nationwide there is a shortage of over 4,500 HGV parking spaces each night, forcing drivers to park in lay-bys or industrial estates with no access to proper facilities or food and drink. This shortage is also seen locally, with sites such as, Leigh Delamere, Swindon Truck Stop, Chippenham Pit Stop and Membury seeing HGV parking either at or approaching full capacity. Local HGV capacity is discussed further Section 2.6 of this report.

2.5.7 In addition to capacity shortages, the National Lorry Parking Study confirms that 55% of truck stops in the south-west are rated as 2 stars or below in terms of standards of on-site parking facilities (where 5 is excellent and 0 is basic).

2.5.8 How this compares nationally can be seen in Figure 2.2 below.



Figure 2.2 – National Lorry Parking Survey Extract (Figure 5.5) – Proportional split of on-site parking facilities by ratings by region

2.5.9 The extract shows that the south-west region is the second worst region in the country for the provision of on-site facilities rated 3 stars or above. This points to a critical need for higher quality services in the region.

2.5.10 Page 15 of the report goes on to state that:

‘the overall net effect over the last five years is that the demand for lorry parking spaces has grown faster than the supply of additional spaces’ and ‘it is clear from the engagement part of the study that poor quality facilities at parking locations, sub-standard security, and the cost of parking are all areas of great concern for the drivers’.

2.6 Existing Motorway Service Areas and Capacity

2.6.1 The proposed site is located at Junction 16 of the M4. The spacing between existing motorway services on the M4 is given in Table 2.1 below.

Existing Service Areas	Leigh Delamere	Membury
Leigh Delamere		28
Membury	28	

Table 2.1 – Location to Existing M4 Services

- 2.6.2** As can be seen from the above, the distance between the Leigh Delamere and Membury exceeds the maximum 14-mile distance set out in Circular 01/2022.
- 2.6.3** This spacing would suggest that the proposed motorway rest area is particularly well sited in relation to the surrounding highway network and in relation to existing motorway service areas. The proposed motorway rest area will fill a critical gap on the Strategic Highway Network, reducing range anxiety for EV vehicle drivers and providing much needed driver welfare opportunities for HGV drivers.
- 2.6.4** To further support the need case, survey data has been obtained from various sources to determine existing parking capacity at nearby MSA's, namely, Chippenham, Swindon Truck Stop, Leigh Delamere, Membury, Chieveley and Sutton Scotney. The full survey data is presented in **Appendix 1**.
- 2.6.5** An analysis of the data obtained from the National Lorry Parking Survey 2022 shows the following observed HGV parking capacities. These surveys were undertaken in March 2022.
- Moto Leigh Delamere Eastbound – 36/40 = 90% (Critical Capacity).
 - Moto Leigh Delamere Westbound – 45/77 = 58% (Acceptable Capacity).
 - Chippenham Pitstop – 91/95 = 96% (Critical Capacity).
 - Swindon Truck Stop – 72/72 = 100% (Critical Capacity).

2.6.6 In addition, independent HGV parking surveys were undertaken at the following sites. These surveys were undertaken in June 2022.

- Membury Westbound = 98% (Critical Capacity).
- Membury Eastbound = 74% (Serious Capacity).
- Chieveley = 83% (Serious Capacity).
- Sutton Scotney Southbound = 100% (Critical Capacity).
- Sutton Scotney Northbound = 103% (Critical Capacity).

2.6.7 As can be seen above, there are a number of motorway services in the area which are operating at serious or critical levels of capacity for HGV parking. Importantly, both Leigh Delamere eastbound and Membury Westbound, which are closest services on the approaches to the proposed site, were both observed as operating at critical capacity during the survey. This poses a significant threat to driver welfare, with drivers being unable to find a parking space when they need one.

2.6.8 Swindon Truck Stop and Chippenham Pitstop also provide HGV parking opportunities in the area. These offline services were observed as operating at critical levels of capacity during surveys carried out as part of the National Lorry Parking Survey.

2.6.9 These survey results suggest a significant need for more HGV parking in the local area and could also indicate why there is a high amount of layby and indiscriminate HGV parking in the Swindon area, as discussed in the following section.

2.7 HGV Layby Surveys

2.7.1 In order to further identify if there is a need for suitable HGV parking facilities in the vicinity of the site, Eddisons have commissioned a number of HGV parking surveys within the Swindon and Chippenham area. These surveys establish the extent of unofficial HGV parking (layby and indiscriminate industrial estate parking) occurring in the area, within circa 15km of the proposed MRA.

- 2.7.2** The HGV parking surveys were undertaken in the months of March, April, May and September 2023. The locations of surveys and the full results are provided in Appendix 1. An updated parking survey was undertaken in October 2025 in order to check the continued validity of the 2023 counts. These results are also provided in Appendix 1.
- 2.7.3** The aim of the surveys was to identify the current level of unofficial HGV parking currently occurring on the local and strategic highway network in the immediate catchment of the proposed site.
- 2.7.4** Known HGV parking hotspots were identified based on local knowledge, via a desktop study of the National Lorry Parking Survey, and from available online truck parking applications. Associated parking beat surveys were then undertaken at these locations between 7pm and midnight on the respective survey dates. It is considered the results provide a snap shot of unofficial overnight parking which occurs in the vicinity of the proposed site.
- 2.7.5** The survey data shows significant amounts of unmanaged and inappropriate HGV parking occurring on roads, within business parks, industrial areas and within various laybys. These parking areas do not offer appropriate welfare facilities for HGV drivers and can cause a nuisance and hazard on local roads. The 2025 check count shows that the HGV layby parking situation has worsened since the 2023, highlighting the continued need for the timely provision of additional HGV parking on the network. The results are shown in Figure 2.3 below:

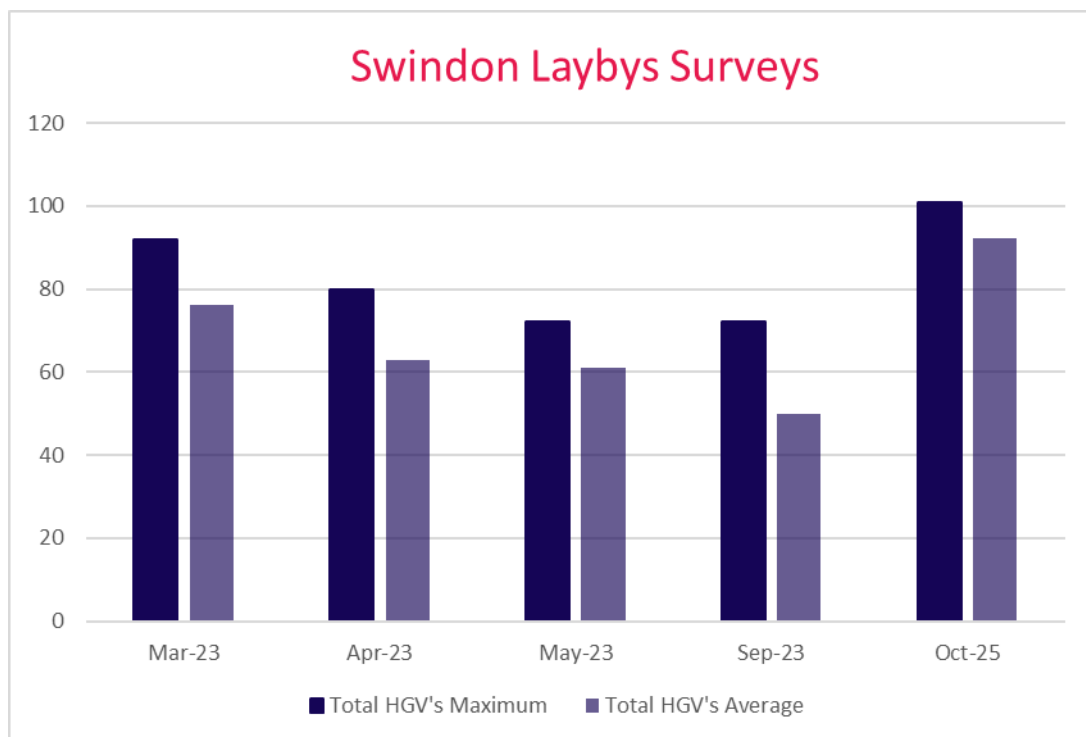


Figure 2.3 – Swindon Laybys 2023 - 2025 – HGV Parking Study Results

- 2.7.6** As can be seen from the graph in Figure 2.3, there is a consistently high number of HGV's (circa 72 – 101 vehicles) parking indiscriminately within the Swindon and Chippenham areas on a typical night.
- 2.7.7** As such, it can be considered there is an immediate need for up to 101 HGV parking spaces in the vicinity of the proposed truck stop on a typical night, based on recent October 2025 surveys.
- 2.7.8** The surveys have shown that HGV drivers are currently forced to park in areas which aren't suitable for overnight parking, and in areas which offer little to no driver welfare facilities, such as, in laybys or on industrial estates, and with no security, increasing the likelihood of freight crime.
- 2.7.9** Freight crime refers to any crime targeted at road vehicles designed to carry goods, ranging from threats and attacks on drivers to the theft of valuable loads and fuel. The National Vehicle Crime Intelligence Service (NaVCIS) provide statistics on

freight crime which are reviewed by the All-Party Parliamentary Group (APPG) for Freight and Logistics - the voice for logistics in Parliament, and the Road Haulage Association (RHA).

- 2.7.10 The latest statistics on freight crime are shown in Figure 2.4 below and further information is provided in a report released by the APPG and RHA, titled 'Securing Our Supply Chains, November 2024'.

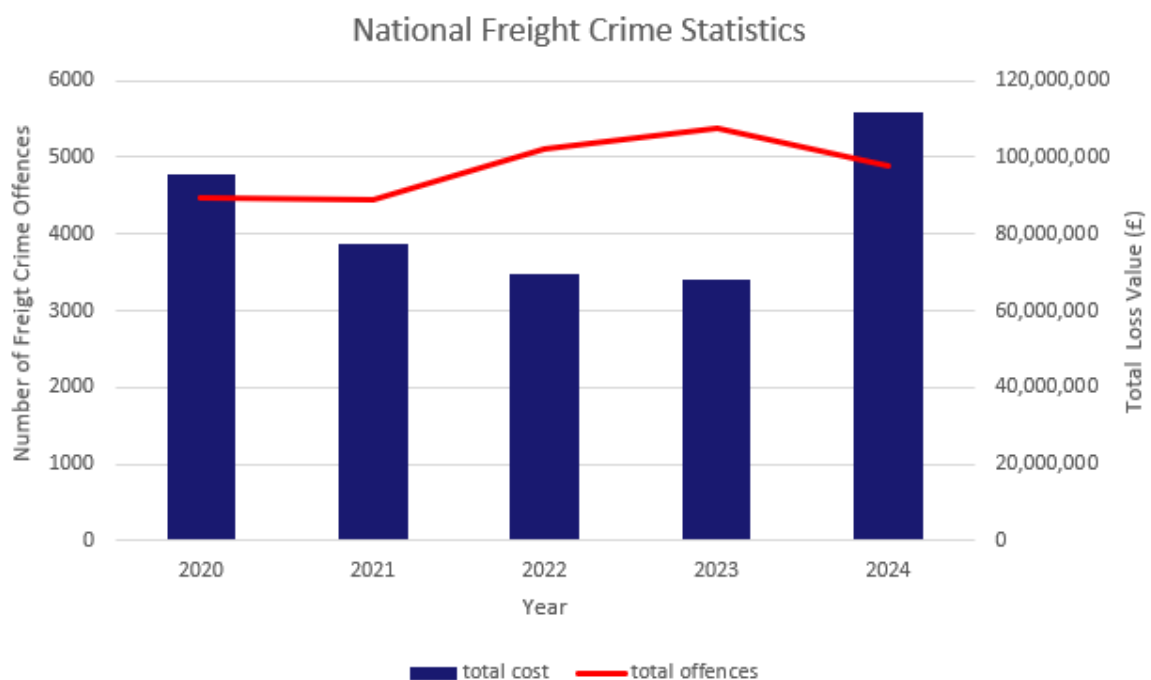


Figure 2.4 – National Freight Crime Statistics

- 2.7.11 Freight crime - or theft from lorries - continues to impact drivers and businesses across the UK every day, resulting in significant financial losses. The latest 2024 figures show a significant rise in the value of goods stolen from lorries – up nearly two-thirds to £111.5 million.
- 2.7.12 The RHA recently commented on the release of the new 2024 figures with their Managing Director Richard Smith stating:

‘These figures highlight the fact that freight crime is becoming more serious, more organised, and more intelligence led. Criminals have always known what goods are moving, when they’re moving and where they’re most at risk – and now it’s even higher reward for them.

2.7.13 Criminals are increasingly focusing on vulnerable vehicles parked independently in laybys and industrial estates. We’re on the back foot because these figures still only represent estimates as we rely on voluntary reports by police forces.’

2.7.14 Chair of the APPG for Freight and Logistics, Rachel Taylor MP stated:

‘The fact that fewer thefts are occurring at truckstops suggests that industry and government investment to date is working. However, there’s a long way to go and these figures underline the urgent need for more to be done to ensure our drivers and businesses are properly protected.’

2.7.15 The APPG have made several recommendations in their November 2024 report to address these significant issues to the industry, including:

- *‘Endorse and support secure parking standards: Drivers today cannot be assured of their own safety or that of their vehicle, even when in designated parking. Coordinated standards must be used to create an environment where drivers can pull into any truck stop with the confidence they deserve.*
- *Launch a national parking programme: there is a significant national shortage of lorry parking which forces many drivers to park overnight at unlit, unpopulated and vulnerable roadside facilities. Central government needs to work closely with local authorities to increase the provision of much-needed parking facilities.’*

2.7.16 The proposed MRA at Swindon will provide a safe and highly secure environment for HGV parking, with associated on-site security and CCTV monitoring. The delivery of the proposals, therefore, has the potential to significantly reduce freight crime in the local area by reducing the risks associated with the current lay-by parking on the strategic road network.

3 DEVELOPMENT SITE AND PROPOSALS

3.1 Existing Site

- 3.1.1** The site is located on the outskirts of Swindon, approximately 5 kilometres to the southwest of the town centre.
- 3.1.2** The site is bound to the north by the M4 Motorway, to the south by the B4005, to the west Junction 16 of the M4 and to the east by undeveloped land.
- 3.1.3** The location of the site in relation to the surrounding area is shown on **Plan 1**.

3.2 Existing Highway Network

- 3.2.1** The site is located in close proximity to the primary route network, namely Junction 16 of the M4.
- 3.2.2** To the northwest of the site, the B4005 provides direct access to the M4 motorway at Junction 16 via a five-arm signalised roundabout. The B4005 is subject to a 40mph speed limit where it passes the site and is street lit on the approach to Junction 16 only.
- 3.2.3** Junction 16 links the M4 to the nearby towns of Swindon (to the north of the site via the A3102) and to Royal Wooten Bassett (to the southwest via the A3102 Swindon Road).
- 3.2.4** A small layby is located on the B4005 site frontage. This layby will be retained as part of the Proposed Development.

3.3 Development Proposals

- 3.3.1** The proposals would provide motorway rest area with associated amenities for up to 242 cars and 62 HGV drivers. Amenities will include showers and toilets, hot food franchises, a lounge area and retail space.
- 3.3.2** The proposed site layout is shown in **Plan 2**.

3.4 Proposed Vehicular Access

3.4.1 Vehicular access to the site would be gained via the creation of a new 55 metre ICD roundabout on the B4005.

3.4.2 The proposed site access arrangement is shown at **Plan 3**.

3.4.3 A Stage 1 Road Safety Audit for the proposed site access has been undertaken and agreed with Highways Officers at Wiltshire Council. The Stage 1 Road Safety Audit and subsequent Designers Response is provided at **Appendix 2**.

3.5 Parking Provision

3.5.1 The DfT Circular 01/2022 states that:

‘The parking requirements for a motorway service area (MSA) are set out in Table 2 of Annex A. In calculating this, the most recent complete year data should be used to identify the peak monthly traffic flow, which should then be averaged to find the daily flow for the number of cars and light goods vehicles (A) and number of HGVs and coaches (B). The Company can advise on obtaining and interpreting traffic flows.’

3.5.2 In relation to a motorway rest area, the Circular goes on to state:

‘The parking requirements for a motorway rest area are half of those required for a MSA as set out in table 2 of Annex A, rounded up to a whole number, as necessary.’

3.5.3 In reference, to HGV parking, Table 2 of Circular 01/2022 Annex A states that HGV parking provision should be:

‘0.5% of B (total HGV’s and coaches), or 1% in areas where there is an identified need. This will be informed by regular updates to the Department for Transport’s National Lorry Parking Survey and demand assessments undertaken by the Company to ensure that appropriate evidence is available on the national picture.’

- 3.5.4** In order to calculate the parking requirements, traffic count data for M4 has been obtained from Highways England Traffic Information System (WebTRIS) database for 2022 (the most recent complete year of date).
- 3.5.5** August 2022 was identified as the peak month of 2022 and the respective total 2-way average ADT mainline flow on the M4 for August was 89,003 vehicles (78,555 light vehicles and 10,448 HGV's). The full parking provision calculations and raw data is presented in **Appendix 3**.
- 3.5.6** To ensure a robust approach to car parking requirement and to ensure that the proposed parking provision is fit for the future, the M4 mainline flows have been factored to a future assessment year of 2033 (10 years post submission in line with National Highways future year assessment). It should be noted that within Circular 01/2022, there is no requirement to make an allowance for a future year assessment to establish parking requirements, however, it is considered good practice to ensure that service area are appropriately future proofed, particularly when considering the growing demand for electric vehicle charging points and HGV .
- 3.5.7** As will be detailed in the subsequent section of this TA, a need has been identified in the Swindon area and, therefore, a minimum of 1% of the total HGV's and Coaches has been applied.
- 3.5.8** Table 3.1 below summarises the minimum parking requirements based on the parking requirements contained within in the Circular 01/2022 and the proposed parking provision on the site. The proposals allow for an increase in traffic to provide for future traffic growth.

Parking Type	MRA Parking Requirements	Proposals
Cars - 0.5% of A	226	241
HGV – 1.0% of B	60	62
Abnormal Loads – Minimum of 1	1	1
Coach – 0.1% of B	6	6
Caravan/Motorhome – 0.015% of A	7	7
Motorcycle – 0.015% of A (minimum of 10)	7	12
Disabled car users – 5% of car spaces (minimum of 5)	11	11
Disabled Caravan – 5% of spaces (minimum of 1)	1	1

Table 3.1 – Parking Requirements

3.5.9 As can be seen, the proposals provide parking provision equal to, or in excess of the minimum parking requirements contained within Circular 01/2022.

3.5.10 In addition, the proposals include up to 50 electric vehicle charging spaces for cars from day one and there is potential to increase this EV charging provision in the future, including the provision of EV charging spaces for HGV's in the near future. The future provision will be subject to demand and electricity grid capacity.

3.6 Access by Non Car Modes

3.6.1 It is not considered that a development of this type will offer significant local customer demand to warrant a dedicated public transport service, cycle lanes or footpaths on the local road network upon opening.

3.6.2 Nevertheless, the connectivity of the site by other modes of travel should be considered to ensure that unnecessary staff related trips are not induced via the strategic road network.

- 3.6.3** Indeed, as will be detailed in section 5 of the report, the site is accessible by non-car modes and will cater for the needs of the development's staff in promoting a choice of travel modes other than the private car.

3.7 Signage Proposals

- 3.7.1** The signing of the MSA from the motorway will be provided as stated within the Highways Agency document entitled 'Guide to the Signing of Roadside Facilities for Motorists on the Strategic Road Network in England'.
- 3.7.2** The location of signage internally will be provided in accordance with the standards laid down within the Traffic Signs Manual and Traffic Signs Regulations and General Directions (TSRGD) current at the time of detailed design.

3.8 Servicing and Deliveries

- 3.8.1** The site layout has been designed to safely accommodate servicing vehicles as per the good practice guidance contained within the Freight Transport Association Ltd document entitled 'Designing for Deliveries, August 1998).
- 3.8.2** Internal roads, servicing and parking areas for all vehicle types have been tested with vehicle tracking software to ensure adequacy. The tracking diagrams can be seen at **Plans 5 to 7**.
- 3.8.3** Heavy Goods Vehicle bays have been designed at 45° angles with 11 metre aisle widths. The bays measure 3.5 metres in width and 19 metres in length in accordance with the guidance stipulated within Designing for Deliveries. In addition, a circa 1.8 metre wide strip has been provided adjacent to the HGV spaces in order to cater for future electric vehicle charging infrastructure. The proposed 19 metre bay lengths and the 1.8m infrastructure strip ensures that the spaces are appropriately future proofed as they can accommodate both an increase in HGV vehicle sizes, following recent changes to Government guidance with reference to the max length of HGV's, and the provision of future fuelling infrastructure.

4 TRANSPORT PLANNING POLICY

4.1 Introduction

4.1.1 This section of the report reviews the relevant national and local transport planning policy and guidance documents in the context of the proposed development.

4.1.2 The national policy presented in this document focuses on the National Planning Policy Framework ('Framework'), which was first published in March 2012 and updated in July 2021 setting out the Government's planning policies for achieving sustainable development.

4.1.3 Consideration has also been given to the Department for Transport (DfT) Circular 01/2022 'Strategic Road Network and the Delivery of Sustainable Development (23 December 2022) and the 'The strategic road network, Planning for the future: A guide to working with Highways England on planning matters (September 2015)'.

4.1.4 Local transport planning policy has been taken from the Wiltshire Core Strategy (January 2015) and the Wiltshire Local Transport Plan (February 2011). This section will briefly outline the pertinent policies relating to the proposed development.

4.2 National Planning Policy

National Planning Policy Framework

4.2.1 The Ministry of Housing, Communities and Local Government (MHCLG) updated its National Planning Policy Framework (NPPF) in December 2024.

4.2.2 The updated version of the NPPF continues to provide guidance on the same key themes for Local Authorities when preparing Development Plans and associated Policies, with a presumption in favour of sustainable development unless any adverse impacts of doing so would significantly and demonstrably outweigh the benefits, when assessed against the policies in the framework taken as a whole.

- 4.2.3 The same principles are also emphasised in order to ensure new developments are brought forward with minimal delay through the planning process.
- 4.2.4 At the heart of NPPF is ‘a presumption in favour of sustainable development’ (Paragraph 11).
- 4.2.5 Regarding sustainable transport, the new NPPF states in paragraph 110 that:
- ‘The planning system should actively manage patterns of growth in support of these objectives. Significant development should be focused on locations which are or can be made sustainable, through limiting the need to travel and offering a genuine choice of transport modes. This can help to reduce congestion and emissions and improve air quality and public health. However, opportunities to maximise sustainable transport solutions will vary between urban and rural areas, and this should be taken into account in both plan-making and decision-making.’*
- 4.2.6 In determining planning proposals, paragraph 115 of the NPPF states:
- ‘In assessing sites that may be allocated for development in plans, or specific applications for development, it should be ensured that:*
- a) sustainable transport modes are prioritised taking account of the vision for the Site, the type of development and its location;*
 - b) safe and suitable access to the Site can be achieved for all users;*
 - c) the design of streets, parking areas, other transport elements and the content of associated standards reflects current national guidance, including the National Design Guide and the National Model Design Code; and*
 - d) any significant impacts from the development on the transport network (in terms of capacity and congestion), or on highway safety, can be cost effectively mitigated to an acceptable degree through a vision-led approach.’*
- 4.2.7 Paragraph 118 of the NPPF states:

'All developments that will generate significant amounts of movement should be required to provide a travel plan, and the application should be supported by a vision-led transport statement or transport assessment so that the likely impacts of the proposal can be assessed and monitored.'

4.2.8 In order to satisfy this policy requirement, the application provides a Transport Assessment (TA) and Travel Plan (TP).

4.2.9 Paragraph 116 of the NPPF states:

'Development should only be prevented or refused on highways grounds if there would be an unacceptable impact on highway safety, or the residual cumulative impacts on the road network, following mitigation, would be severe, taking into account all reasonable future scenarios.'

4.2.10 The proposed development therefore accords with the aims and objectives of the Framework.

National Planning Practice Guidelines

4.2.11 The Government has produced the National Planning Practice Guidance to supplement the NPPF. Within the guidance, there is specific section clarifying the over-arching principles on Travel Plans, Transport Assessments and Transport Statements. There are also sections advising further on each of the three documents discussed.

4.2.12 This resource collates relevant planning practice guidance and provides links between the NPPF and relevant legislation and guidance.

4.2.13 In terms of transportation, the guidance on 'Travel Plans, Transport Assessments and Statements in Decision-Taking' is relevant to the proposals.

4.2.14 It essentially replaces the DFT's 'Guidance on Transport Assessment' (2007) and states in Paragraph 005 that:

‘Transport Assessments and Transport Statements primarily focus on evaluating the potential transport impacts of a development proposal. (They may consider those impacts net of any reductions likely to arise from the implementation of a Travel Plan, though producing a Travel Plan is not always required). The Transport Assessment or Transport Statement may propose mitigation measures where these are necessary to avoid unacceptable or “severe” impacts. Travel Plans can play an effective role in taking forward those mitigation measures which relate to on-going occupation and operation of the development.’

4.2.15 Transport Assessments and Statements can be used to establish whether the residual transport impacts of a proposed development are likely to be “severe”, which may be grounds for refusal, in accordance with the National Planning Policy Framework.’

4.2.16 Paragraph 014 provides guidance on establishing the need and scope of a Transport Assessment or Statements. It states that:

‘The need for, scale, scope and level of detail required of a Transport Assessment or Statement should be established as early in the development management process as possible as this may positively influence the overall nature or the detailed design of the development.’

4.2.17 Paragraph 014 goes on to state that the key issues to consider at the start of preparing a Transport Assessment are as follows:

- The planning context of the development proposal;
- Appropriate study parameters (i.e. area, scope and duration of study);
- Assessment of public transport capacity, walking / cycling capacity and road network capacity;
- Road trip generation and trip distribution methodologies and/or assumptions about the development proposal;
- Measures to promote sustainable travel;
- Safety implications of development; and

- Mitigation measures (where applicable) – including scope and implementation strategy.

4.2.18 Regarding treatment of cumulative impact of development, the NPPG also states in Paragraph 014 that:

'It is important to give appropriate consideration to the cumulative impacts arising from other committed development (i.e. development that is consented or allocated where there is a reasonable degree of certainty will proceed within the next three years).'

At the decision-taking stage this may require the developer to carry out an assessment of the impact of those adopted Local Plan allocations which have the potential to impact on the same sections of transport network as well as other relevant local sites benefitting from yet unimplemented planning approval.'

4.2.19 The analysis is in line with current guidance and conforms to the principles outlined in the NPPG.

DfT Circular 01/2022

4.2.20 The DfT Circular 01/2022 'The Strategic Road Network and the Delivery of Sustainable Development' also provides advice on the assessment of development proposals, stating:

4.2.21 '47.... Development promoters are strongly encouraged to engage with the company to resolve any potential issues and maximise opportunities for walking, wheeling, cycling, public transport and shared travel, as early as possible.

48. Where a transport assessment is required, this should start with a vision of what the development is seeking to achieve and then test a set of scenarios to determine the optimum design and transport infrastructure to realise this vision....'

49. A transport assessment for consideration by the company must also consider existing and forecast levels of traffic on the SRN, alongside any additional trips from committed developments^[footnote 21] that would impact on the same sections

(link or junction) as the proposed development. Assumptions underpinning projected levels of traffic should be clearly stated to avoid the default factoring up of baseline traffic. The scenario(s) to be assessed, which depending on the development and local circumstances may include sensitivity testing, should be agreed with the company; where a scenario with particularly high or low growth is proposed, this should be supported by appropriate evidence. Planned improvements to the SRN or local road network should also be considered in any assessment where there is a high degree of certainty that this will be delivered^[footnote 22].

50. An opening year assessment to include trips generated by the proposed development, forecasted growth and committed development shall be carried out to establish the residual transport impacts of a proposed development...

51. Where a transport assessment indicates that a development would have an unacceptable safety impact or the residual cumulative impacts on the SRN would be severe, the developer must identify when, in relation to the occupation of the development, transport improvements become necessary.'

- 4.2.22** In addition to the consideration of traffic impact from a development, DfT Circular 01/2022 also provides specific policy on roadside facilities for road users on motorways, including parking and signage requirements. This has also been fully considered in the preparation of this TA.

National Highways 'Planning for the Future: A guide to working with National Highways on planning matters.'

- 4.2.23** The National Highways document 'Planning for the Future: A guide to working with National Highways on planning matters' replaces the Highways England document 'The Strategic Road Network – Planning for the Future'.

- 4.2.24** The document '*describes the approach we take to engaging in the planning system and the issues we look at when considering draft planning documents and planning applications.*' It advises that it should be read in conjunction with the DfT Circular 01/2022.

4.2.25 Para 37 advises that *‘The policy test on whether the residual cumulative impacts on the SRN would be ‘severe’ will be assessed on a case-by-case basis. This will take into account the performance and character of the relevant link or junction of the SRN, and the predicted effects of the development on its safe operation.’*

4.2.26 Para 39 confirms that *‘Transport assessments should be carried out in line with prevailing government guidance and industry standards.’*

4.2.27 This approach has been applied to the traffic impact assessments contained within this TA.

4.3 Local Planning Policy

Wiltshire Core Strategy (January 2015)

4.3.1 The Wiltshire Core Strategy (Adopted January 2015) sets out the spatial vision, key objectives and overall principles for development in the County for a period up to 2026. The aim of the Core Strategy is to deliver new jobs and homes, whilst providing high quality design, infrastructure, environmental and community benefits.

4.3.2 The pertinent policies to consider with regards to highways and transportation are Policies CP60, CP61, CP62, CP63, CP64 and CP65.

4.3.3 The Proposed Development and associated infrastructure will provide a development that is accessible by non-car modes and the implementation of a Travel Plan will further maximise the use of alternative modes of travel to the private car for staff at the development. Given the nature of the proposals, the development will also promote sustainable travel for existing road users by meeting the growing demand for electric vehicle charging stations.

4.3.4 The location of the site is ideal for a Motorway Rest Area, with its close proximity to the M4, and it has potential to provide a high quality of design, as well as assisting in meeting the growing demands for heavy goods vehicles (HGV) parking and electric vehicle charging stations.

Wiltshire Local Transport Plan

4.3.5 As with the Core Strategy, climate change and sustainable transport are key drivers within the Wiltshire Local Transport Plan. To this extent, the Plan is based around the following overarching vision:

‘To develop a transport system which helps support economic growth across Wiltshire’s communities, giving choice and opportunity for people to safely access essential services. Transport solutions will be sensitive to the built and natural environment, with a particular emphasis on the need to reduce carbon emissions.’

4.3.6 The development proposals are considered particularly pertinent to this vision due to the opportunities it provides to assist with the decarbonisation of the Transport Network.

4.3.7 The Government requires every Local Plan to be reviewed at least once every five years. Wiltshire's Local Plan, the Wiltshire Core Strategy, was adopted in 2015, and is therefore being reviewed. This review is termed the 'Local Plan review'. Wiltshire Council submitted the Wiltshire Local Plan to the Secretary of State for Housing Communities and Local Government for independent examination on 28 November 2024. The first stage of hearings in relation to the Duty to Cooperate were held on 24 June 2025. Stage 2 will commence on 11 November 2025.

5 ACCESSIBILITY BY NON CAR MODES

5.1 Introduction

5.1.1 In order to accord with the aspirations of the NPPF and Local Planning Policy, any new proposals should extend the choice in transport and secure mobility in a way that supports sustainable development.

5.1.2 New proposals should therefore attempt to influence the mode of travel to the development in terms of gaining a shift in modal split towards non-car modes, thus assisting in meeting the aspirations of current national and local planning policy.

5.1.3 It is not considered that a development of this type will offer significant local customer demand to warrant a dedicated public transport service, or footpaths and cycle lanes at Junction 16 of the M4.

5.1.4 Nevertheless, the connectivity of the site by other modes of travel should be considered to ensure that unnecessary staff related trips are not induced via the strategic road network.

5.1.5 The accessibility of the proposed site has been considered by the following modes of transport:

- accessibility on foot;
- accessibility by cycle;
- accessibility by bus; and
- accessibility by rail.

5.2 Access on Foot

5.2.1 It is important to create a choice of direct, safe and attractive routes between where people live and where they need to travel in their day-to-day life. This philosophy clearly encourages the opportunity to walk whatever the journey purpose and also helps to create more active streets and a more vibrant neighbourhood.

- 5.2.2** The pedestrian infrastructure in the vicinity of the site is currently very limited, however, given the nature of the proposed land use, there will be minimal demand to warrant travel to the site by foot.
- 5.2.3** During consultation discussions, the applicant has agreed to provide a new shared footway / cycleway along the site frontage on the B4005. The proposed footway is shown at **Plan 4** and will be delivered by a Section 278 application.
- 5.2.4** This proposed new footway / cycleway will link the site to the existing controlled pedestrian crossing facilities at Junction 16, thus, facilitating pedestrians crossing the B4005 to reach the A3102. The existing pedestrian crossing facilities can be seen in Figure 5.1 below:



Figure 5.1 – Existing Pedestrian Crossing at Junction 16

- 5.2.5** Once on the A3102 Swindon Road, pedestrians can utilise the existing footway to access the local bus stops and the local public right of way network.

- 5.2.6** For Swindon bound bus services, pedestrians can utilise the existing pedestrian crossing on the A3102. This pedestrian crossing consists of a pedestrian refuge with associated tactile paving. The existing pedestrian refuge can be seen in Figure 5.2 below:



Figure 5.2 – Existing Pedestrian Crossing on the A3102

- 5.2.7** These links and crossing facilities provide access to the local bus stops on the A3102 and the wider footway and Public Right of Way (PRoW) network.
- 5.2.8** The surrounding PRoW network can be seen in Figure 5.3 below.



Figure 5.3 – Existing Public Right of Way Network

5.2.9 As can be seen, a number of PRoWs can be accessed from the A3102. In turn, these footpaths provide links to Royal Wootton Bassett and to Swindon. It should be noted that there are no PRoWs on the site itself.

5.2.10 Appropriate pedestrian crossing facilities will be provided internally within the site to link the car parking areas to the proposed amenity building.

5.3 Access by Cycle

5.3.1 An alternative mode of travel to the site could be achieved by bicycle.

- 5.3.2** Clearly, the new advice contained within the Highway Code, which was updated on 29th January 2022, will improve the safety of vulnerable road users including cyclists, pedestrians, and horse-riders. Most of the new advice relates to where cyclists should position themselves within the lane in various traffic conditions and motorists being required to give cyclists priority in slow moving traffic and locations where there is insufficient room for vehicles to overtake cyclists safely, allowing 1.5-metres for cyclists when overtaking them.
- 5.3.3** The Cycling England document 'Integrating Cycling into Development Proposals' advises that 'For short trips, [cycle links] can give cyclists significant advantages over car users in terms of convenience and journey time... Most cycle journeys for non-work purposes and those to rail stations are between 0.5 and 2 miles, but many cyclists are willing to cycle much further. For work, a distance of 5 miles should be assumed.'
- 5.3.4** This distance equates to a journey of around 40 minutes based on a leisurely cycle speed of 12 kilometres per hour and would encompass Royal Wootton Bassett, Common Platt, Hook, Lydiard Millicent and Swindon.
- 5.3.5** National Cycle Route 45 is located approximately 2 kilometres to the north of the site in Blagove off Franklands Road. This route links to Swindon town centre and many of its surrounding suburbs providing an opportunity to assist with commuting trips to and from the site.
- 5.3.6** The development proposals will provide cycle parking facilities along with lockers and changing facilities for staff.
- 5.3.7** The site can, therefore, be considered as being accessible by cycle.

5.4 Access by Bus

- 5.4.1** An effective public transport system is essential for providing large parts of the population with access to work, education, shopping, leisure and healthcare opportunities.

5.4.2 The nearest bus stops to the site are located along the A3102 Swindon Road, immediately to the west of the development site. This stops consists of a bus stop layby and pole with service information.

5.4.3 A summary of the services available from the nearest bus stops from the development site is provided in Table 5.1 below.

Service No.	Route	Monday - Friday			Saturday			Sun
		Pre 08:00	08:00-17:00	Post 17:00	Pre 08:00	08:00-17:00	Post 17:00	
55	Chippenham - Swindon	9 services	10 minutes	18 services	5 services	20 minutes	10 services	30 minutes
99	Chippenham - Malmesbury - Wootton Bassett -	2 services	60 minutes	3 services	-	60 minutes	2 services	-

Table 5.1 Existing Bus Services Operating in the Vicinity of the Site

5.4.4 As can be seen from Table 5.1, the nearest bus stops to the site provides various services throughout the day to destinations such as Chippenham, Swindon and Royal Wooten Bassett.

5.4.5 The above services operate from around 4:45am to around 23:45pm, making travel by public transport a real alternative to travelling by car for commuting trips.

5.4.6 It is therefore concluded that the site is accessible by bus for locally employed staff.

5.5 Accessibility by Rail

5.5.1 The nearest railway station to the site is Swindon station. This station can be accessed by a 15-minute bus journey on service 55 or by a 26-minute cycle. The station is managed by Great Western Railway and has 4 platforms, offering 13 services per hour to destinations such as London and Swansea.

5.5.2 This provides commuting opportunities to and from the site as part of a multi-model trip.

5.6 Accessibility Summary

5.6.1 The proposals have been considered in terms of accessibility by non-car modes for the proposed development.

5.6.2 The following conclusions can be drawn from this section of the report:

- The applicant is content to explore the provision of a new footway / cycleway link on the B4005 frontage. This footway will provide links to the existing pedestrian crossing facilitates at Junction 16 and the wider footway and PRow network. This will ensure that the site is accessible by foot and by public transport by linking the site to nearby bus stops.
- The site is accessible by cycle for locally employed staff.
- The bus and rail services available in the area will help to encourage employees to travel to and from the site by public transport.

5.6.3 In light of the above, it is considered that the site is accessible and will cater for needs of the development's staff and assist in promoting a choice of travel modes other than the private car.

6 PROMOTING SMARTER CHOICES VIA TRAVEL PLANS

6.1 Introduction

6.1.1 In order to encourage employee travel to the site by non-car modes, a Staff Travel Plan is proposed.

6.2 Travel Plan

6.2.1 A Framework Travel Plan is included at **Appendix 4**. The objective of the Travel Plan is the delivery of the objectives of the Framework, i.e. to encourage staff to travel to work by non-car modes of travel. The Travel Plan outlines physical and management measures that are designed to achieve this objective.

6.2.2 The effectiveness of Travel Plans in assisting the use of non-car modes for journeys to work is intrinsically linked to the accessibility of a given site by means other than the private car.

7 TRAFFIC IMPACT ANALYSIS

7.1 Introduction

7.1.1 Having established that the proposed development site is accessible by modes of travel other than the private car and would be in general accordance with transport policies, the following section considers the traffic impact of the development proposals on the local and strategic highway network.

7.2 Scope of Assessment

7.2.1 The methodology and scope of the Transport Assessment has been subject to initial scoping discussions and post submission consultation with National Highways (NH), Wiltshire Council (WC) and Swindon Borough Council (SBC), the three highway authorities.

7.2.2 As agreed with the three authorities, the assessments will consider the traffic impact of the development proposals on the following junctions on the local highway network:

- Proposed site access / B4005 roundabout junction; and
- Junction 16 of the M4.

7.2.3 Given the proposed land use and levels of baseline traffic, it is assumed reasonable to consider the AM and PM weekday peak hours as being those with the greatest impact on the local highway network.

7.3 Reference Case Traffic Flows

7.3.1 Before considering the potential changes in traffic that would occur on the highway network as a result of the potential development, the existing levels of traffic that occur in the vicinity of the site must first be established.

- 7.3.2** A VISSIM model has been prepared by WSP, on behalf of NH, for Junction 16 of the M4 which will be used as the basis for the assessment of the impact of the proposals. This approach has been agreed with the three highway authorities.
- 7.3.3** The VISSIM model includes M4 Junction 16 – 2023 Reference Case flows, which will form the basis of the assessment. The model accounts for March 2023 WebTRIS data for the four slip roads, and applies pro-rata adjustments to the 2021 base model flows to reflect recent flow changes observed in February 2023.
- 7.3.4** The Local Model Validation Report (LMVR) prepared by WSP and dated April 2023 is provided within **Appendix 5** and has confirmed that the peak hours at the junction are between 7.30am and 8.30am and between 4.30pm and 5.30pm.
- 7.3.5** In addition, as requested by NH, a 14 day automatic traffic count (ATC) survey has been undertaken on the B4005 close to the proposed Site Access which will assist in the assessment of the Site Access junction. The 14 day ATC was undertaken from the 18th November 2022 to Thursday 1st December 2022 and raw data is presented in **Appendix 6**.
- 7.3.6** To determine the mainline M4 flows in the vicinity of the site, the Department for Transport WebTRIS system has been utilised. The WebTRIS system provides links to recent traffic data from MIDAS, TMU and TAME sensors on the Strategic Road Network. For the purposes of the mainline WebTRIS flows, average March 2023 data has been utilised to correspond with the latest traffic flows used to inform the VISSIM model reference case flows.
- 7.3.7** The subsequent 2023 Reference Case Flows are presented in **Figures 1** and **2** for the AM and PM peak periods respectively.

7.4 Assessment Periods

- 7.4.1** For the purpose of this TA, 2027 has been assessed as the baseline 'year of opening' along with a future year of 2033. 2033 is 10 years post application registration which considered a robust future assessment year.

7.4.2 At the request of National Highways, 2038 Sensitivity analysis has also been undertaken as part of the VISSIM modelling, to understand the impact of the proposals in a cumulative assessment with Wiltshire's Local Plan allocations.

7.4.3 The Wiltshire Local Plan has a final year of 2026. As such, the '*ten years after the date of registration*', or a 2033 future year assessment is appropriate. The 2038 Sensitivity analysis is considered a worst case scenario to understand sensitivities on the network. The 2038 scenario includes SBC delivering the full extent of the Wichelstowe development and a bus gate on Redposts Drive which results in a redistribution of Wichelstowe traffic + general traffic growth and no consideration of potential Regulation 18 non-car accessibility interventions. As such, it is considered that the Sensitivity analysis is unlikely to be fully realised on the network and the bus gate delivery is also within SBC's power not to pursue due to the impacts it would have on Junction 16.

7.4.4 In order to factor the 2023 reference case traffic flows to the future assessment years of 2027 and 2033, a National Road Traffic Model growth factor have been used.

7.4.5 The full TEMPRO outputs are provided within **Appendix 7**.

7.4.6 **Figures 3** and **4** show the 2027 Growthed Flows for the weekday AM and weekday PM peak periods respectively, whilst **Figures 5** and **6** show the 2033 Growthed Flows for the weekday and weekday pm periods respectively. The 2038 Sensitivity scenarios are discussed and reported in the accompanying VISSIM Forecasting Report.

7.5 Committed Development

7.5.1 As part of the analysis, it is important to consider any 'committed' developments in the vicinity of the site which will need to be accounted for within the operational assessments.

7.5.2 The following list of committed development sites have been considered but have been found to have a negligible impact on the highway network under assessment.

#	Application reference	Address	Description of development	Status	Traffic Impact
1	19/02146 (Wiltshire)	Hay Lane, Wroughton	Demolition of 328m canopy, infill extensions of a) 39m and b) 553m, erection of building for relocated indoor play centre 598m, siting of Portakabin sales office (35m), change of use of open sales area to outdoor play area, change of use of car park to ancillary landscape materials yard, change of use of retail area to car park and formation of coach parking area, all for use as garden centre, craft centre and family leisure attraction.	Partially developed	No material impact at Junction 16
2	S/OUT/20/055 6	Land at Swindon Road in Wroughton	Erection of 104no. dwellings, traffic roundabout, roads and associated works - Means of Access, Layout and Scale not reserved - (without compliance with condition 29 of permission S/15/1750 regarding substitute drawings).	Decision: Granted Permission Wed 10 Feb 2021	No material impact at Junction 16

Table 7.1 Committed Development Sites Considered

7.5.3 Following a review of the traffic impact of each of the above sites, it is considered that these developments will have a minimal impact on the assessments contained within this report. It can, therefore, be robustly concluded that the application of traffic growth, with no adjustments, will ensure a robust approach to account for any minor impacts from the above sites which are generally considered to be within the limits of typical daily traffic fluctuations.

7.5.4 In addition, the Swindon Southern Town Expansion development proposals, detailed below and the Land East of RWB application site have also been considered. The Southern Town Expansion has approval for up to 4,500 dwellings and there have been a number of subsequent reserved matters applications.

#	Application reference	Address	Description of development	Status	Traffic Impact
3	S/13/1524	Wichelstowe Development Area	Southern Town Expansion including up to 4500 dwellings, employment, commercial, shopping, schools, open space, park and ride, roads, sewers and associated works (Variation of extent of infrastructure, phasing and affordable housing, upon S/TIME/13/1521 by the Local Planning Authority, conditions 1, 62, 66 & 67, 73, 76 - 79, 82, 85, 88 - 90, 93 and 95 - 97).	Decision: Granted Permission Fri 28 Feb 2014 – Partially developed	Yes
4	PL/2023/02129	Land to the South of A3102 and East of Royal Wootton Bassett	Outline planning application with all matters reserved except access for up to 410 dwellings, land for a primary school and pitches, public open space, landscaping and associated infrastructure.	Awaiting decision	Yes

Table 7.2 Committed Development Sites Included

7.5.5 It is understood that currently 1090 dwellings out of the proposed 4500 dwellings have already been delivered on the Wichelstowe site and have been accounted for in the 2023 Reference Case flows. As such, an adjustment factor of -0.25 (1105/4500) has been applied to the committed development flows to account for the built out development and the level of trips which are considered to already be on network in the 2023 Reference Case scenario. It is considered that this is a robust consideration of the committed development position as it is understood that full 4500 dwellings may never be realised on the site due to changes which have occurred during subsequent reserved matters applications.

7.5.6 The corresponding committed development traffic flows are shown in **Figure 7** to **Figure 10**.

7.5.7 The committed development trips contained within Figures 7 and 8 have been added to the 2027 and 2033 Growthed flows to produce the 2027 and 2033 Base flows.

7.6 Base Flows

7.6.1 **Figures 11** and **12** show the 2027 Base flows for the weekday AM and PM peak periods, whilst **Figures 13** and **14** show the 2033 Base Flows for the AM and PM peak flows respectively.

7.7 Trip Distribution

7.7.1 The vast majority of the traffic generated by the proposed MRA will come directly from the M4 via Junction 16. The proposed distribution for motorway (M4) trips has been calculated based on a proportional split of the mainline traffic flows.

7.7.2 The resultant motorway trip distribution is shown in **Figure 15** and **16** for the AM and PM peak periods respectively.

7.7.3 During initial scoping discussions, a 5% allowance for traffic travelling along the B4005 was recommended. Subsequently officers at Wiltshire considered this to be slightly high, however, they also suggested an allowance should also be made for local traffic travelling to and from Royal Wootton Bassett on the A3012. As such, a 7% allowance has been made for Local Road Trips and this has been distributed to both the B4005 and the A3012 based on the current patterns of traffic on the local road network.

7.7.4 Therefore, the proposed distribution for local road trips, based on the current pattern of traffic on the local road network, is shown in **Figures 17** and **18** for the AM and PM peak periods respectively.

7.8 Proposed Development

7.8.1 As previously stated, the development proposals will provide motorway rest area with associated amenities.

7.8.2 MRA's are typically not considered to be a trip generator but primarily an attractor of a proportion of existing passing traffic.

- 7.8.3** During pre-application discussions, it was agreed that the trip generation is established by reference to traffic flows from two Motorway Service Areas (MSA) located either side of the site on the M4.
- 7.8.4** These are as follows:
- Membury – located east of the site between Junctions 14 and 15 of the M4.
 - Leigh Delamere – located west of the site between Junctions 17 and 18 of the M4.
- 7.8.5** Both of these sites are ‘online’ MSAs and, as such, would exhibit much higher turn-in rates than off-line facilities, such as, the proposed MRA.
- 7.8.6** In order to establish the traffic generation and trip rates for Membury and Leigh Delamere, arrival and departure data at the services has been utilised. This approach has been agreed with the three highway authorities as part of pre-application discussions.
- 7.8.7** The trip rates for cars and HGV/coaches has been established from Webtris to calculate a trip rate per car and HGV/coach parking space. These trip rates have then been averaged and applied to the MRA proposals. This will be robust on two counts, firstly these are online MSAs and generate higher levels of traffic and secondly, the Webtris data will include traffic that enters the MSAs and then leaves without staying or parking which will increase the trip rates.
- 7.8.8** Webtris data was analysed for Membury and Leigh Delamere Services and August 2019 was found to be the month with the highest average annual daily traffic in the most recently available pre-Covid 19 period.
- 7.8.9** The arrival and departure data for a typical weekday was then established from the August data for both Light vehicles (Cars and LGV’s) and HGV’s:
- 7.8.10** Table 7.3 below presents the observed vehicle movements for the AM and PM peak hours associated with Membury services.

Period	Existing Trips for Membury Services					
	Arrivals			Departures		
	Cars	HGV's	Total PCU's	Cars	HGV's	Total
AM Peak	447	146	738	447	146	738
PM Peak	593	194	981	593	194	981

Table 7.3 Existing Vehicle Movements – Membury Services

7.8.11 Membury services currently offers 583 parking spaces for car users and 132 parking spaces for HGVs. Table 7.4 summarises the associated Trip Rates.

Period	Trips Rate per Parking Space – Membury Services			
	Arrivals		Departures	
	Cars	HGV's	Cars	HGV's
AM Peak	0.766	1.104	0.766	1.104
PM Peak	1.018	1.467	1.018	1.467

Table 7.4 Observed Trip Rates – Membury Services

7.8.12 Table 7.4 below presents the observed vehicle movements for the AM and PM peak hours associated with Leigh Delamere services.

Period	Existing Trips for Leigh Delamere Services					
	Arrivals			Departures		
	Cars	HGV's	Total PCU's	Cars	HGV's	Total
AM Peak	478	105	688	478	105	688
PM Peak	623	137	897	623	137	897

Table 7.5 Existing Vehicle Movements – Leigh Delamere Services

7.8.13 Leigh Delamere services currently offers 620 parking spaces for car users and 158 parking spaces for HGVs. Table 7.6 summarises the associated Trip Rates.

Period	Trips Rate per Parking Space – Leigh Delamere Services			
	Arrivals		Departures	
	Cars	HGV's	Cars	HGV's
AM Peak	0.771	0.664	0.771	0.664
PM Peak	1.005	0.866	1.005	0.866

Table 7.6 Observed Trip Rates – Leigh Delamere Services

7.8.14 An average trip rate was then established from the Membury and Leigh Delamere trip rates. Table 7.7 below presents the proposed average trip rates for the AM and PM peak hours associated with Membury and Leigh Delamere services.

Period	Trips Rate per Parking Space			
	Arrivals		Departures	
	Cars	HGV's	Cars	HGV's
AM Peak	0.769	0.844	0.769	0.844
PM Peak	1.011	1.166	1.011	1.166

Table 7.7 Proposed Trip Rates per Parking Space

7.8.15 As previously stated, the proposed services will provide 241 parking spaces for car users, 62 parking spaces for HGVs, 6 spaces for coaches and 7 for caravans. For the purposes of the establishing a trip generation, coaches have been counted as HGV spaces and caravans as light vehicles as this corresponds with WebTris vehicle classification. Table 7.8 summarises the associated Trip Rates based on a total of 248 light vehicle spaces (including caravans) and 68 HGV spaces (including coaches).

7.8.16 A summary of these trip rates and the likely level of trips that would occur as a result of the proposed development is included in Table 7.8, below.

Period	Proposed Services Trips					
	Arrivals			Departures		
	Cars	HGV's	Total	Cars	HGV's	Total
AM Peak	191	60	251	191	60	251
PM Peak	251	79	330	251	79	330

Table 7.8 Proposed Development Trip Rates and Trips

7.8.17 As can be seen from the above table, the proposed development is predicted to result in 502 two-way total vehicle trips during the weekday AM peak and 660 two-way trips total vehicle trips during the weekday PM peak period.

7.9 Trip Types

7.9.1 The proposed service area will be a facility predominantly for vehicles travelling along the M4, with drivers diverting into the services before resuming their journey.

7.9.2 However, whilst the levels of local trips are likely to be small, these have been considered as part of the analysis.

7.9.3 In this regard, reference has been made to recent questionnaire surveys undertaken at the Ferrybridge MSA (Moto), which included the following questions to establish MSA customer’s origin and destination:

- ‘Where have you just come from? (Town or City of last stop)’ and;
- ‘Where are you going to? (Town or City of next stop)’.

7.9.4 For the purpose of the analysis, it is assumed that an origin or destination within 3 miles of the MSA would represent a local trip, i.e. at the start of a journey or at the end of a journey. In the case of Ferrybridge, this includes the built-up areas of Knottingley, Pontefract and parts of Castleford.

7.9.5 Table 7.9 below summarises the questionnaire results in this regard.

Ferrybridge Total Interviewees	No. of Interviewees with Origin within 3 miles	No. of Interviewees with Destination within 3 miles	% of Interviewees with 3 miles
567	12	10	3.8%

Table 7.9 Ferrybridge Survey Results

7.9.6 As can be seen from the above, 3.8% of the interviewees can be considered to be carrying out local trips. As such, and in light of the above questionnaire results, it is considered that a figure of 7% represents a robust figure for local trips to the MRA.

7.9.7 For the avoidance of doubt, the local trips would form part of the total number of trips to the MRA, not over and above; therefore, Table 7.10 and 7.11 provide the proportion of the M4 / local road trips for the AM and PM peak hours respectively.

Period	Proposed Services Trips – AM Peak					
	Arrivals			Departures		
	Cars	HGV's	Total	Cars	HGV's	Total
M4 Trips (93%)	177	56	233	177	56	233
Local Road Trips (7%)	13	4	18	13	4	18
Total	191	60	251	191	60	251

Table 7.10 Proposed Development Vehicle Trips – AM Peak

Period	Proposed Services Trips – PM Peak					
	Arrivals			Departures		
	Cars	HGV's	Total	Cars	HGV's	Total
M4 Trips (93%)	233	74	307	233	74	307
Local Road Trips (7%)	18	6	23	18	6	23
Total	251	79	330	251	79	330

Table 7.11 Proposed Development Vehicle Trips – PM Peak

7.9.8 The methodology used to calculate the increase in trips provides a robust estimate of the likely peak hour trips that would occur on the highway network as a result of the proposed development.

7.9.9 Based on the distributions shown on Figures 13 to 16, Figures 17 to 24 show the proposed development trips for the AM and PM Peak periods respectively.

- 7.9.10** The proposed development trips shown in Figures 17 to 24 are split as follows:
- **Figures 19 and 20** – Motorway light vehicle trips calculated at 93% of the total trips.
 - **Figures 21 and 22** – Local road trips calculated at 7% of the total trips.
 - **Figures 23 and 24** – Total vehicle trips calculated at 100%. The number of HGV's have been converted to PCU's, the unit of assessment (HGV PCU Value of 2.3), for use in traffic impact assessments.
- 7.9.11** The total proposed development trips shown in Figures 21 and 22 have been added to the 2027 Baseline Flows to derive 2027 'With Development' Flows shown in **Figures 25 and 26**.
- 7.9.12** Similarly, **Figures 27 and 28** show the 2033 'With Development' Flows for the AM and PM Peak periods respectively.
- 7.9.13** Capacity assessments of Junction 16 and the B4005/Proposed Site Access roundabout have been undertaken using the derived 2027 and 2033 traffic flows.

7.10 Capacity Assessments

B4005 / Proposed Site Access

- 7.10.1** In order to carry out capacity assessments of the B4005/Proposed Site Access roundabout, reference has been made to the ARCADY module of the industry standard Junctions 11 software.
- 7.10.2** When interpreting ARCADY results, a Ratio of Flow to Capacity (RFC) of 0.85 is the perceived theoretical capacity of the junction, although a value of 1.00 represents the point of saturation where no actual available capacity remains. Maximum Queue Lengths (Max Q, in vehicle numbers) are also presented for the 2033 'With Development' scenarios.

7.10.3 Table 7.12, below, summarises the results of the 2033 'With Development' scenario, based on the proposed roundabout layout. The ARCADY output is provided in full at **Appendix 8**.

Arm	2033 With Development Flows			
	Weekday AM		Weekday PM	
	RFC	Max Q	RFC	Max Q
B4005 (W)	0.90	9	0.78	4
Proposed Site Access	0.40	1	0.44	1
Farm Access	0.00	0	0.00	0
B4005 (E)	0.58	2	0.90	9

Table 7.12 Summary of ARCADY Results for A6055/Proposed Site Access Roundabout

7.10.4 As can be seen in the above table, even with the robust assumptions (including SBCs bus gate proposals, as set out earlier in this Chapter, the proposed site access junction is forecast to operate within its capacity in the AM and PM 'With Development' scenarios and can therefore adequately accommodate the traffic forecast to be generated by the proposed development and potential future increases in traffic at the junction.

M4 Junction 16

7.10.5 In order to consider the operation and impact upon Junction 16 of the M4, a VISSIM microsimulation model has been developed. The VISSIM model has been prepared by WSP, on behalf of NH, for Junction 16 of the M4. This model will be used as the basis for the assessment of the impact of the proposals.

- 7.10.6** The VISSIM model was developed by WSP for the year of 2021 and revised in 2023. Details relating to the refinement of the model can be found in the Local Model Validation Report (LMVR) contained in Appendix 4.
- 7.10.7** Subsequently, the validated model has been used to test the impact of prospective development proposals in the 2027 opening year assessment and 2038 sensitivity assessment scenarios presented in this report. The traffic flows, growth factors, trip generation and distribution used in the analysis has been agreed with WCC and NH.
- 7.10.8** Micro-simulation is especially powerful in congested urban networks with junctions located in close proximity as it reflects the impact of queues blocking back through several junctions of various types. Traditional individual junction modelling approaches (e.g. LINSIG, Arcady, Transyt) struggle to replicate these effects over a wide network area.
- 7.10.9** The Junction 16 VISSIM results and the corresponding forecasting report is provided within **Appendix 9**.
- 7.10.10** The results revealed that the forecast impact of the development proposals on average delay per vehicle at Junction 16 of the M4 is negligible at around 5-6 seconds in the AM peak and decreases by 8-9 seconds in the PM peak.
- 7.10.11** The forecast impact of the development proposals on journey times is also considered minor, with minor journey time increases observed on the A3102 travelling southbound through the junction in the AM peak and on the B4005 approach during the PM peak.
- 7.10.12** The overall summary of VISSIM modelling concluded that the development is forecast to have a negligible impact on the highway network.

7.11 Slip Road Assessments

- 7.11.1** In order to inform NH of the likely effect on the operation of the M4 Junction 16, assessments have been prepared for the merge and diverge operation compared to the design standard for motorways set in TD22/06 of the Design Manual for Roads and Bridges (DMRB).
- 7.11.2** The operation of the slip roads has also been assessed in the VISSIM model.
- 7.11.3** The merging/diverging and mainline traffic flows have been plotted onto the figures using a CAD based layout for accuracy. These are provided at **Appendix 10**.
- 7.11.4** The analysis does not identify any material locations in either the weekday AM, weekday PM peak periods when the addition of traffic would detrimentally affect the level of service which the M4 slip roads would otherwise provide.
- 7.11.5** Accordingly, it should properly be concluded that there is no material impact from the proposed development on the Junction 16 slip roads.

7.12 Traffic Impact Summary

- 7.12.1** In summary, the capacity assessment undertaken as part of this traffic impact analysis have demonstrated the following:
- The proposed site access junction off the B4005 has been designed to accord with highway design standards and has been subject to a formal Stage 1 /2 Road Safety Audit.
 - The proposed site access is forecast to operate within its capacity in the future year assessments and will have sufficient capacity to accommodate the proposed development traffic.
 - It is considered that Junction 16 VISSIM model has been robustly validated against queue survey data and against journey time data.
 - The forecast impact of the development proposals on average delay per vehicle at Junction 16 of the M4 is negligible.

- The forecast impact of the development proposals on journey times is considered minor, with minor journey time increases observed on the A3102 travelling southbound through the junction in the AM peak and on the B4005 approach during the PM peak.
- There are no forecast issues with the M4 slip roads and no slip road queues exceed the available slip road lengths.

7.12.2 It is therefore concluded that the development proposals will result in a minimal impact on the local highway network.

8 ACCIDENT ANALYSIS

8.1.1 Accident statistics confirm that numerous accidents have occurred along the motorway mainline sections of the M4 in the vicinity of the development site. The proposed MRA is not predicted to generate any additional traffic on the motorway network, rather its purpose is to provide safety and welfare opportunities for those already travelling on the motorway network. As such, the provision of the proposed MRA will assist in reducing accidents on the M4 mainline.

8.1.2 It is, however, acknowledged that the proposals will increase turning movements at Junction 16 of the M4. As such, Stats19 accident data has been obtained from NH for the most recent 5 year data period (2017 – 2021). The accident data covers Junction 16 of the M4, along with the M4 mainline and its associated slip roads.

8.1.3 A summary of the accident statistics at the area under consideration is provided below. The full accident data is contained within **Appendix 11**.

B4005 in the vicinity of the Proposed Site Access

8.1.4 The data supplied by National Highways shows that no accidents have occurred along the B4005 within the 5-year study period.

M4 Junction 16

8.1.5 The data provided confirms that eleven accidents have occurred at the M4 Junction 16 roundabout within the 5 year study period. Ten of these accidents were classed as slight in severity and one was classified serious. The causality assessment of these accidents is detailed below in Table 8.1.

Date	Severity	Light Conditions	Weather	Road Conditions	Manoeuvre
30/08/2019	Slight	Daylight	Unknown	Dry	Both vehicles moved off at the lights, V1 (Van) collided nearside of V2 and then drove off.
25/01/2020	Slight	Darkness, Streetlights lit	Fine, without high winds	Dry	Vehicle slowed down for traffic lights, vehicle behind collided into the rear.

26/04/2019	Serious	Daylight	Raining, With high winds	Wet or Damp	Vehicle moved off at the lights in the wrong lane, resulting in a collision with another vehicle.
22/09/2021	Slight	Daylight	Fine, without high winds	Dry	Vehicle slowed down for traffic lights, vehicle behind failed to notice and collided into the rear.
27/03/2020	Slight	Daylight	Fine, without high winds	Dry	Vehicle runs a red light and collides on the offside of another vehicle.
15/09/2021	Slight	Daylight	Fine, without high winds	Dry	Vehicle disobeyed red traffic light causing another vehicle to collide into the front nearside.
15/09/2021	Slight	Darkness, Streetlights lit	Fine, without high winds	Dry	Vehicle has entered roundabout on green light when another vehicle has collided front causing the vehicle to spin and impact crash barrier.
05/05/2017	Slight	Darkness, Streetlights lit	Fine, without high winds	Dry	Vehicle (V1) cut across front of another vehicle to leave roundabout, hitting the vehicle (V2). V2 was then pushed into another vehicle, before leaving road across island and back into C/Way, hitting another vehicle.
10/12/2018	Slight	Darkness, Streetlights lit	Fine, without high winds	Dry	Motorcyclist looked at the wrong traffic light and thought they had the green light and moved off, before colliding into another vehicle.
14/02/2018	Slight	Darkness, Streetlights Unlit	Raining, Without high winds	Wet or Damp	Vehicle crossed junction where traffic lights and streetlights were not functioning before colliding with another vehicle mid junction.
14/06/2020	Slight	Daylight	Fine, without high winds	Dry	Vehicle goes through traffic lights to beat the green light and collides into the rear of a pedal cycle.

Table 8.1 Accident Summary at the M4 Junction 16 Roundabout

8.1.6 Considering the volume of traffic at Junction 16 and the severity of the accidents that have occurred, it is considered that Junction 16 does not have an unduly poor safety record. A review of the causal factors reveal that the majority of the accidents can be attributed to driver error.

- 8.1.7** It should also be noted that the signal arrangement to the south of Junction 16 is relatively new, with construction completed on the highway works in circa 2019. As such, there would be an expected bedding down period where accidents are likely to increase due to drivers not being familiar with the new junction arrangement. This could account for some of accidents which have occurred at the junction post 2019.
- 8.1.8** Overall, the accidents statistics do not point to any particular highway safety issues and there is no reason why this would change as a result of the Proposed Development.

9 CONCLUSIONS

9.1.1 Eddisons have been instructed by Moto Hospitality Ltd to advise on the traffic and transport issues relating to an outline planning application for a new motorway rest area on land adjacent to Junction 16 of the M4 in Swindon, Wiltshire.

9.1.2 Moto Hospitality Ltd is bringing forward plans to extend the electric vehicle charging network and address the critical local need for new HGV parking, through a new market-leading, low-carbon rest area in this strategic location at Junction 16 of the M4.

9.1.3 The proposals will provide a motorway rest area comprising a new amenity building with parking for up to 242 light vehicles, 62 HGV's, 6 coaches and 7 caravans in accordance with Circular 01/2022. 50 EV charging spaces will be provided from day 1, with the remaining spaces EV-ready. A private petrol filling station and HGV petrol filling station facilities are also proposed to cater for traditional fuelling. All HGV spaces have been designed to accommodate electric charging infrastructure, should electric HGVs become more common in the future.


9.1.4 A number of conclusions can be drawn from the report, namely:

- The proposed development will be accessed by safe and efficient vehicular access arrangements;
- The report has demonstrated that the proposed development would be sufficiently accessible for staff to travel to the site by non-car travel modes of travel, such as, walking, cycling and public transport;
- The development will be supported by a Staff Travel Plan;
- The traffic impact of the proposals is not considered severe and can be accommodated on the local highway network and at Junction 16 of the M4.

- The analysis does not identify any material locations where the addition of traffic related to the development would detrimentally affect the level of service that the M4 would otherwise provide.

9.1.5 It can therefore be concluded that the proposals are acceptable in highway terms.

PLANS

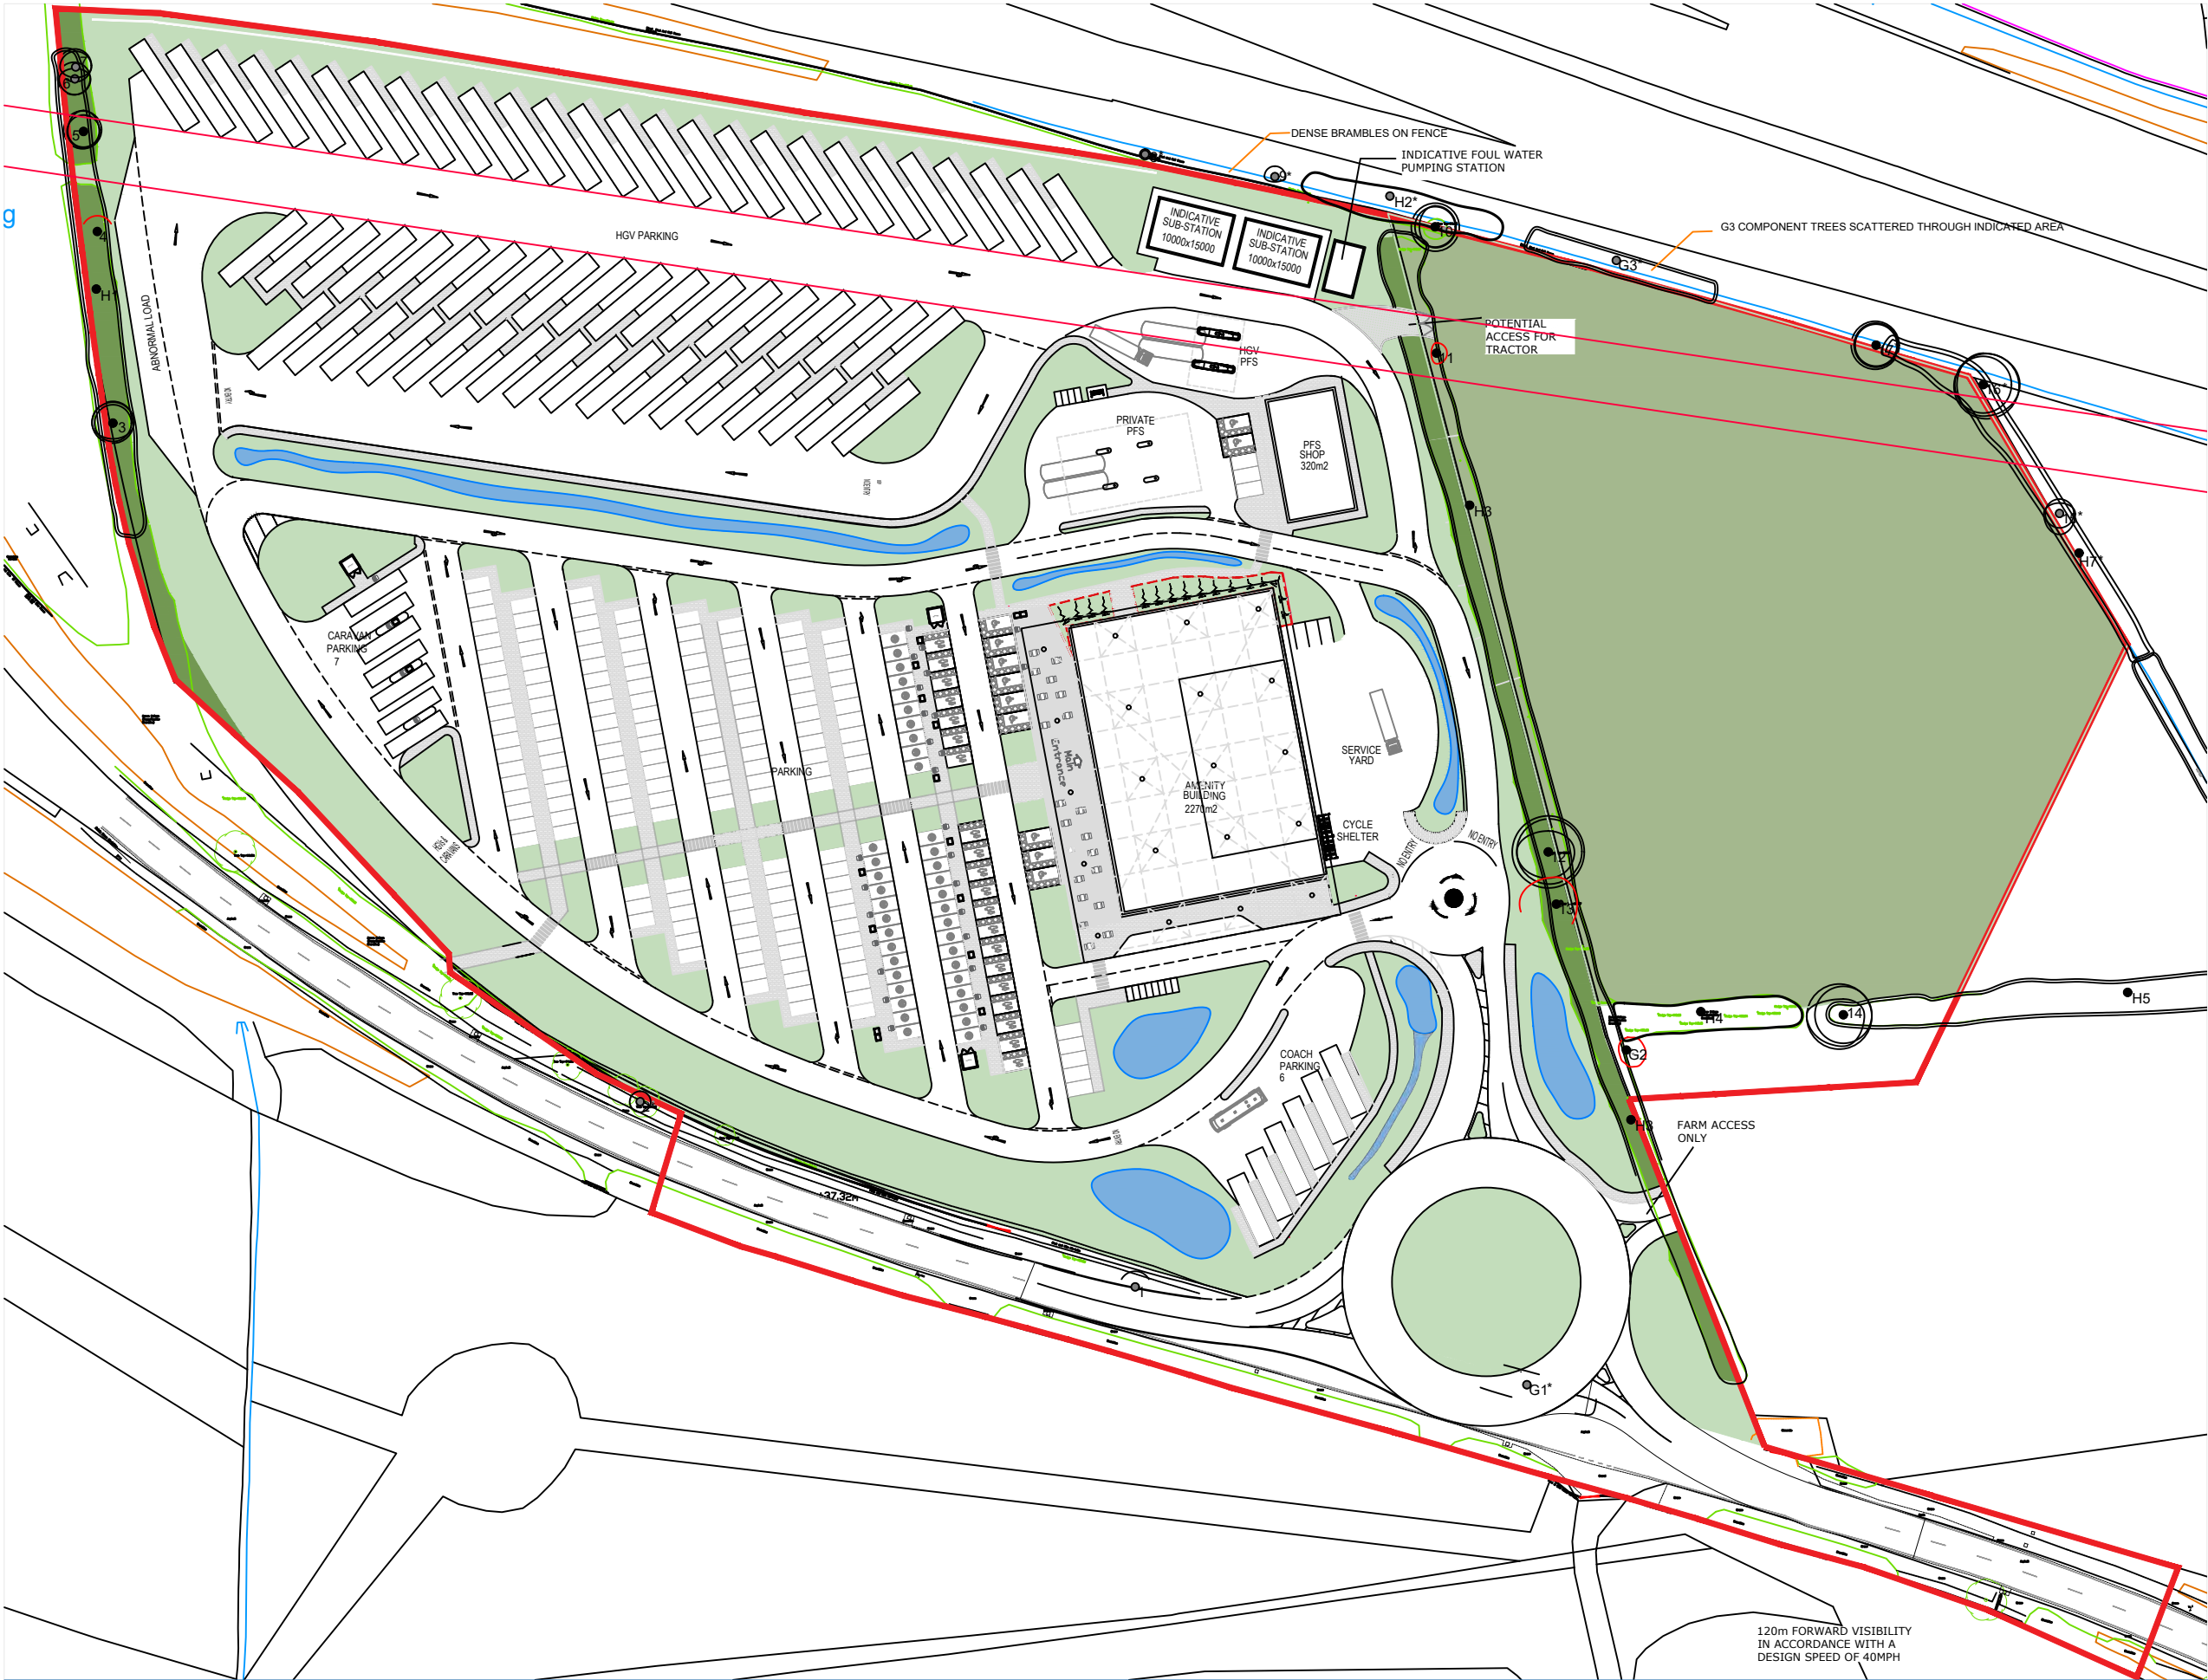

Revision	Date	Revision note
H	30.05.2024	Renamed from previous issue (M49_101 rev G)
I	30.05.2024	Revised following consultation comments

Notes

Project :
 Swindon MRA
 Title :
 Proposed Layout Plan (Illustrative)
 Drawing number :
 915-201
 Issue :
 I
 Client :
 Moto Hospitality Ltd

Scale :
 1:1250 @ A3
 Date :
 30.05.24
 CAD Ref :
 PL210
 Drawn by :
 CG




Z:\projects\3728 MOTO Swindon\CAD\Croft Drawings\3728-Mastercopy.dwg



NORTH SOUTH AERIAL VIEW



ADOPTED HIGHWAY PLAN

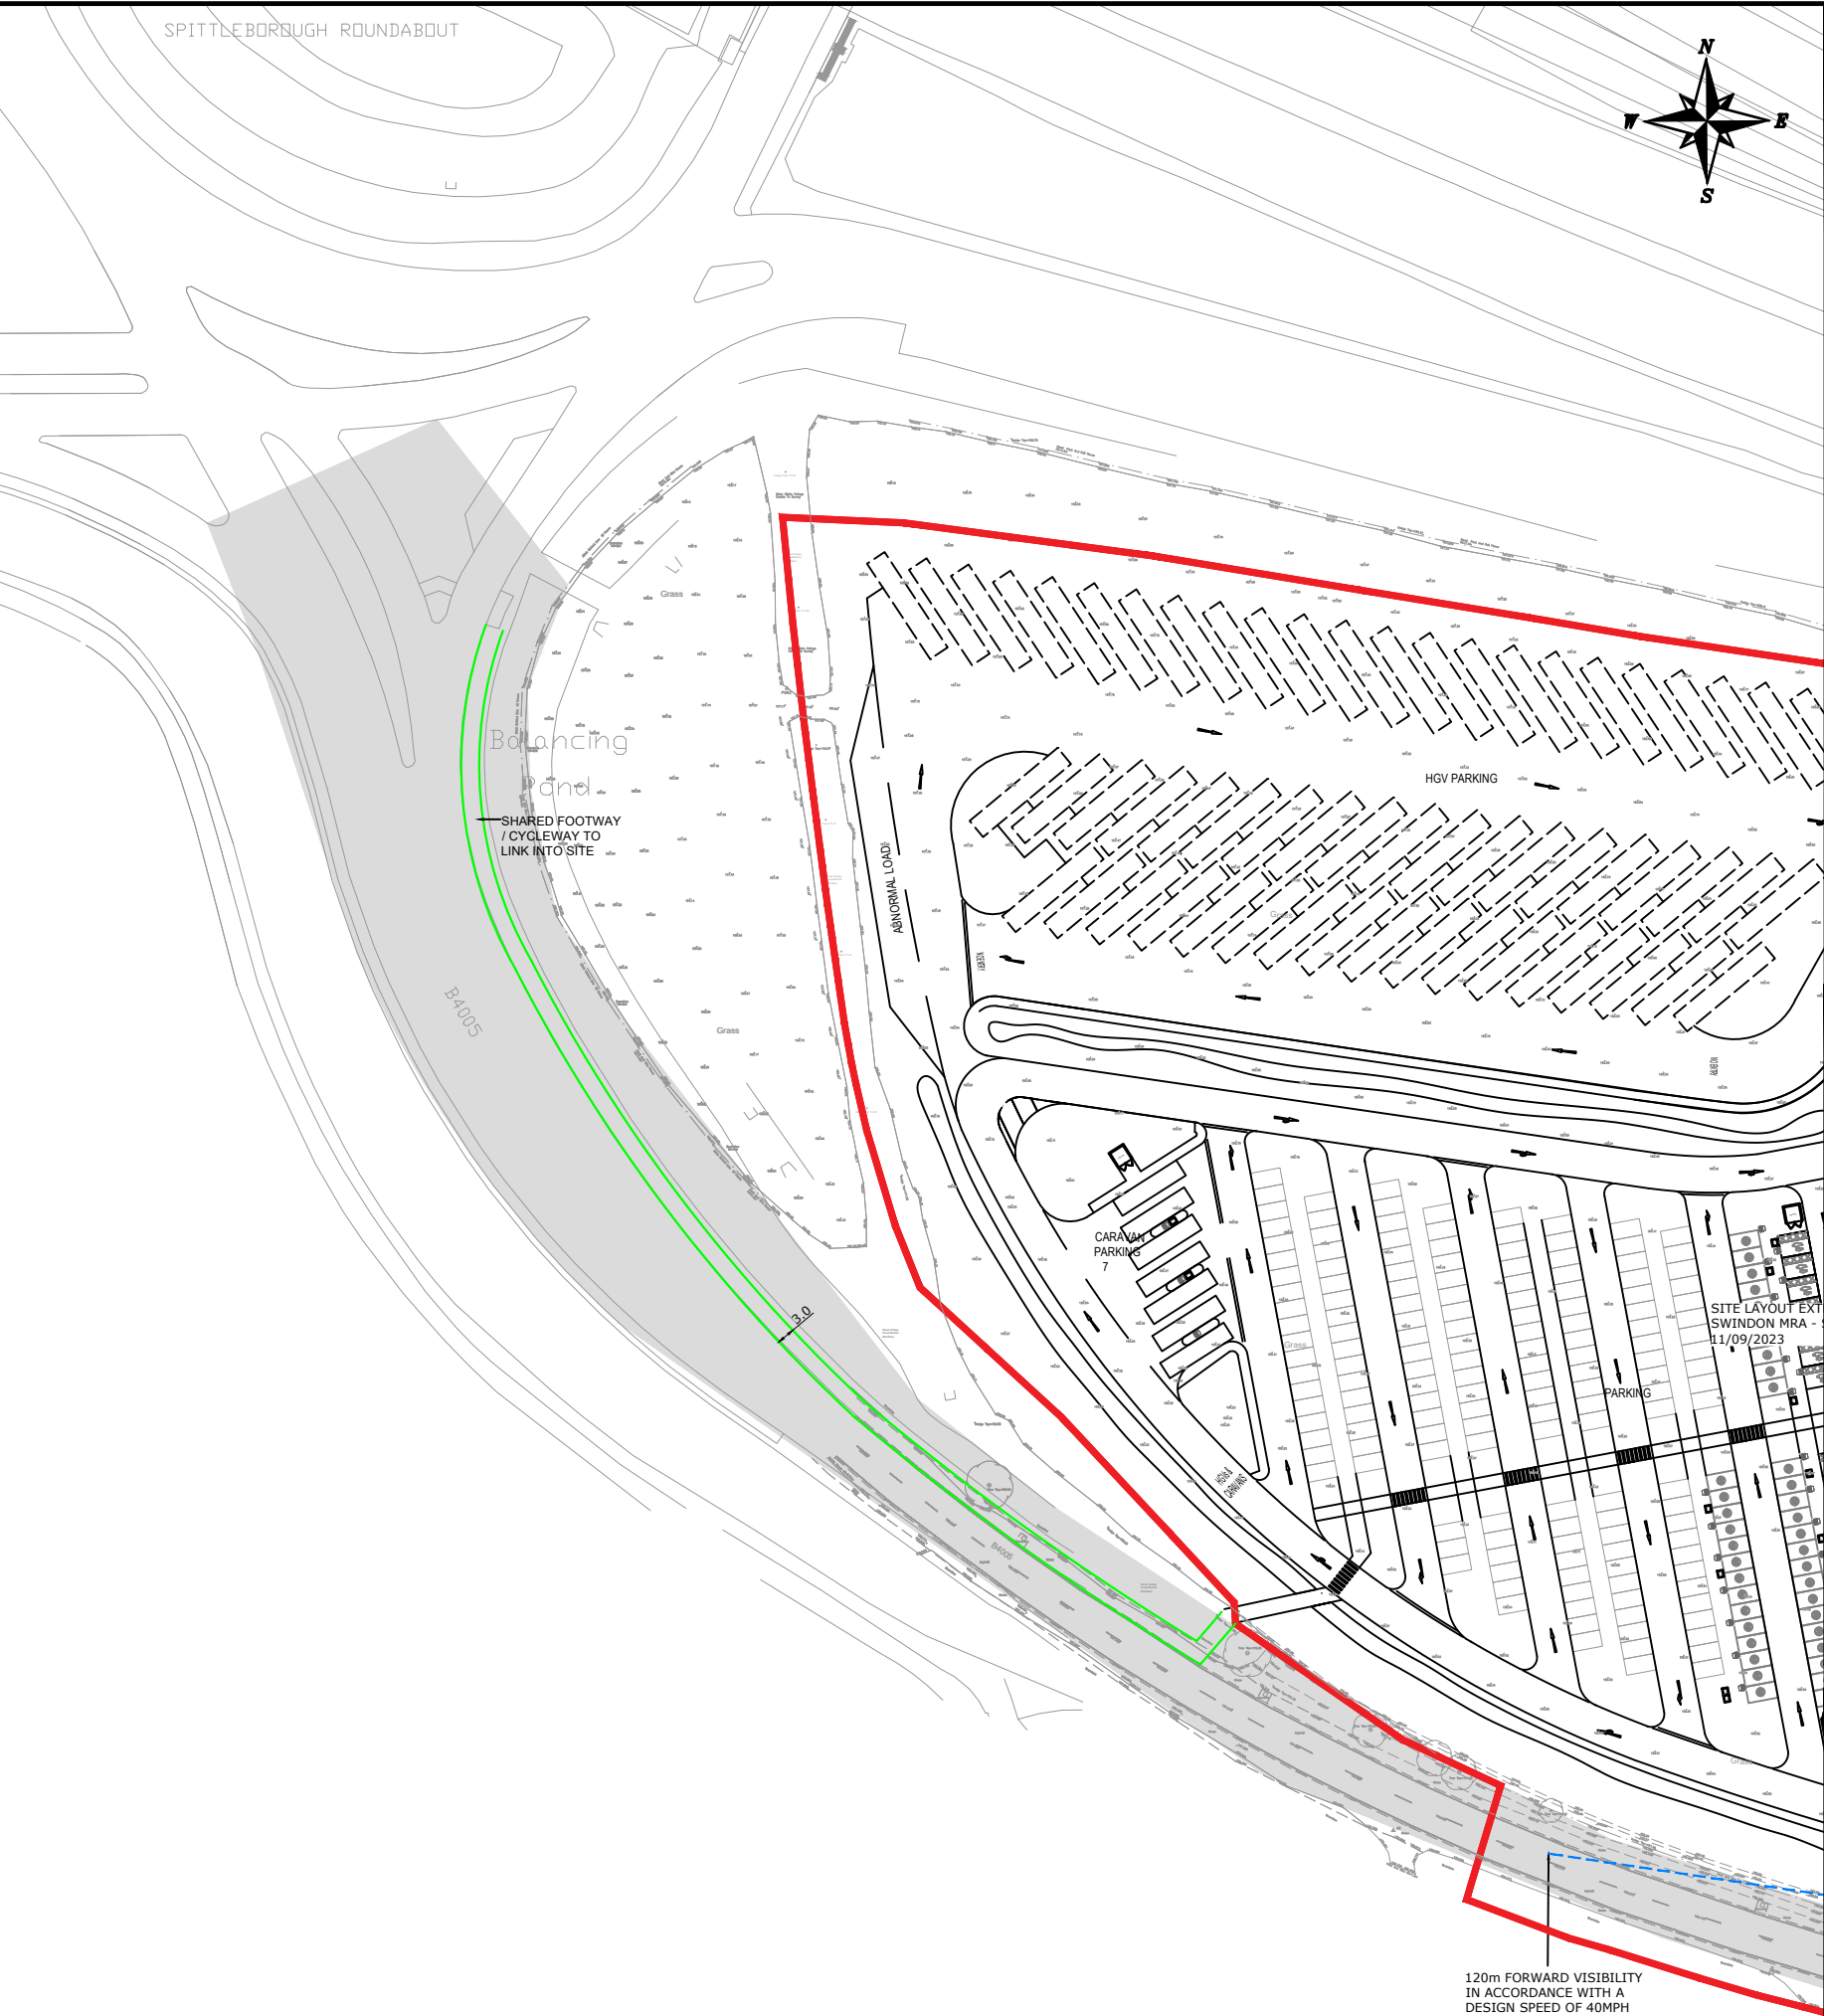


NOTES

THIS IS NOT A CONSTRUCTION DRAWING AND IS FOR INDICATIVE PURPOSES ONLY.
THE DRAWING WILL BE SUBJECT TO CHANGE FOLLOWING LOCAL AUTHORITY REVIEW AND CONFIRMATION OF PUBLIC HIGHWAY AND THIRD PARTY LAND BOUNDARIES.

- INDICATIVE SITE BOUNDARY
- DENOTES NEW KERBS
- EXISTING ADOPTED HIGHWAY

LOCAL AUTHORITY: WILTSHIRE COUNCIL
TOTAL AREA OF SITE: 5.28Ha

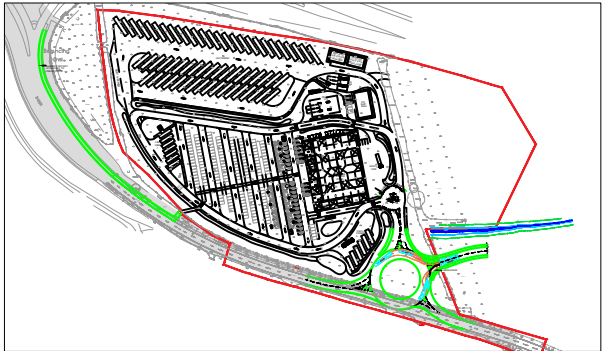

SITE LAYOUT NTS

C	LOCAL AUTHORITY UPDATED	HL	MTC	SEP 23
REV	DETAILS	DRAWN	CHECKED	DATE

CLIENT:
MOTO

PROJECT:
MOTO SWINDON

DRAWING TITLE:
PROPOSED FOOTWAY LINK


SCALES:
1:1250 @ A3

DRAWN:	LB	CHECKED:	MC	DATE:	JUN 23
--------	----	----------	----	-------	--------


Croft Transport Planning & Design
340 Deansgate
Manchester
M3 4LY
Email: info@crofts.co.uk
Tel: 0161 837 7380
Web: www.eddisons.com/services/transport-planning

DRAWING NUMBER:	3728-F06	REVISION:	C
-----------------	----------	-----------	---

Z:\projects\3728 MOTO Swindon\CAD\Croft Drawings\3728-SP06.dwg

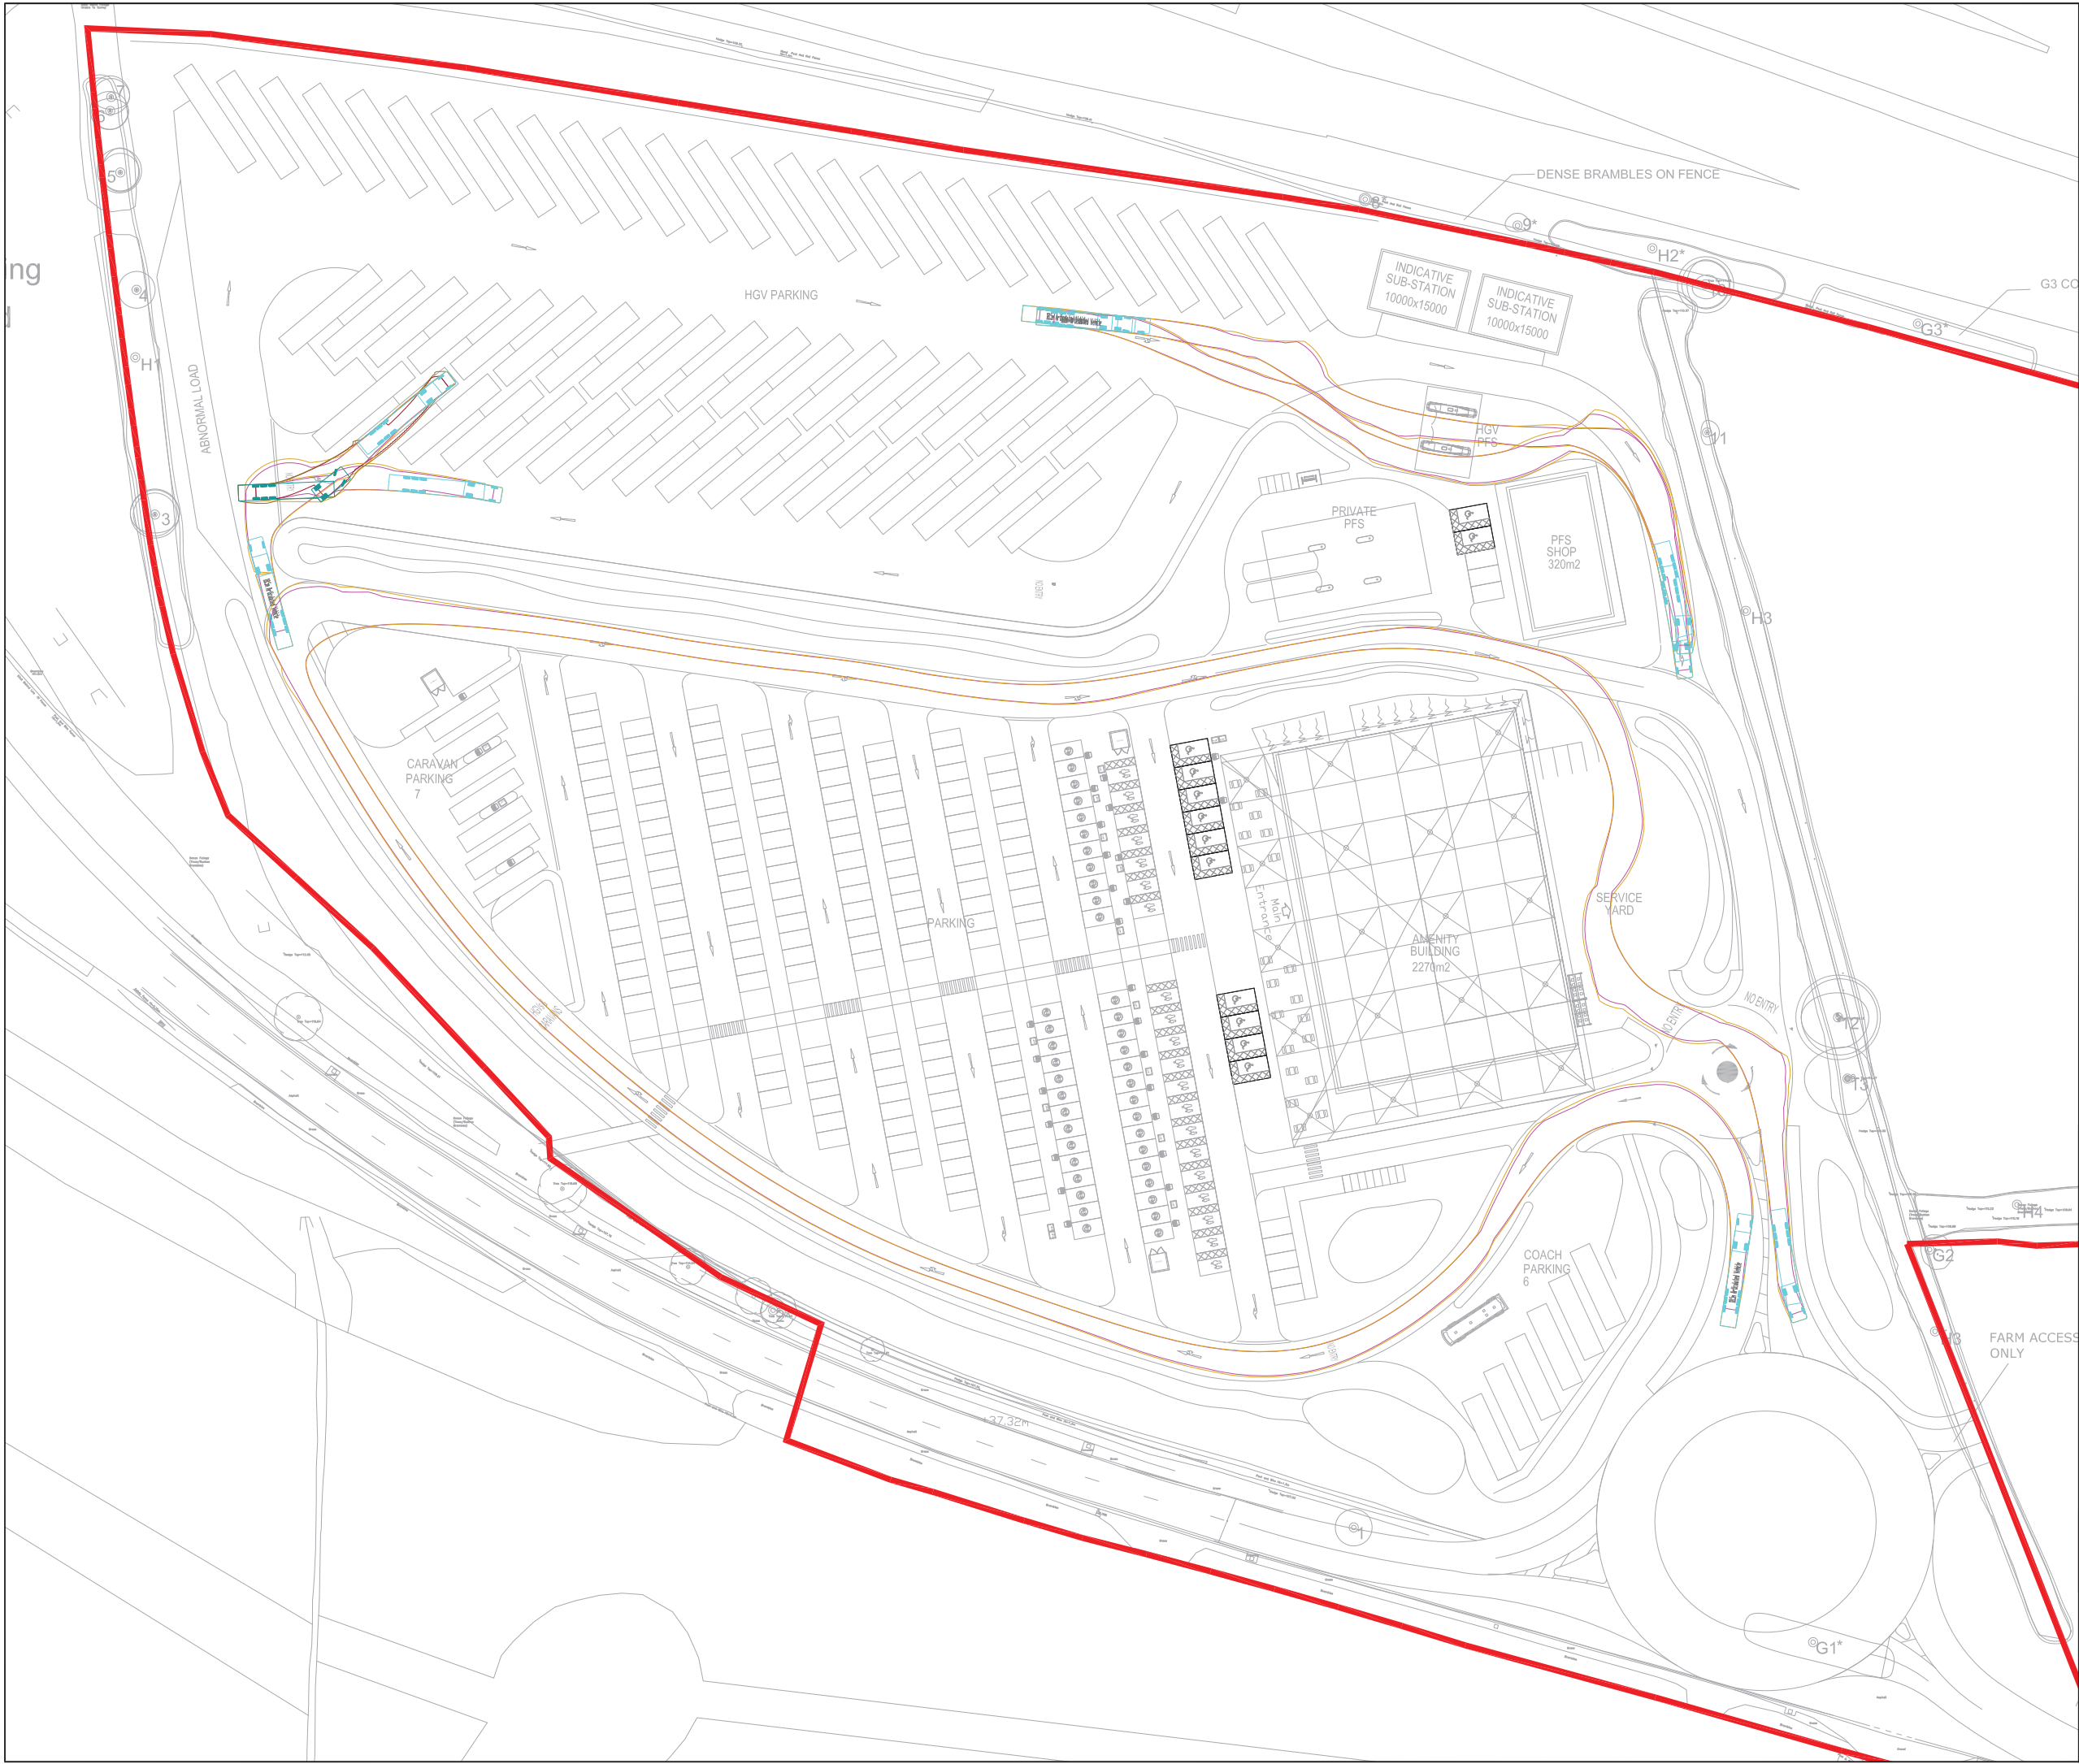

NOTES



18.5m Articulated Vehicle	
Overall Length	18.480m
Overall Width	2.550m
Overall Body Height	3.870m
Min Body Ground Clearance	0.515m
Max Track Width	2.470m
Lock to lock time	3.00s
Kerb to Kerb Turning Radius	6.600m



REV	DETAILS	DRAWN	CHECKED	DATE
-----	---------	-------	---------	------

CLIENT:

MOTO

PROJECT:

MOTO, SWINDON

DRAWING TITLE:

SWEPT PATH ANALYSIS

SCALES:

1:500 @ A1


DRAWN:	G M	CHECKED:	M T C	DATE:	AUG 22
--------	-----	----------	-------	-------	--------

Croft Transport Planning & Design
340 Deansgate
Manchester
M3 4LY
Email: info@crofts.co.uk
Tel: 0161 837 7360
Web: www.eddisons.com/services/transport-planning

DRAWING NUMBER:	3728-SP06	REVISION:	.
-----------------	-----------	-----------	---


Eddisons Incorporating
Croft

Z:\projects\3728 MOTO Swindon\CAD\Croft Drawings\3728-SP08.dwg

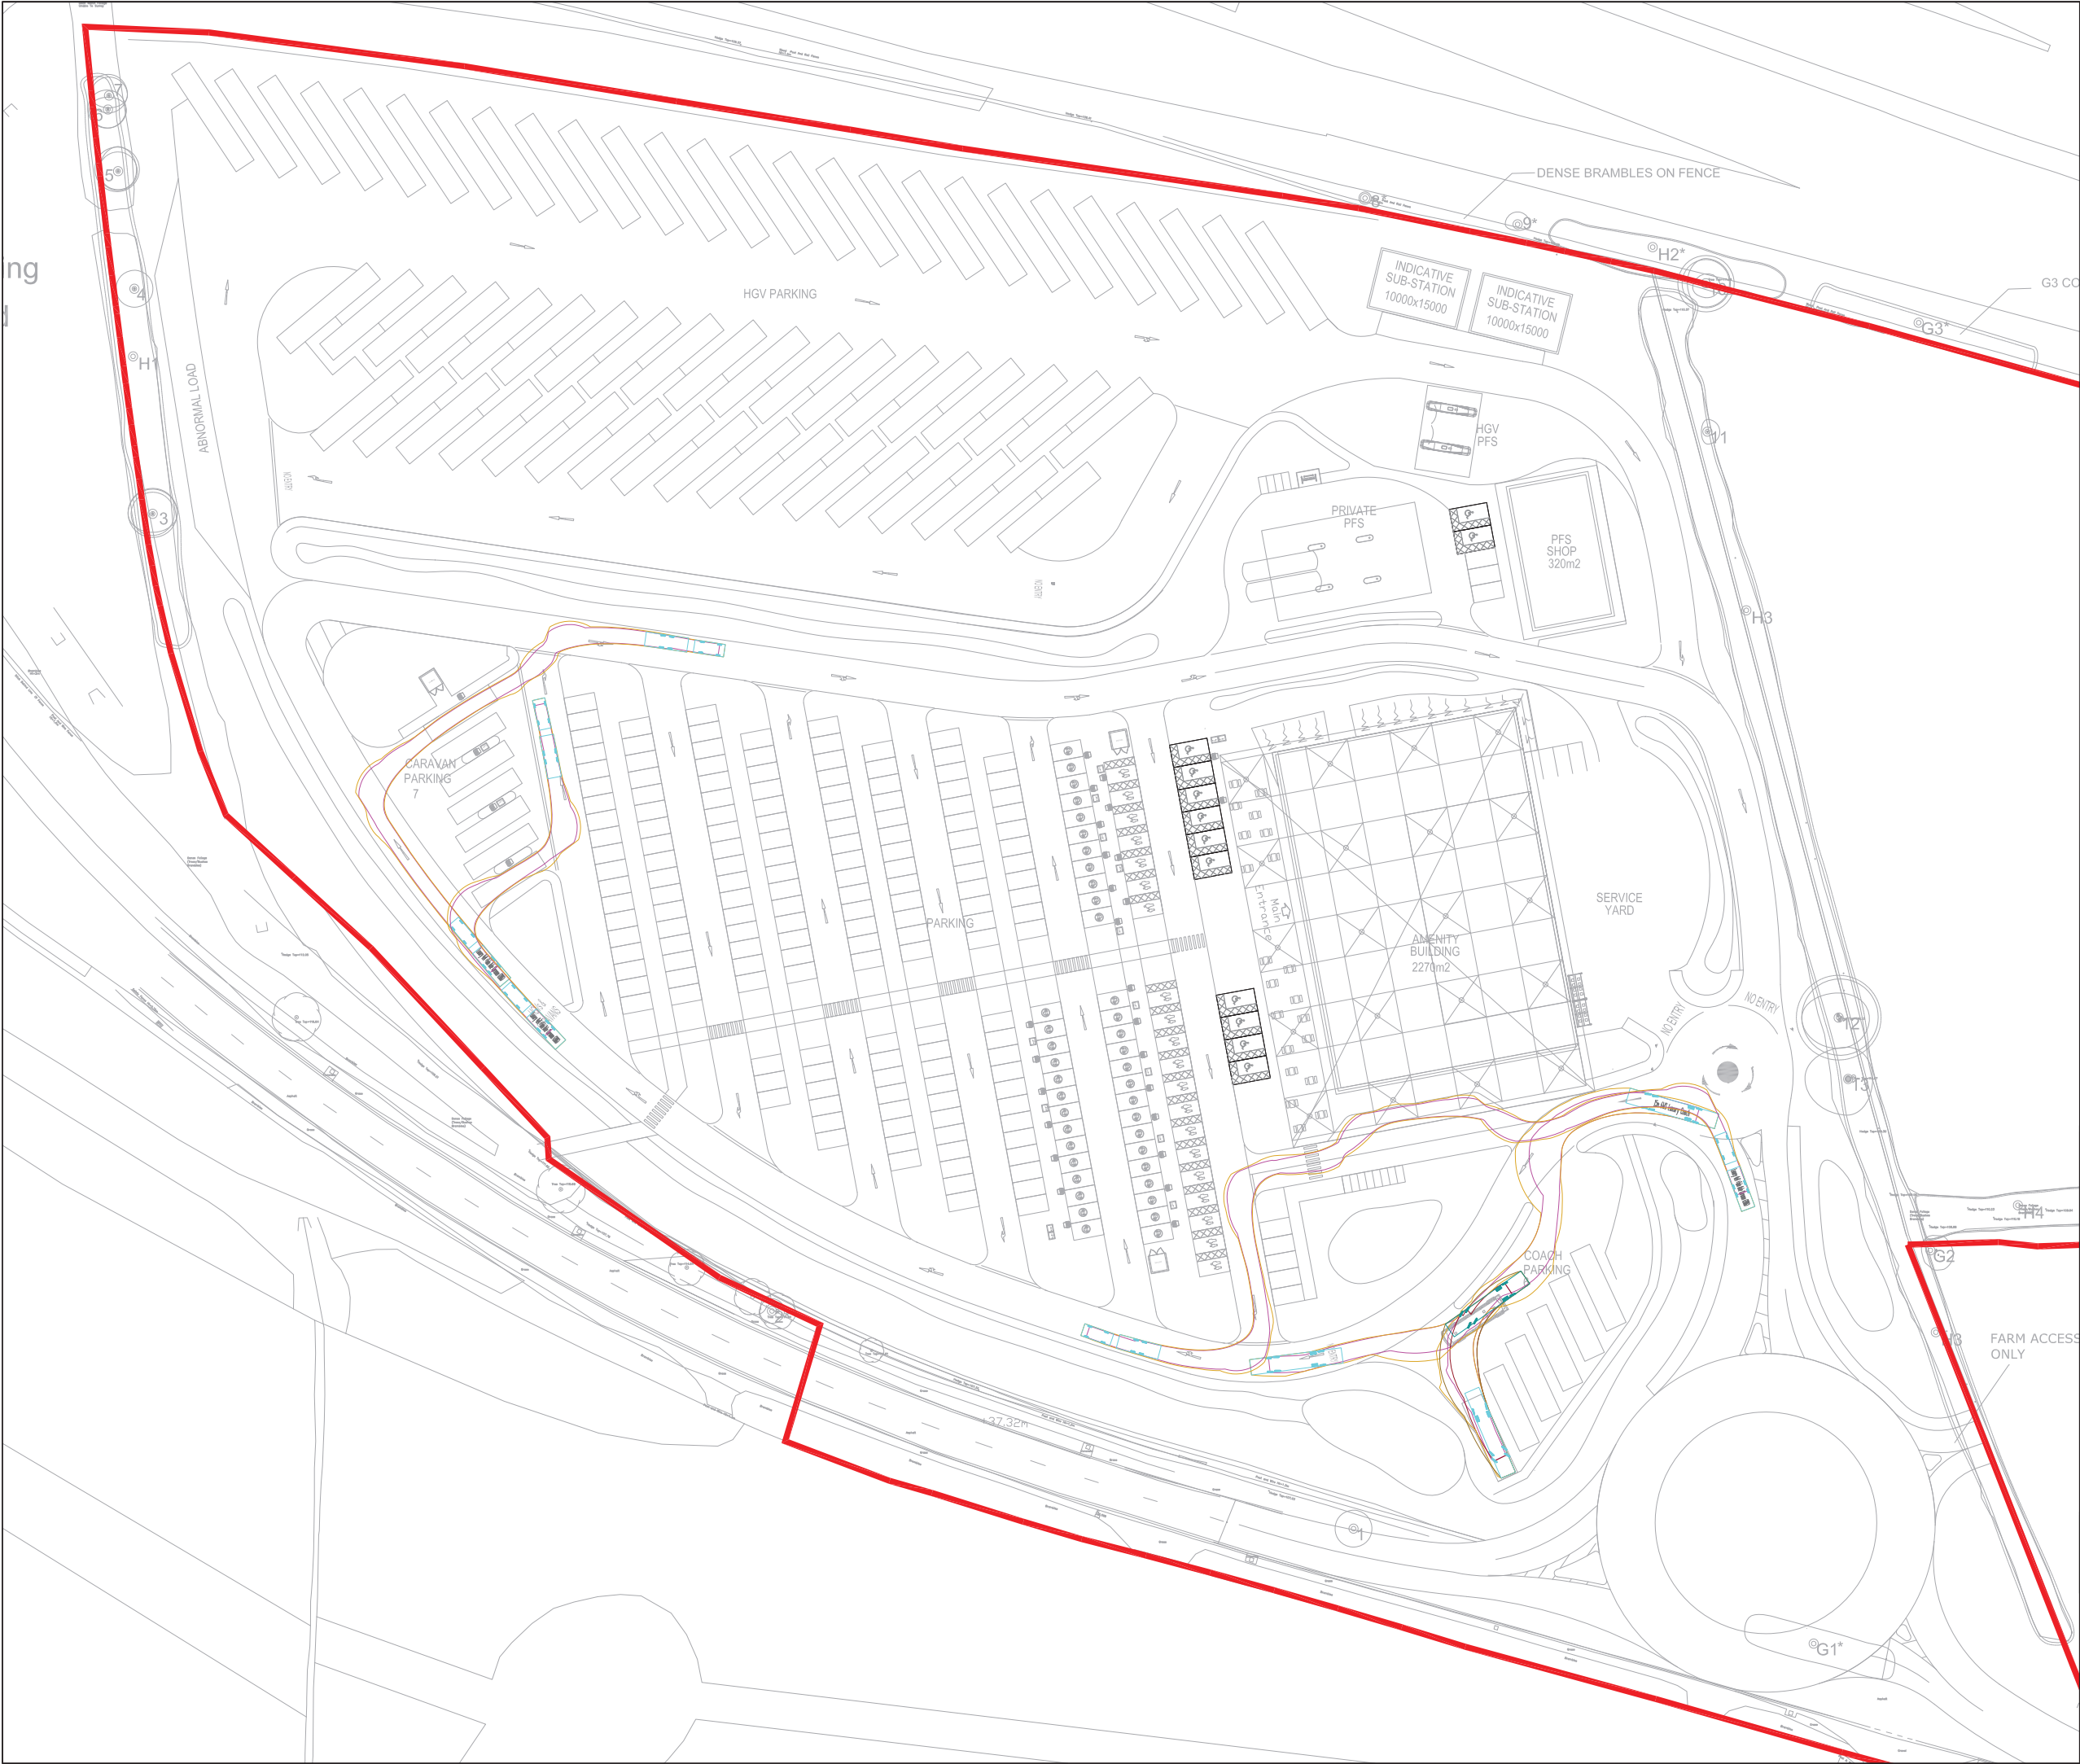


NOTES

PLAN 6



15m 6WS Luxury Coach
Overall Length 15,000m
Overall Width 2,500m
Overall Body Height 4,157m
Min Body Ground Clearance 0,397m
Track Width 2,500m
Lock to lock time 5,00s
Wall to Wall turning Radius 12,490m



Luxury 4x4 +Twin Axle Caravan (2006)
Overall Length 12,990m
Overall Width 2,286m
Overall Body Height 2,524m
Min Body Ground Clearance 0,251m
Max Track Width 2,130m
Lock to lock time 4,00s
Kerb to Kerb Turning Radius 5,800m



REV	DETAILS	DRAWN	CHECKED	DATE
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				

CLIENT:	MOTO
PROJECT:	MOTO, SWINDON
DRAWING TITLE:	SWEPT PATH ANALYSIS
SCALES:	1:500 @ A1
DRAWN:	GM
CHECKED:	MTC
DATE:	AUG 22
Croft Transport Planning & Design 340 Deansgate Manchester M3 4LY Email: info@croftts.co.uk Tel: 0161 837 7360 Web: www.eddisons.com/services/transport-planning	
DRAWING NUMBER:	3728-SP08
REVISION:	.

FIGURES


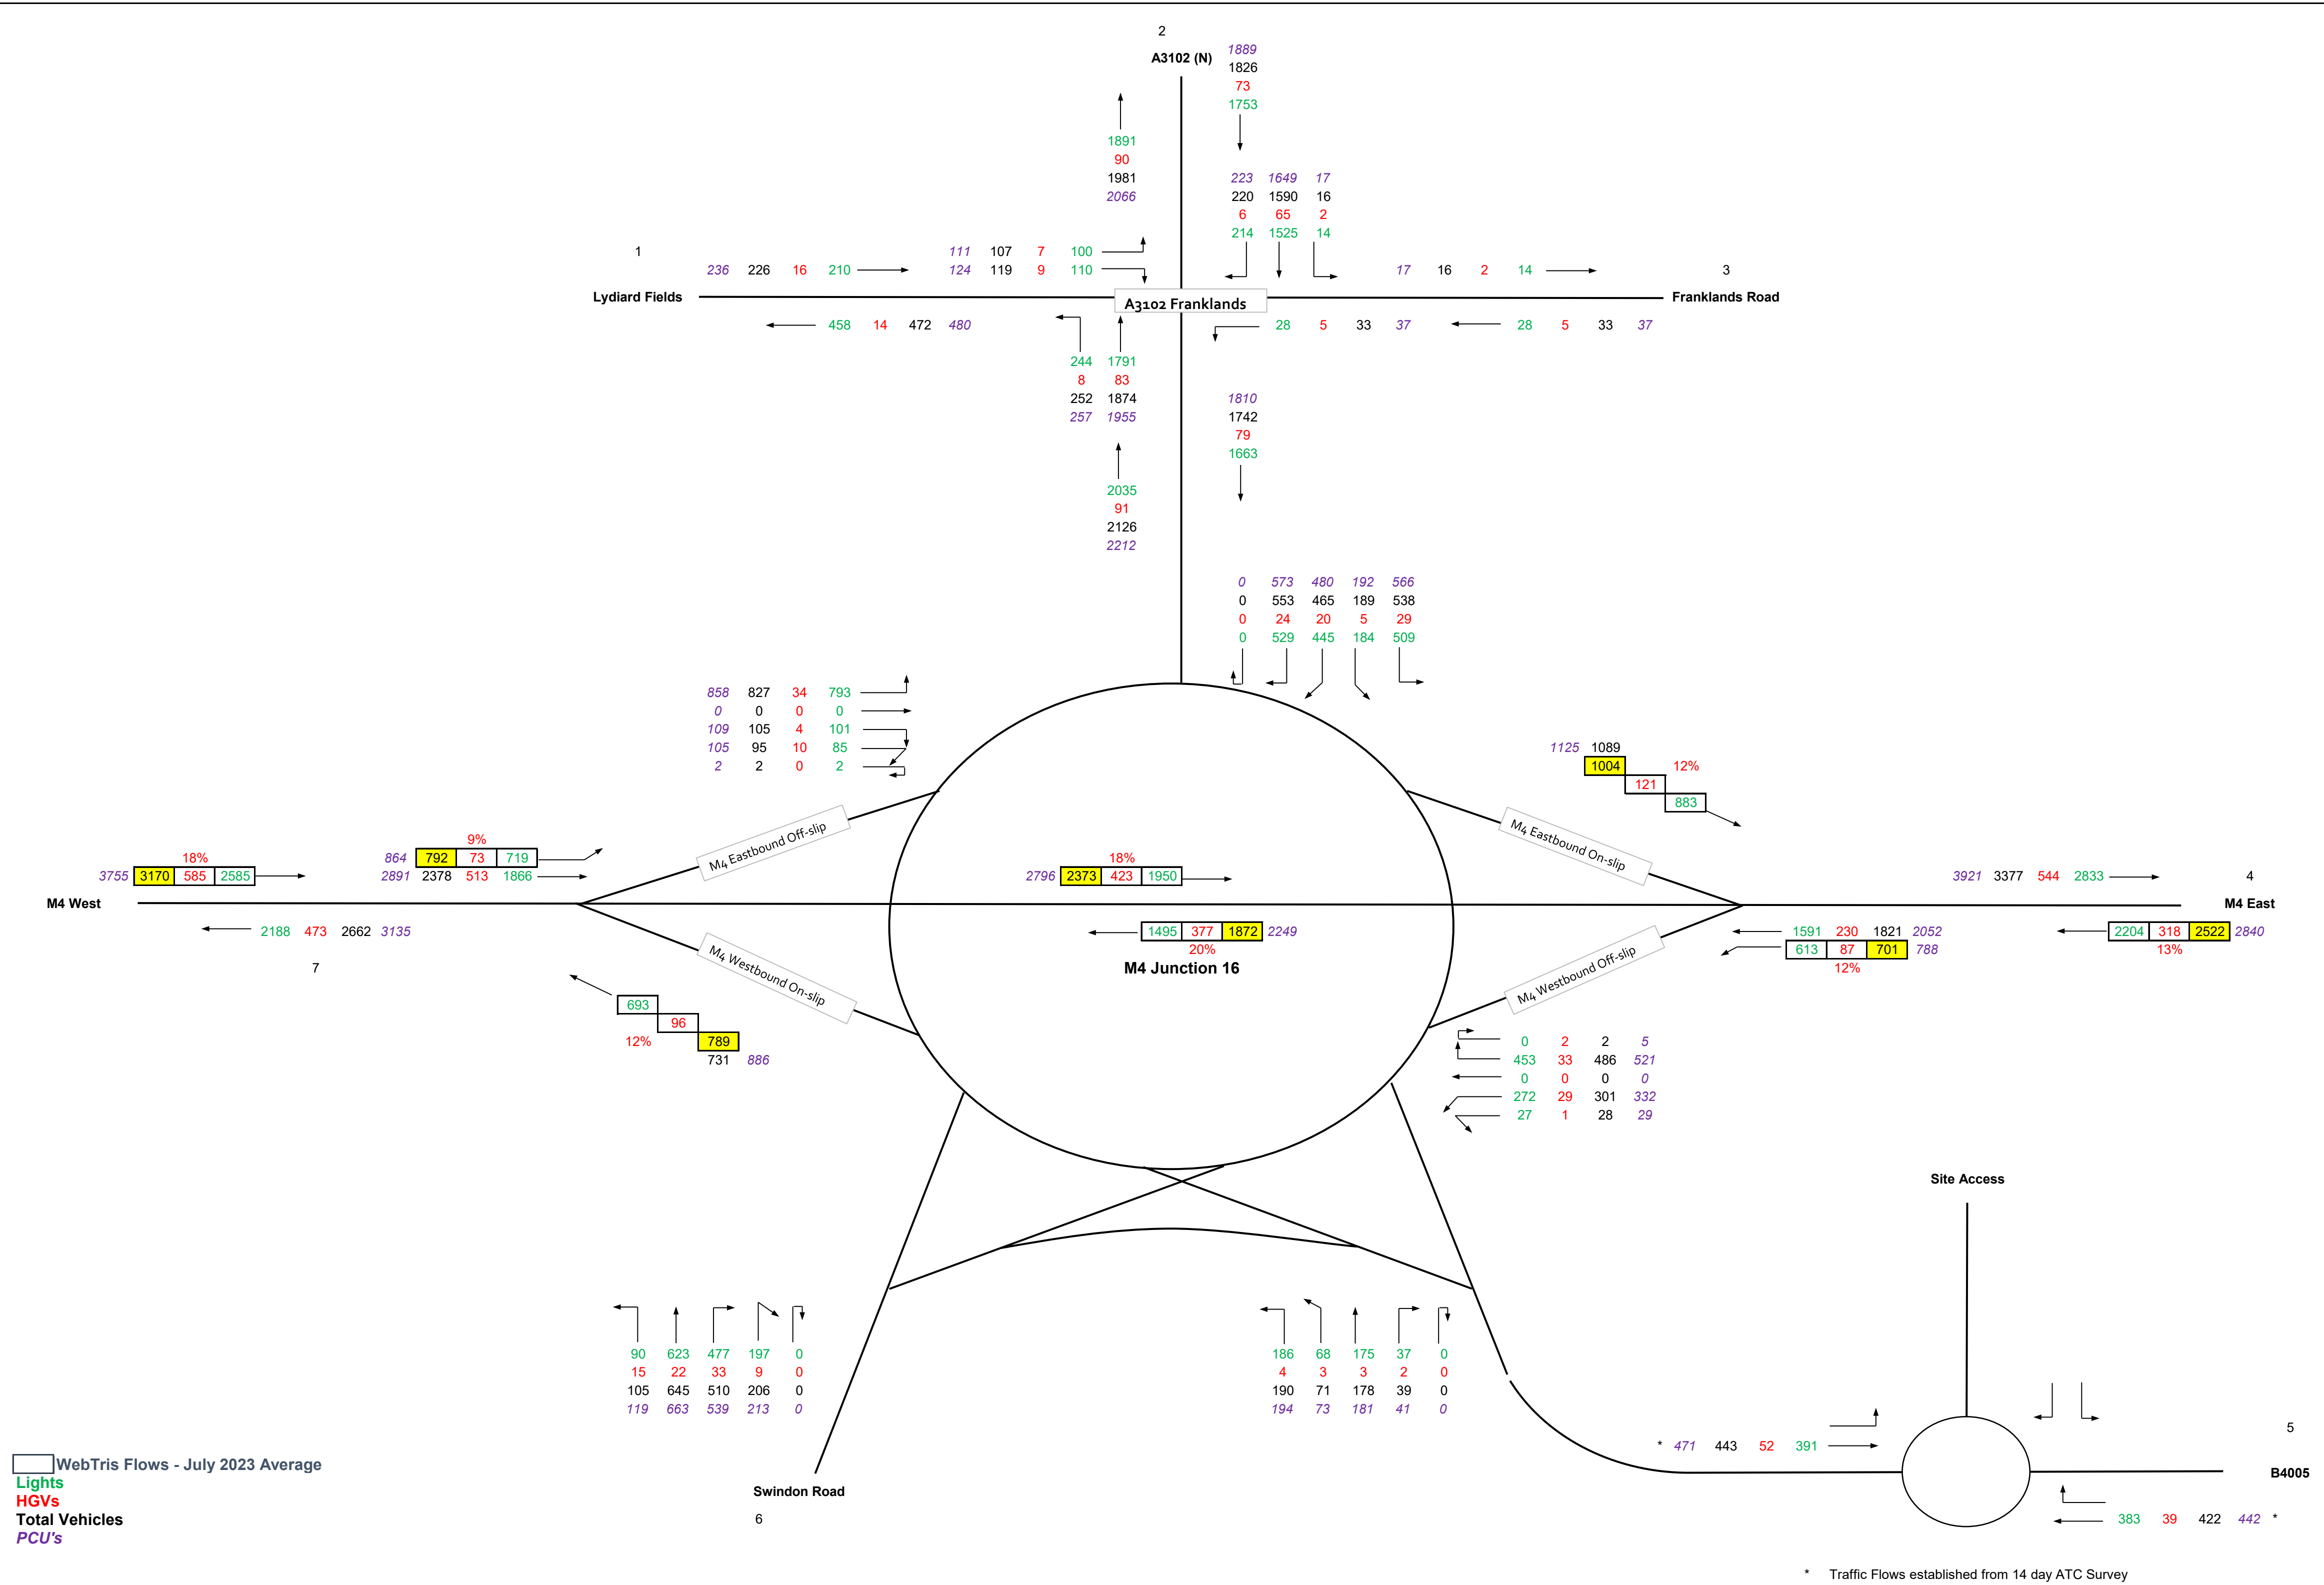


Figure 1 2023 Reference Case Flows - Weekday AM Peak (0730-0830)

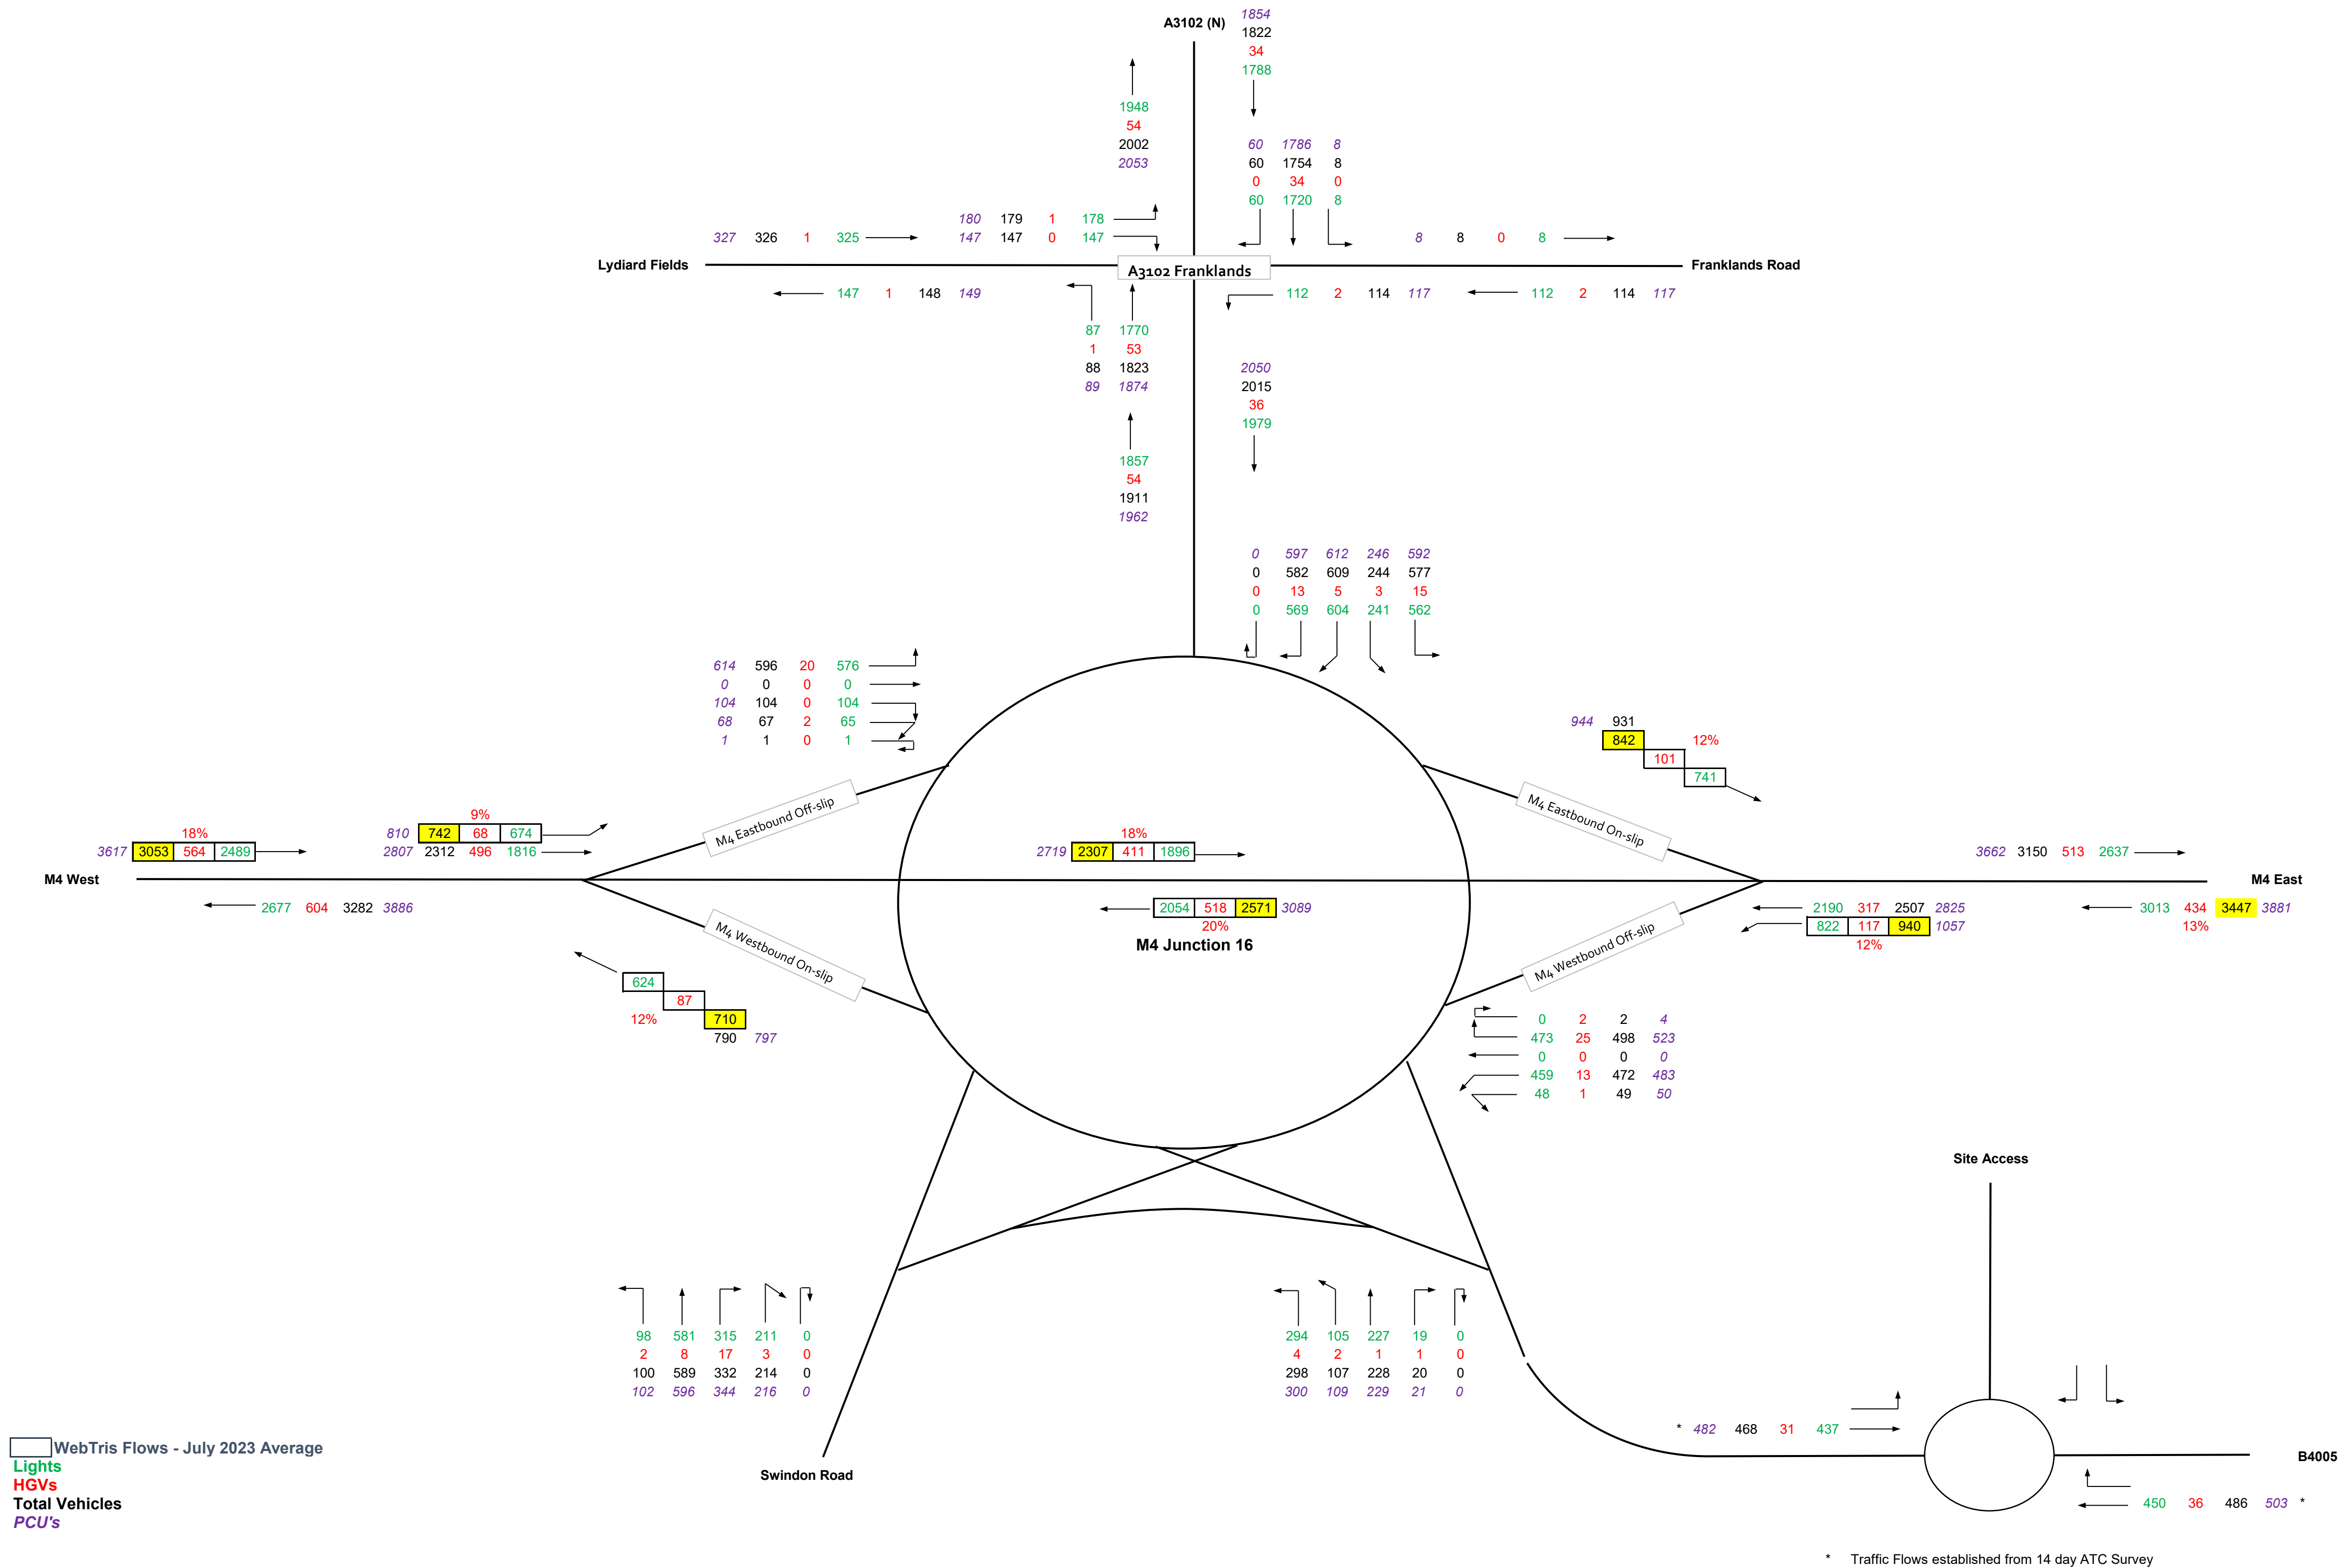

* Traffic Flows established from 14 day ATC Survey

Figure 2 2023 Reference Case Flows - Weekday PM Peak (1630-1730)

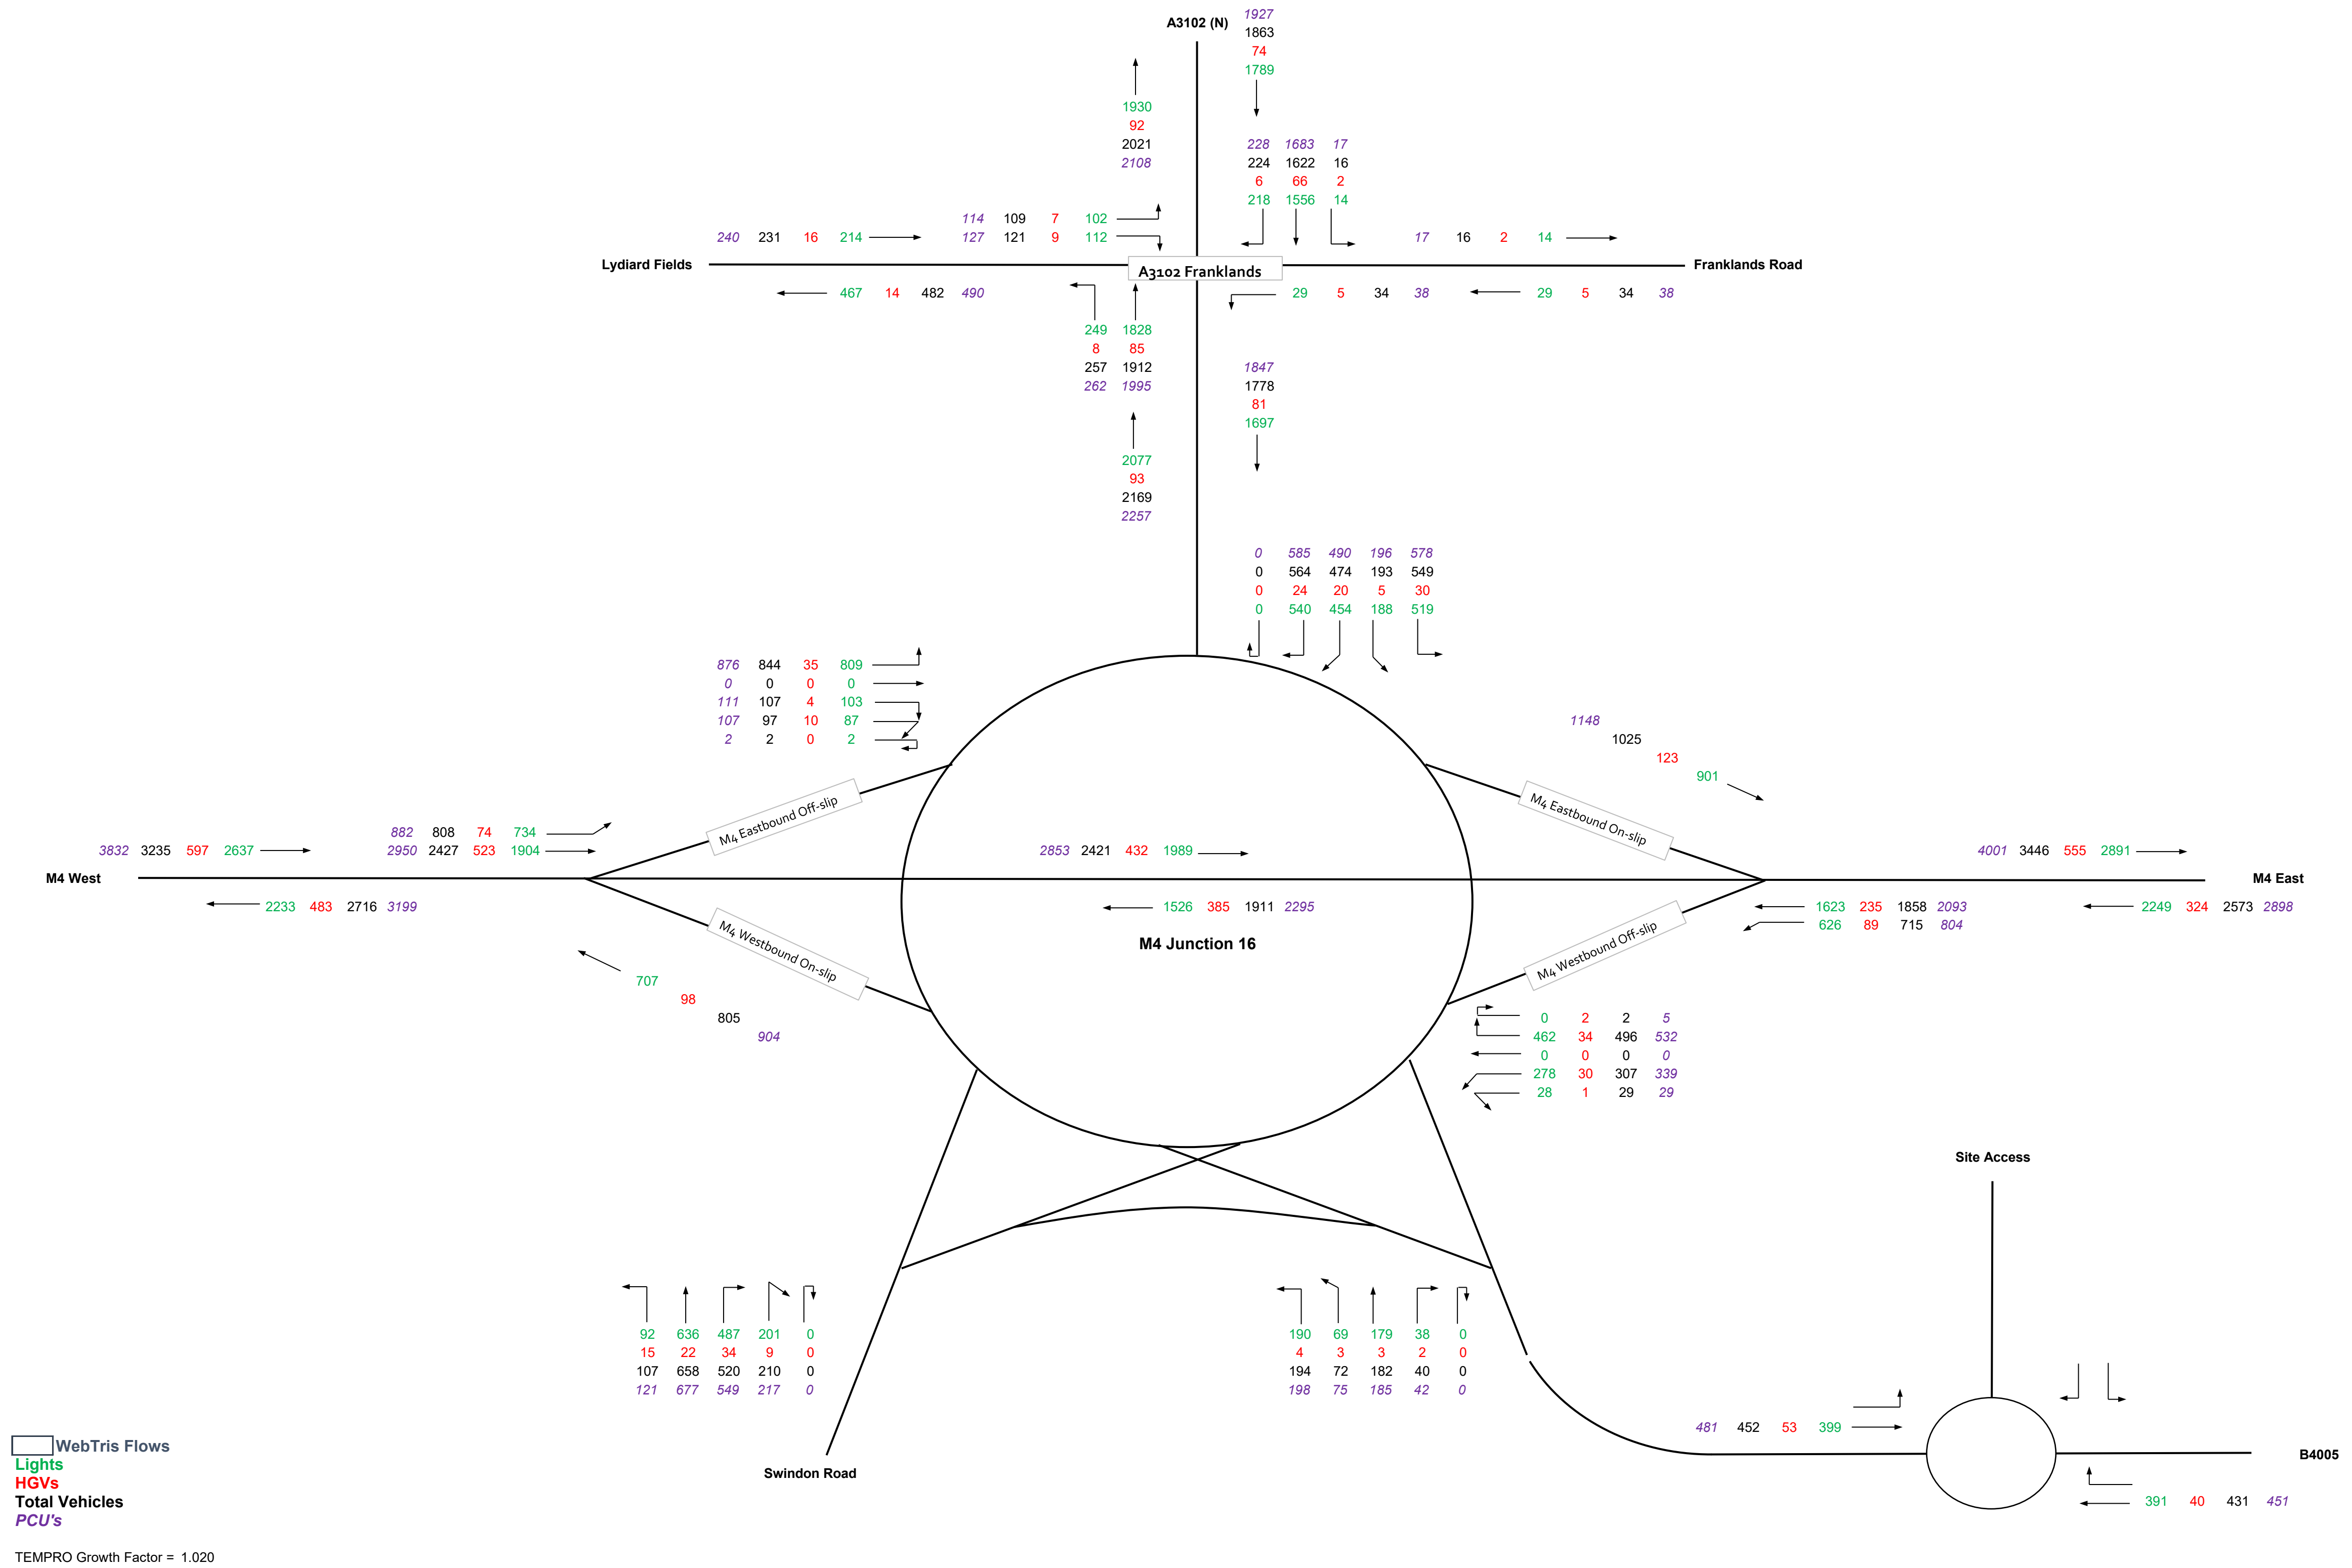


Figure 3 2027 Growthed Flows - Weekday AM Peak (0730-0830)

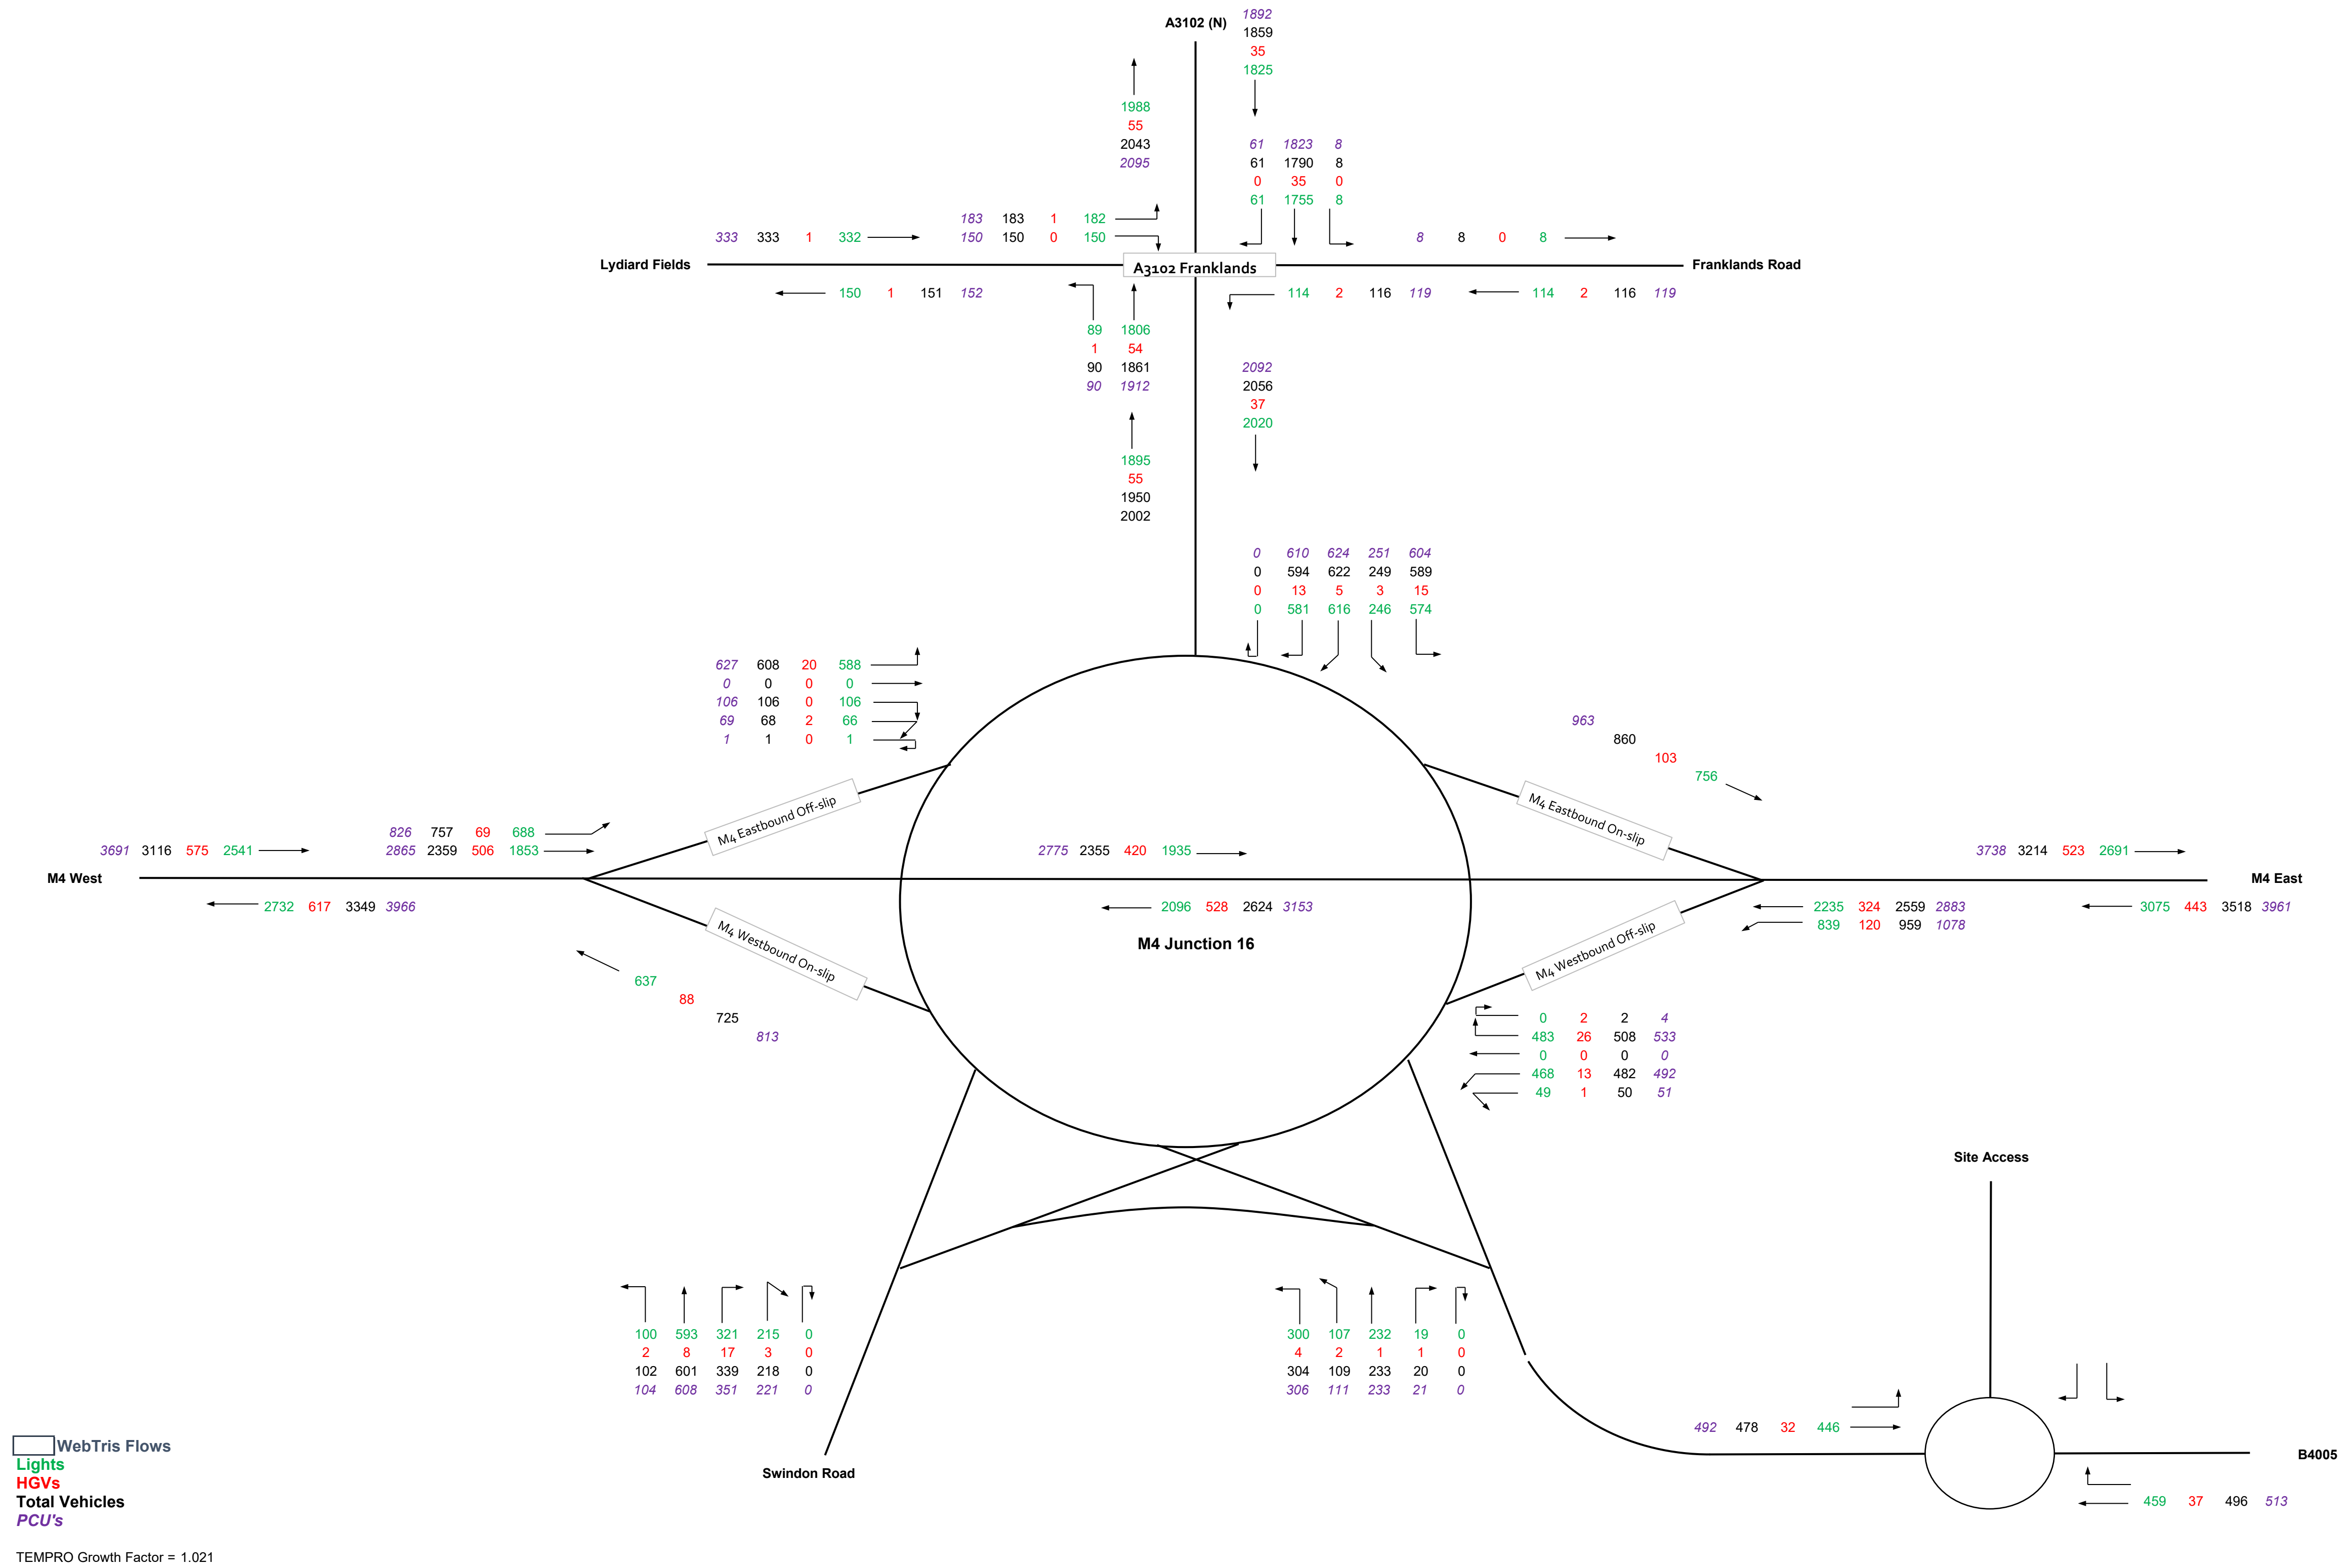


Figure 4 2027 Growthed Flows - Weekday PM Peak (1630-1730)

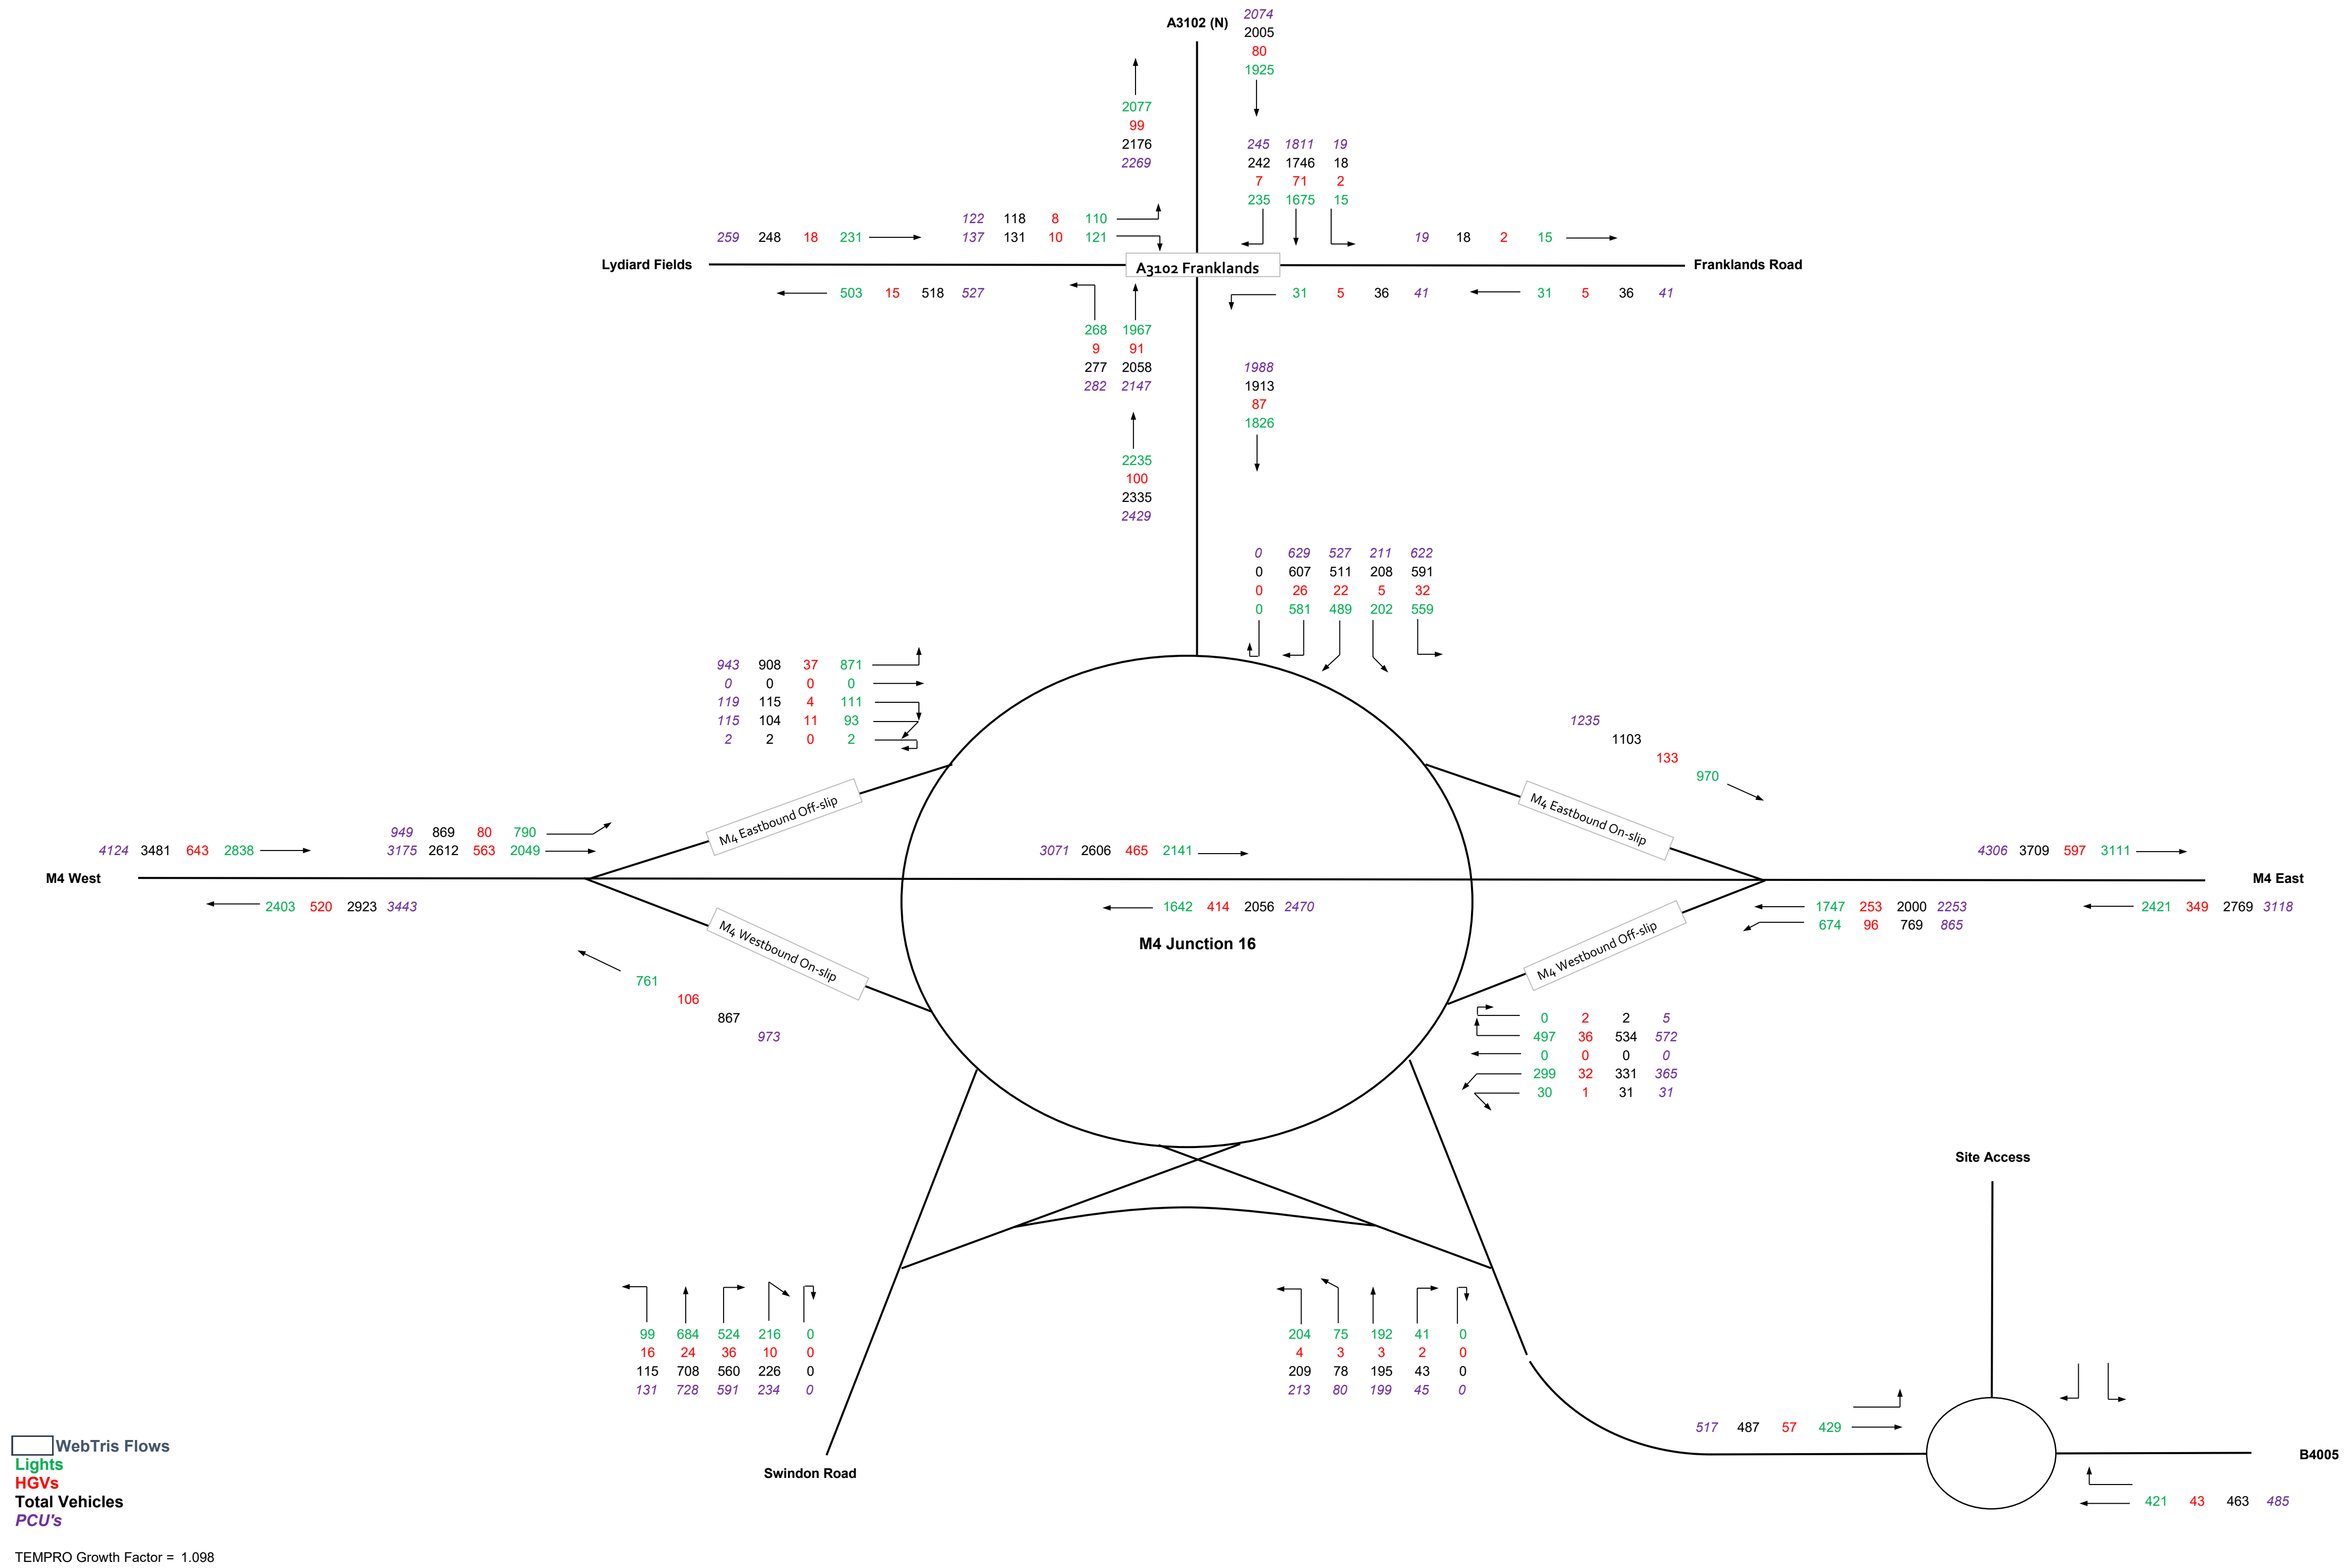


Figure 5 2033 Growthed Flows - Weekday AM Peak (0730-0830)

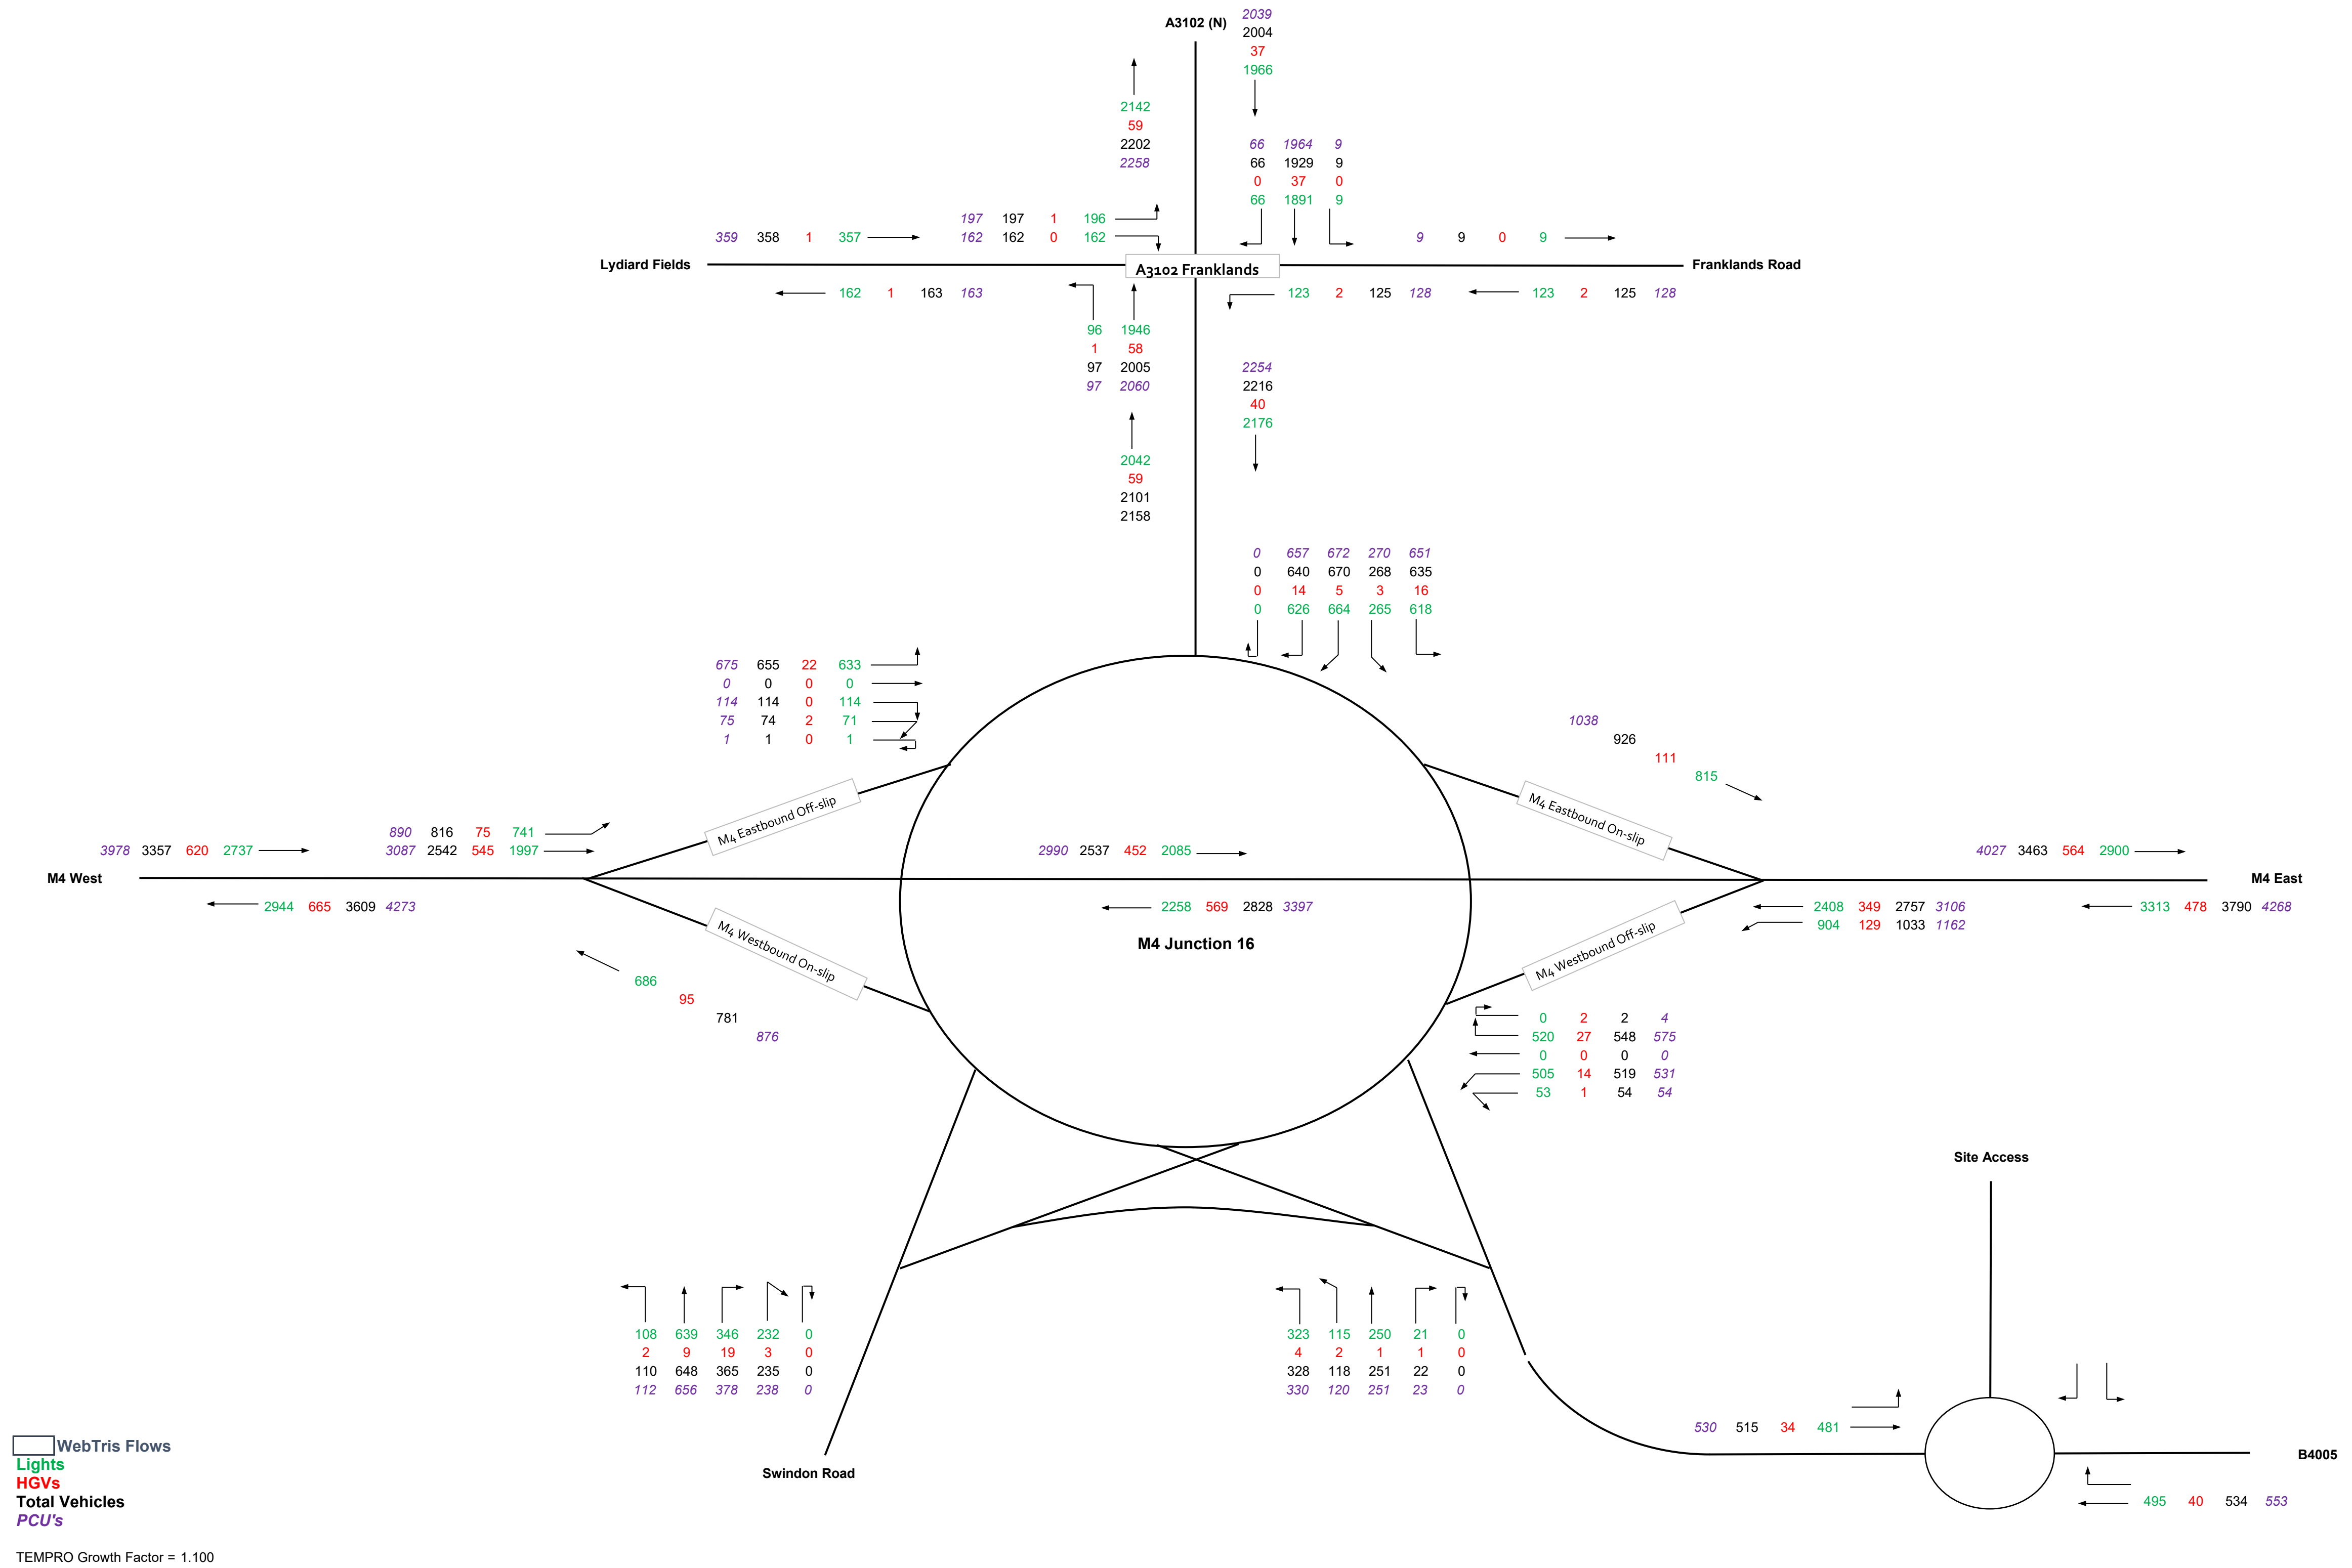


Figure 6 2033 Growthed Flows - Weekday PM Peak (1630-1730)

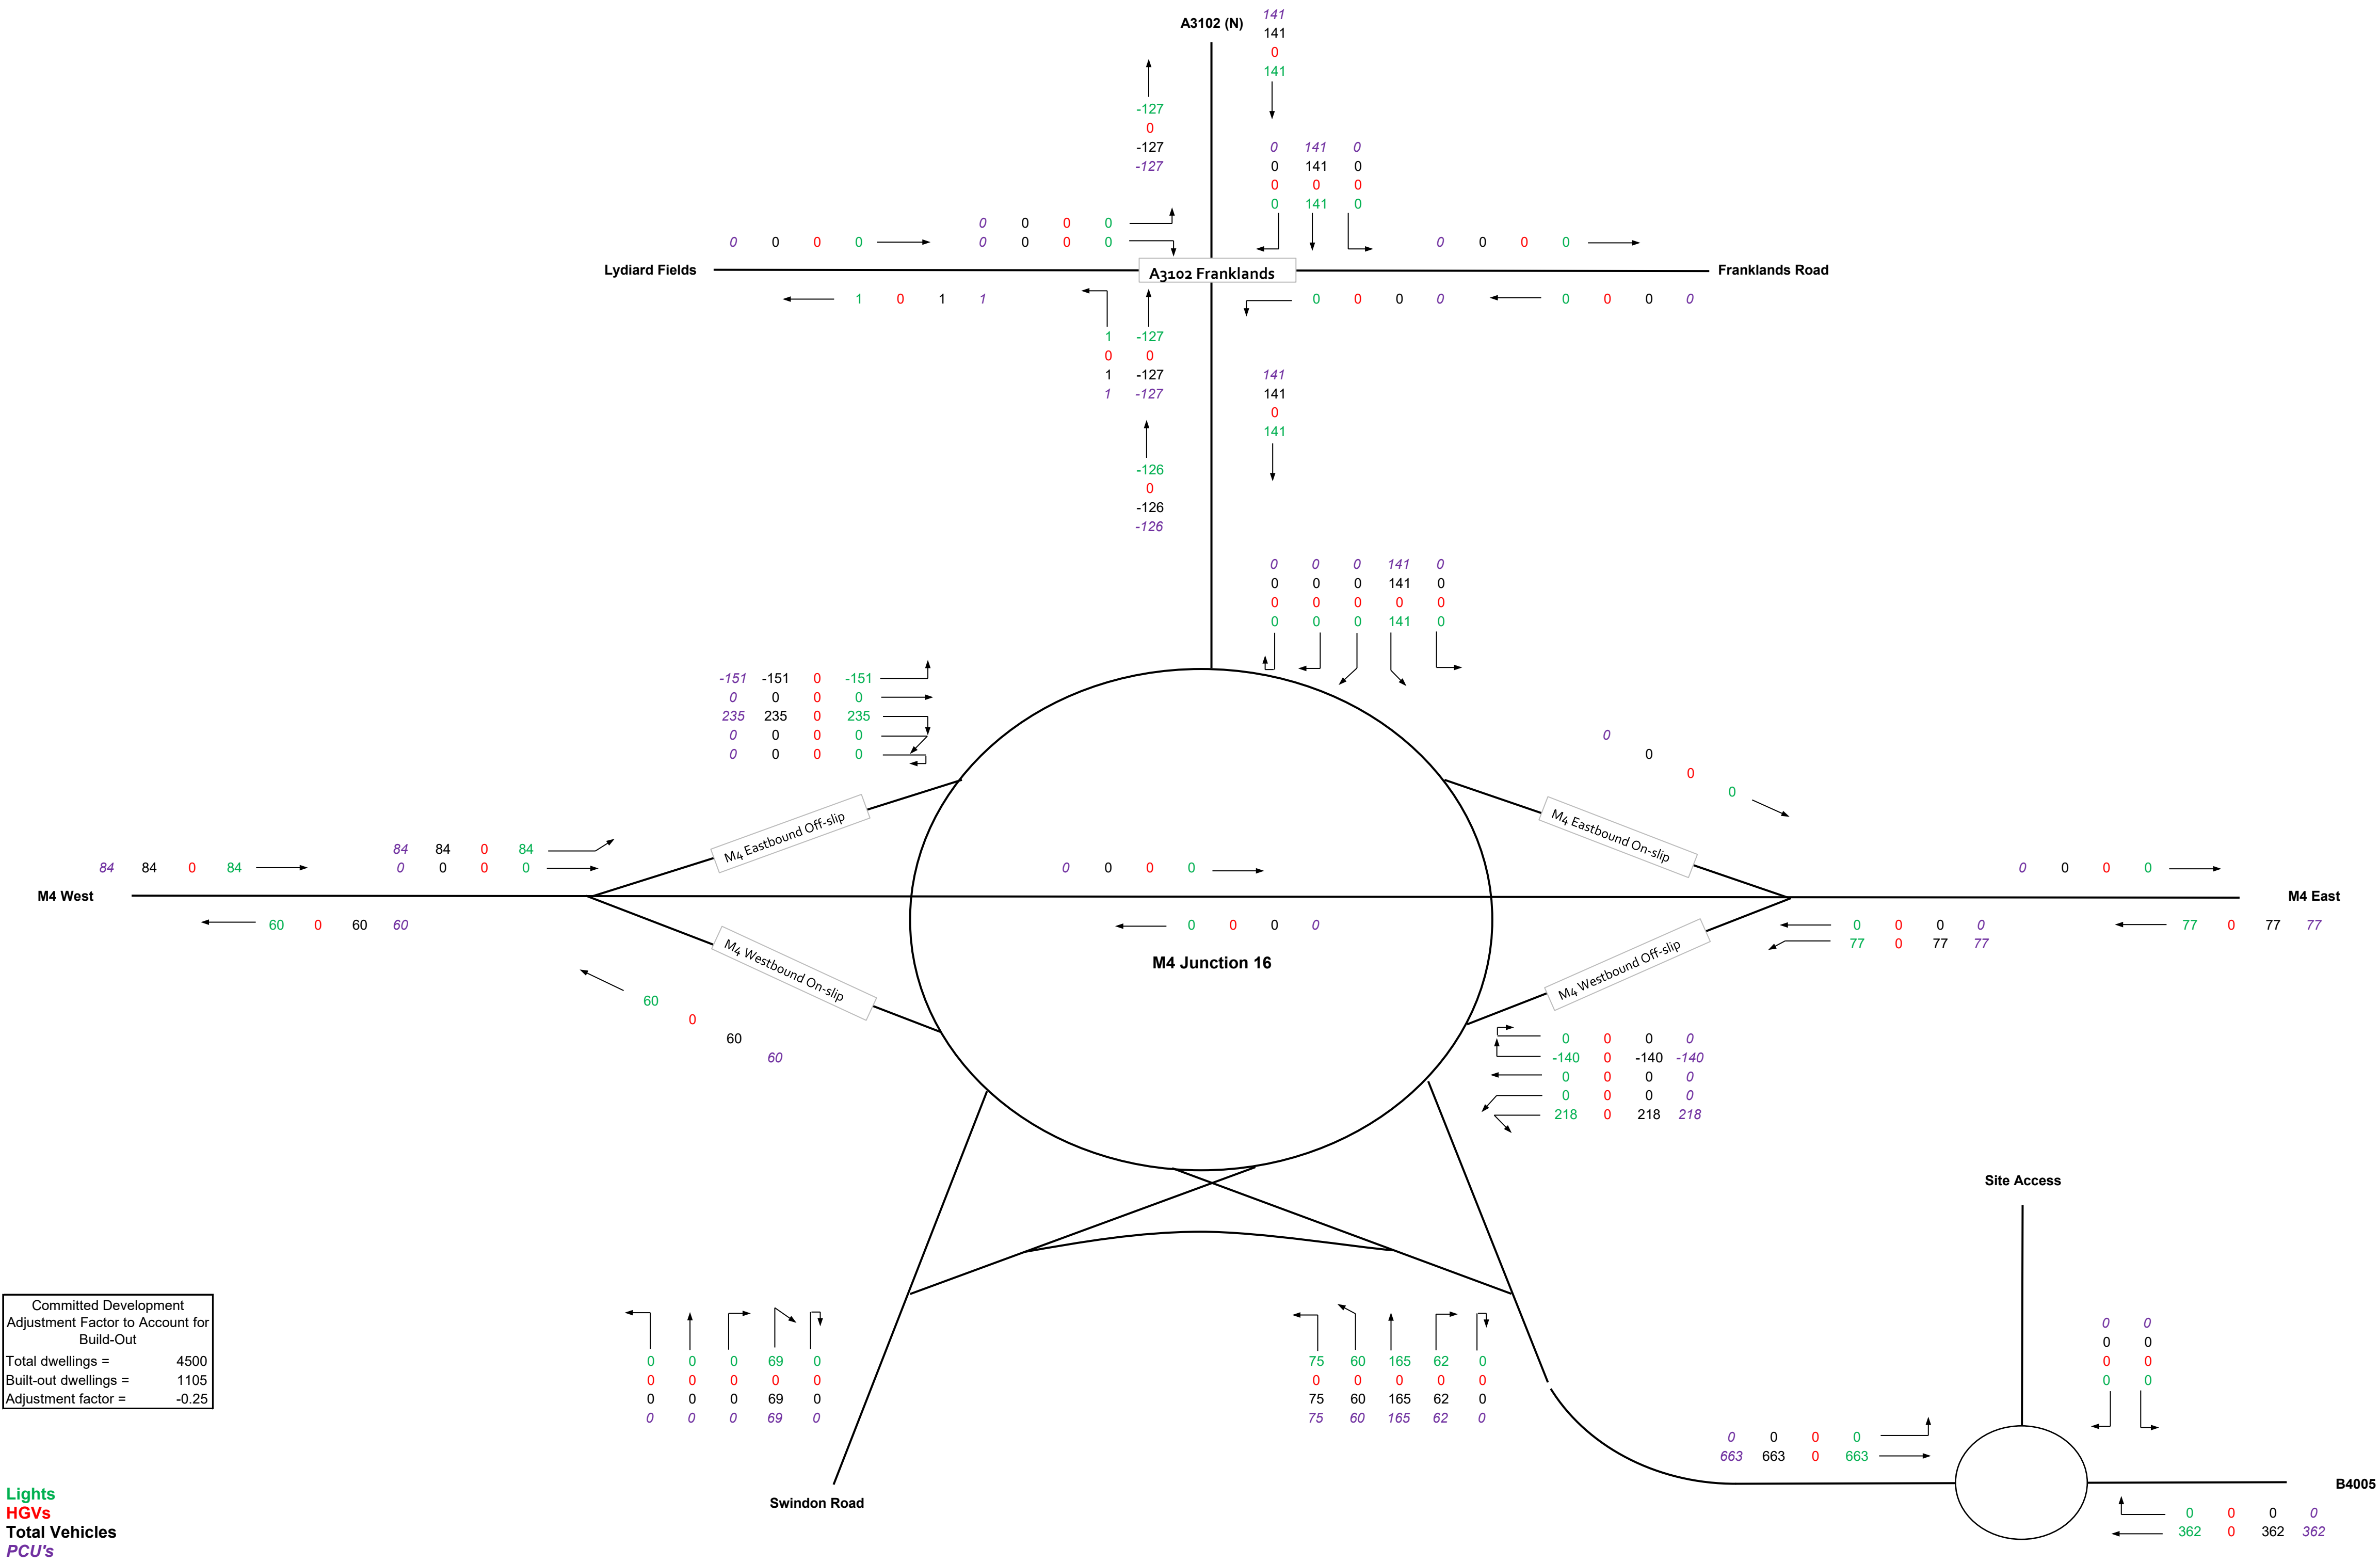


Figure 7 Committed Development Flows - Wichelstowe - Total Trips With Park & Ride - Weekday AM Peak (0730-0830)

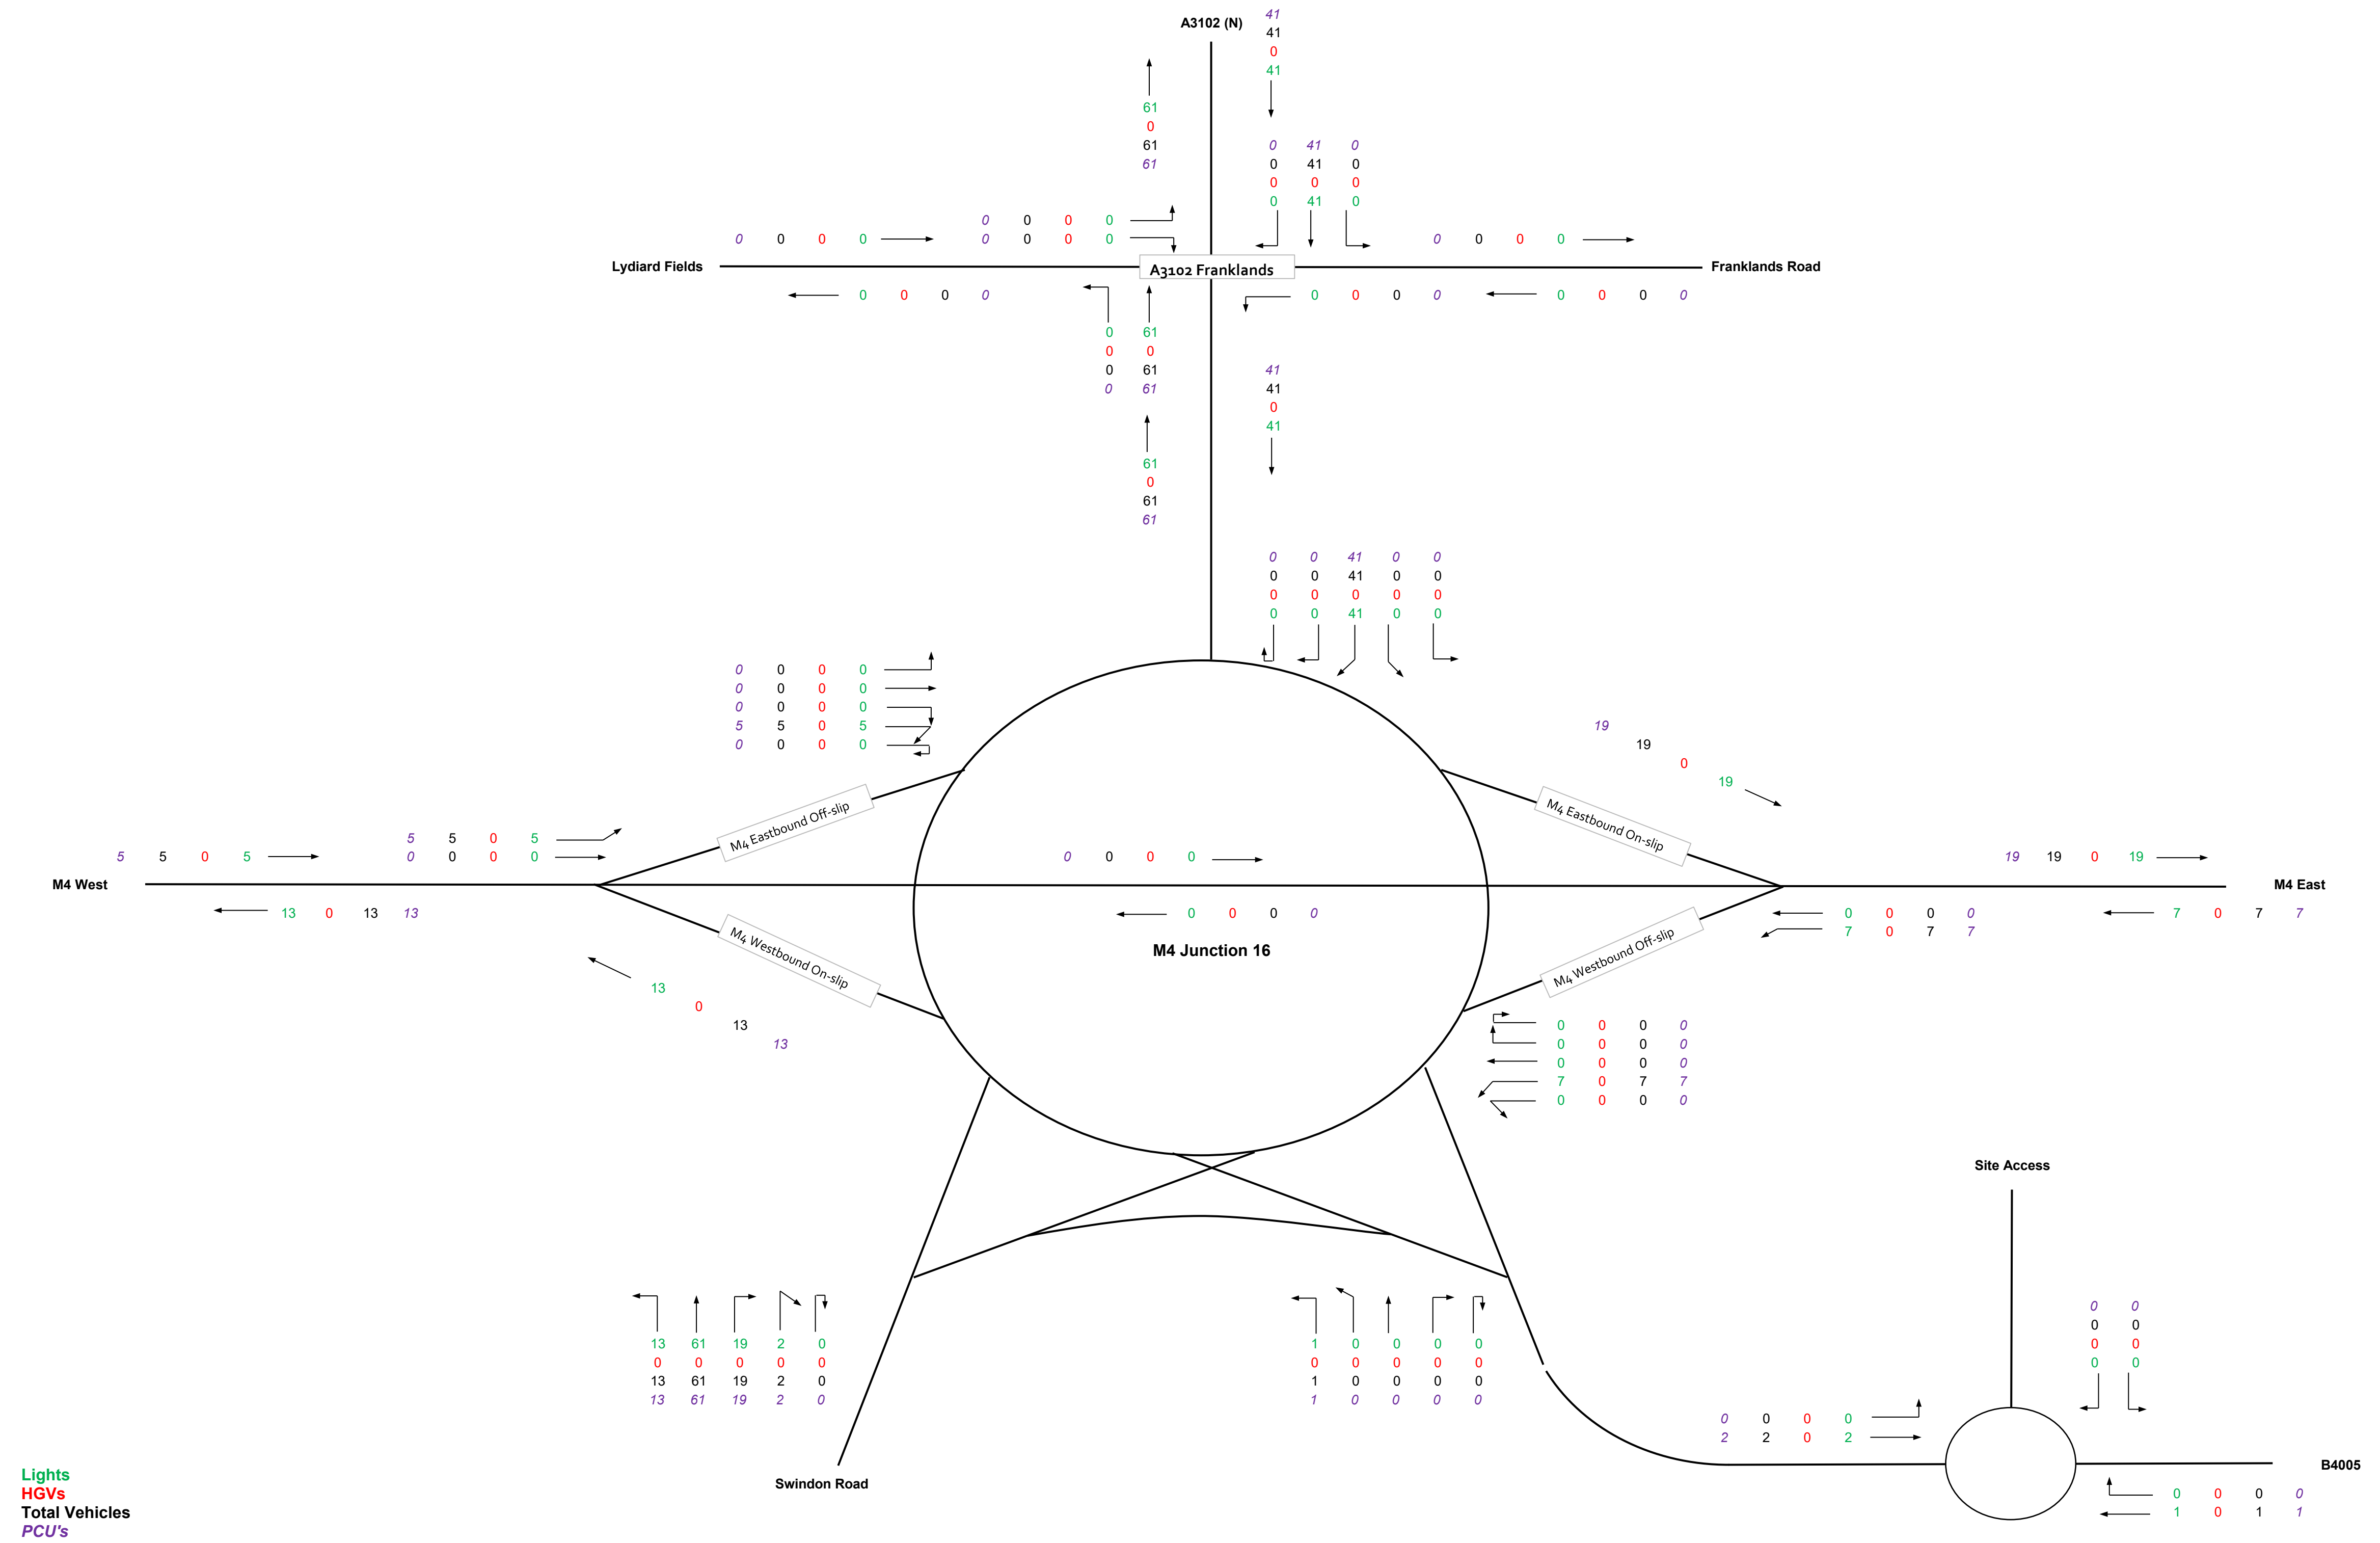


Figure 9 Committed Development Flows - Land East of Royal Wootton Bassett - Weekday AM Peak (0730-0830)

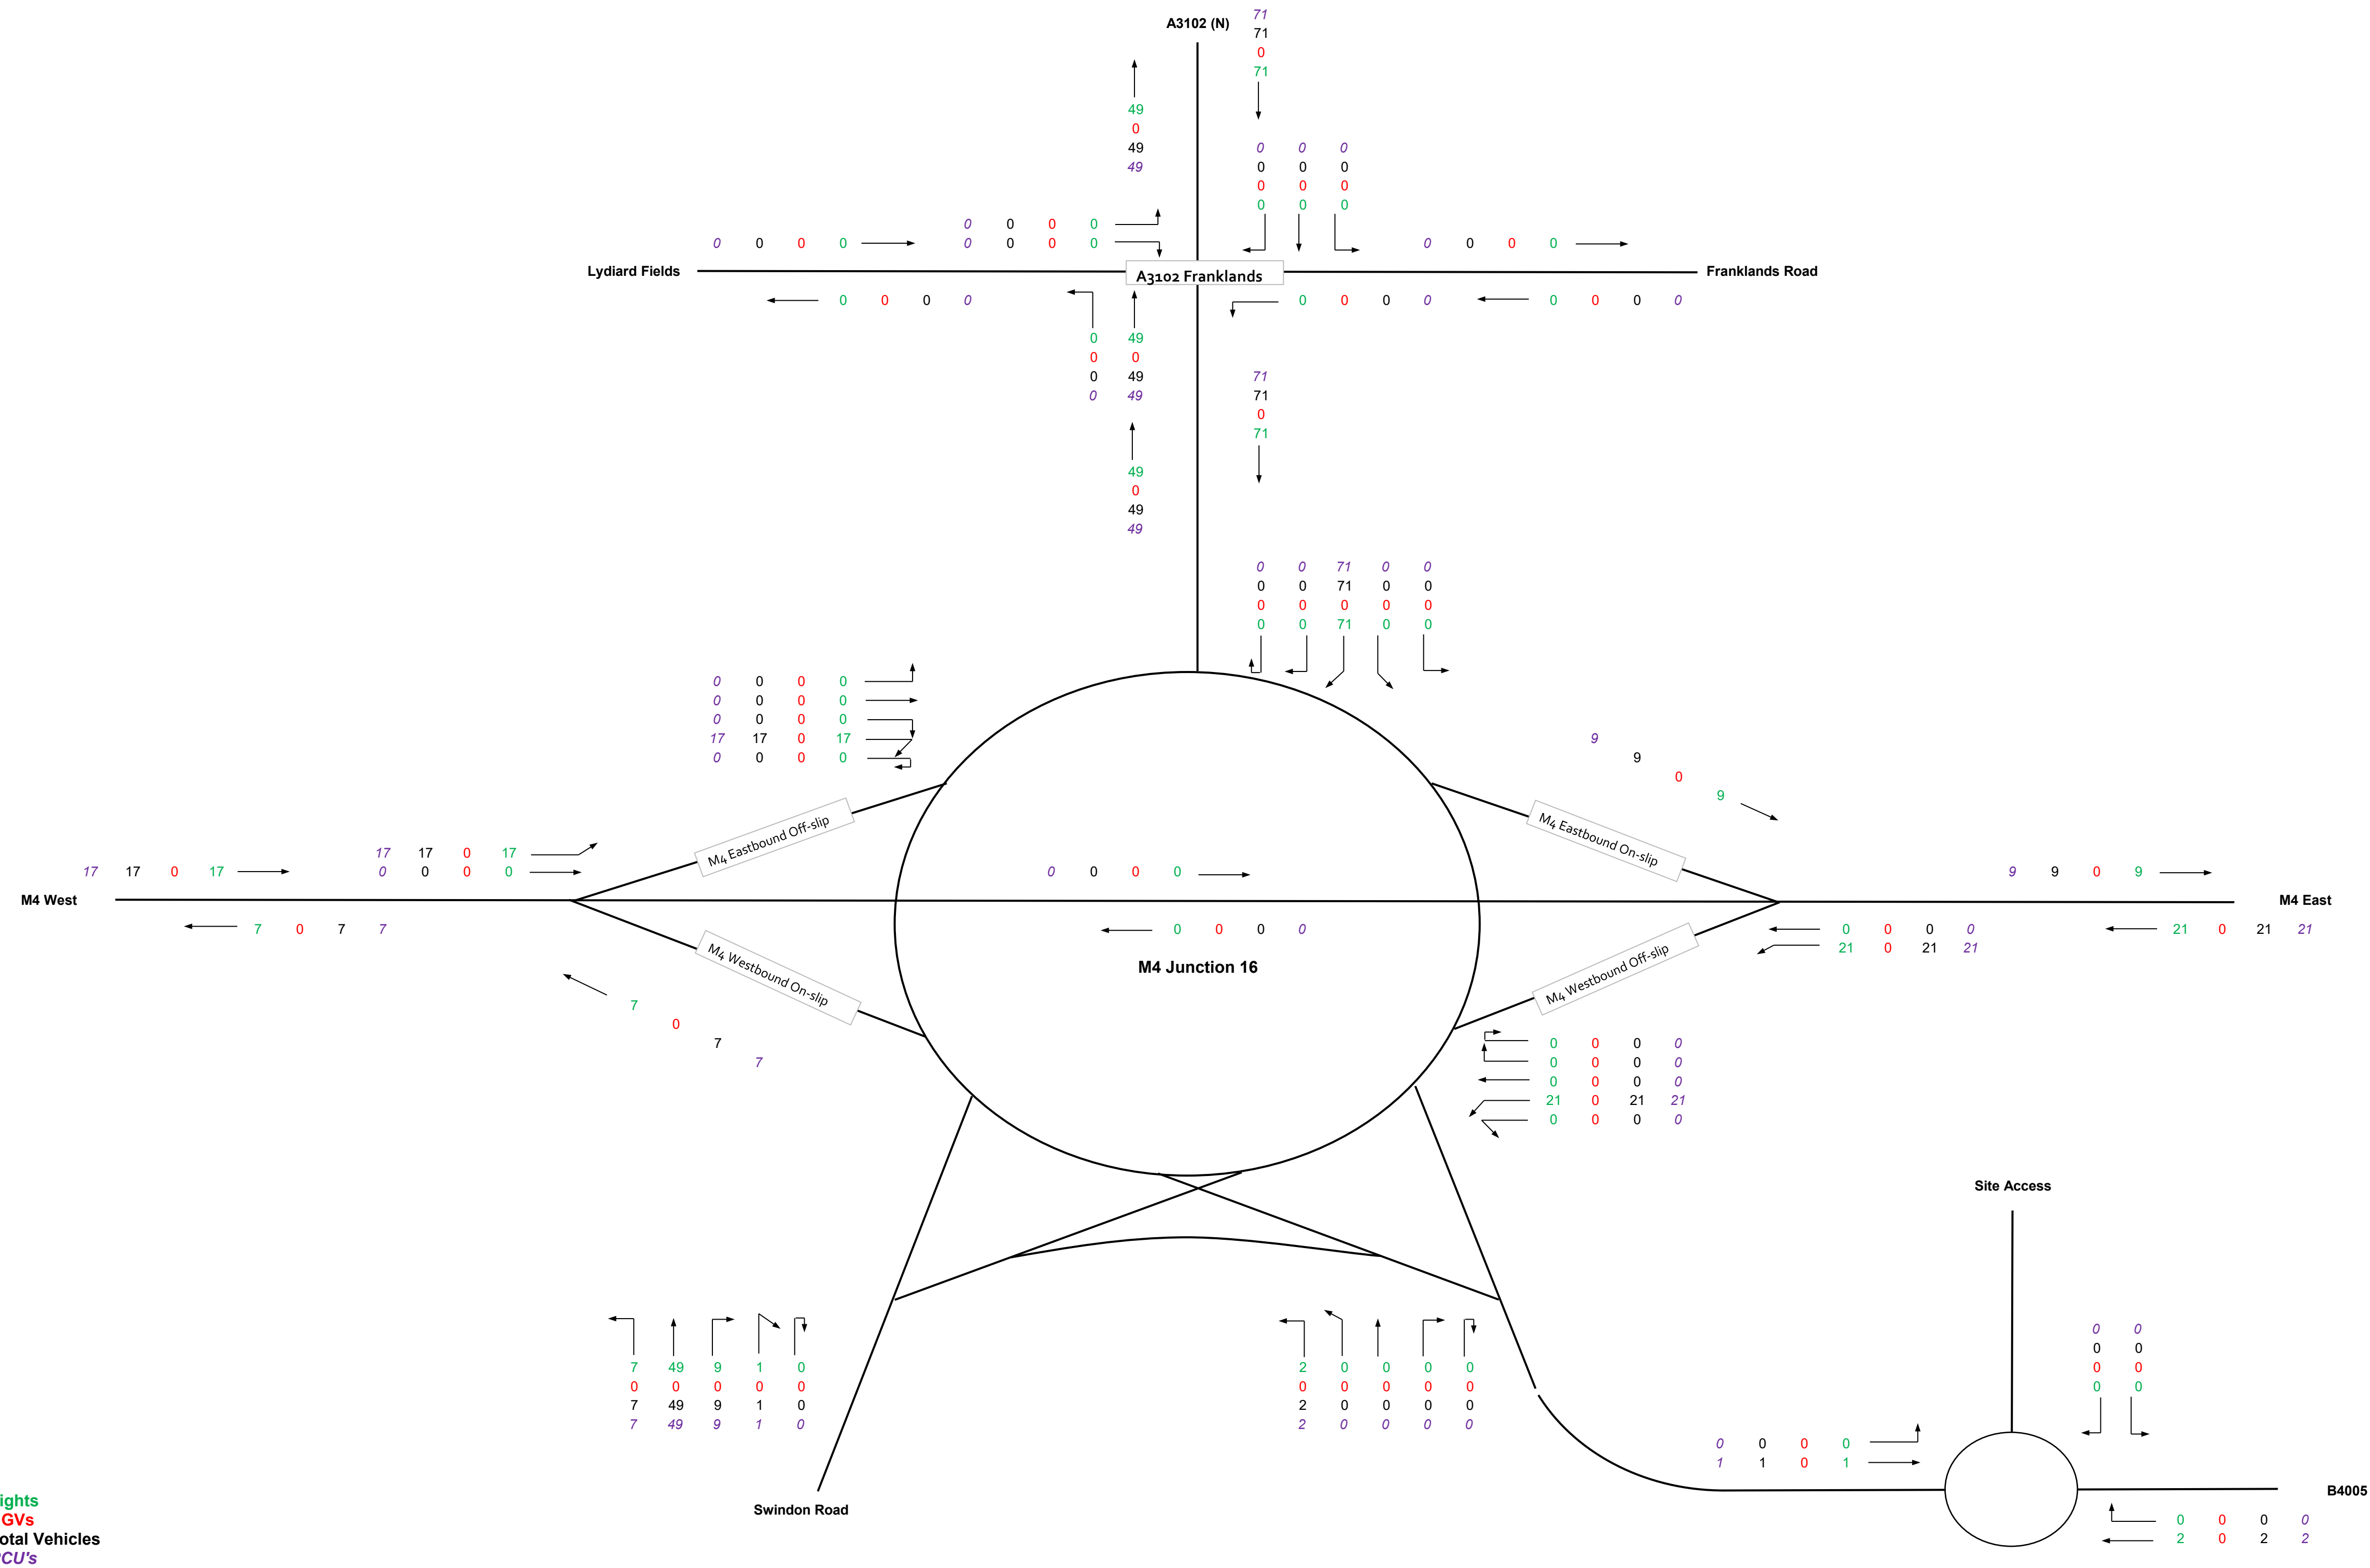


Figure 10 Committed Development Flows - Land East of Royal Wootton Bassett - Weekday PM Peak (1630-1730)

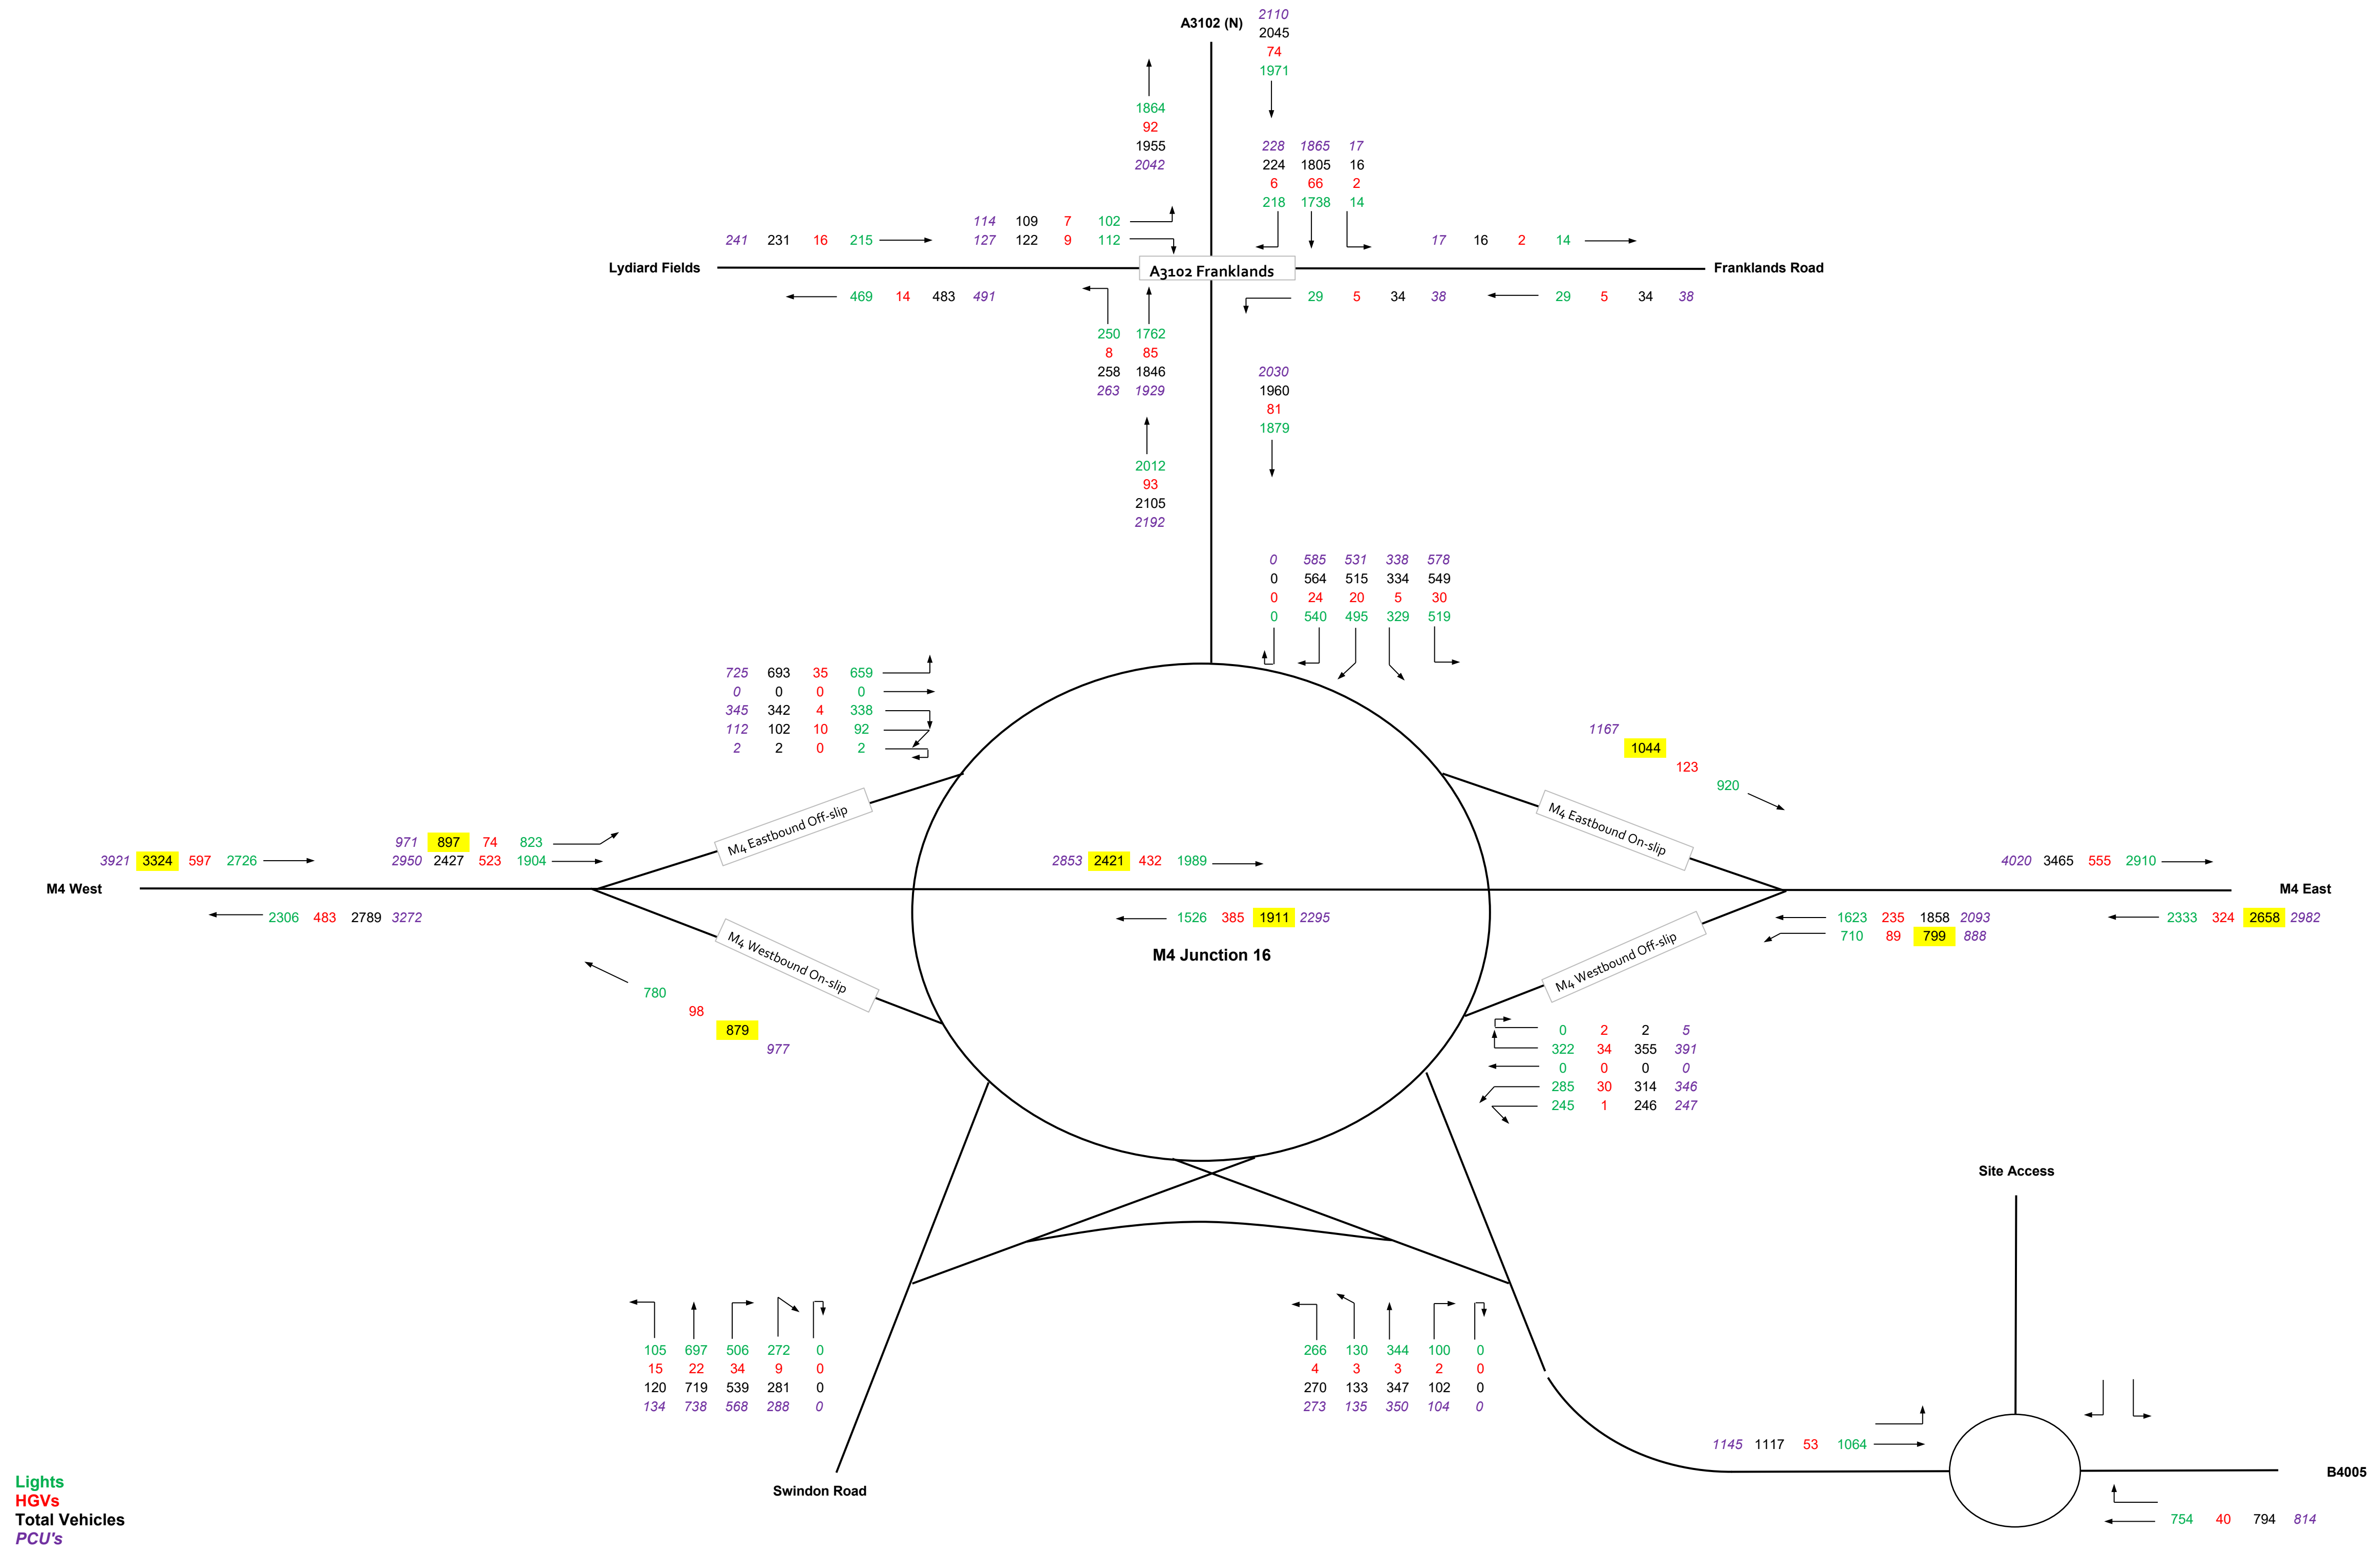


Figure 11 2027 Base Flows - Weekday AM Peak (0730-0830)

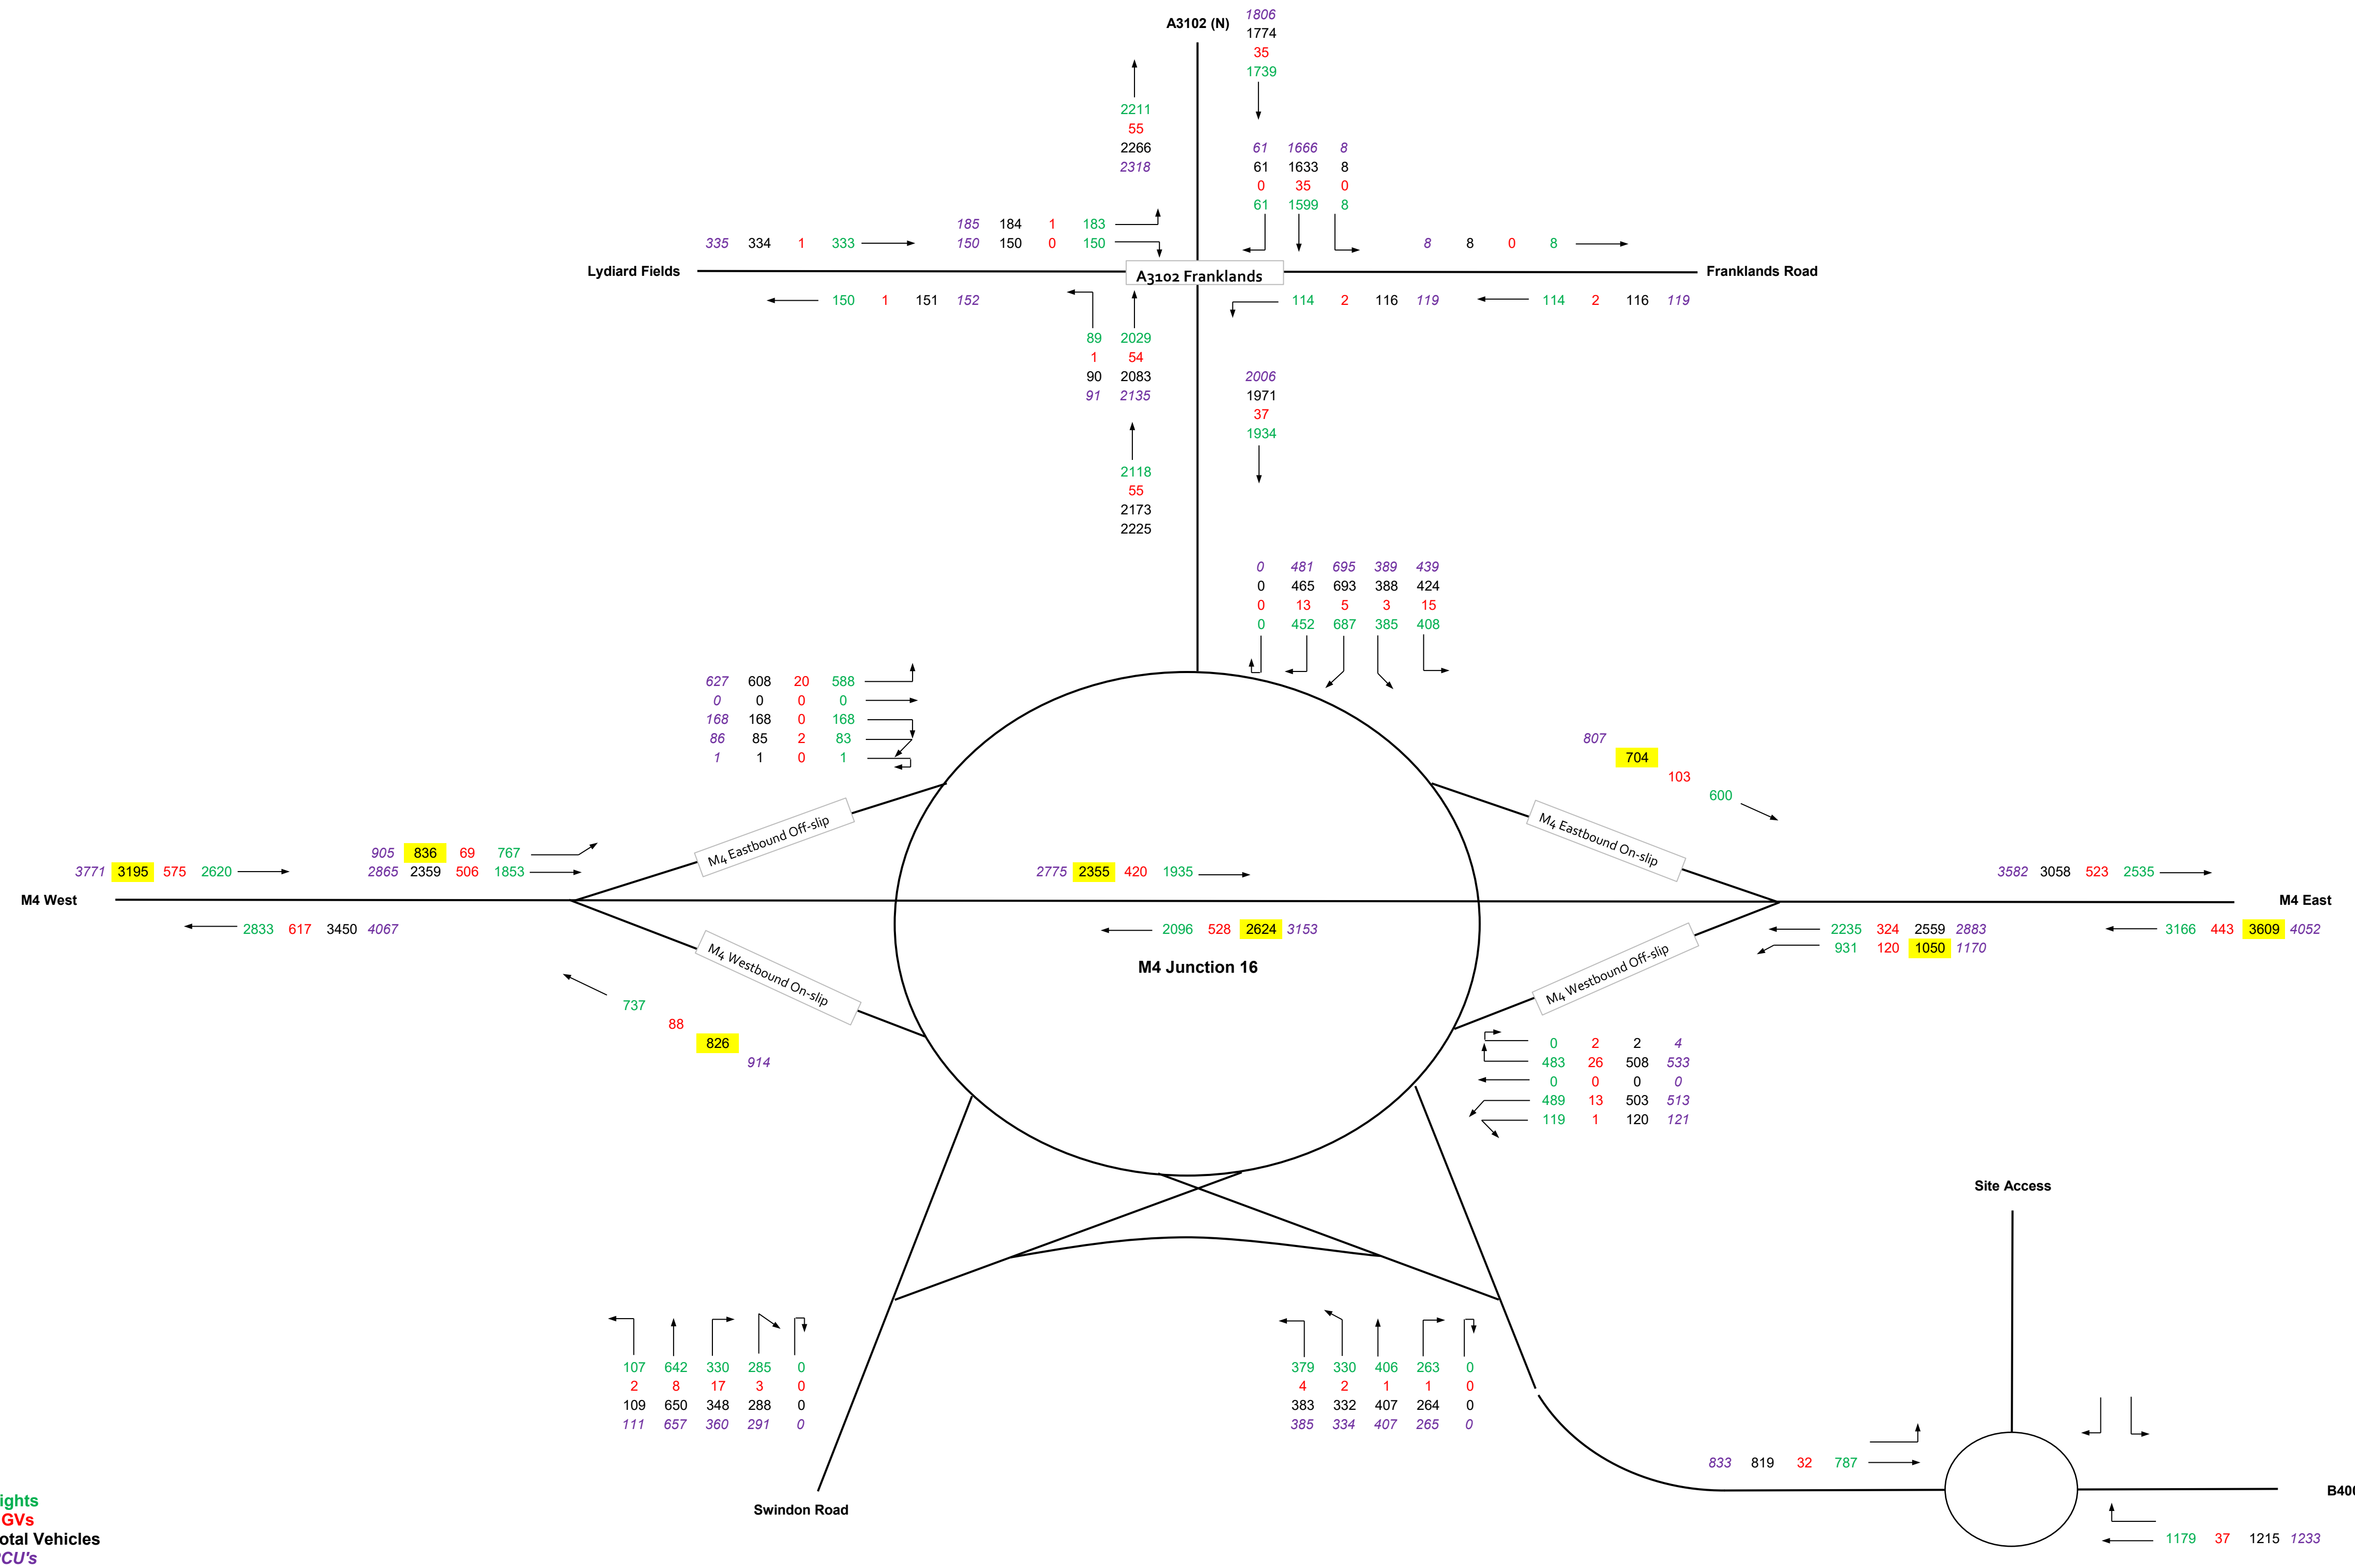


Figure 12 2027 Base Flows - Weekday PM Peak (1630-1730)

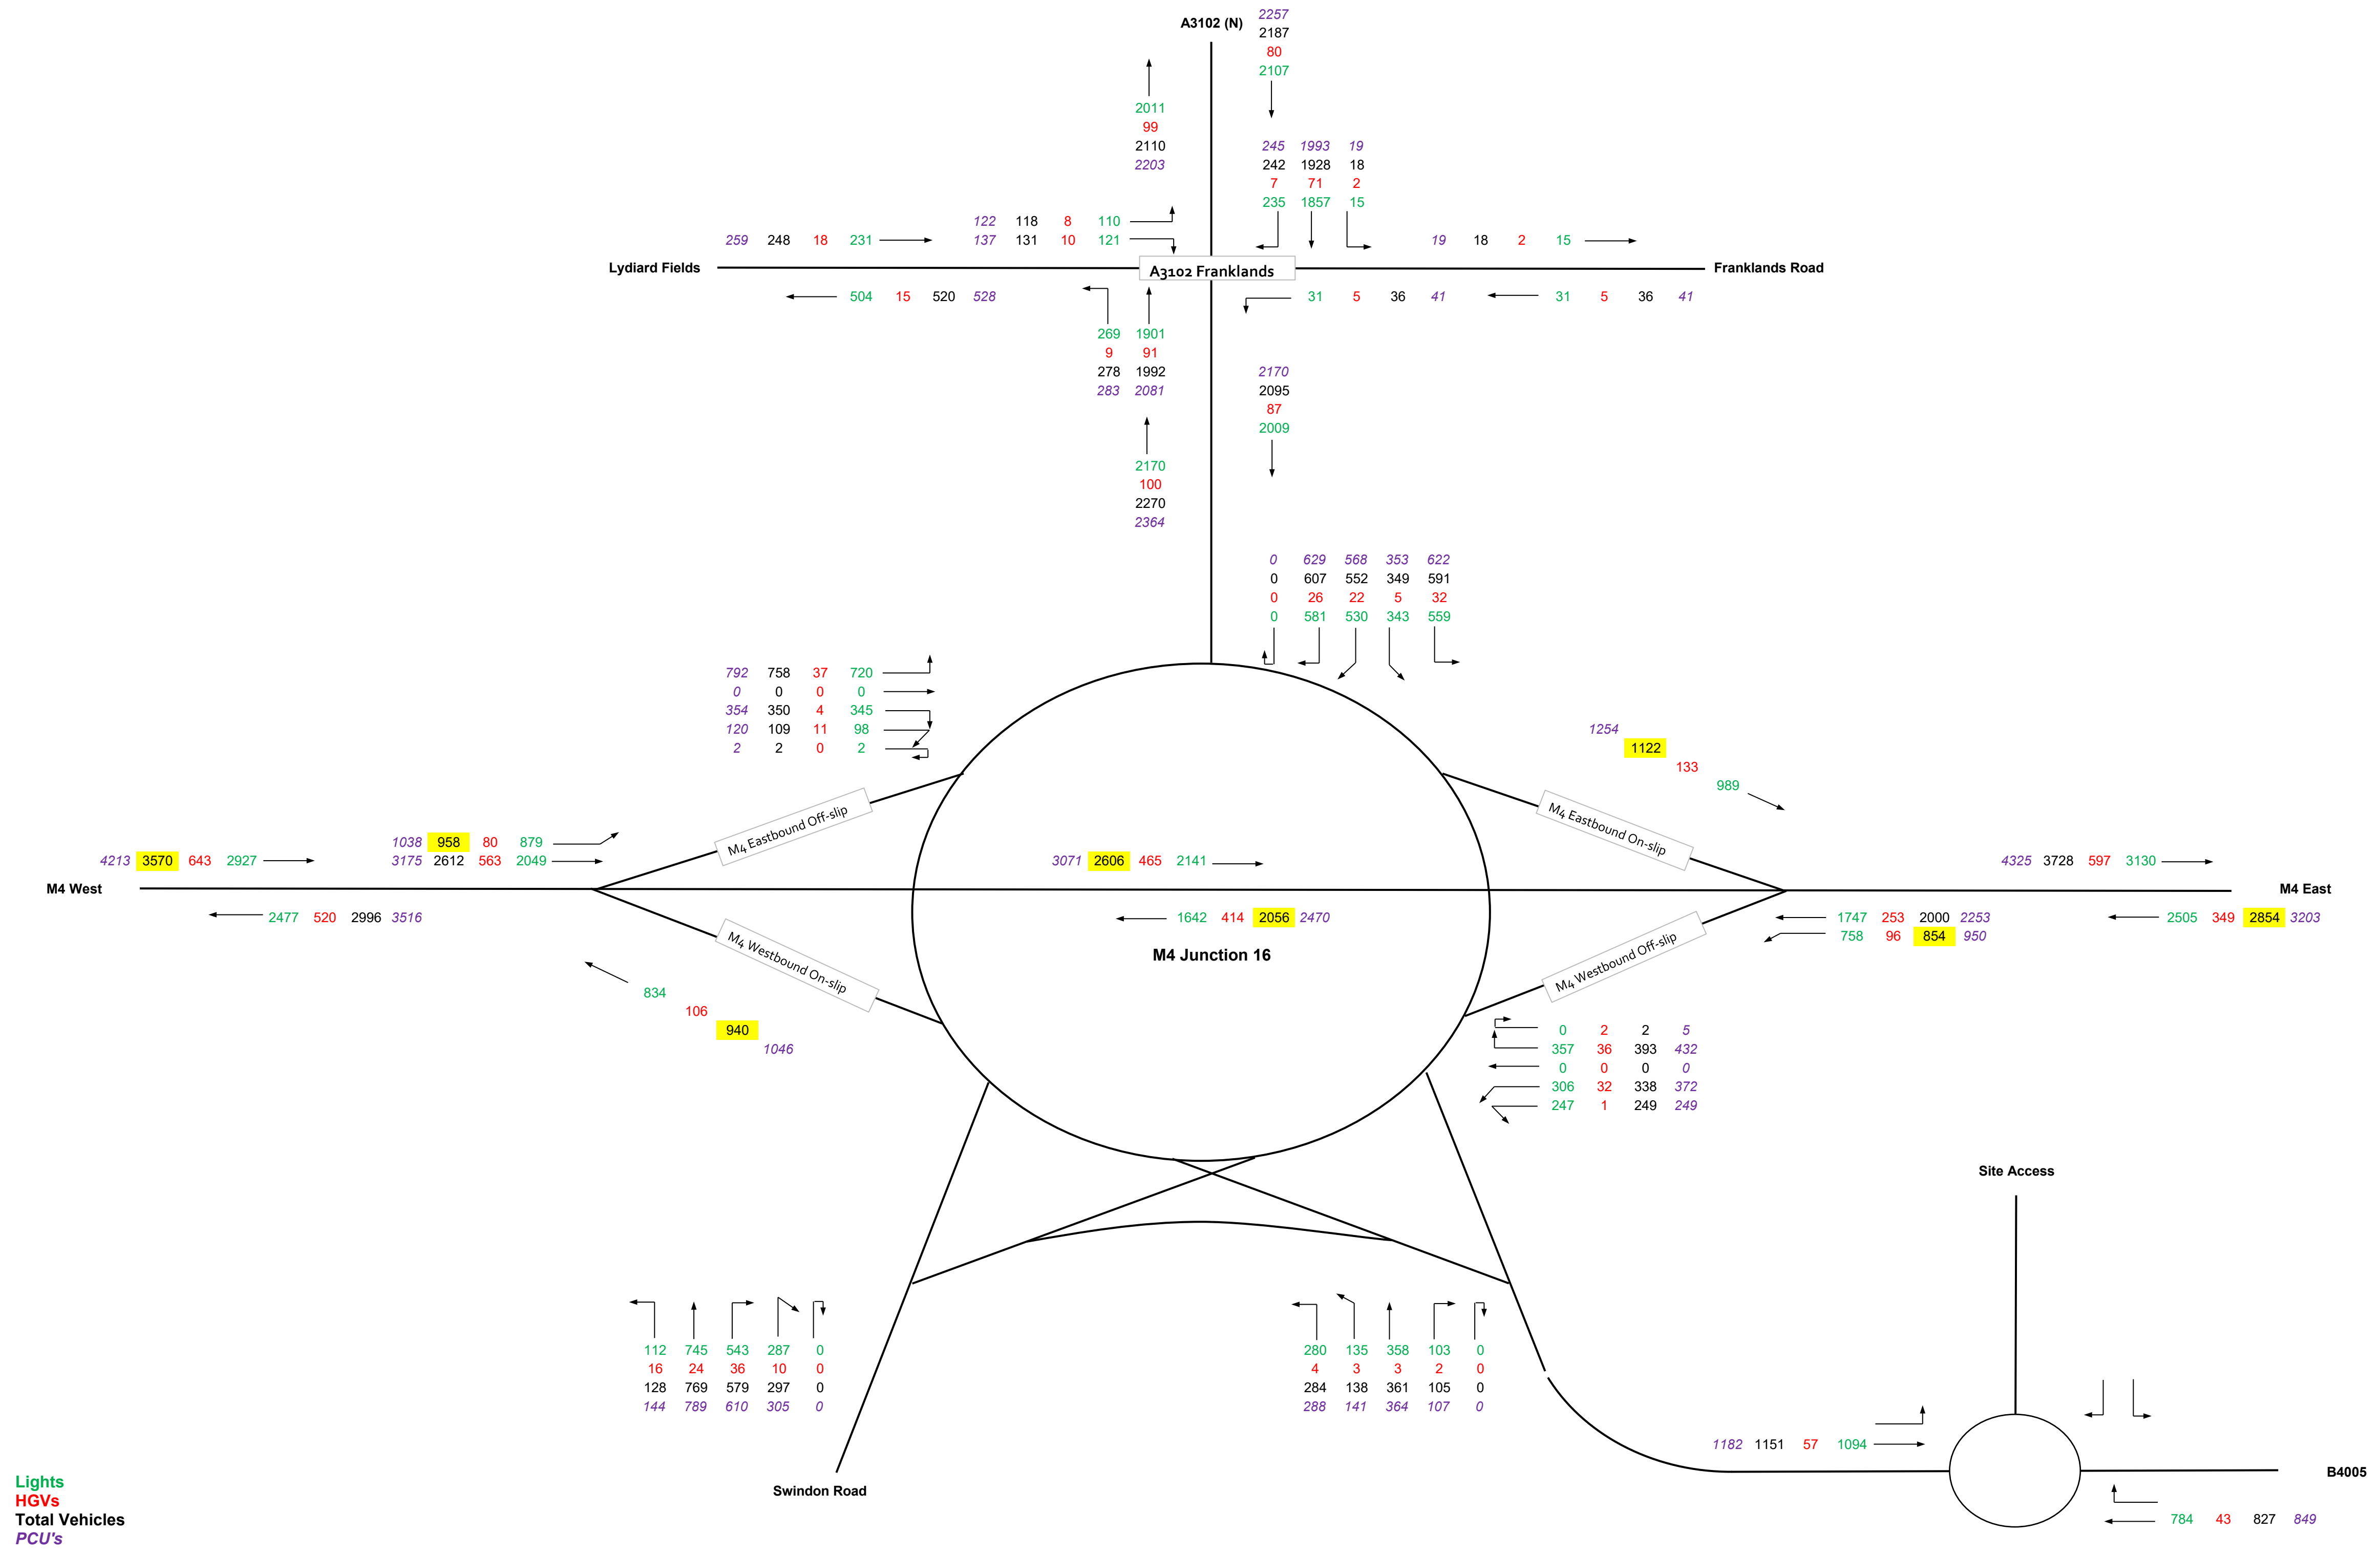


Figure 13 2033 Base Flows (with P&R) - Weekday AM Peak (0730-0830)

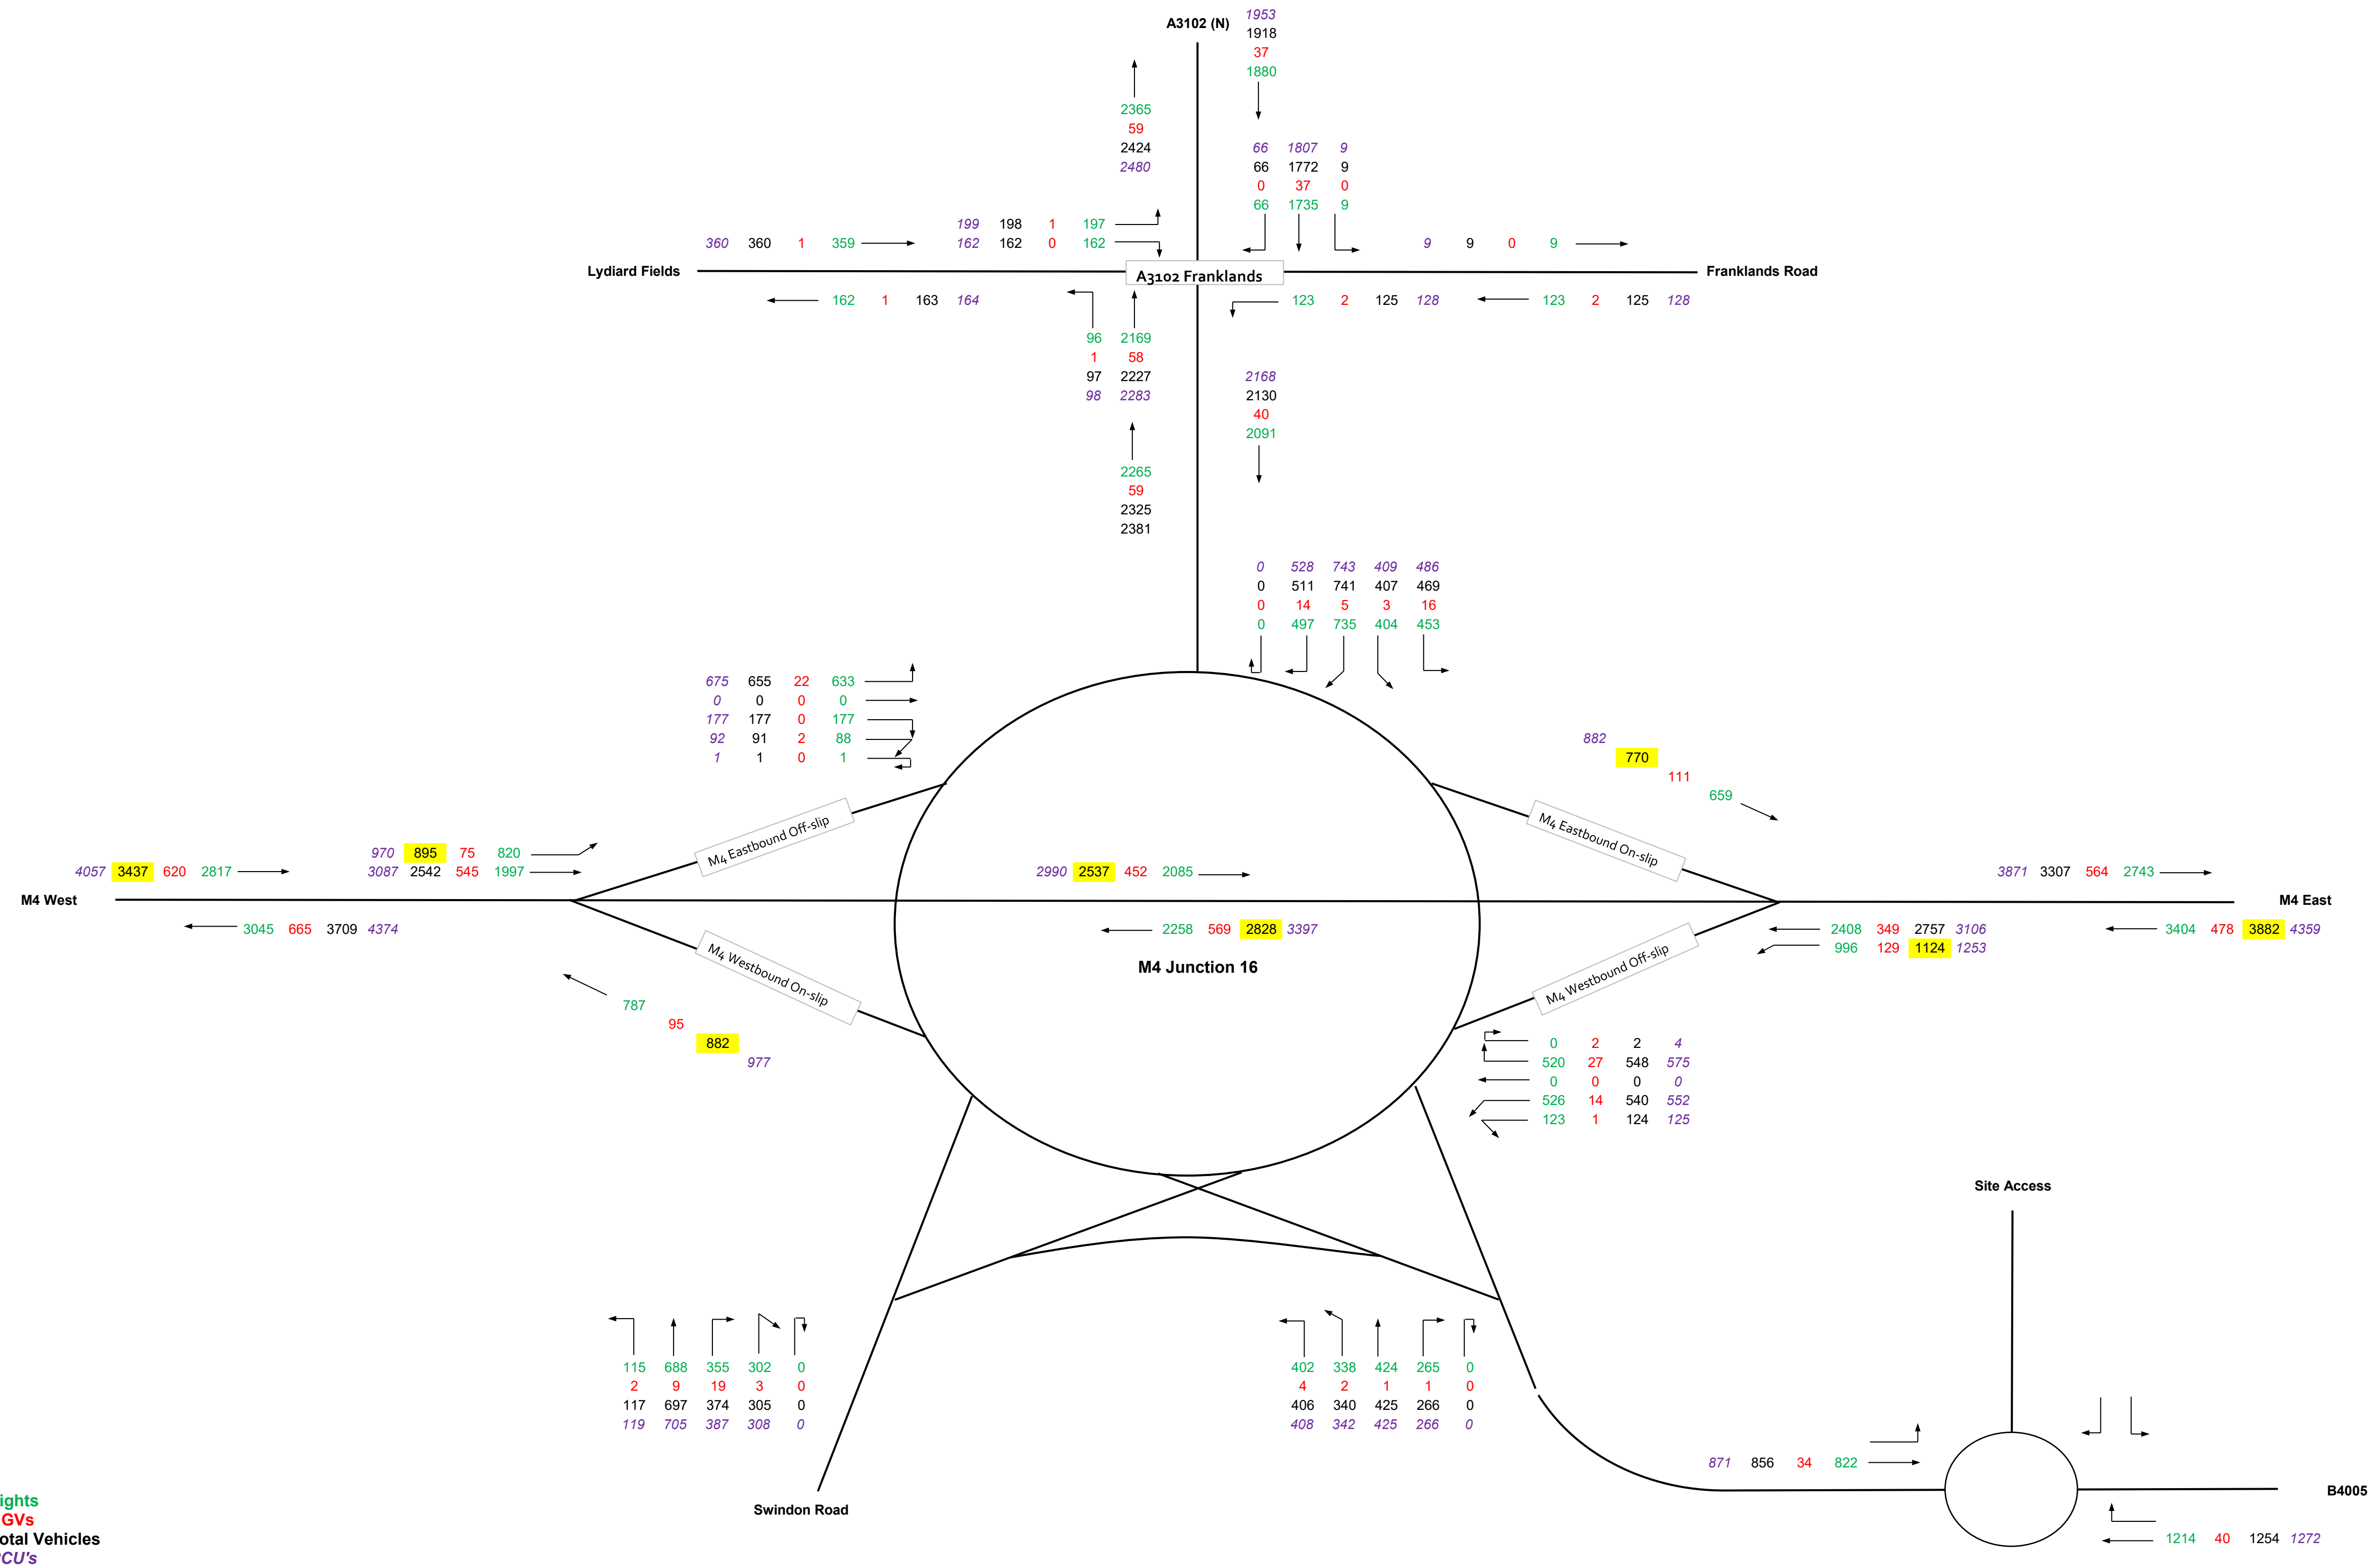


Figure 14 2033 Base Flows (with P&R) - Weekday PM Peak (1630-1730)

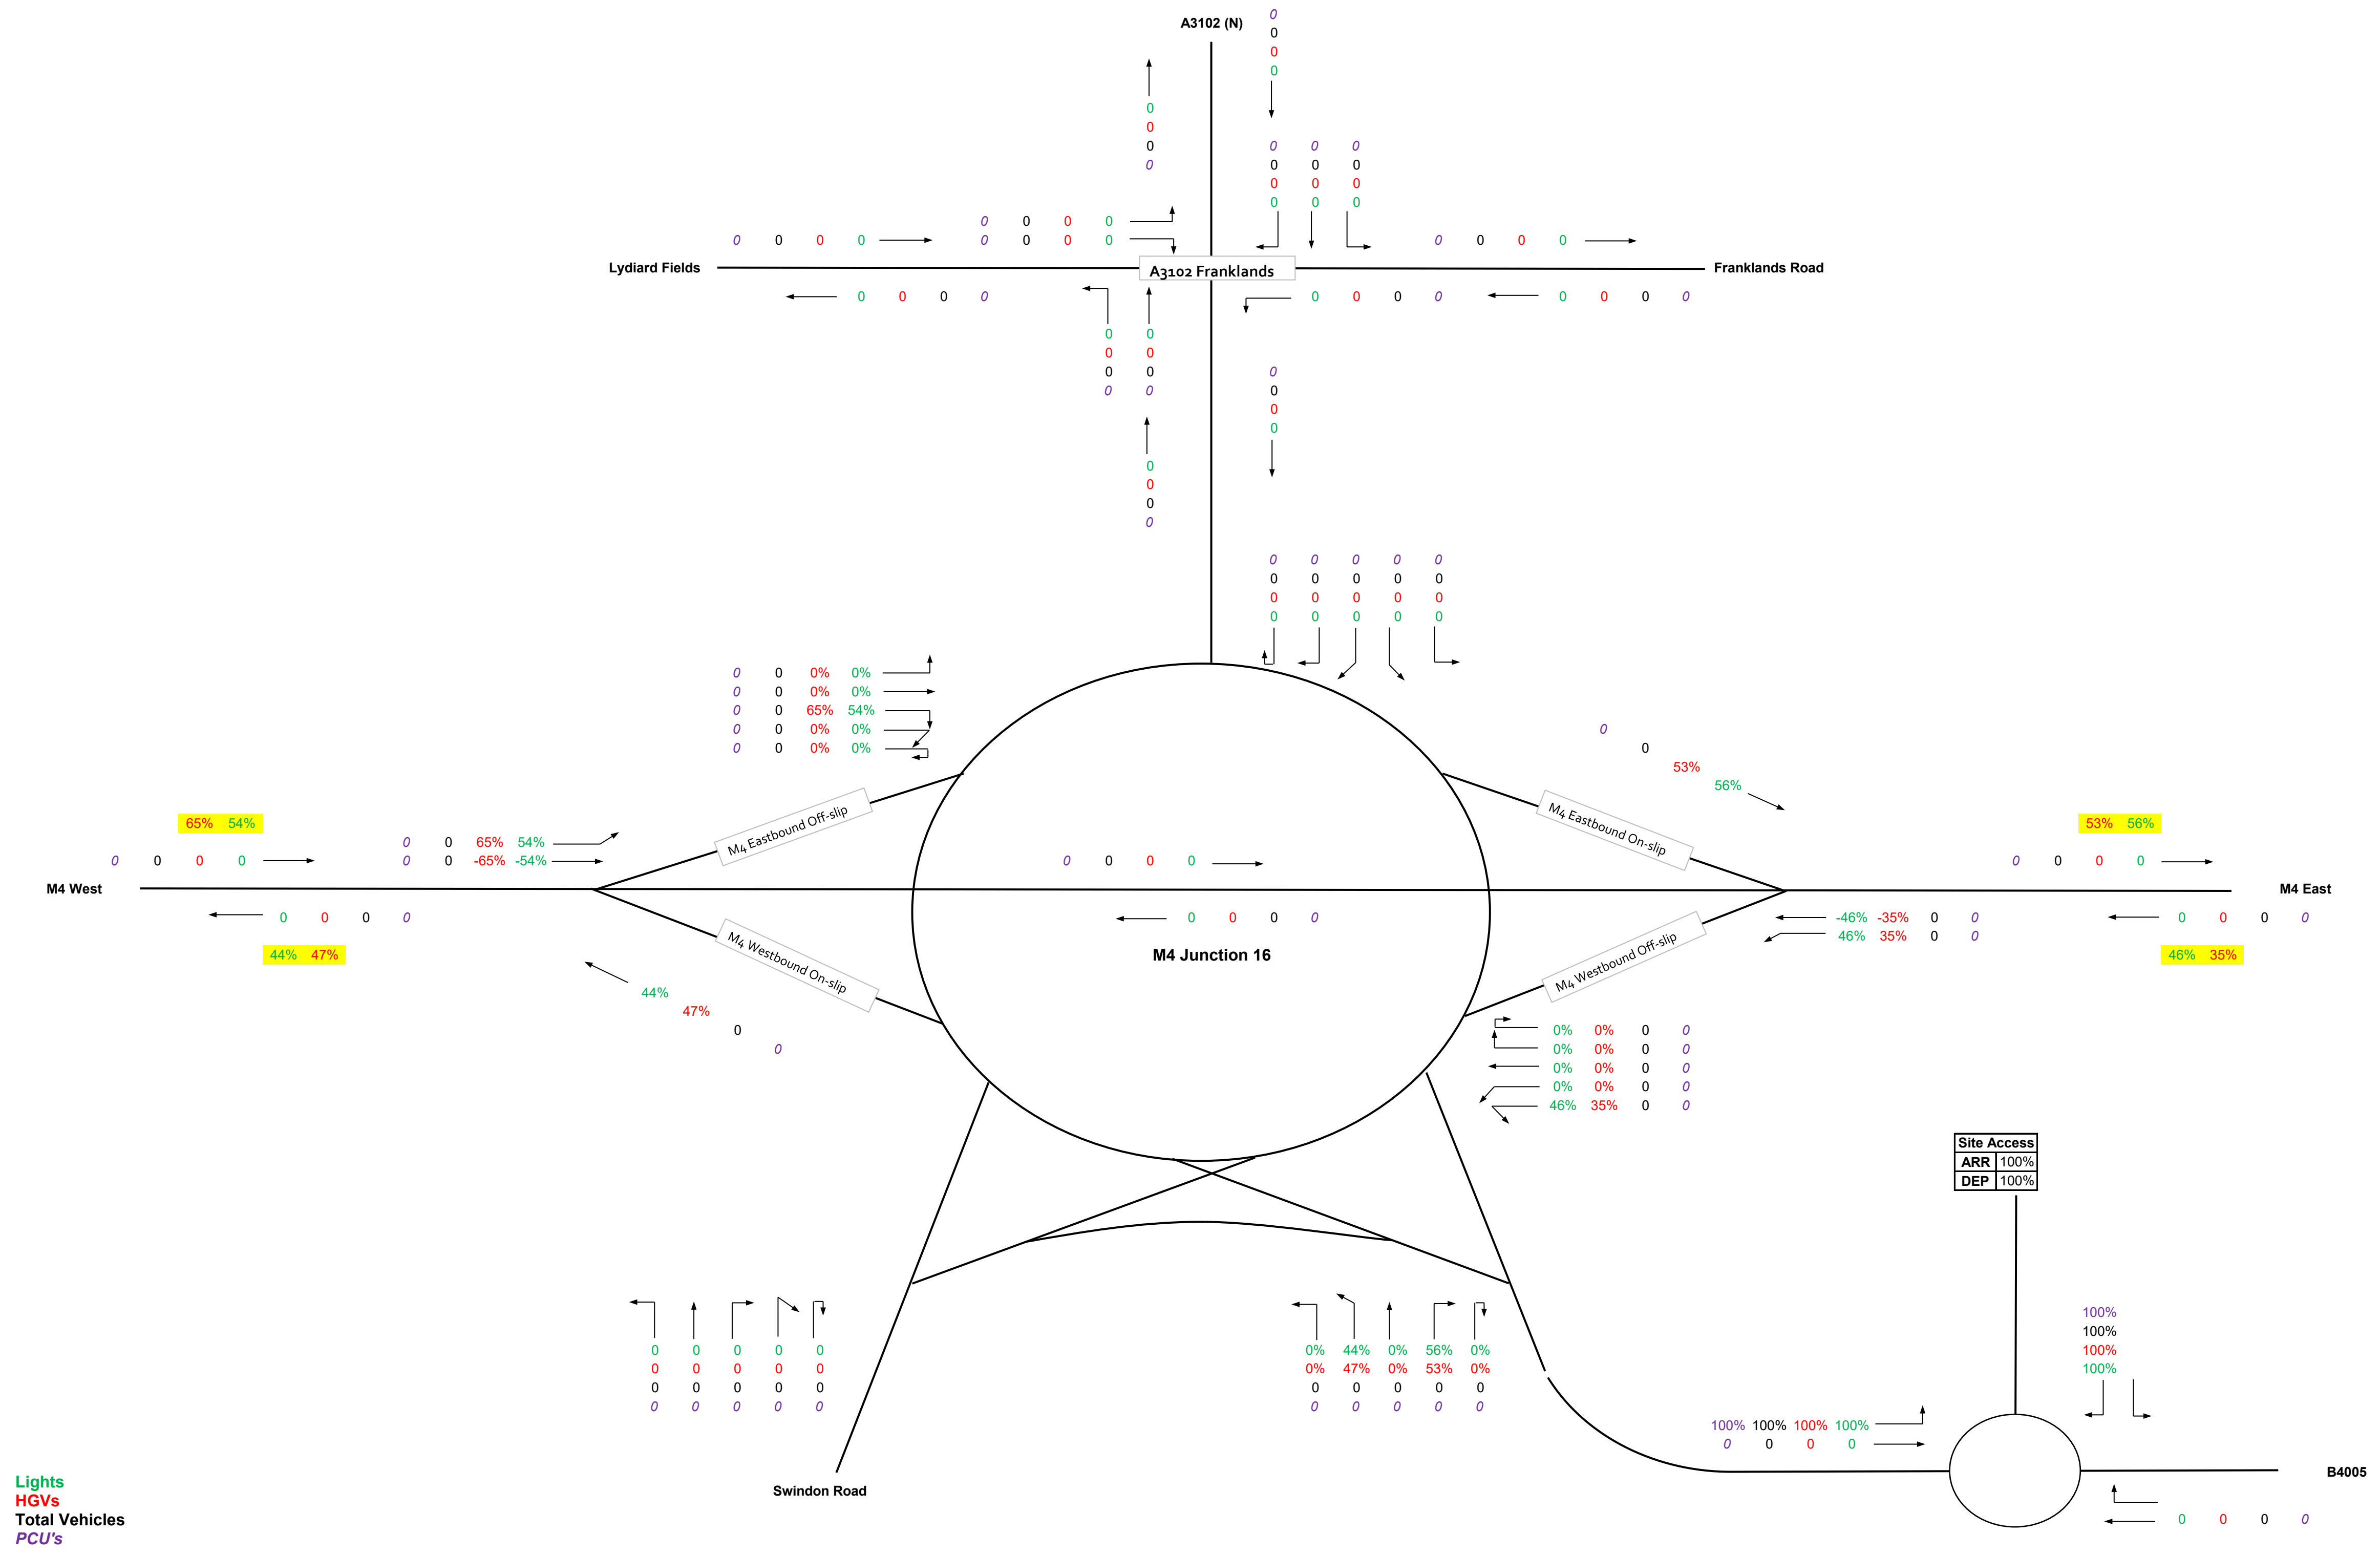


Figure 15 Motorway Trip Distribution - Weekday AM Peak (0730-0830)

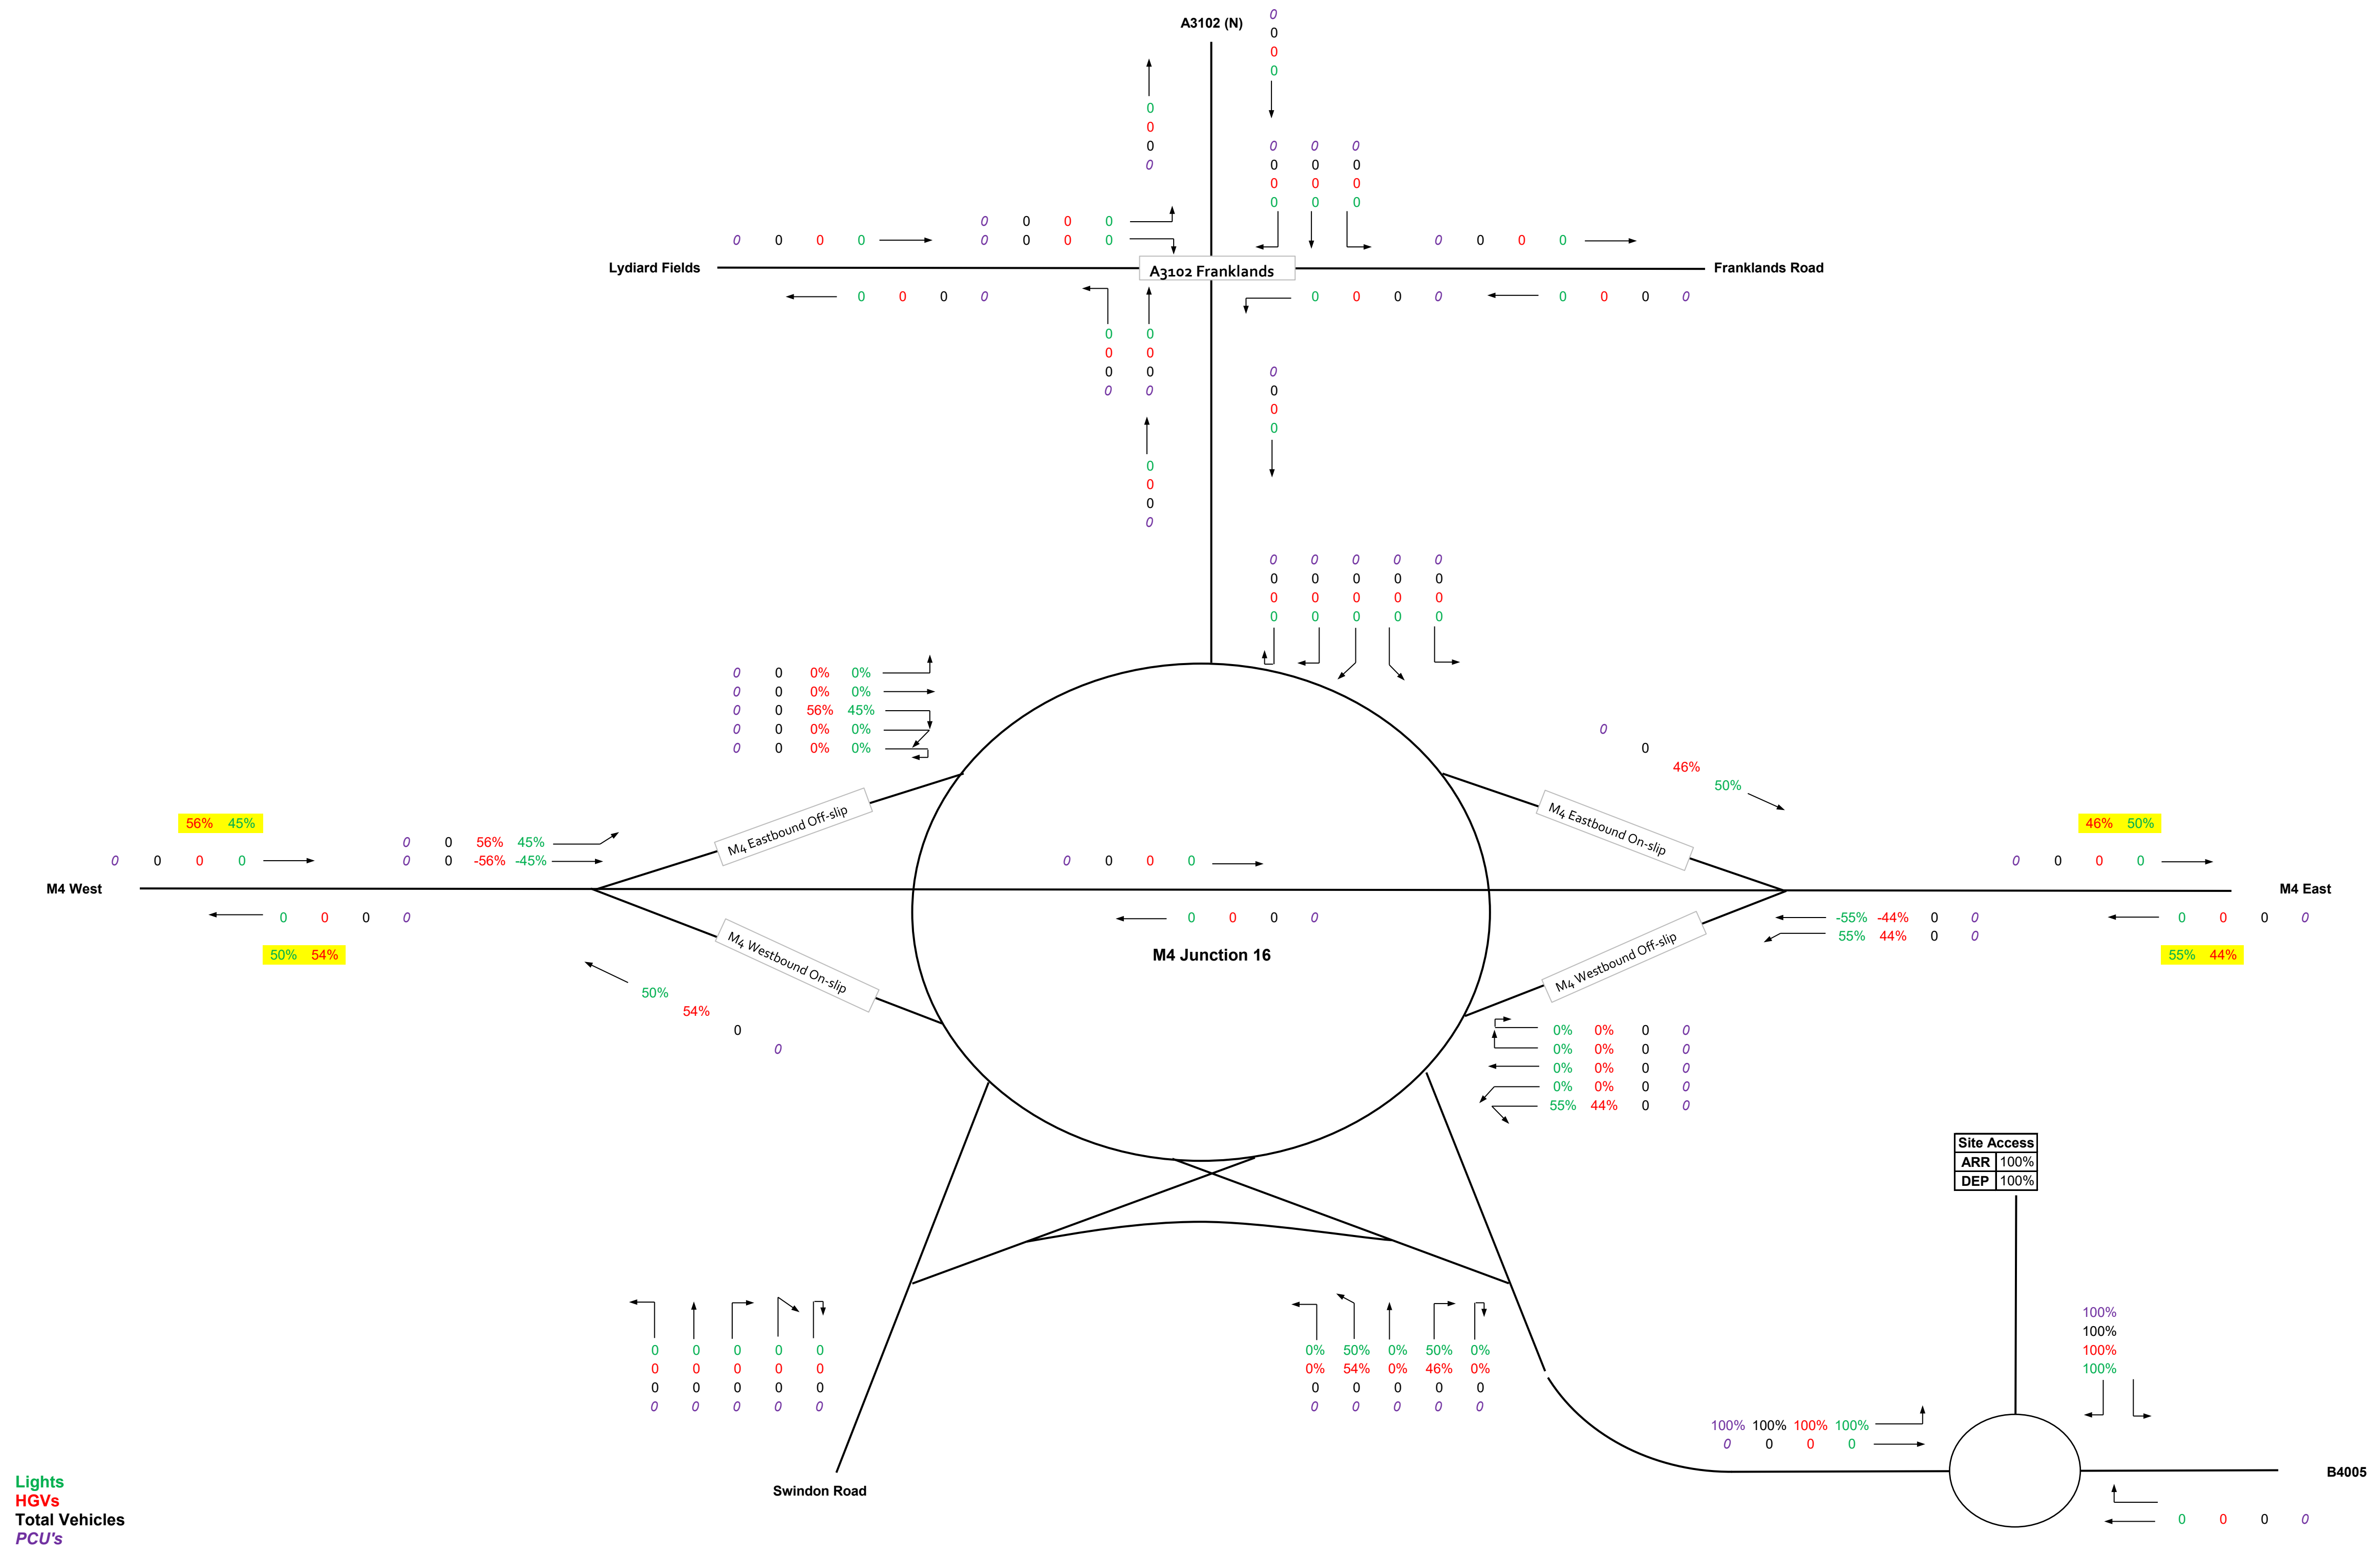


Figure 16 Motorway Trip Distribution - Weekday PM Peak (1630-1730)

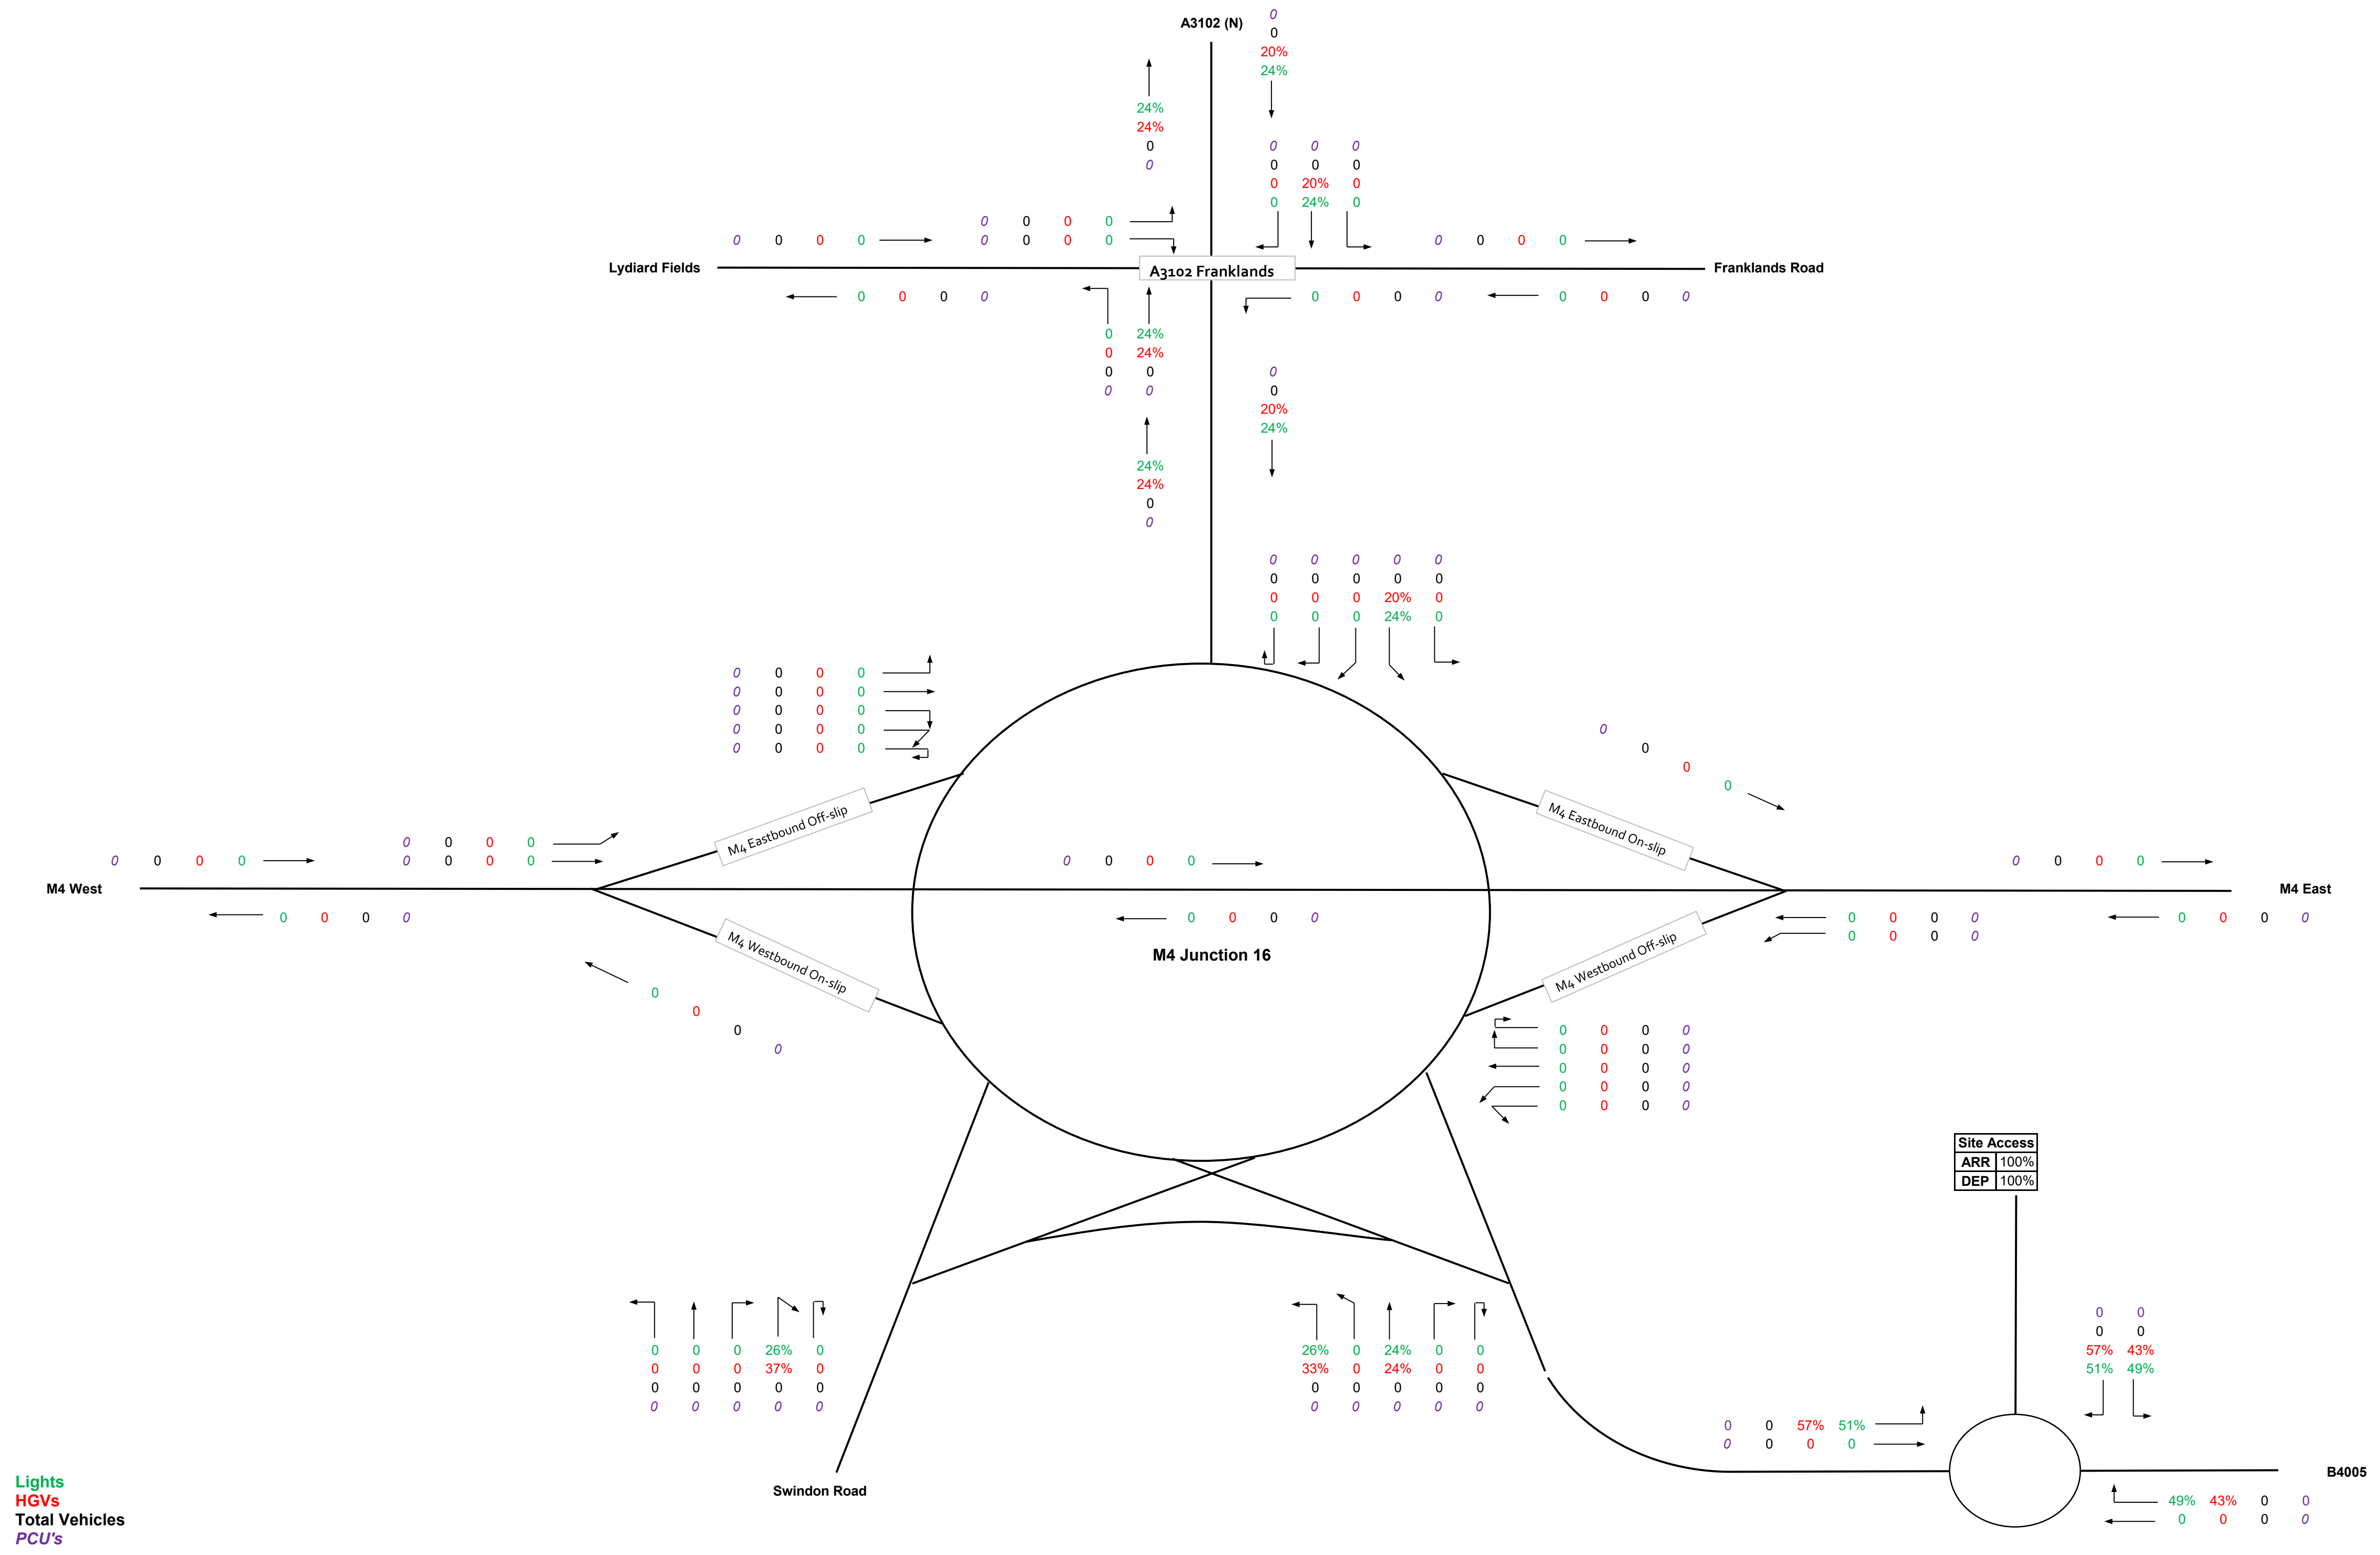


Figure 17 Local Road Trip Distribution - Weekday AM Peak (0730-0830)

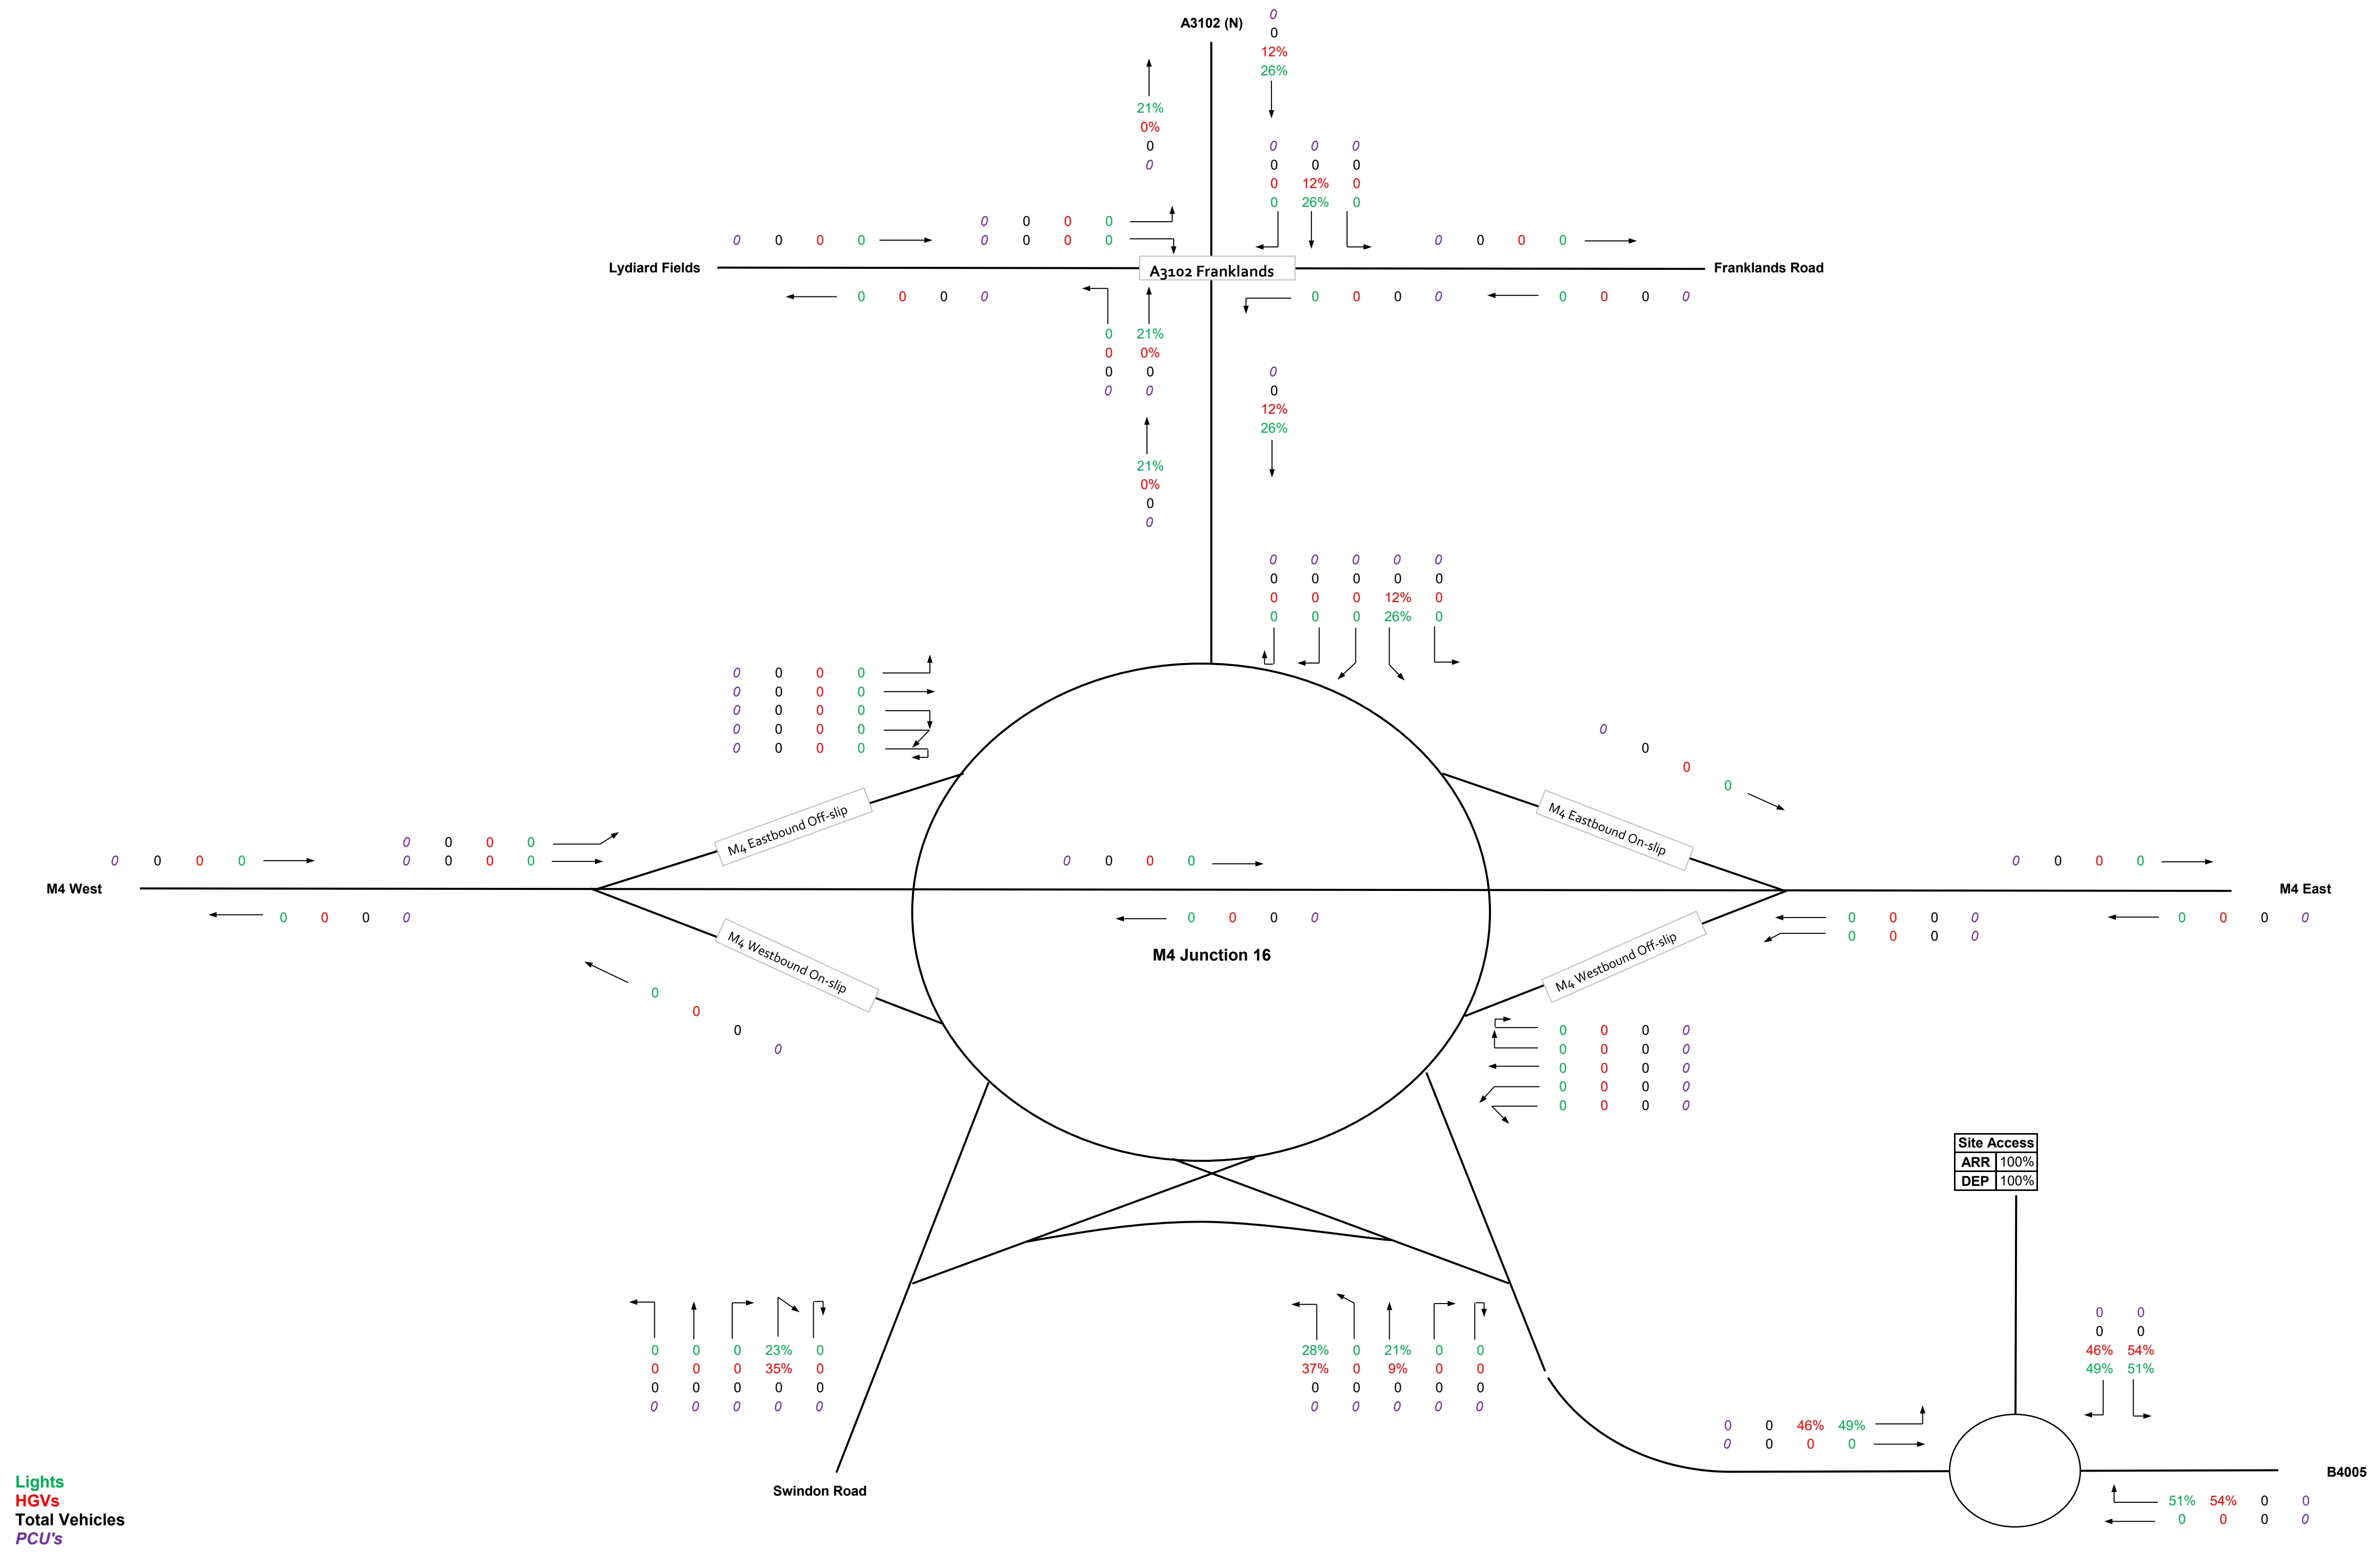


Figure 18 Local Road Trip Distribution - Weekday PM Peak (1630-1730)

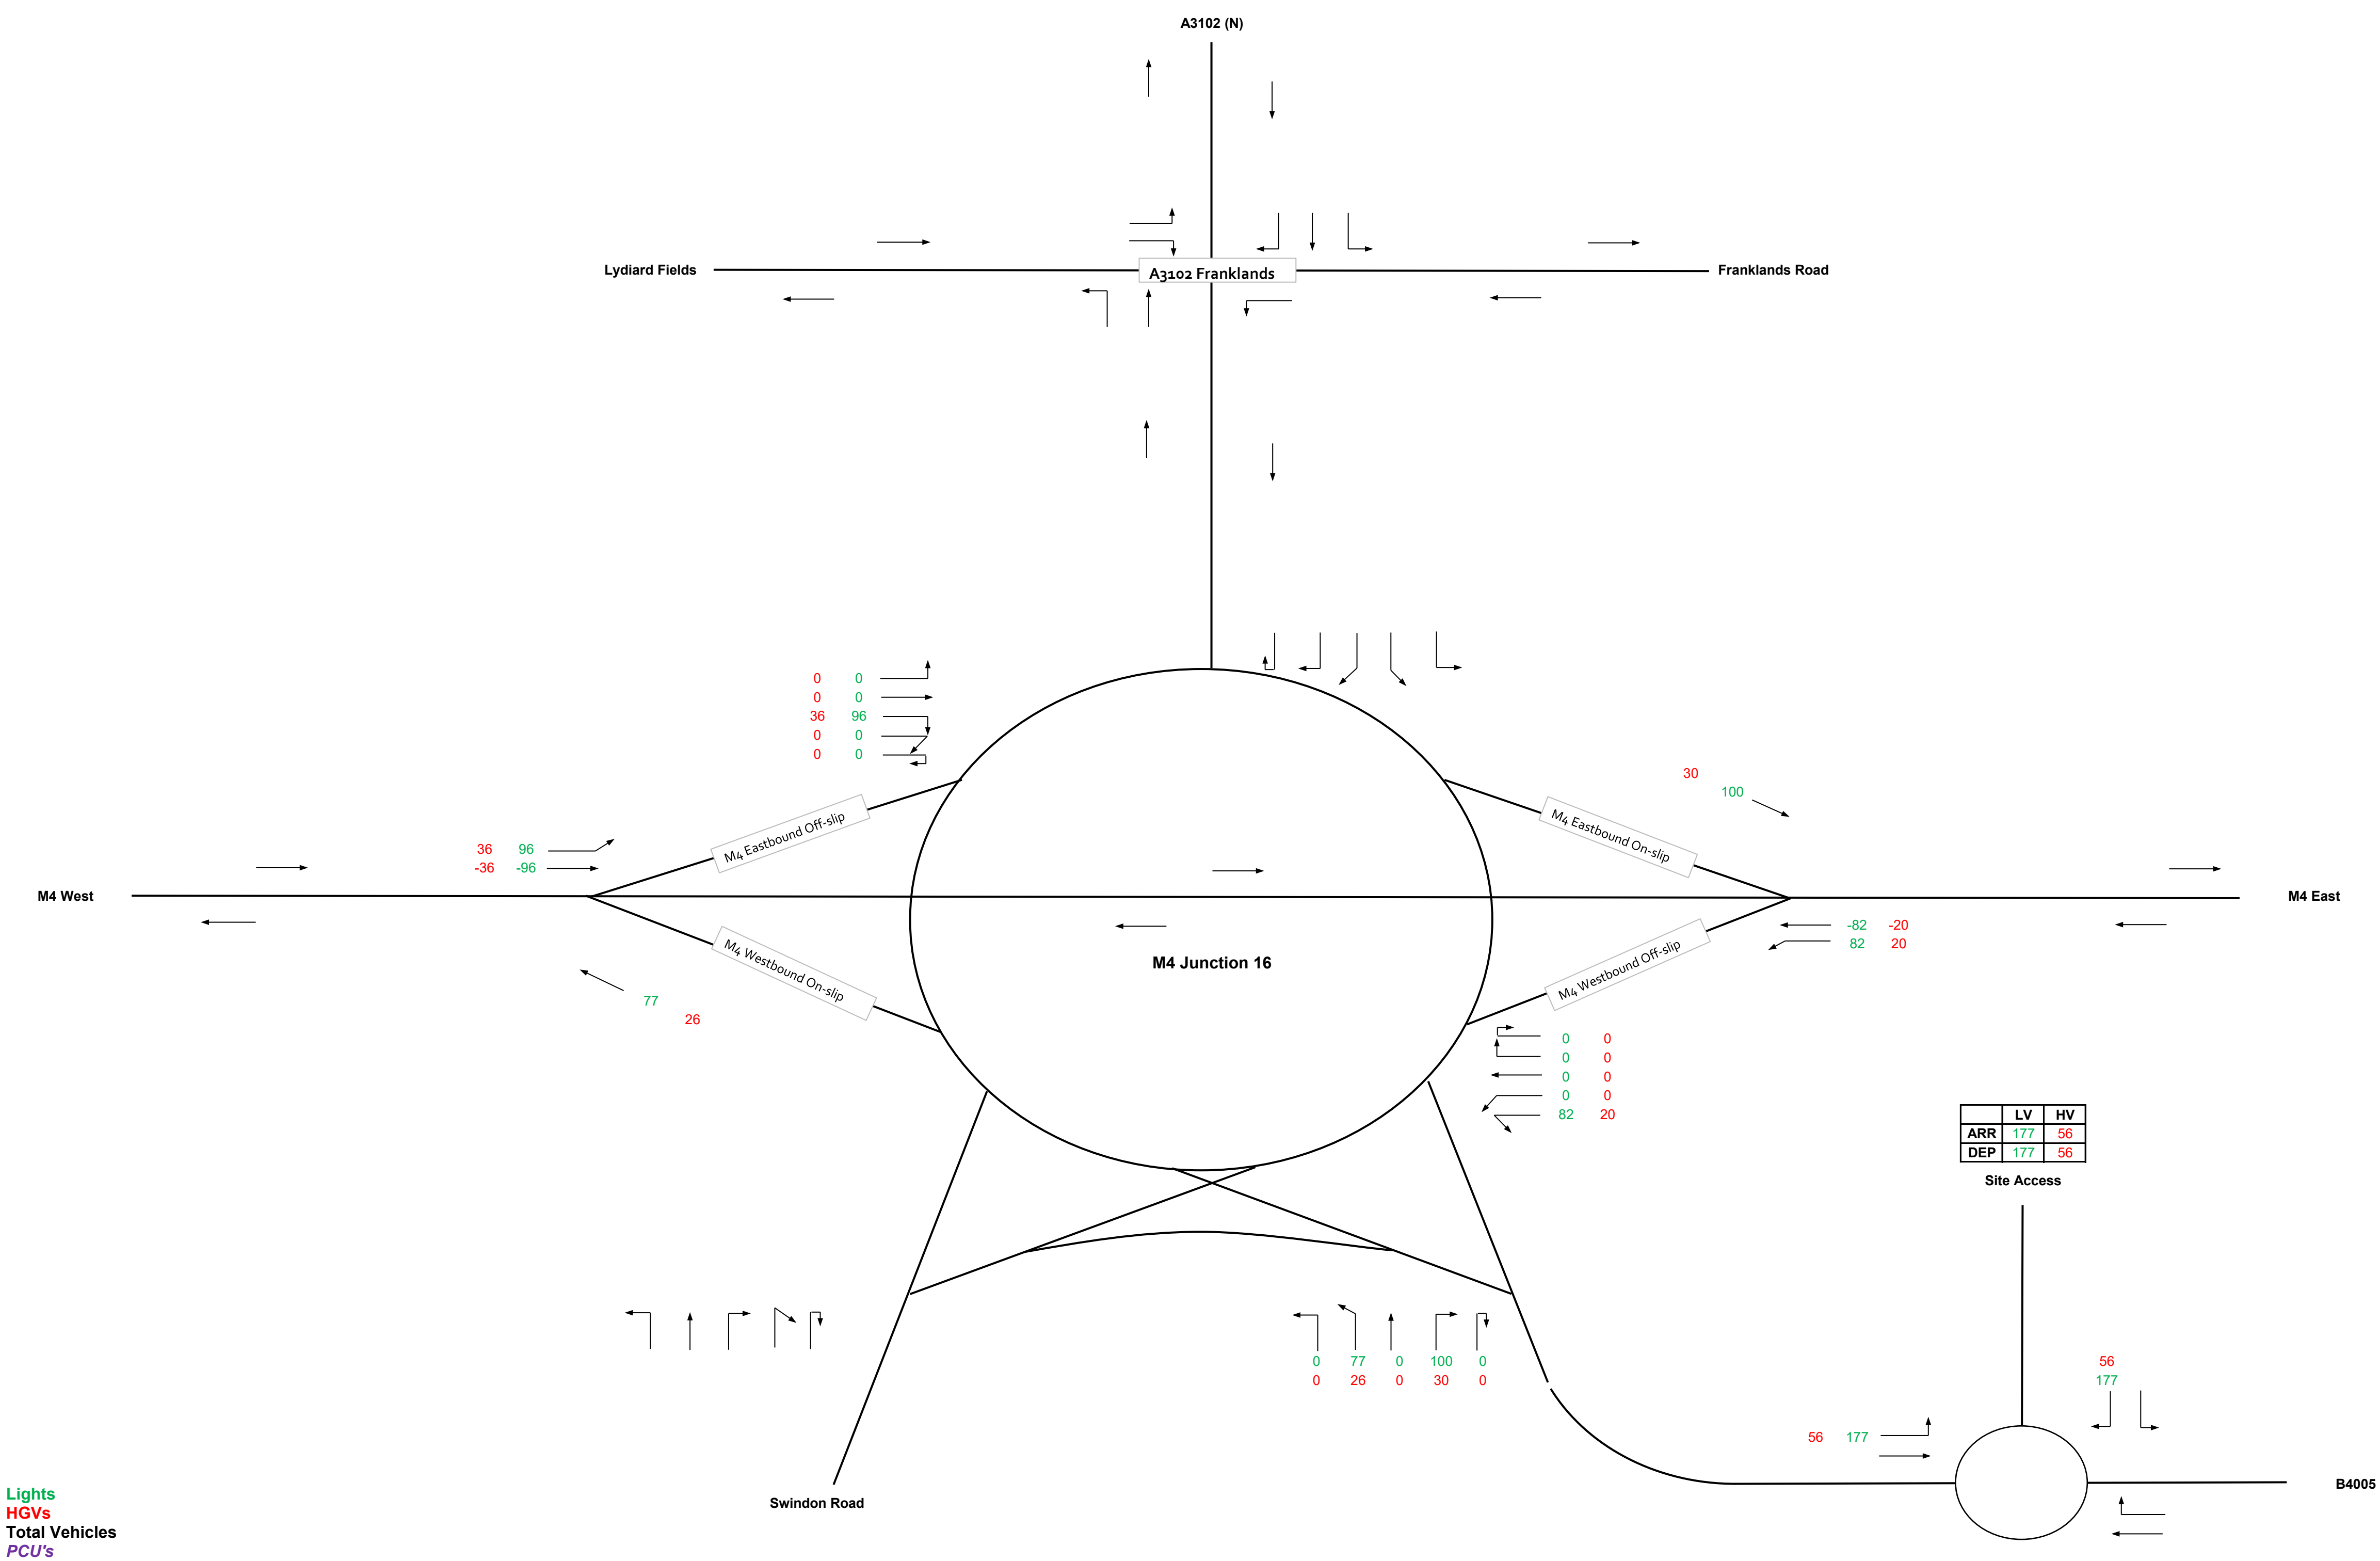


Figure 19 Proposed Development Flows - Motorway Trips - Weekday AM Peak (0730-0830)

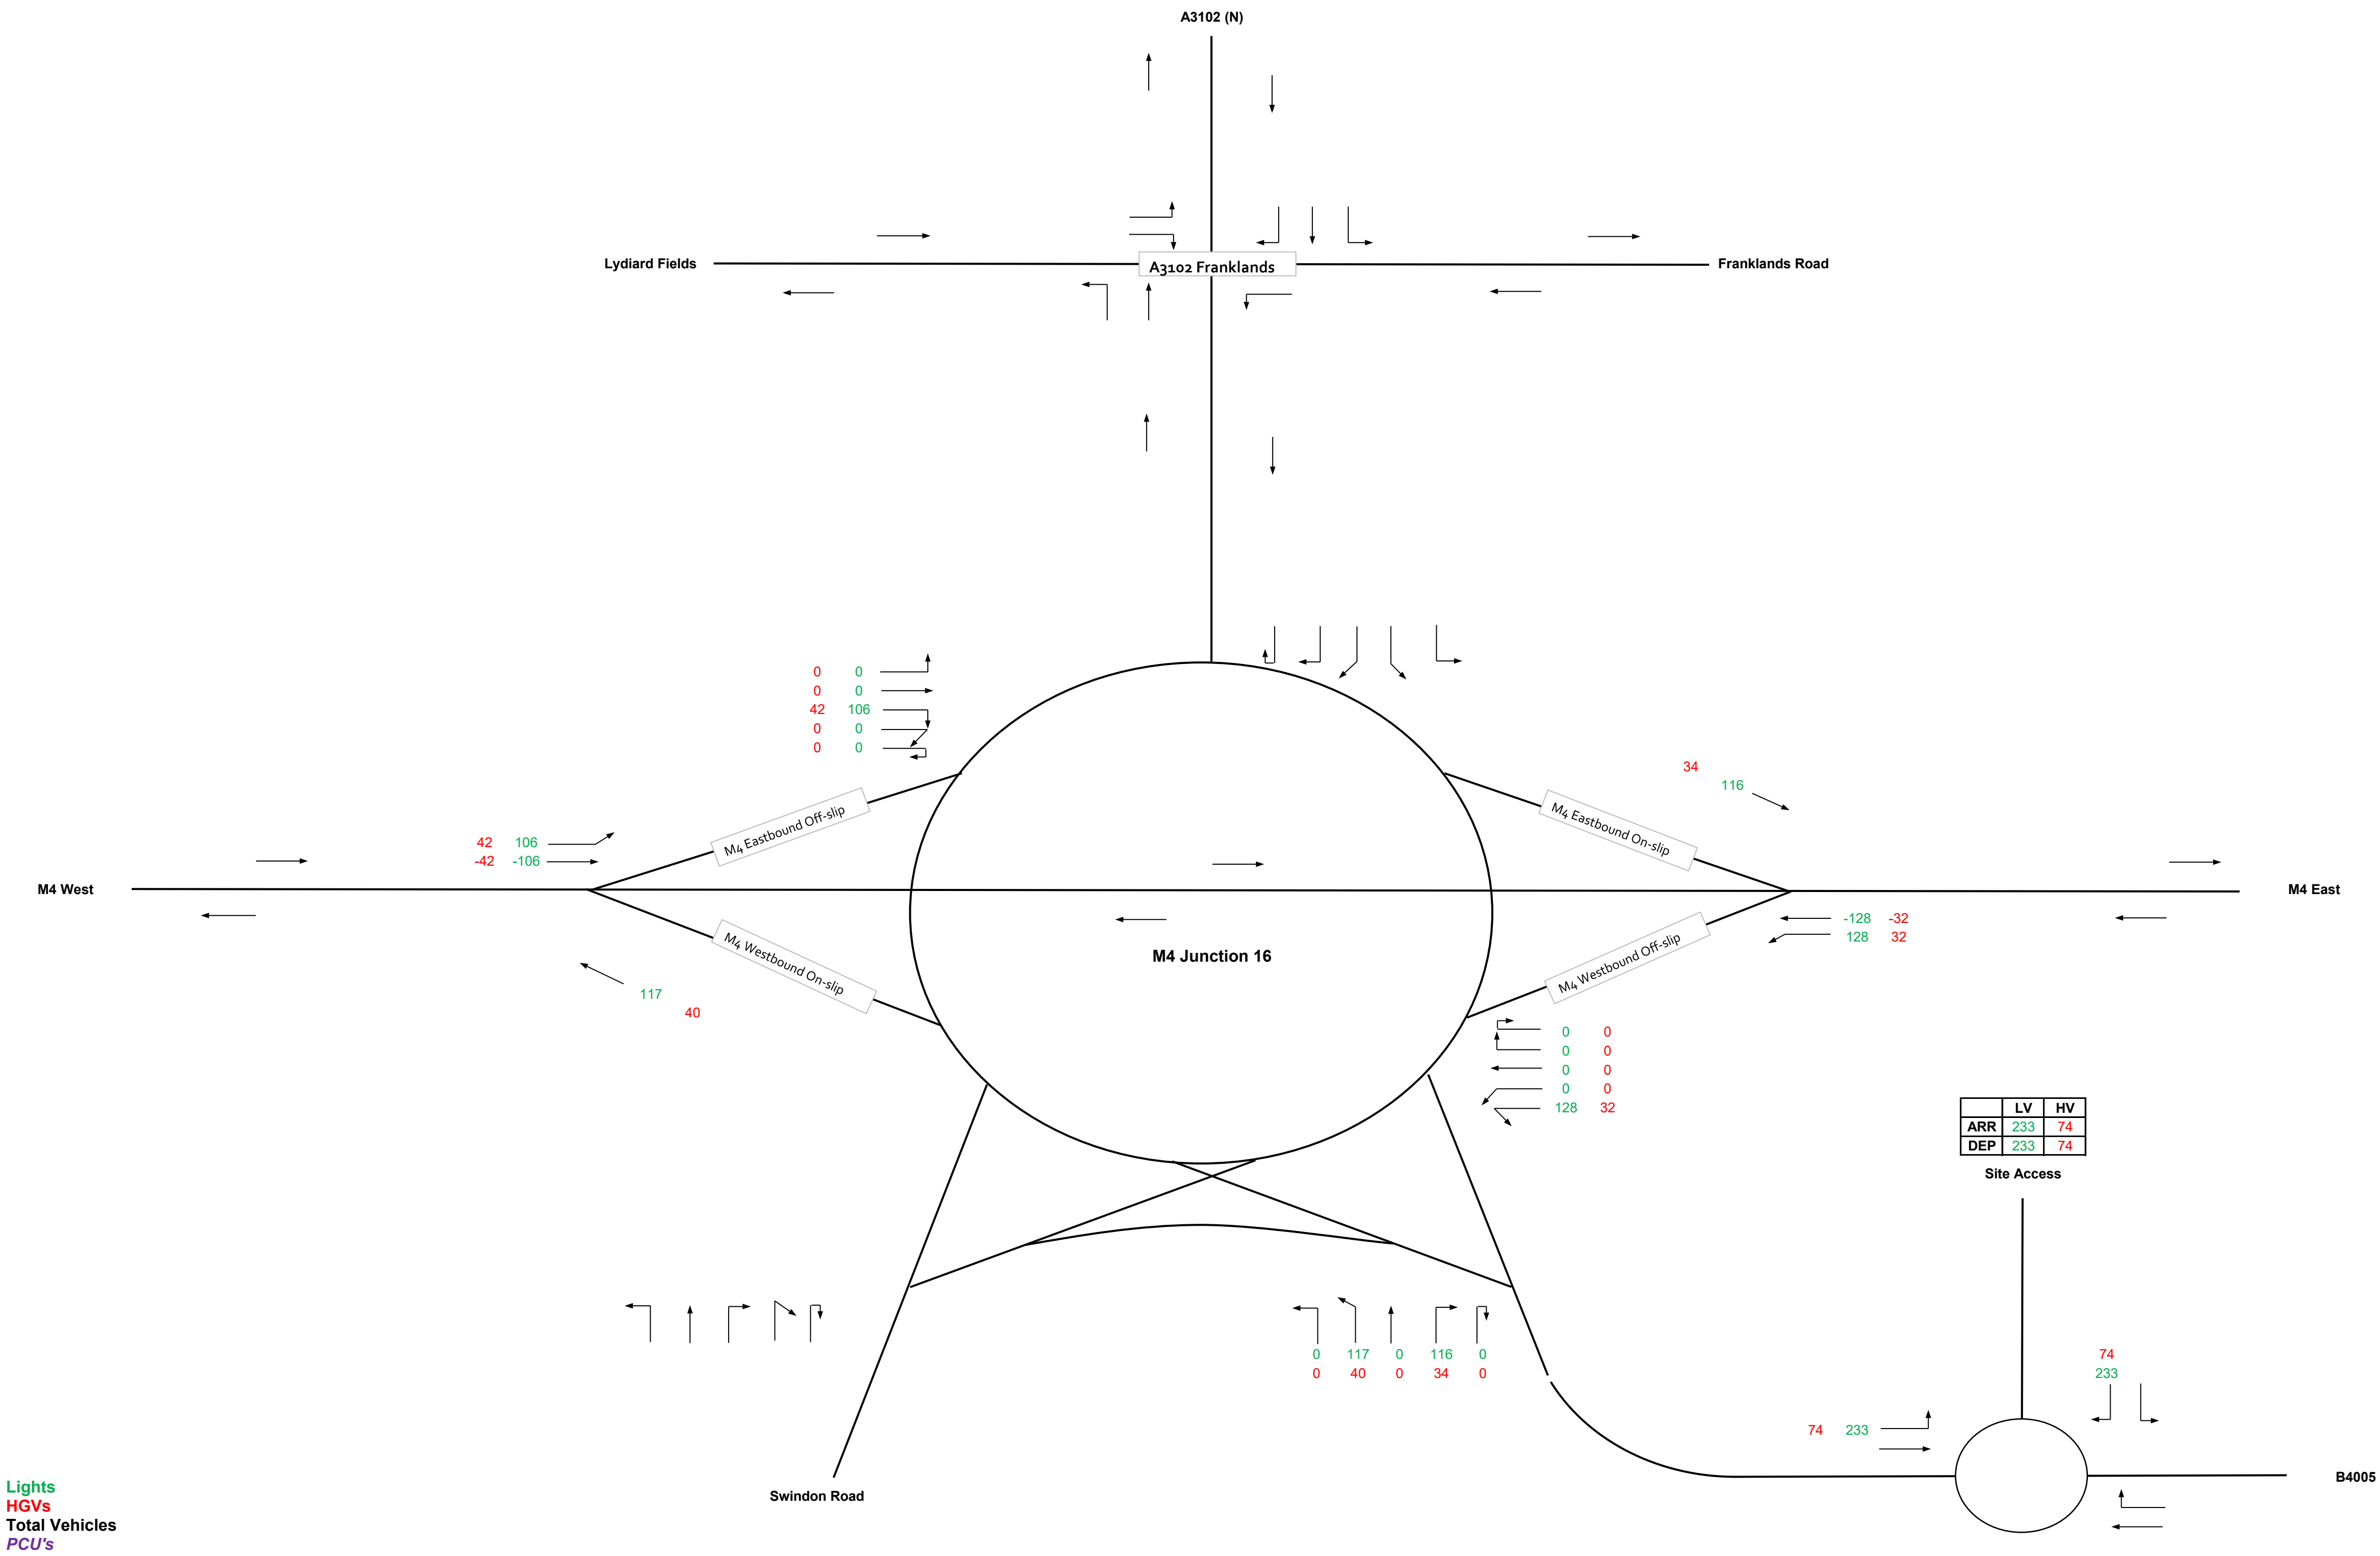


Figure 20 Proposed Development Flows - Motorway Trips - Weekday PM Peak (1630-1730)

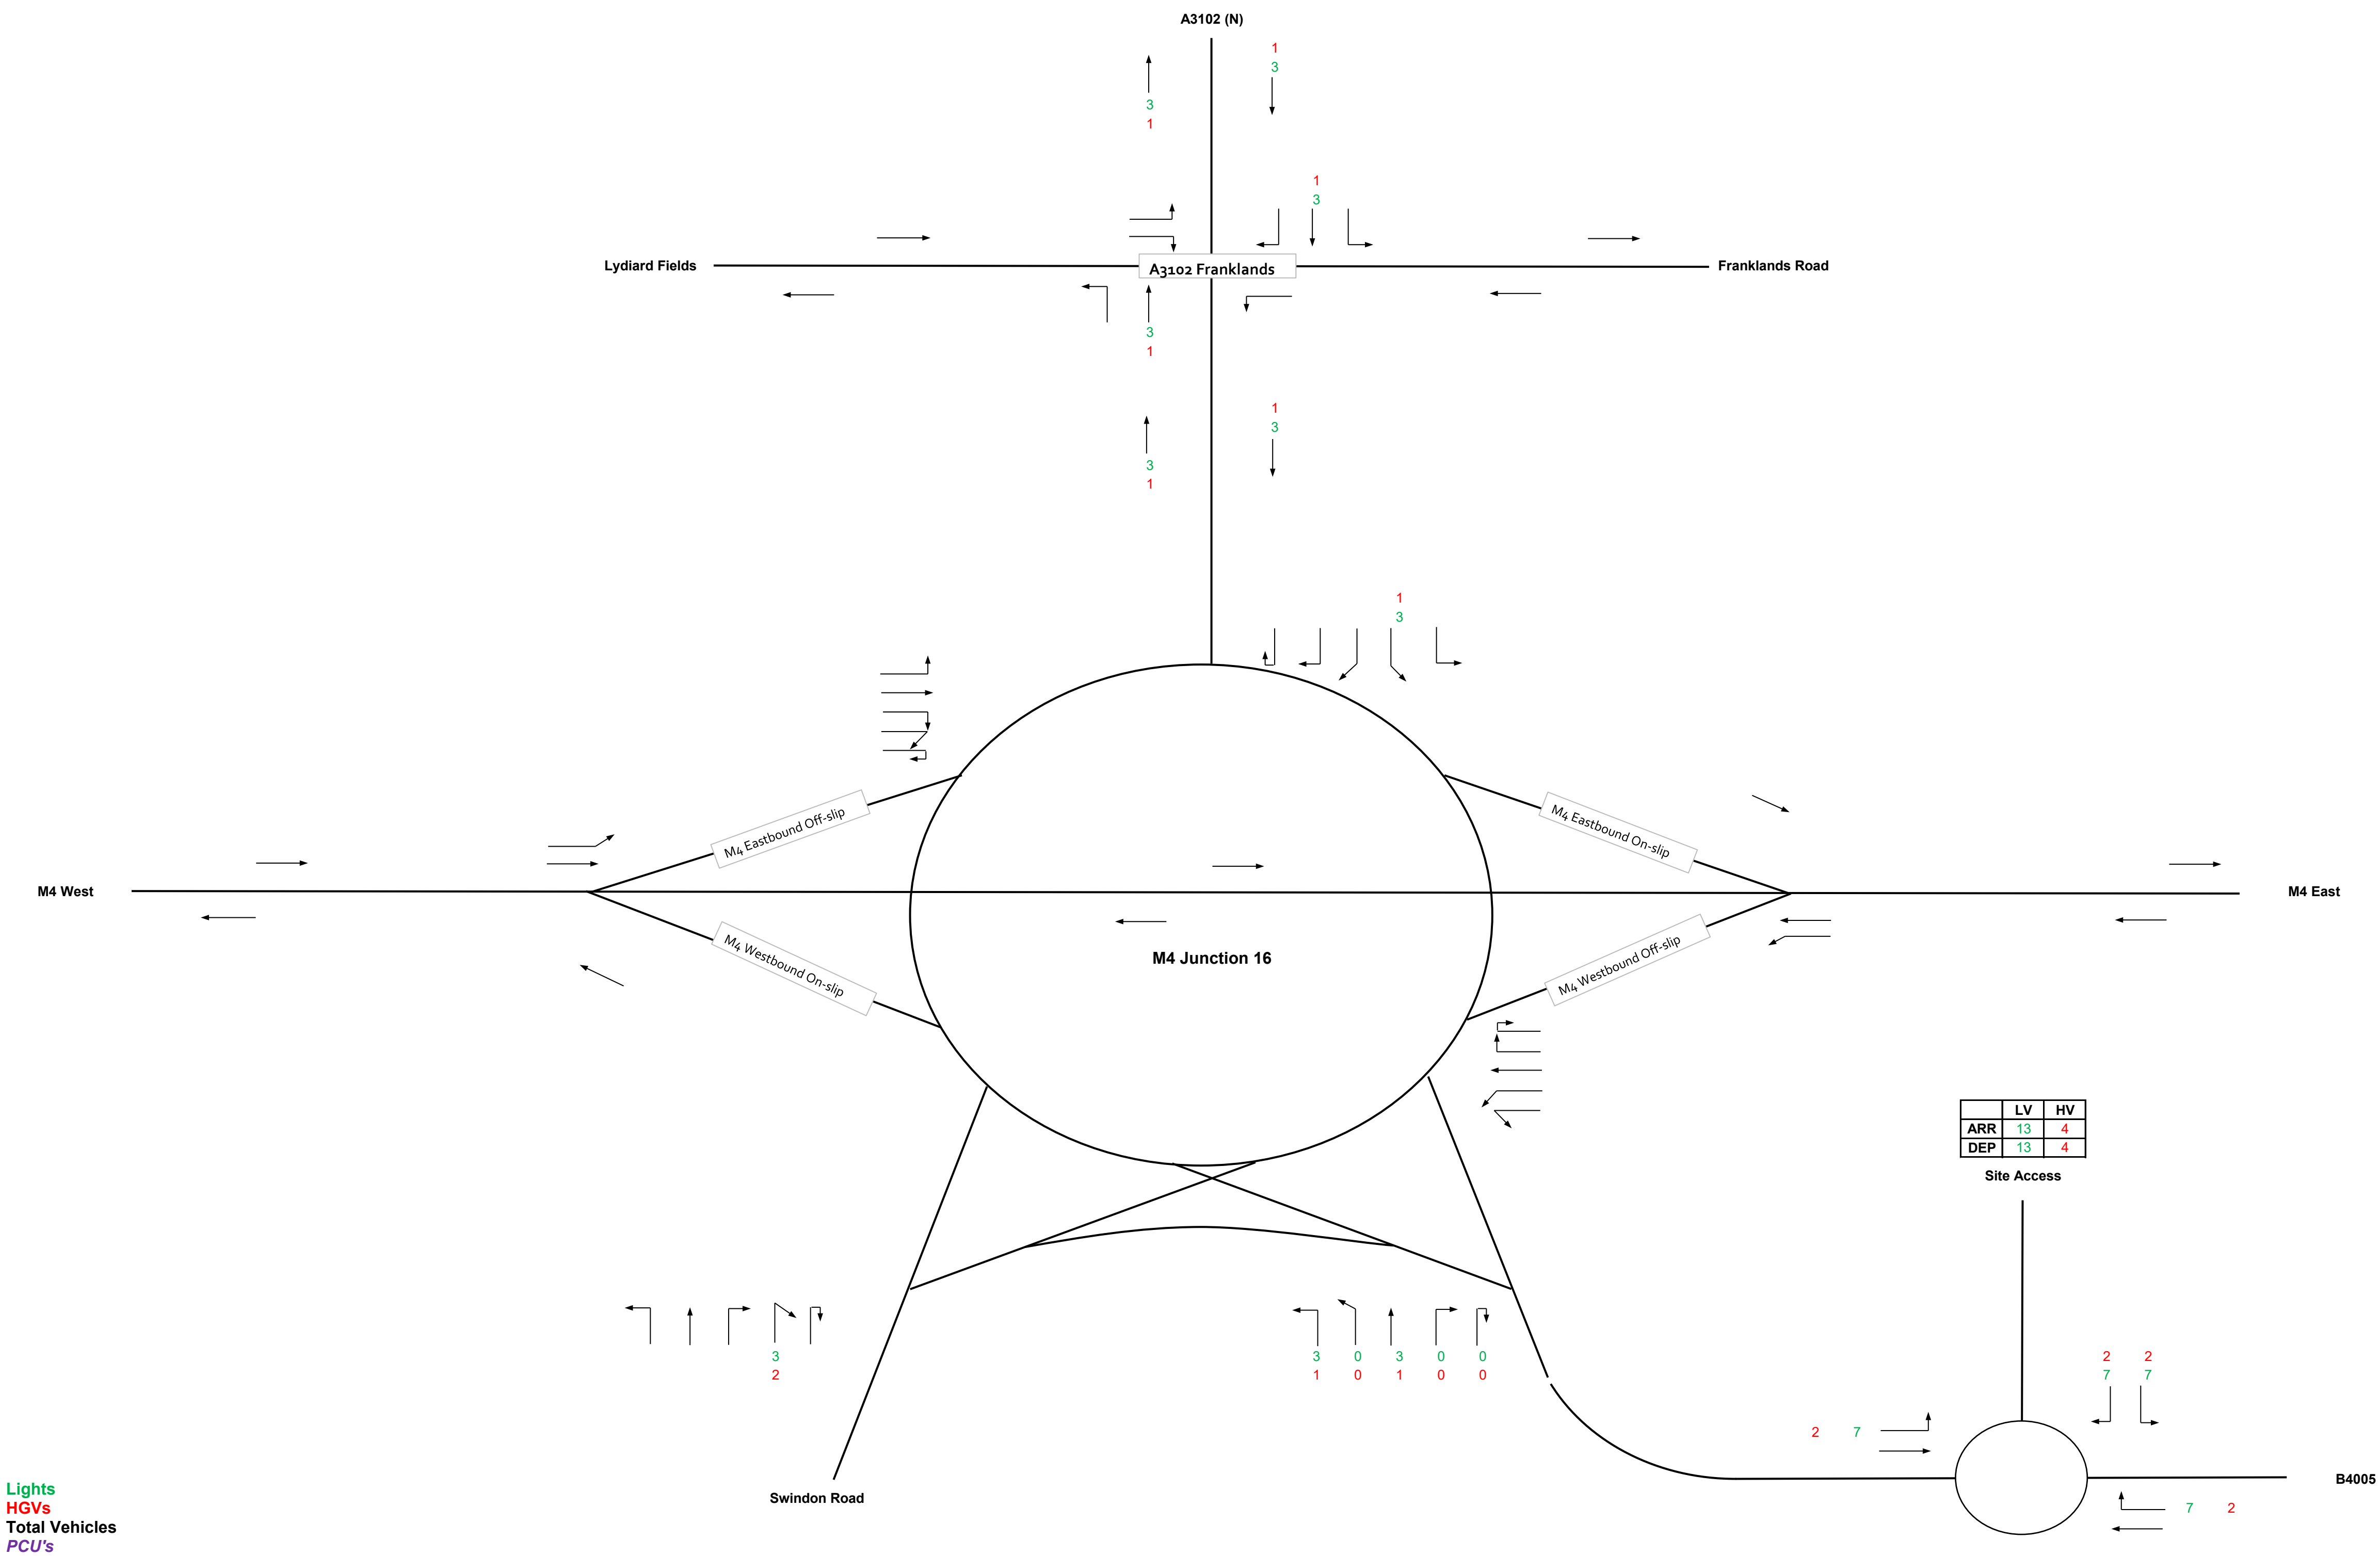


Figure 21 Proposed Development Flows - Local Road Trips - Weekday AM Peak (0730-0830)

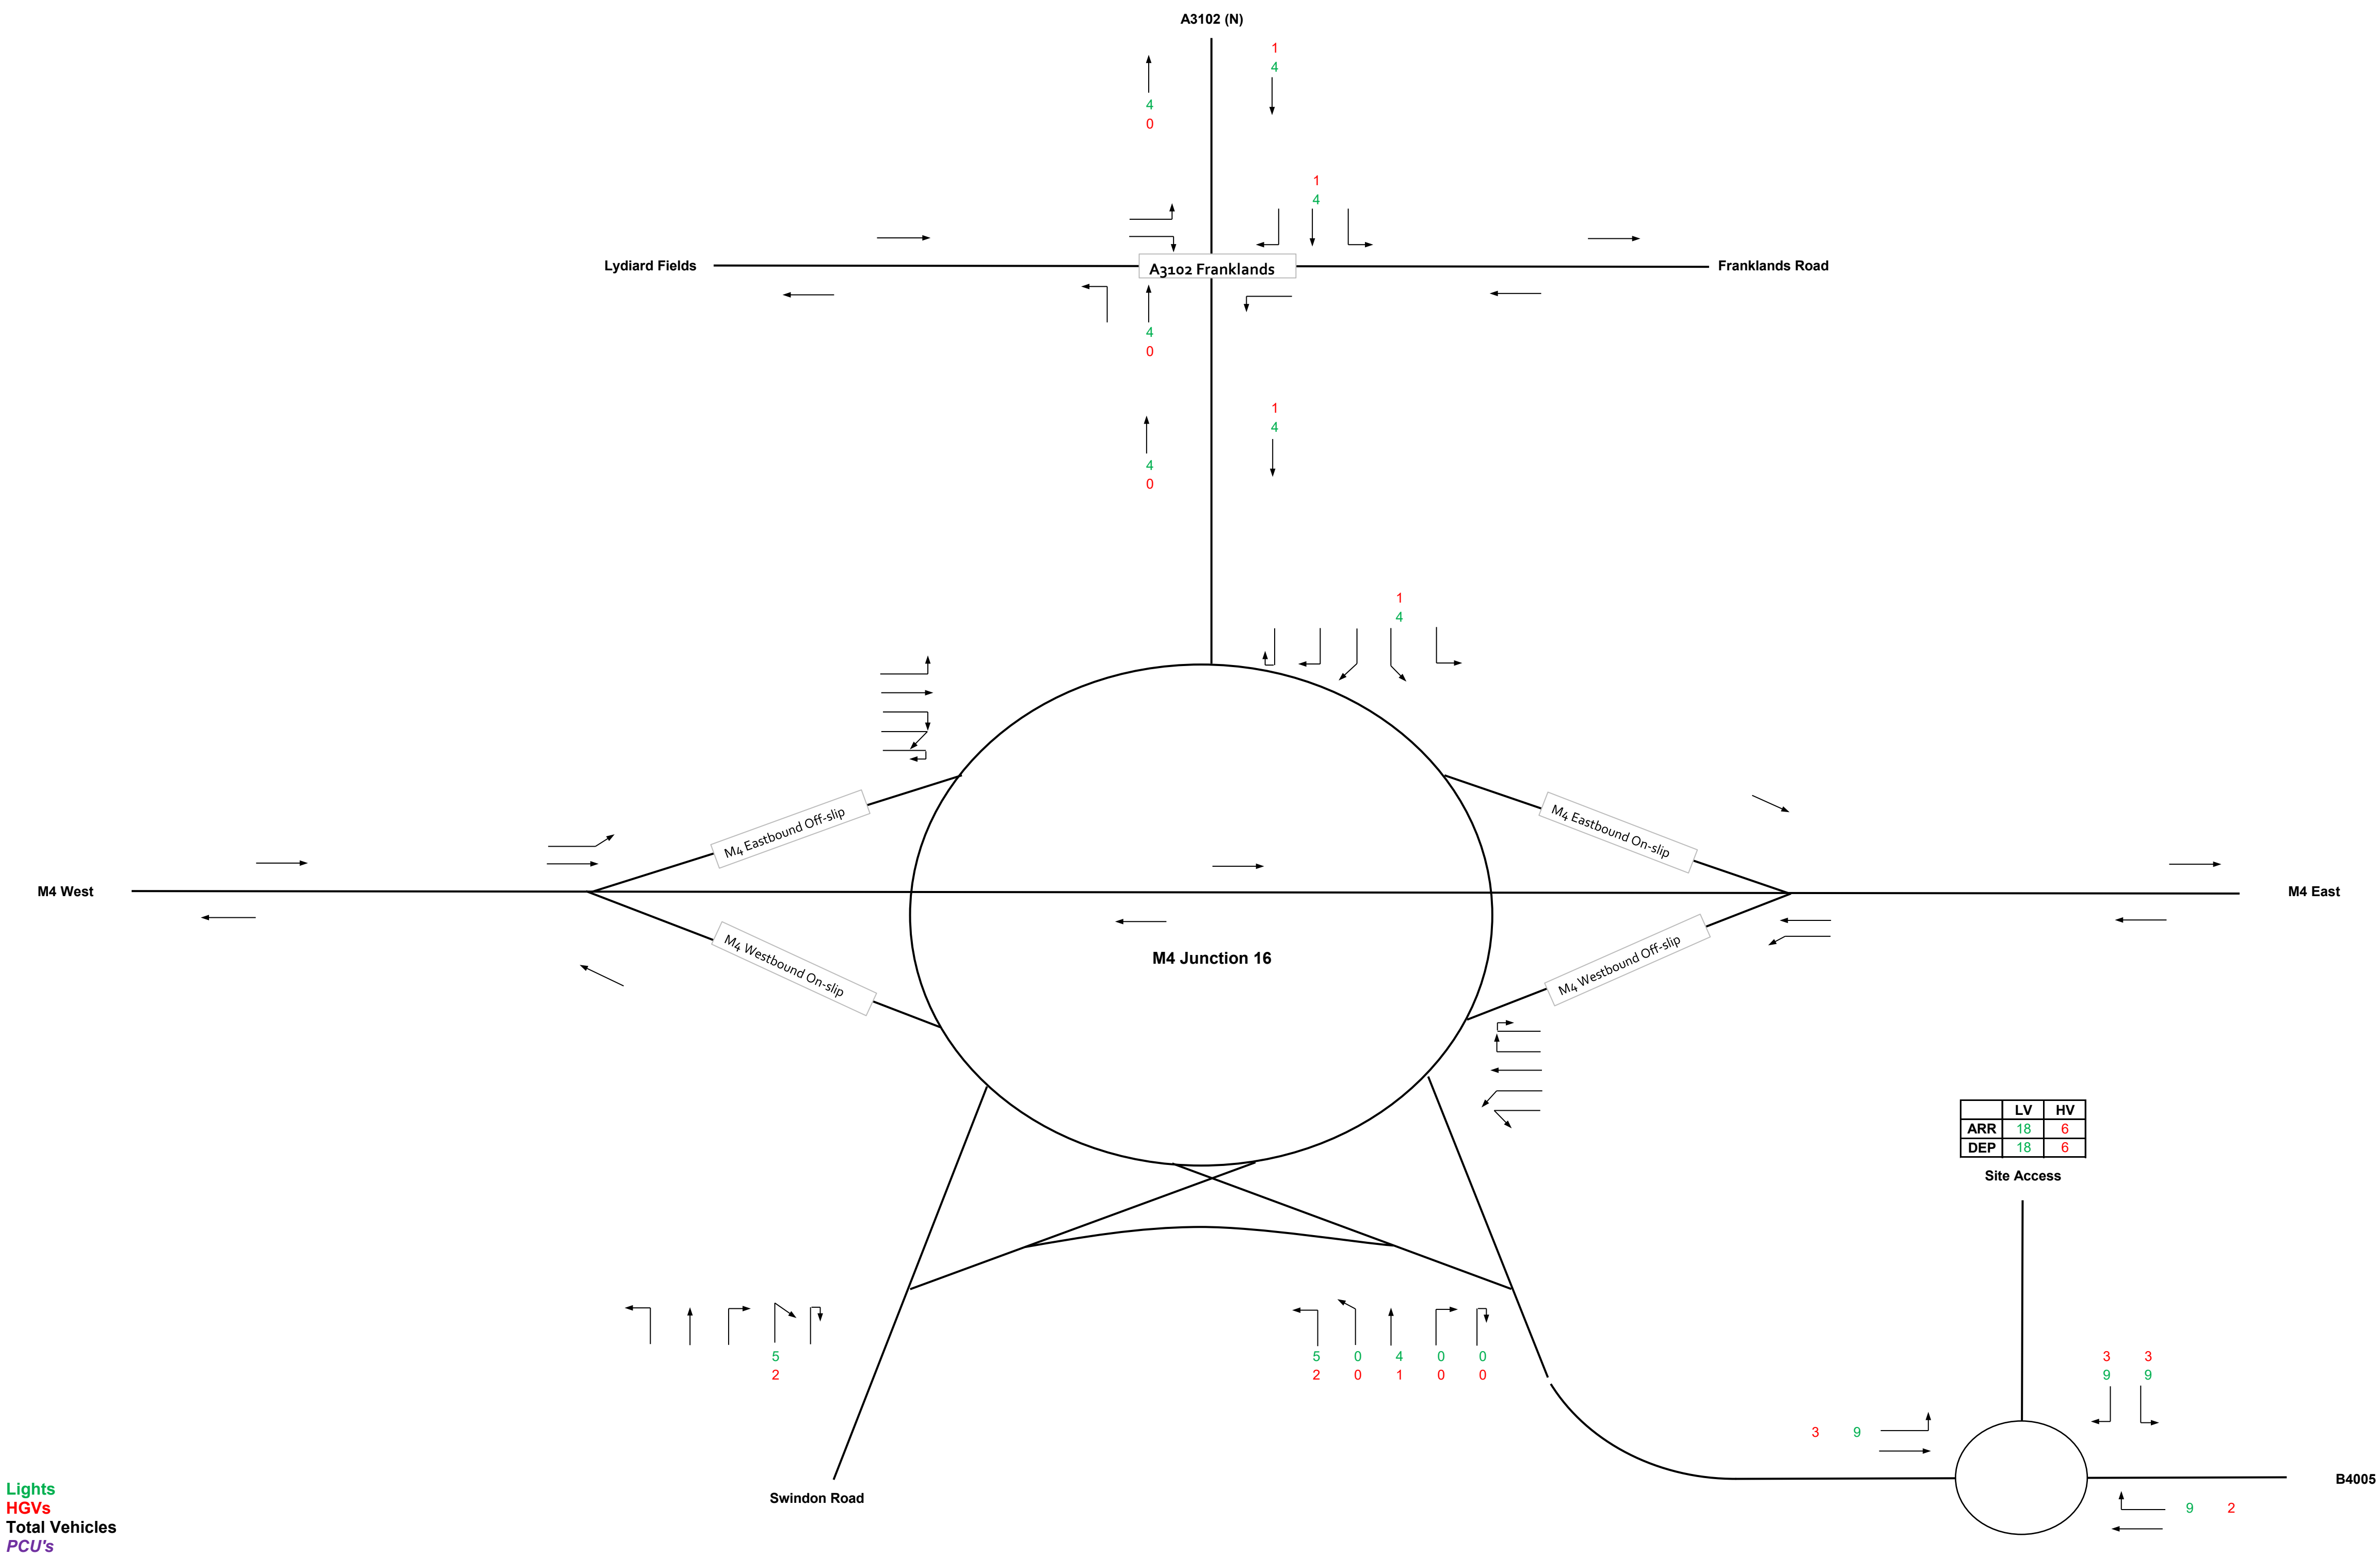


Figure 22 Proposed Development Flows - Local Road Trips - Weekday PM Peak (1630-1730)

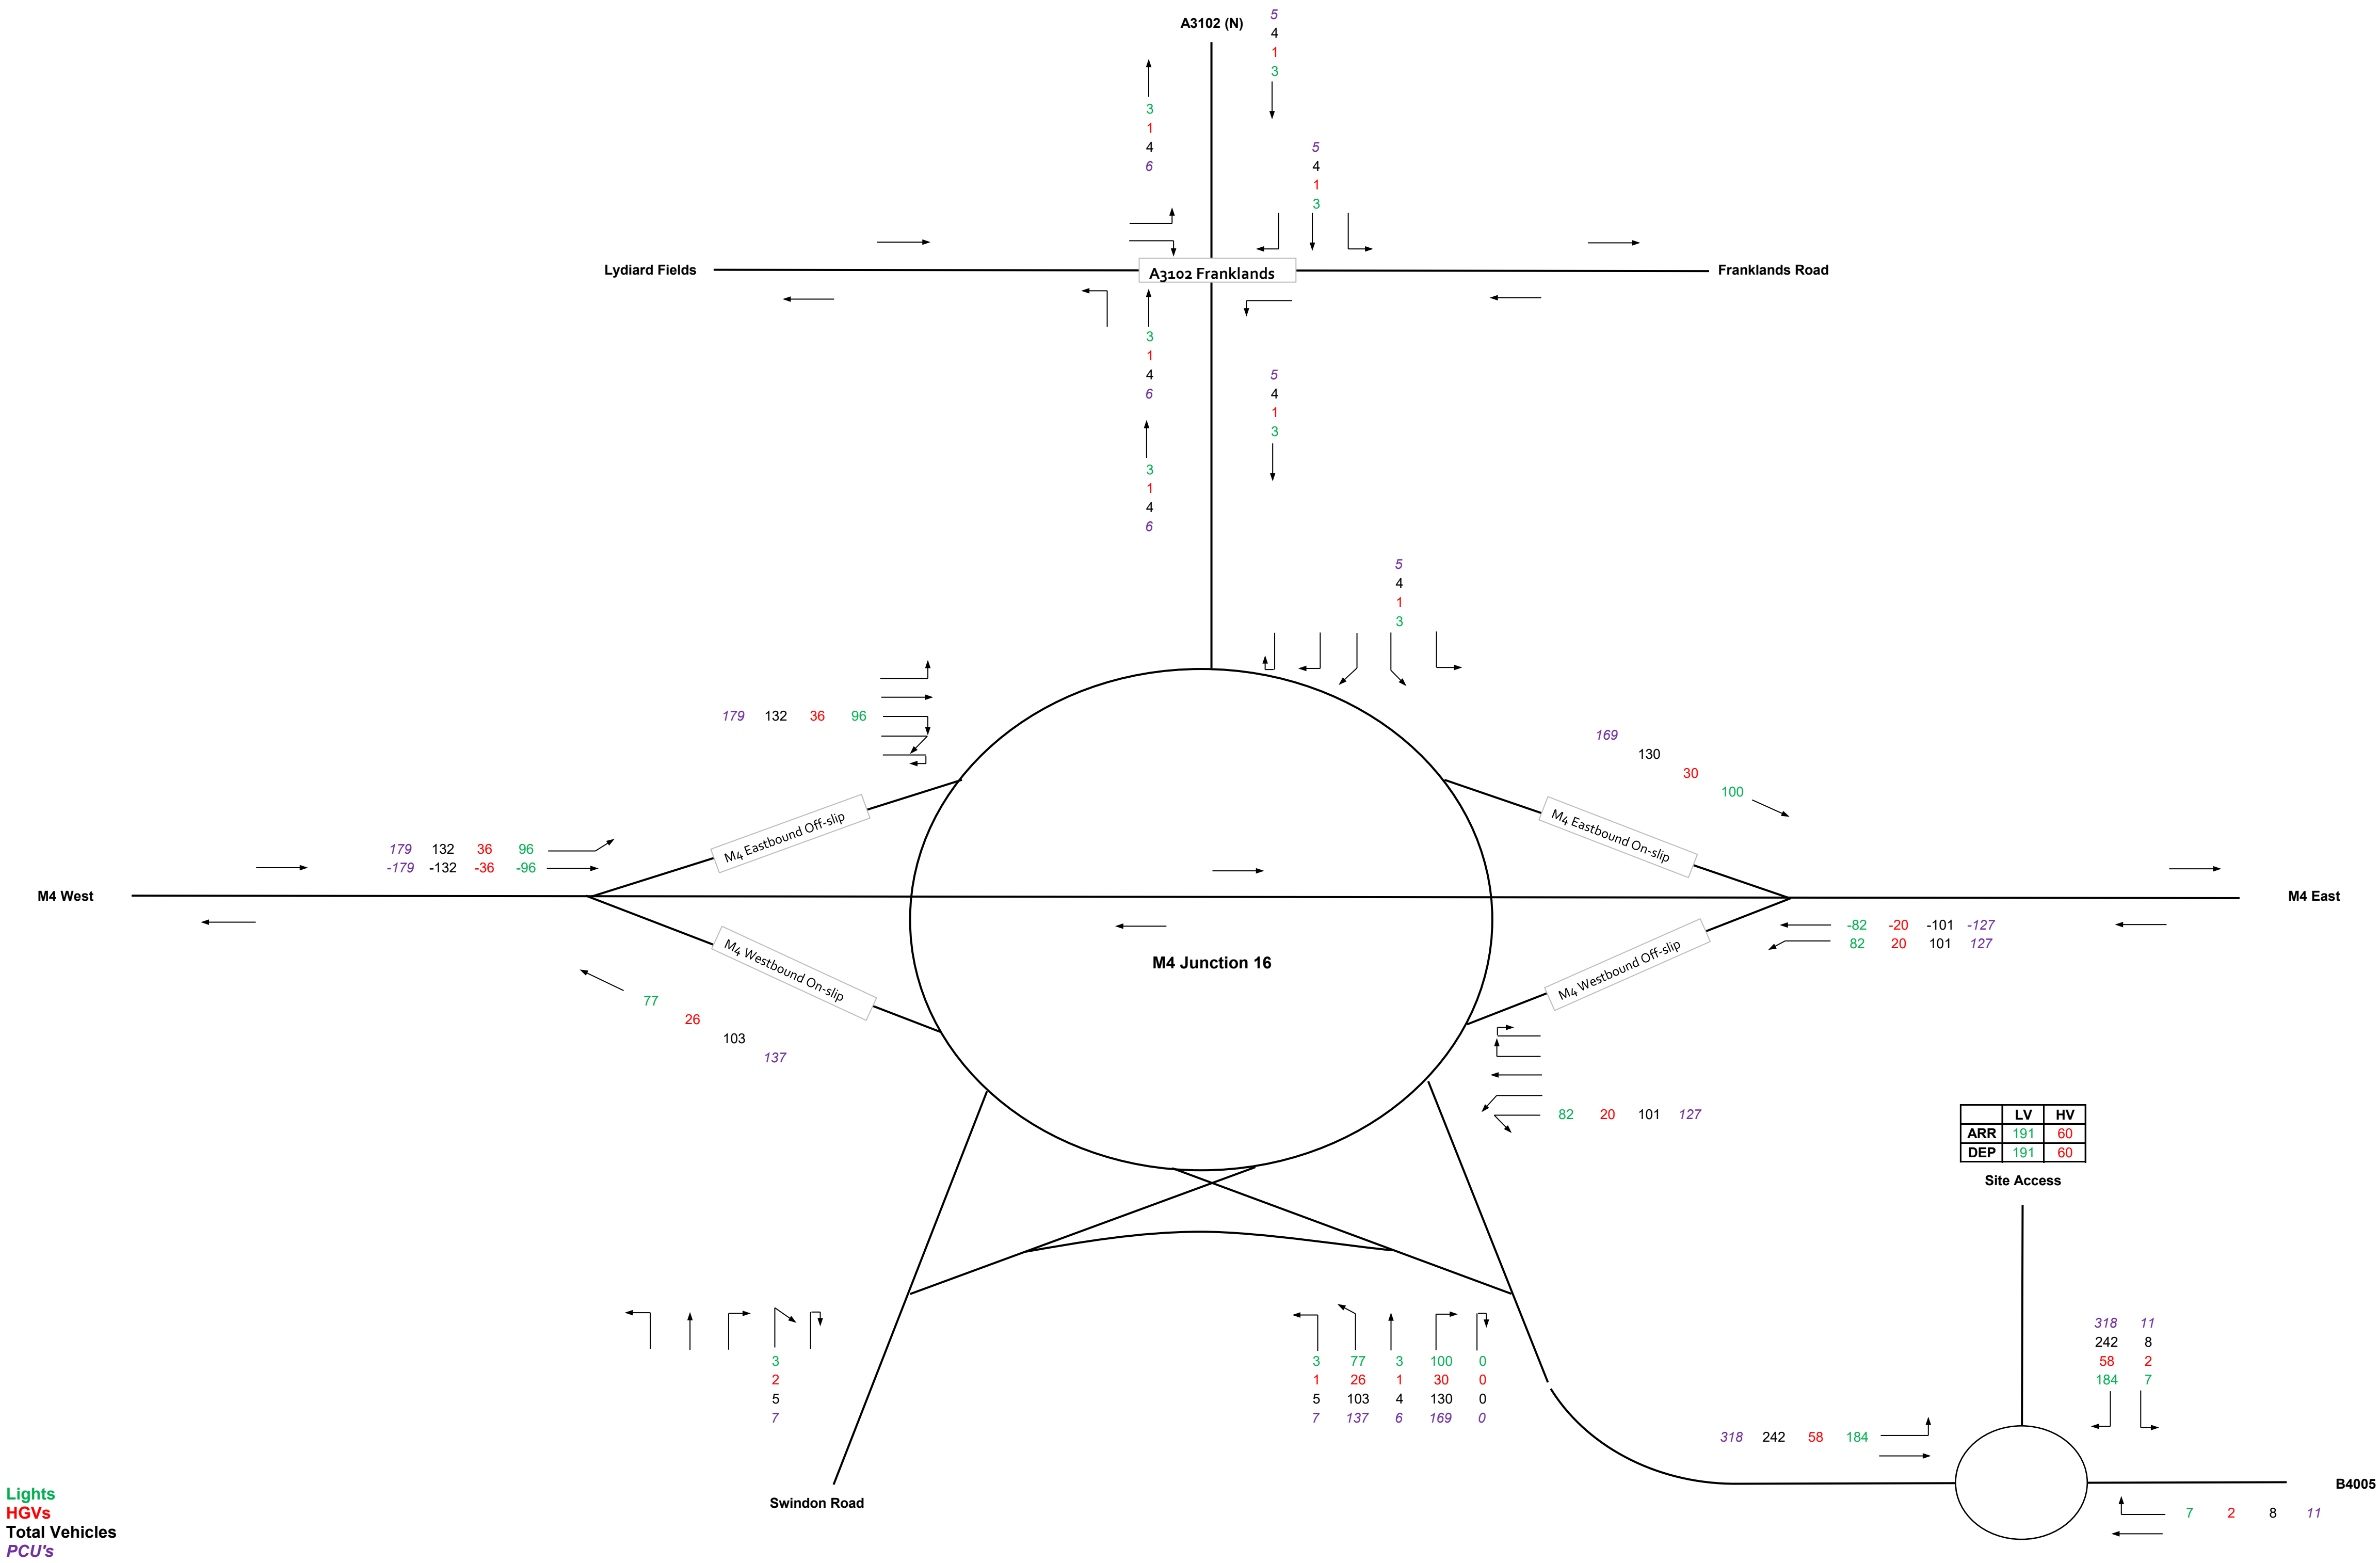


Figure 23 Proposed Development Flows - Total Trips - Weekday AM Peak (0730-0830)

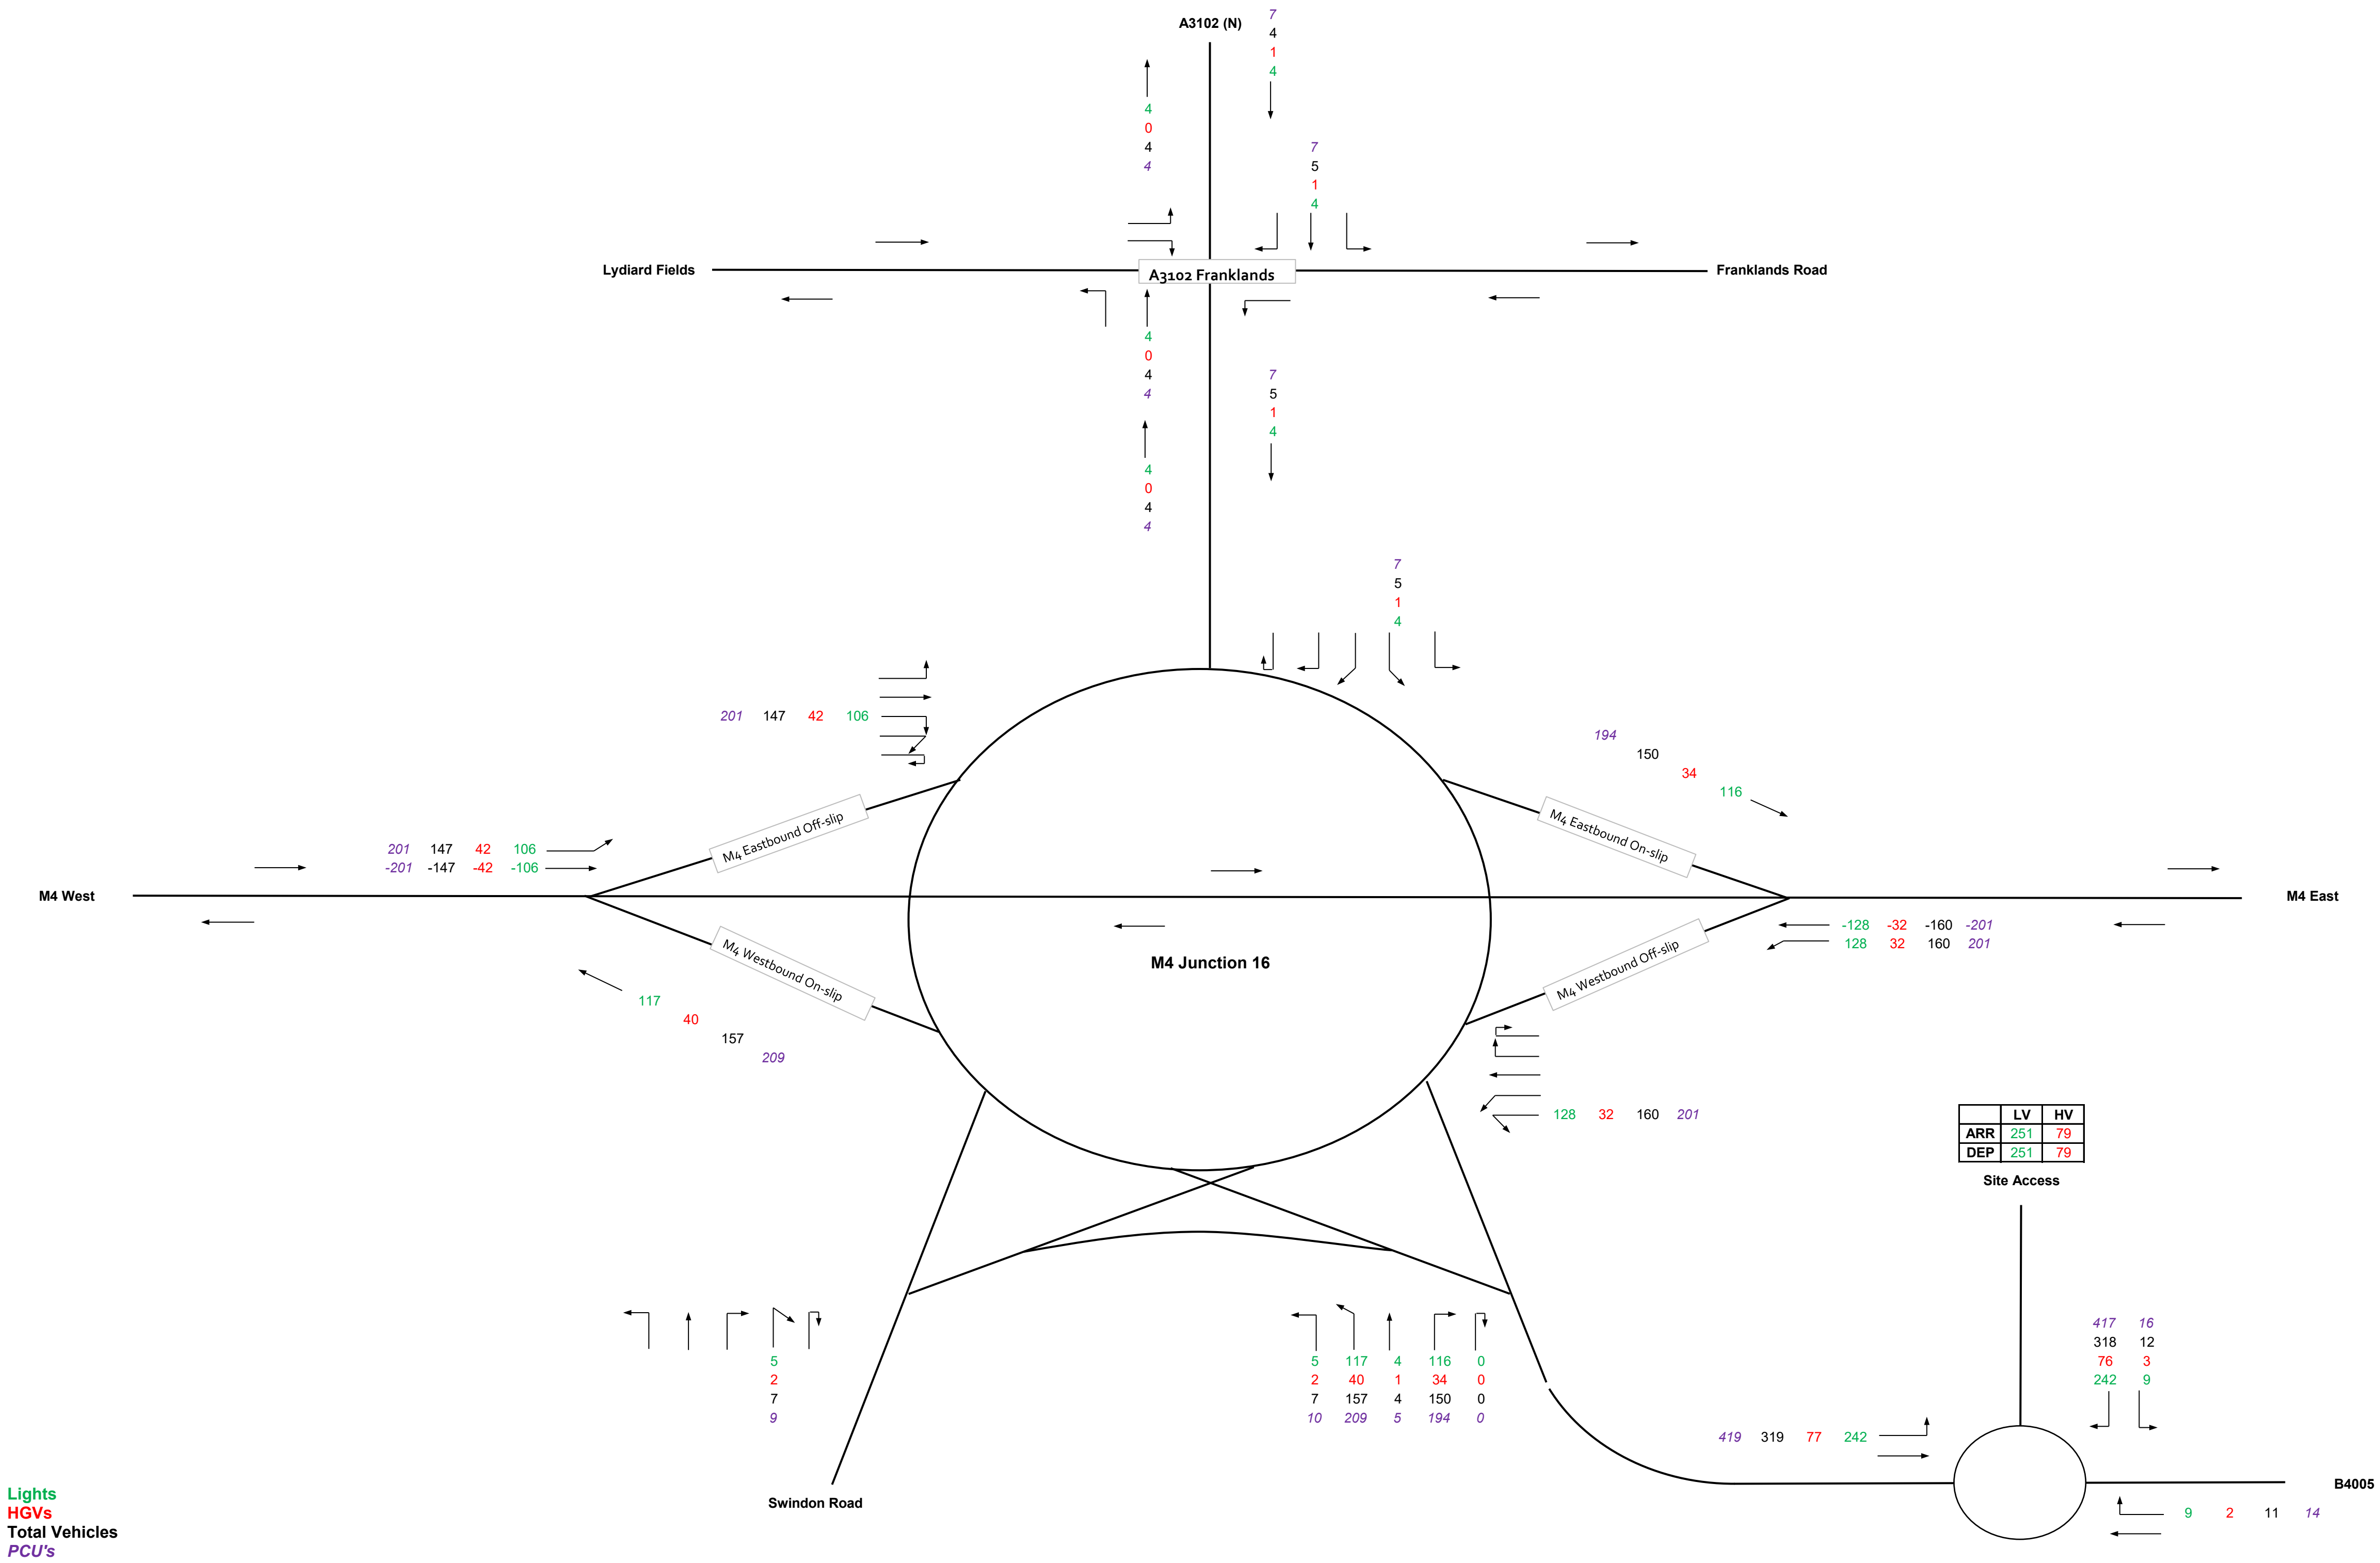


Figure 24 Proposed Development Flows - Total Trips - Weekday PM Peak (1630-1730)

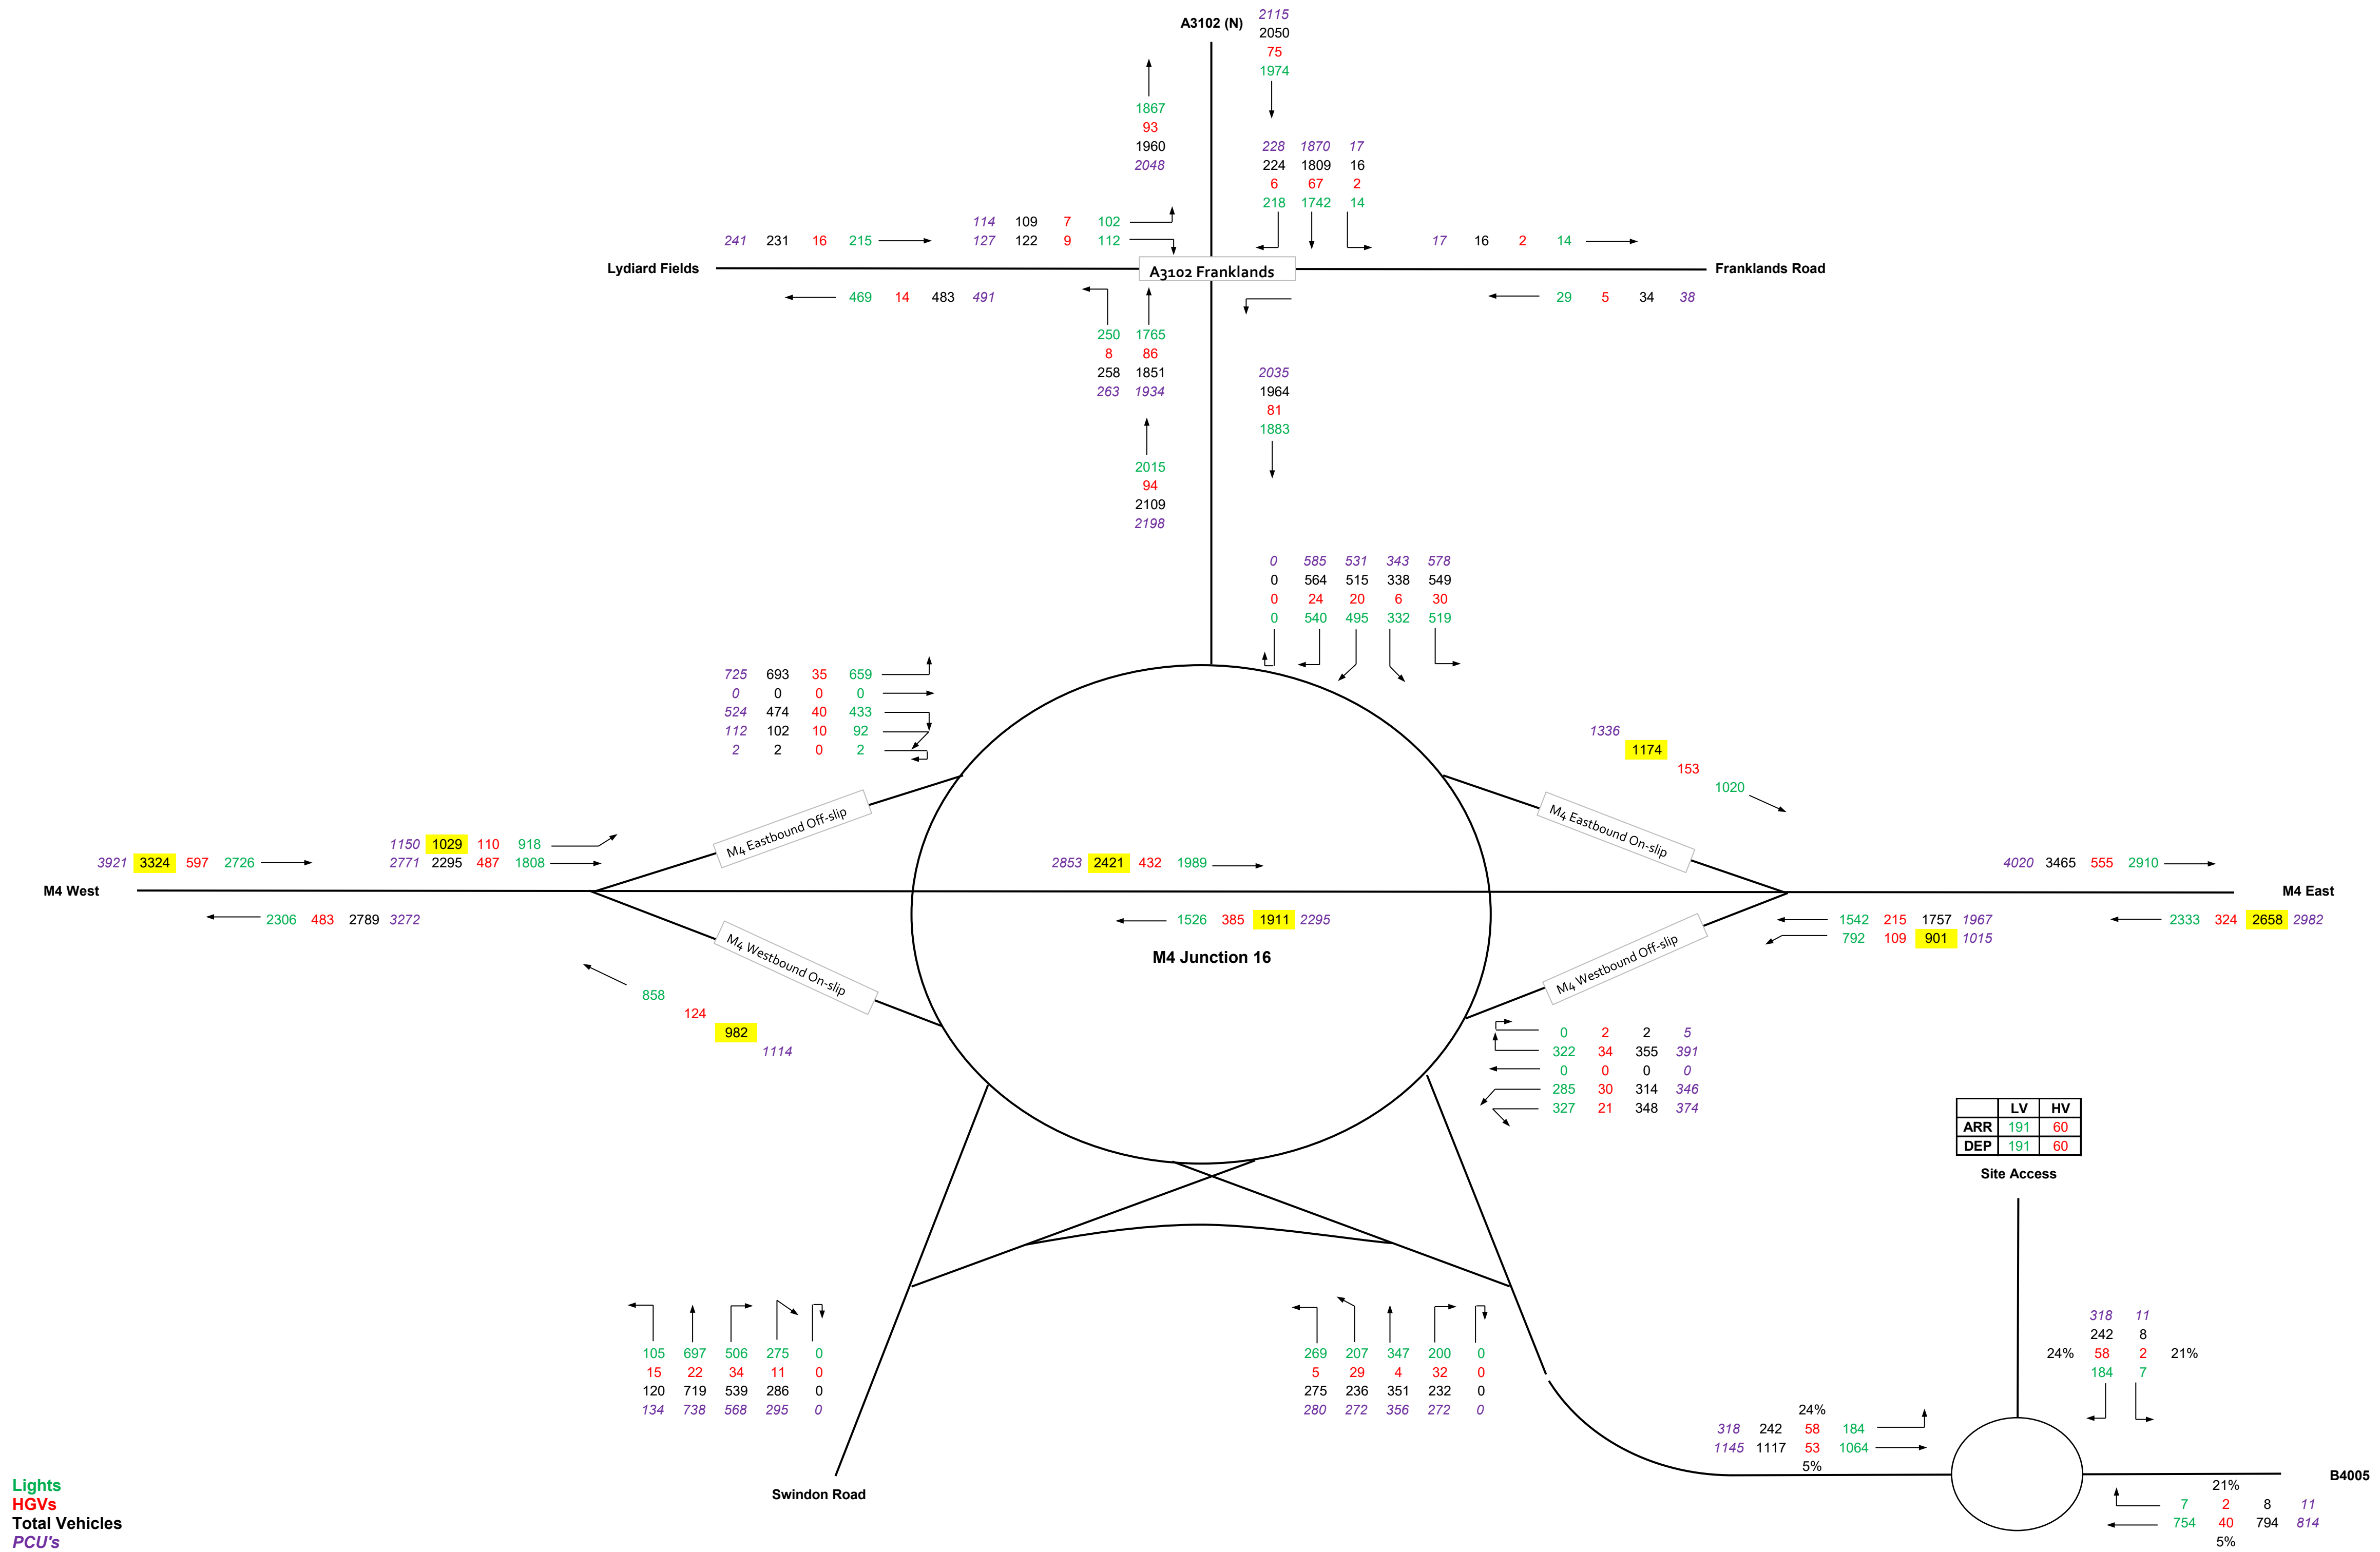


Figure 25 2027 With Development Flows (with P&R)- Weekday AM Peak (0730-0830)

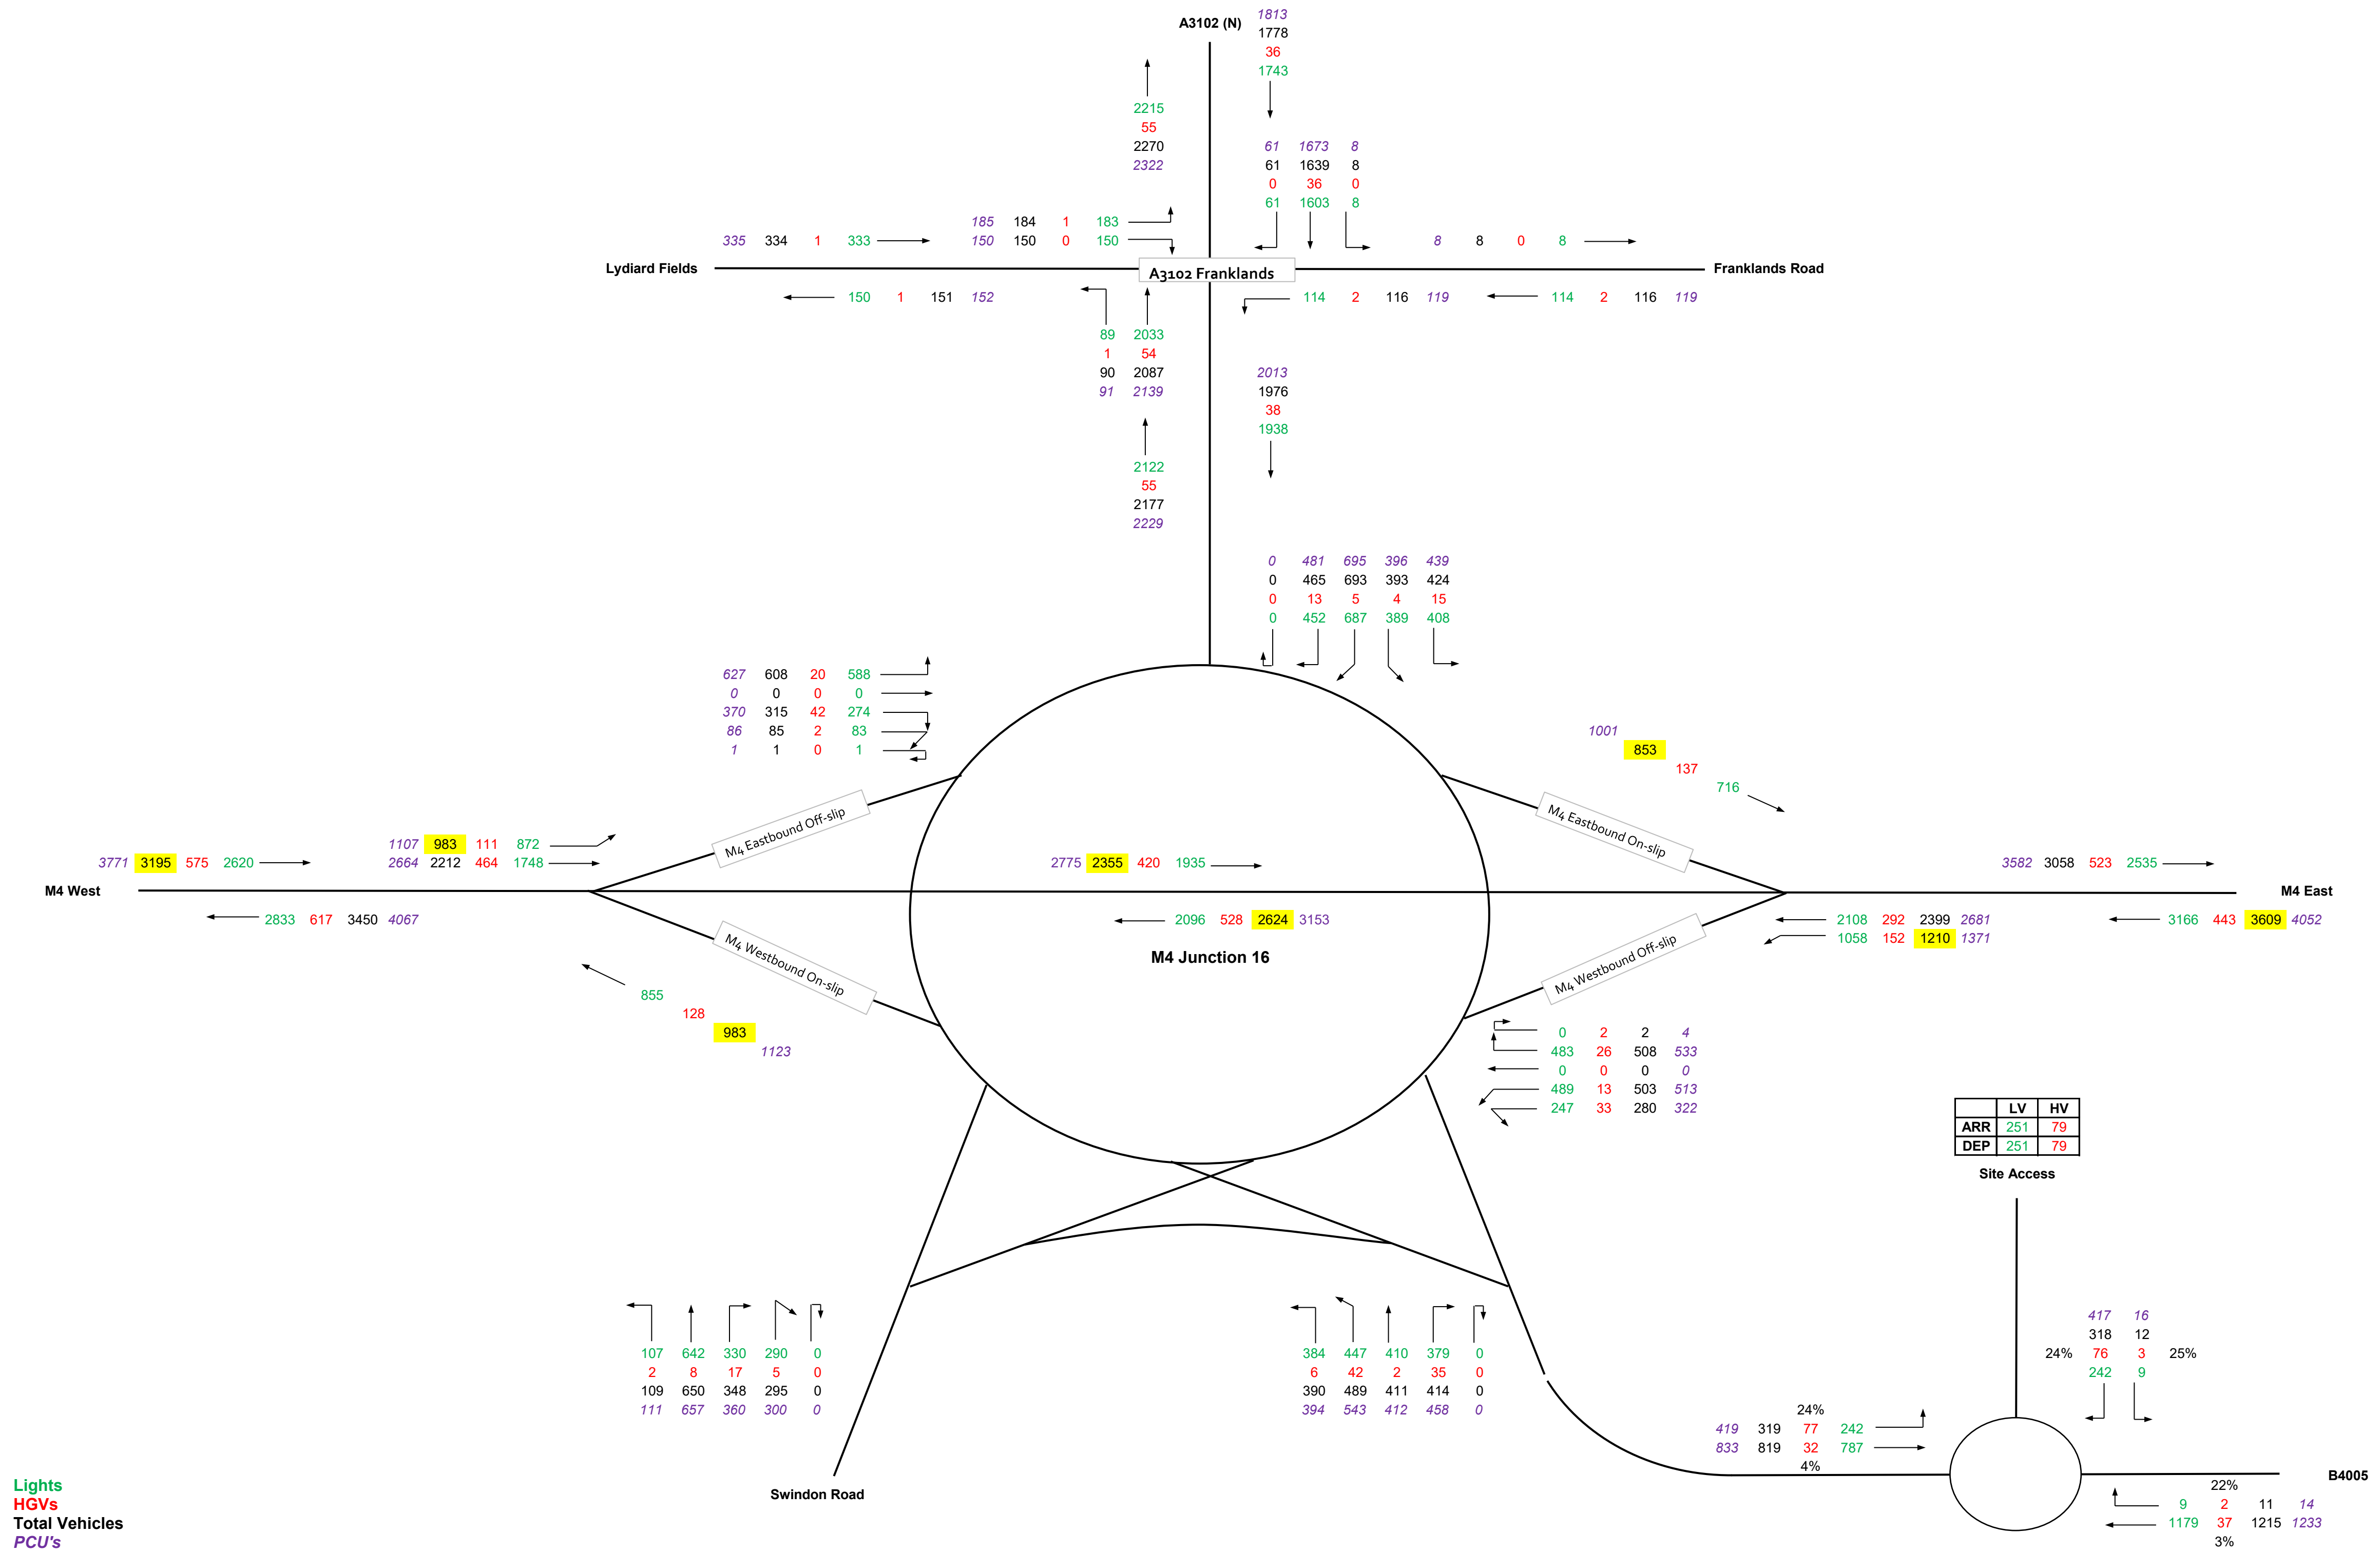


Figure 26 2027 With Development Flows (with P&R)- Weekday PM Peak (1630-1730)

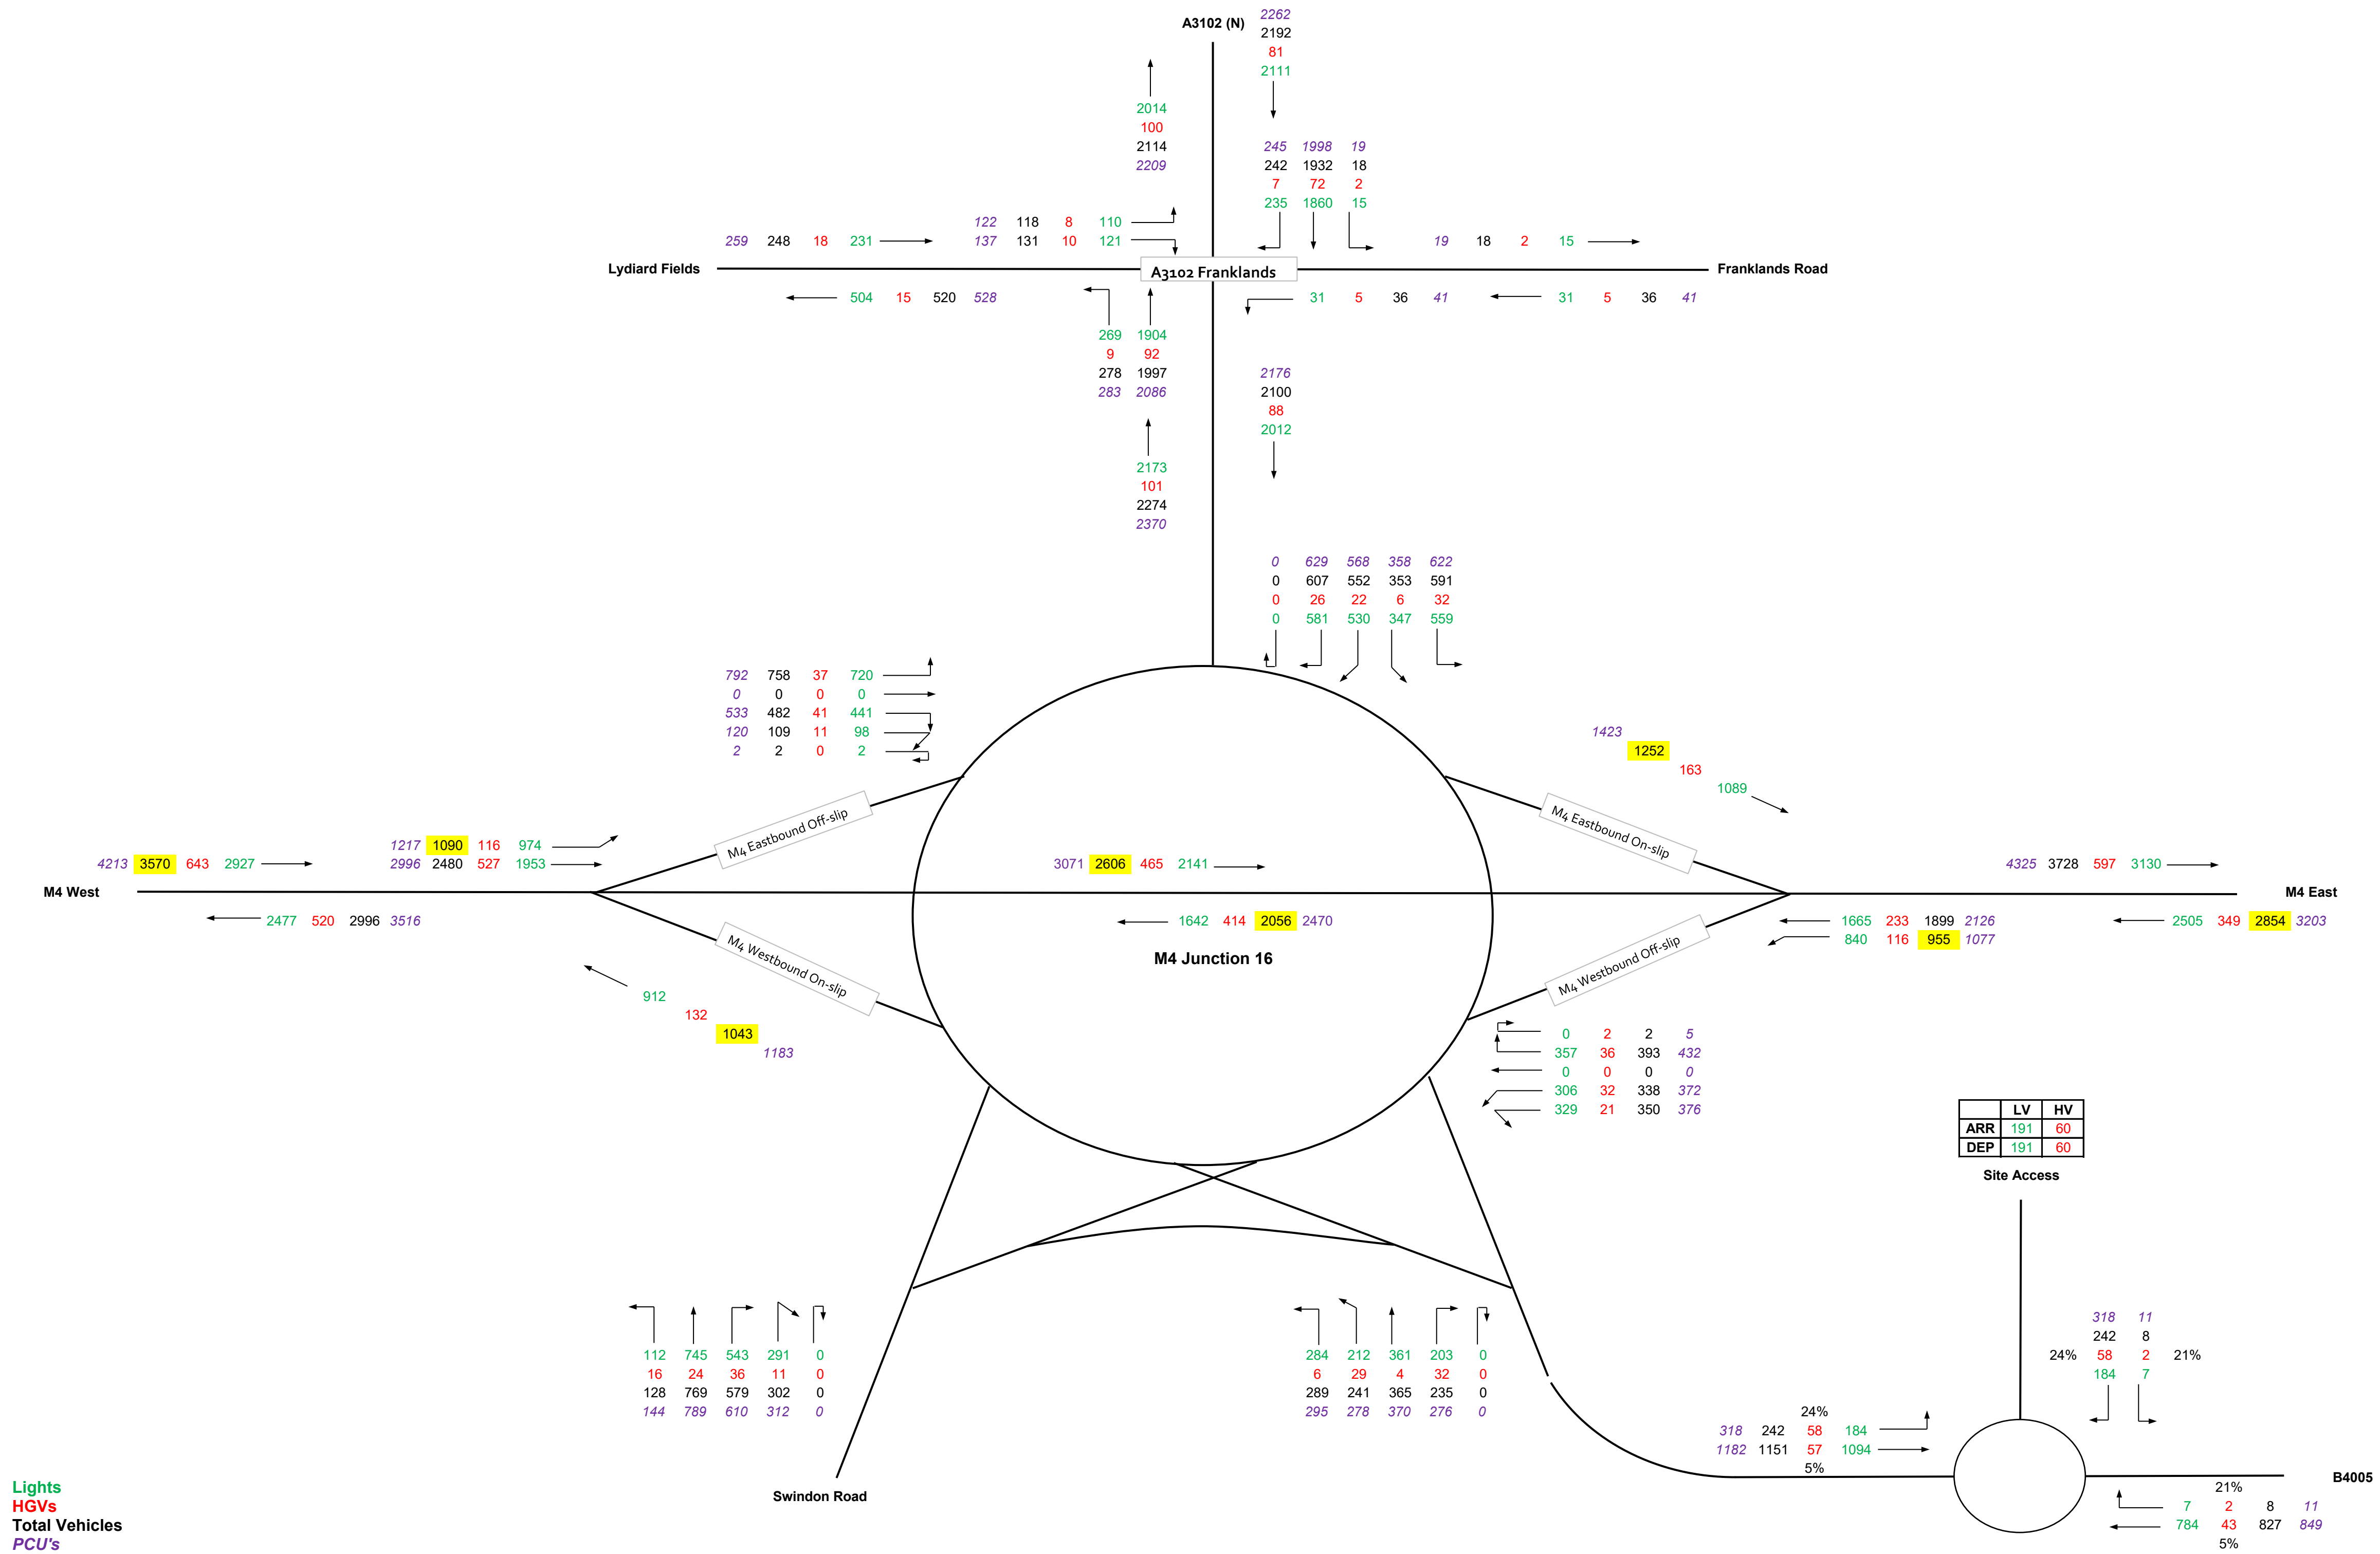


Figure 27 2033 With Development Flows (with P&R) - Weekday AM Peak (0730-0830)


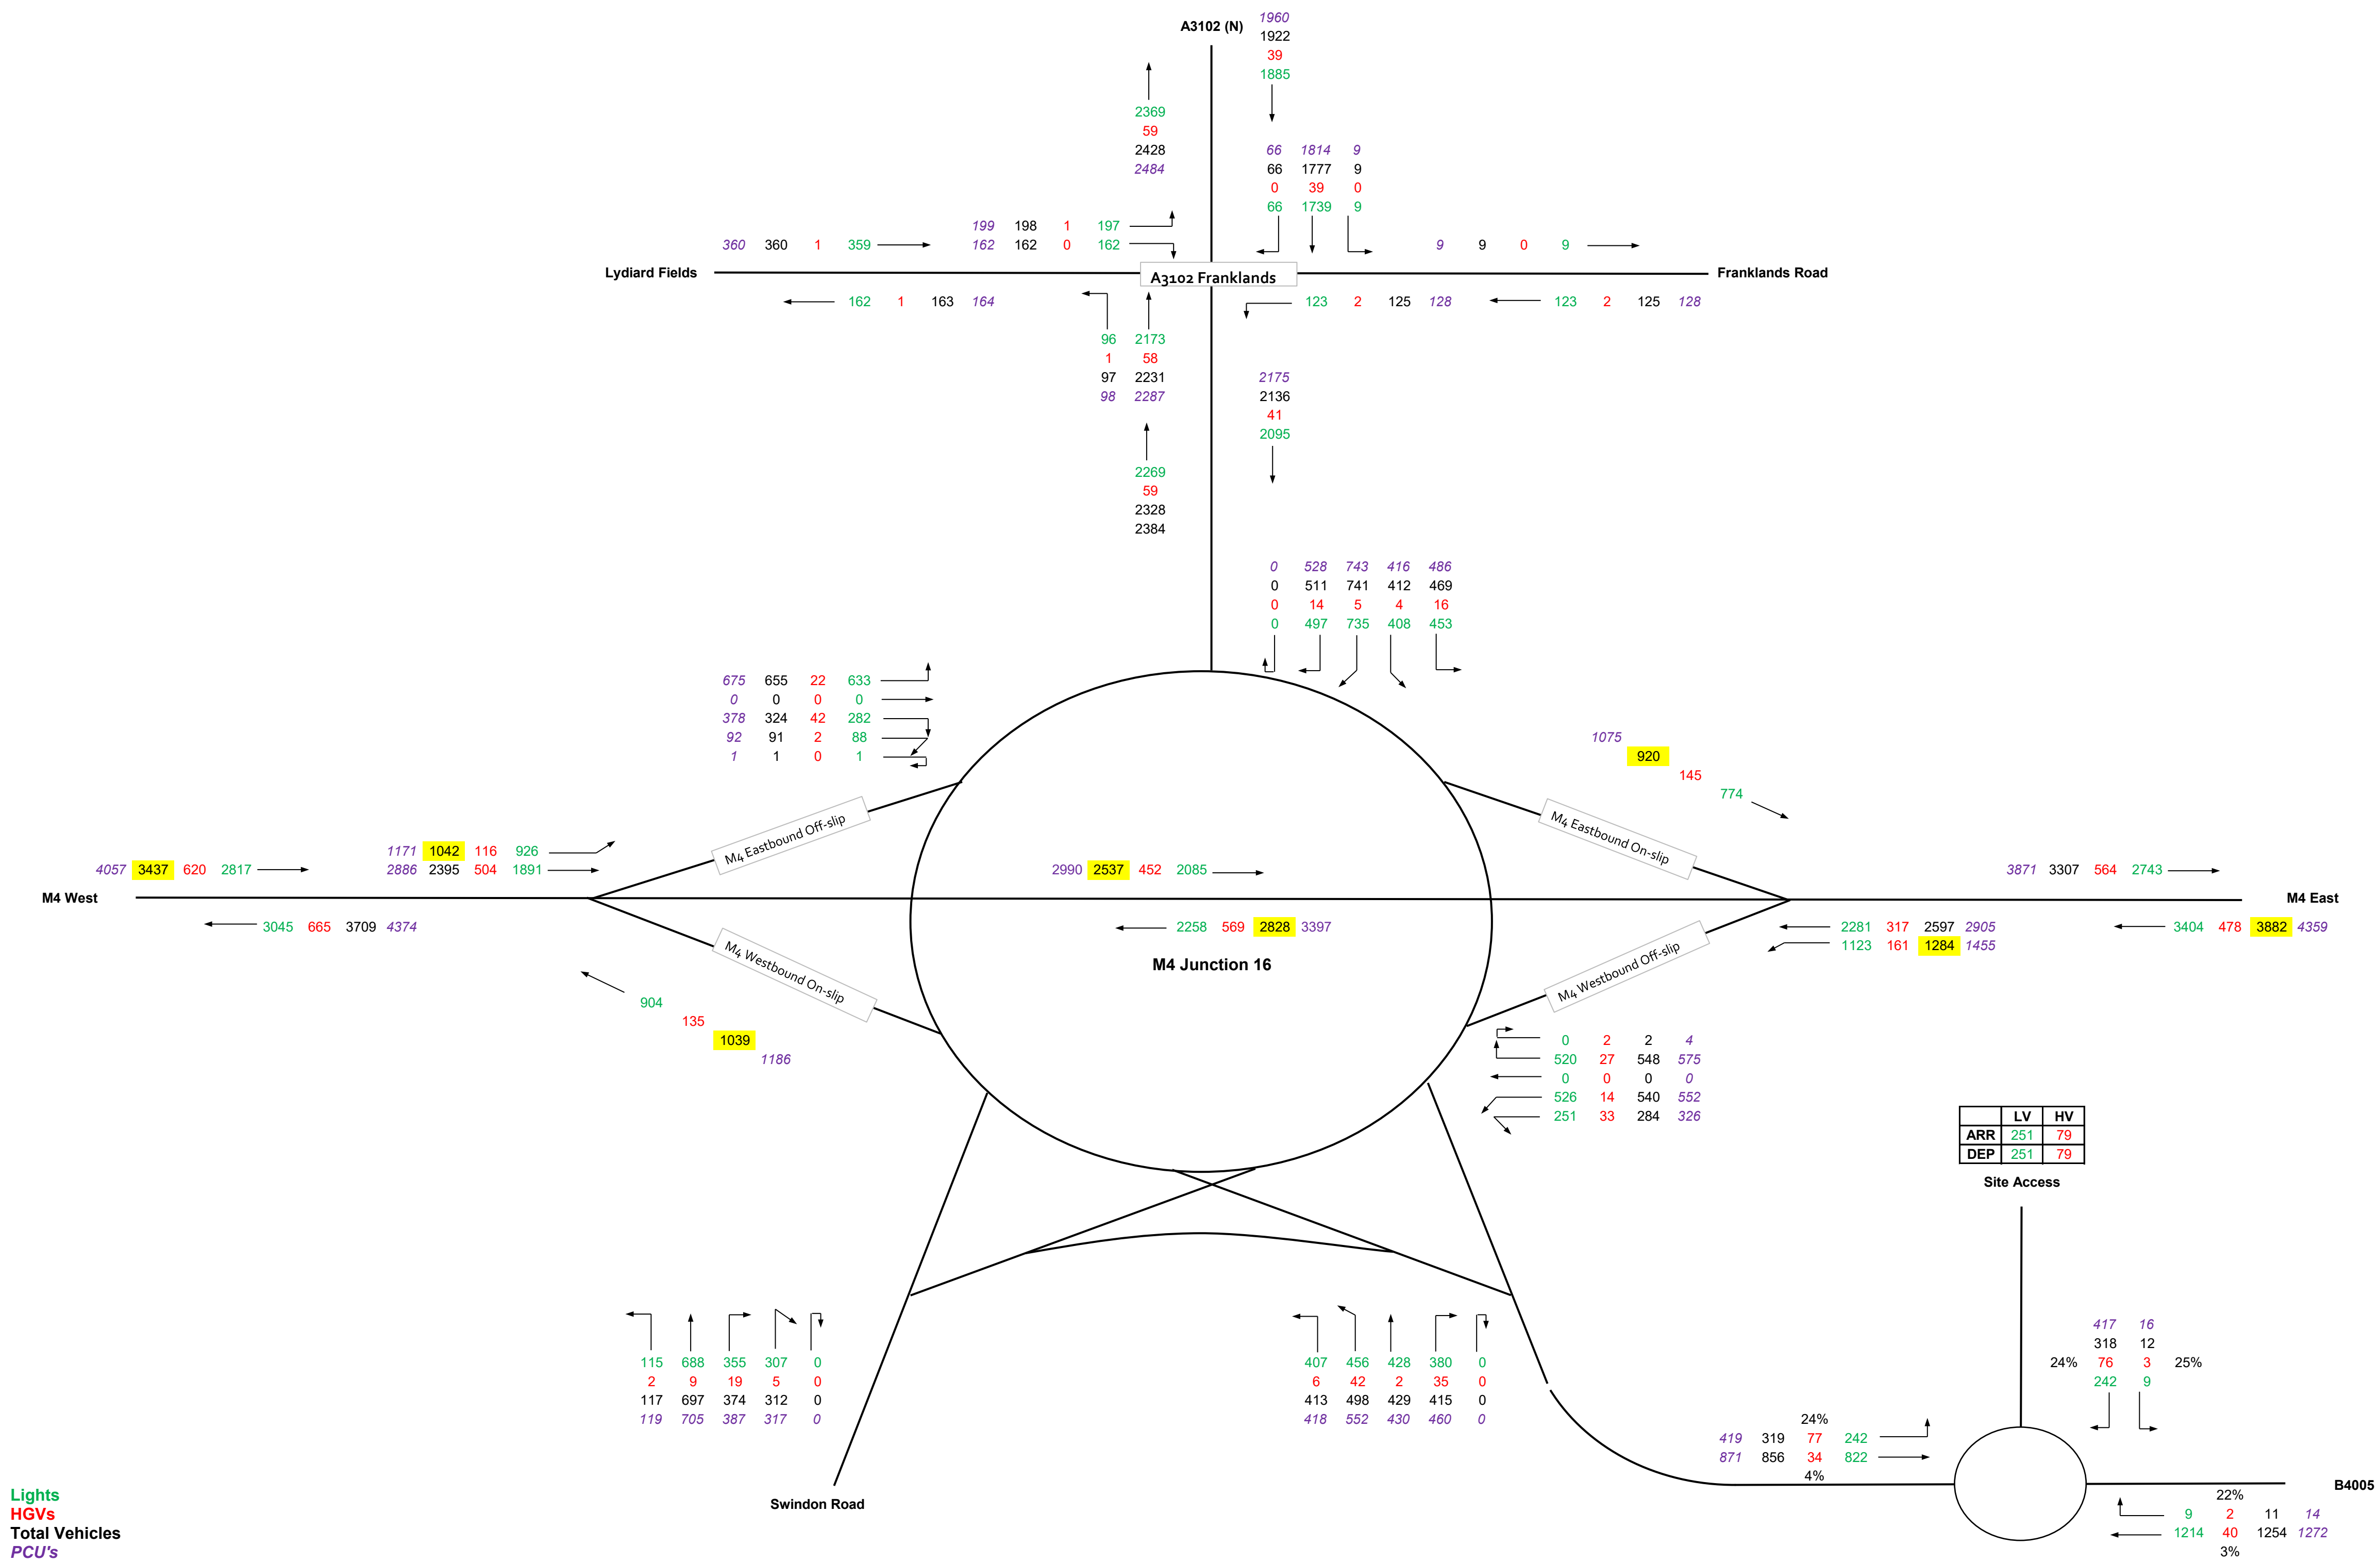


Figure 28 2033 With Development Flows (with P&R) - Weekday PM Peak (1630-1730)

APPENDICES

APPENDIX 1

HGV Parking Survey Data

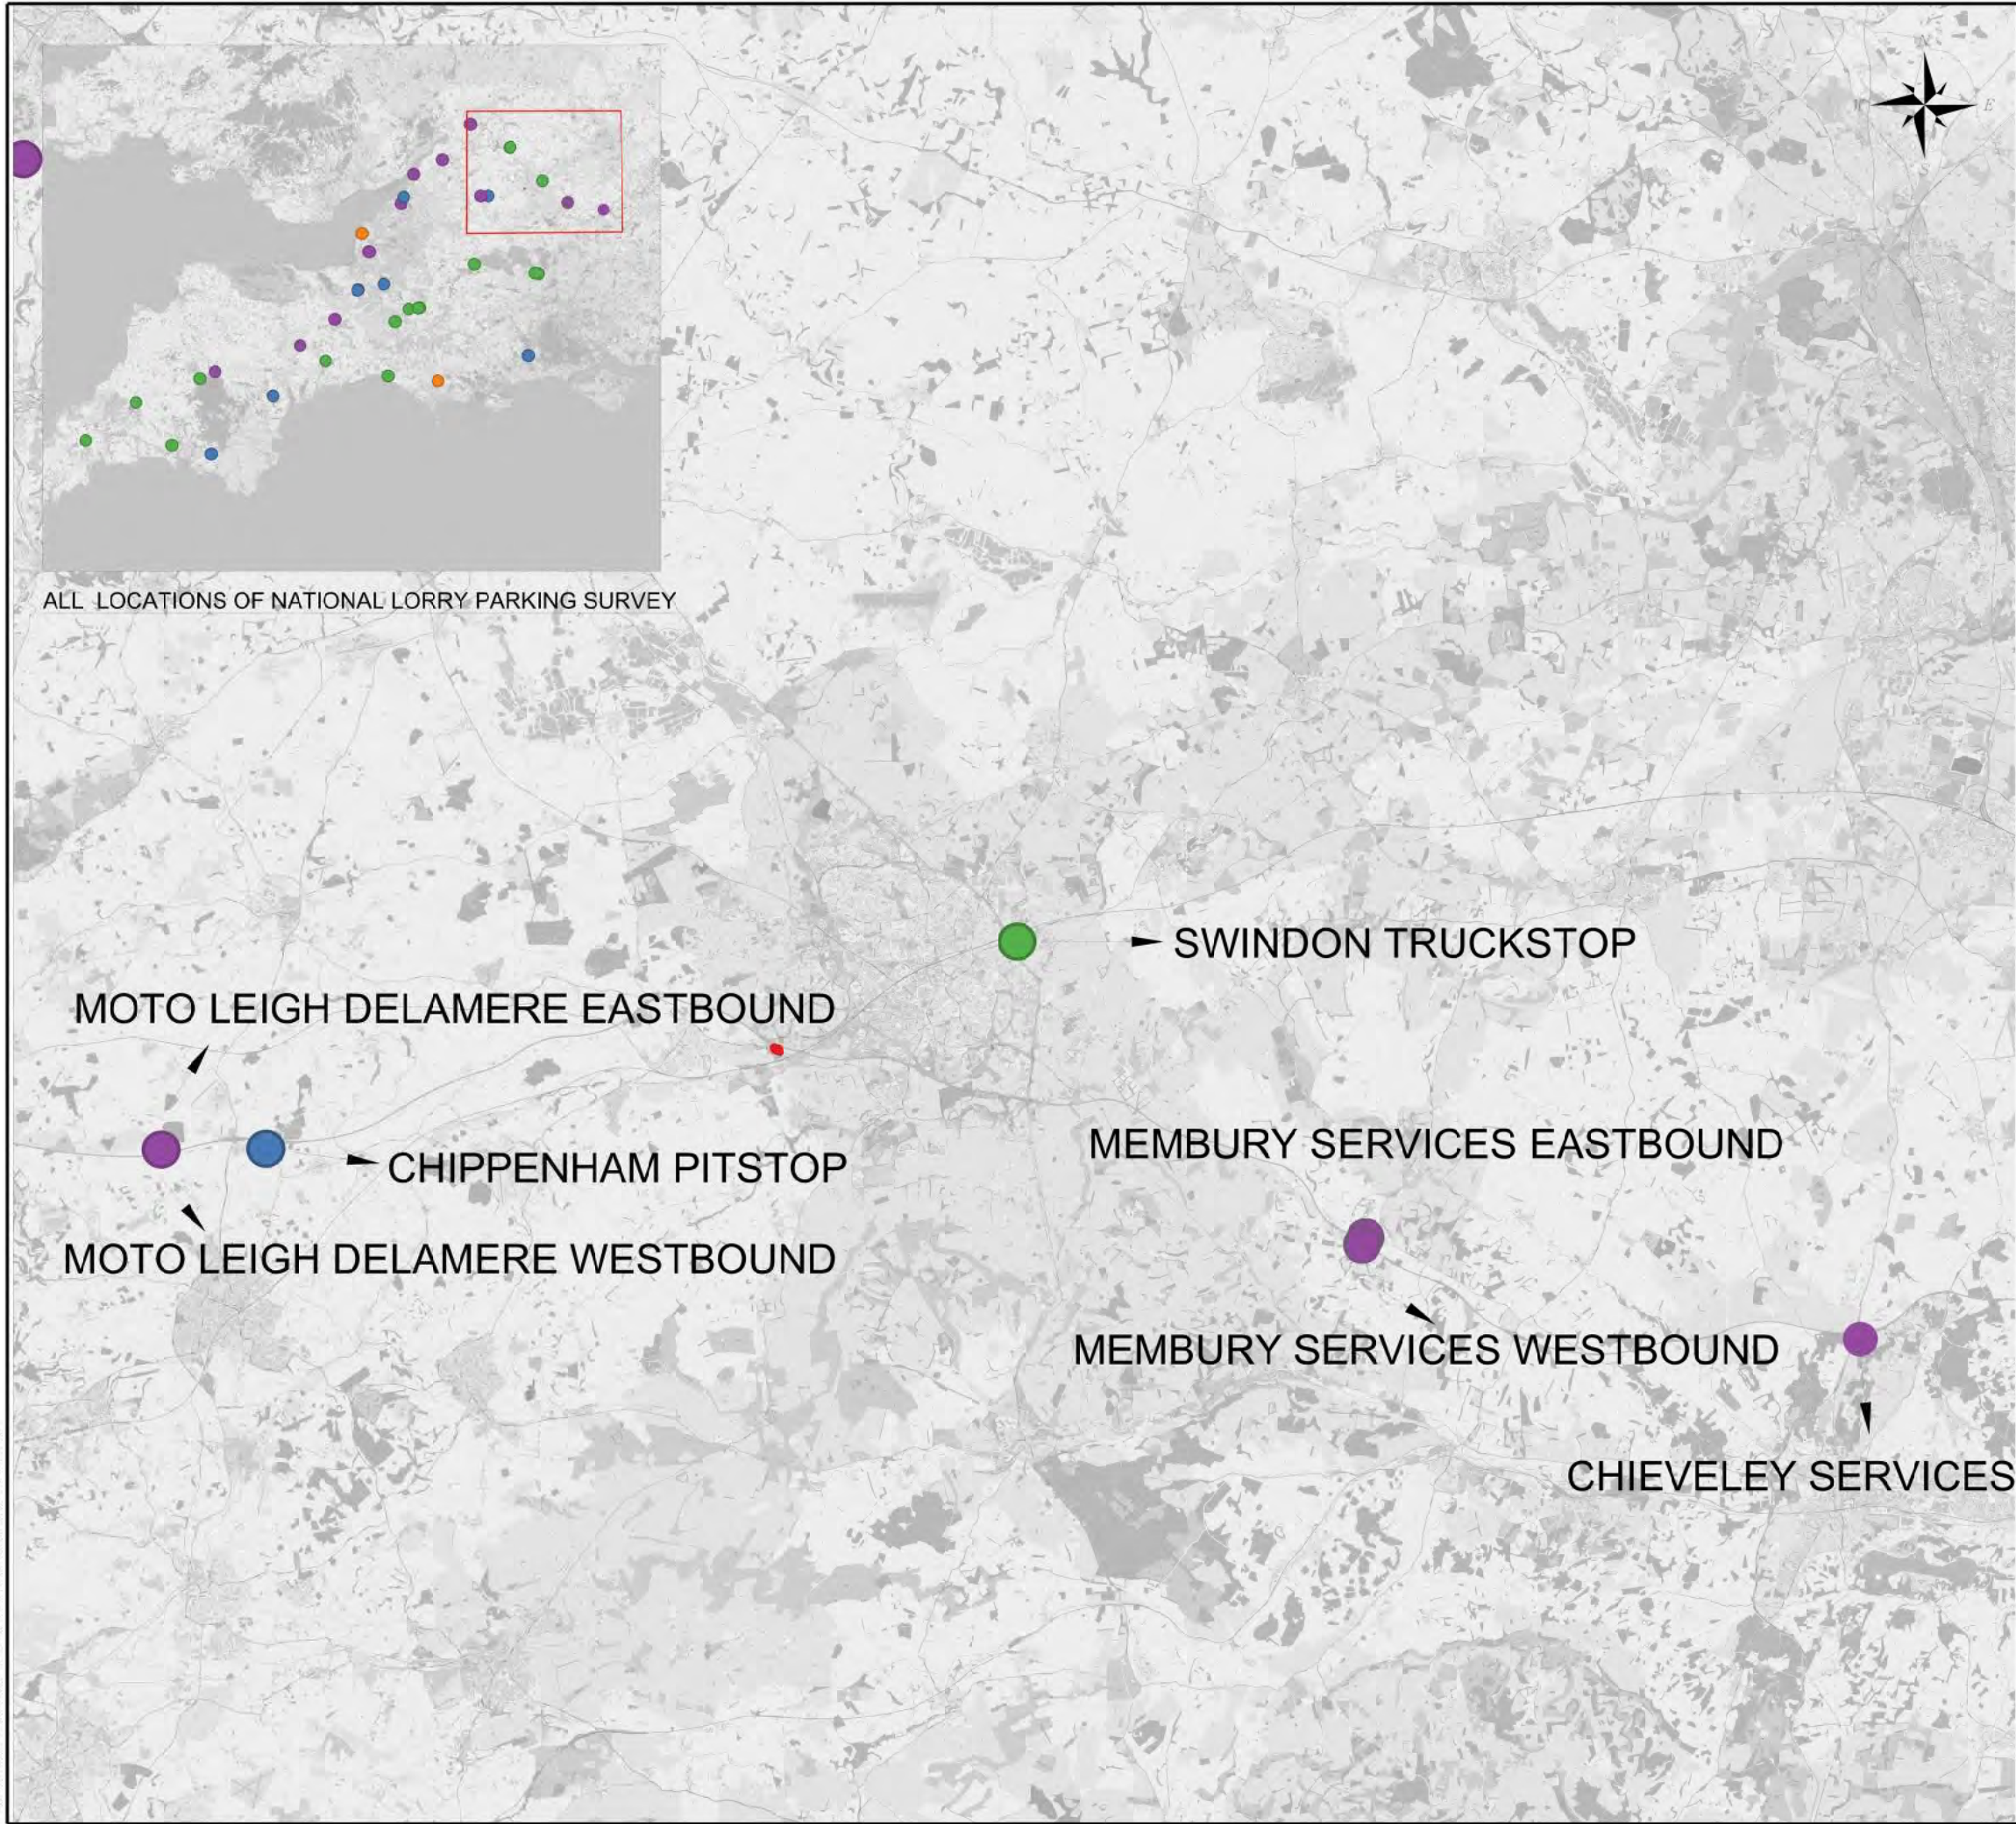

ALL LOCATIONS OF NATIONAL LORRY PARKING SURVEY


NOTES

- Site Location
- Trunk Road Service Area
- Motorway Service Area (MSA)
- Independent Truckstop
- Local Authority Truckstop

REV	DETAILS	DRAWN	CHECKED	DATE
CLIENT: MOTO				
PROJECT: MOTO SWINDON				
DRAWING TITLE: LOCATION OF NATIONAL LORRY PARKING SURVEYS (SOUTH-WEST) IN THE SWINDON AREA				
SCALES: NTS @ A3				
DRAWN: LG	CHECKED: MTC	DATE: OCT 2023		
Eddisons 340 Deansgate Manchester M3 4LY Email: info@crofts.co.uk Tel: 0161 837 7380 Web: www.eddisons.com/services/transport-planning				
DRAWING NUMBER: 3728-03				REVISION: -



Z:\projects\3728 MOTO Swindon\GIS\Workspaces\3728-03.dwg

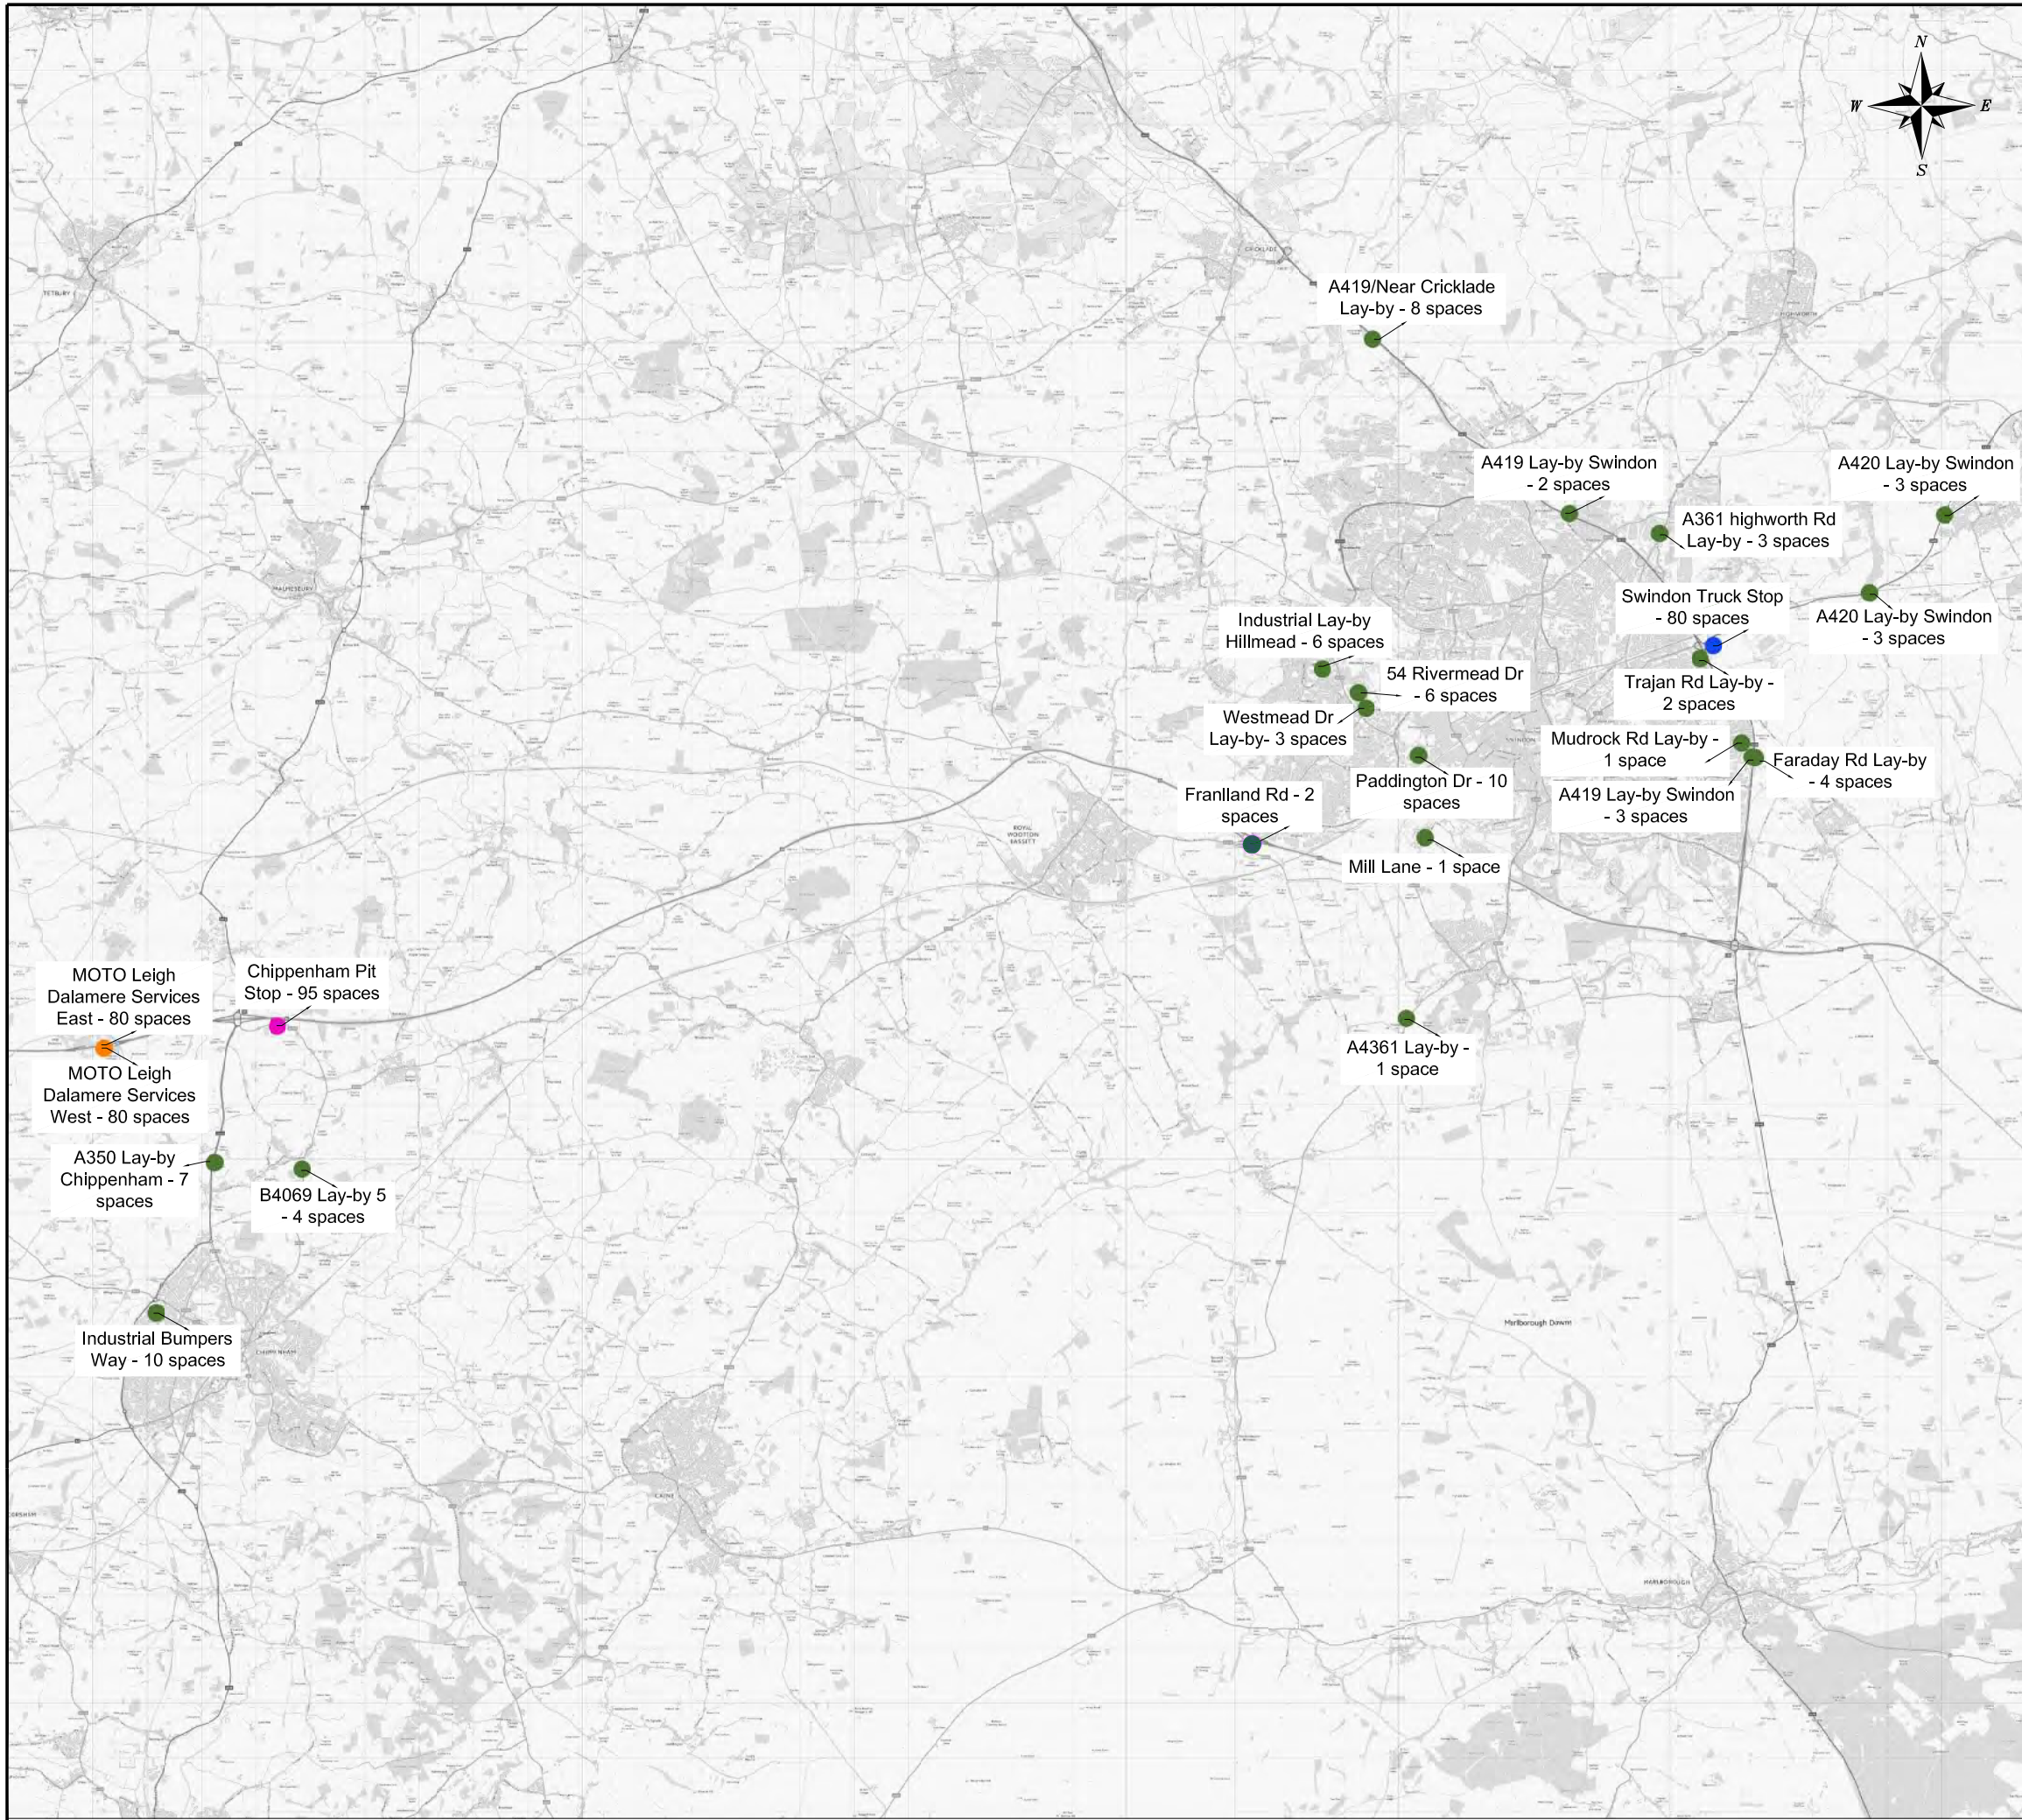

NOTES

- Chippenham Pit Stop
- Lay-bys
- Leigh Dalamere Services
- Swindon Truck Stop

REV	DETAILS	DRAWN	CHECKED	DATE
-	-	-	-	-

CLIENT:

MOTO

PROJECT:

MOTO SWINDON

DRAWING TITLE:

LAY-BYS AND TRUCK STOPS

SCALES:

NTS @ A3

DRAWN:	LG	CHECKED:	MTC	DATE:	MAR 23
--------	----	----------	-----	-------	--------


Eddisons
340 Deansgate
Manchester
M3 4LY

Email: info@crofts.co.uk
Tel: 0161 837 7380
Web: www.eddisons.com/services/transport-planning

DRAWING NUMBER:	3728-03	REVISION:	-
-----------------	---------	-----------	---

Eddisons

SWINDON LAYBY SURVEY - Tuesday 28th March 2023																							
DAY	Layby No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Parked	%
	Description	A350	B4069	Bumpers	A4361	Frankland	Mill Lane	Paddington	Hillmead	Rivermead	Westmead	Faraday	Murdock	A419	Trajan	A419	A361	A420	A420	A419	A350		
Tues 28 Mar	Spaces	10	4	10	1	20	2	10	6	6	6	4	10	10	5	3	3	8	3	8	4	Total	133
	7pm	7	1	5	0	9	0	0	0	3	2	0	1	7	5	2	2	4	1	5	4	58	43.6%
	9pm	9	1	6	0	12	0	1	0	4	3	1	2	11	6	4	2	5	1	5	4	77	57.9%
	12pm	11	0	9	0	17	0	1	1	5	3	1	2	11	5	4	3	7	2	6	4	92	69.2%
	Time																						Total

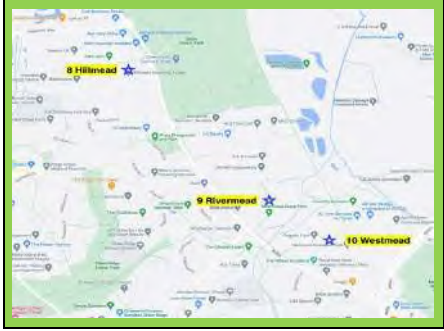


Notes

6 - Mill Lane - Now 3 EV Charging Spaces

Spaces are Estimated on Typical 15m HGV Length and not on DYL

Site 20 - A350 Added

SWINDON LAYBY SURVEY - Tuesday 18th April 2023																							
DAY	Layby No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Parked	%
	Description	A350	B4069	Bumpers	A4361	Frankland	Mill Lane	Paddington	Hillmead	Rivermead	Westmead	Faraday	Murdock	A419	Trajan	A419	A361	A420	A420	A419	A350		
Tues 18 April	Spaces	10	4	10	1	20	2	10	6	6	6	4	10	10	5	3	3	8	3	8	4	Total	133
	7pm	6	0	3	0	8	0	5	1	2	0	0	0	7	2	1	1	3	2	2	3	46	34.6%
	9pm	7	0	5	0	9	0	7	1	3	1	0	0	10	4	3	1	3	4	2	4	64	48.1%
	12pm	9	0	7	0	13	0	8	1	3	1	0	2	10	4	4	3	4	4	3	4	80	60.2%
	Time																					Total	

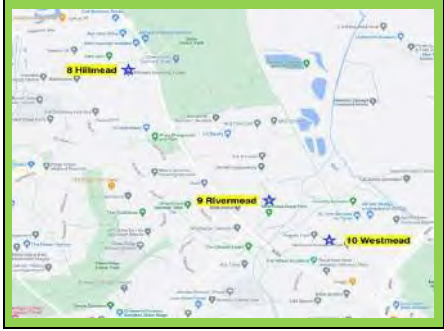




Notes

6 - Mill Lane - Now 3 EV Charging Spaces

Spaces are Estimated on Typical 15m HGV Length and not on DYL

Site 20 - A350 Added

SWINDON LAYBY SURVEY - Tuesday 9th May 2023																						
DAY	Layby No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
	Description	A350	B4069	Bumpers	A4361	Frankland	Mill Lane	Paddington	Hillmead	Rivermead	Westmead	Faraday	Murdock	A419	Trajan	A419	A361	A420	A420	A419	A350	
Tue 9 May	Spaces	10	4	10	1	20	2	10	6	6	4	10	10	5	3	3	8	3	8	4	Total	133
	7pm	6	0	6	1	10	0	1	2	5	0	0	0	4	3	2	3	1	1	3	2	50
	9pm	7	0	7	1	11	0	1	3	6	0	0	1	4	4	2	3	1	2	5	2	60
	12pm	7	0	9	2	14	0	1	4	9	0	0	1	4	4	2	4	1	2	6	2	72
	Time	* NB Coned Off												* SB Coned Off							* NB Coned Off	Total

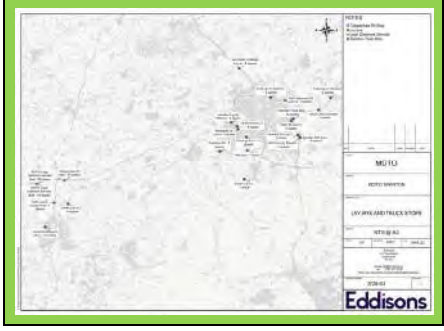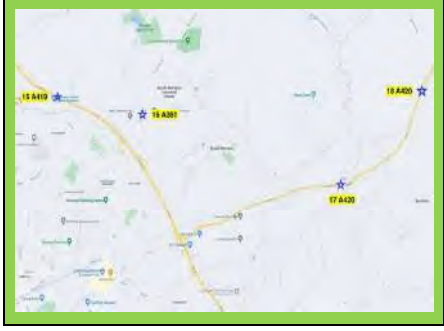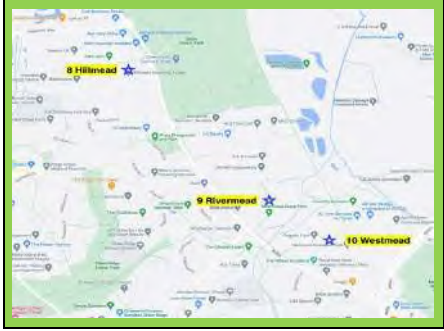




Notes

6 - Mill Lane - Now 3 EV Charging Spaces

Spaces are Estimated on Typical 15m HGV Length and not on DYL

Site 20 - A350 Added

SWINDON LAYBY SURVEY - Tuesday 12th September 2023																						
DAY	Layby No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
	Description	A350	B4069	Bumpers	A4361	Frankland	Mill Lane	Paddington	Hillmead	Rivermead	Westmead	Faraday	Murdock	A419	Trajan	A419	A361	A420	A420	A419	A350	
Tue 12 Sept	Spaces	10	4	10	1	20	2	10	6	6	4	4	10	10	5	3	3	8	3	8	4	Total
	7pm	3	0	6	0	5	0	1	1	3	2	1	0	1	1	1	1	1	0	0	0	27
	9pm	4	1	8	0	9	0	1	2	3	2	4	1	4	1	1	4	1	1	2	1	50
	12pm	7	1	10	0	11	0	2	5	4	3	5	2	6	2	2	4	1	2	4	1	72
	Time																					Total
																						%

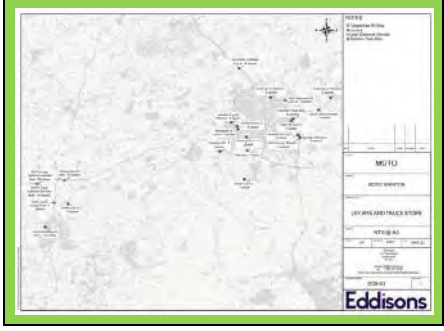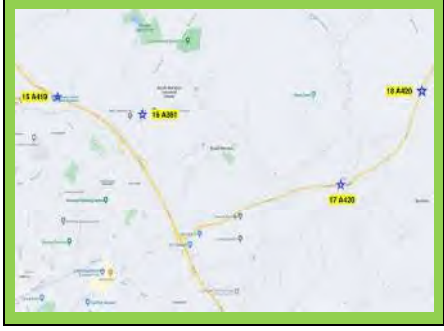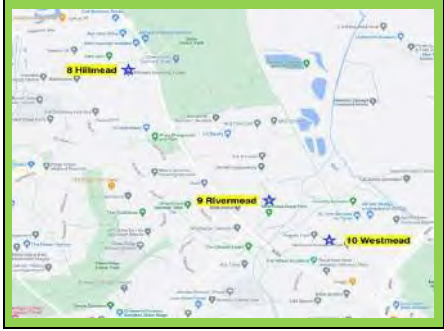






Notes

6 - Mill Lane - Now 3 EV Charging Spaces

Spaces are Estimated on Typical 15m HGV Length and not on DYL


Site 20 - A350 Added

SWINDON LAYBY SURVEY - Tuesday 8th October 2025																										
DAY	Layby No	1	2	3	4	5	6	7	8	9	10	11	12	13 NB	13 SB	14 NB	14 SB	15	16	17	18	19	20	Parked	%	
	Description	A350	B4069	Bumpers	A4361	Frankland	Mill Lane	Paddington	Hillmead	Rivermead	Westmead	Faraday	Murdock	A419	A419	Trajan	Trajan	A419	A361	A420	A420	A419	A350			
Tue 8th Oct	Spaces	10	4	10	1	20	2	10	6	6	6	4	10	10	10	5	5	3	3	8	3	8	4	Total	148	
	7pm	5	0	4	0	16	0	2	5	14	0	6	3	4	3	2	1	3	3	1	2	4	3	81	60.9%	
	9pm	5	0	5	1	20	0	4	7	15	0	6	3	3	3	2	2	2	5	2	2	4	4	95	71.4%	
	12pm	5	0	8	1	21	0	4	7	16	0	6	2	3	3	2	2	2	5	1	2	7	4	101	75.9%	
	Time																							Total		

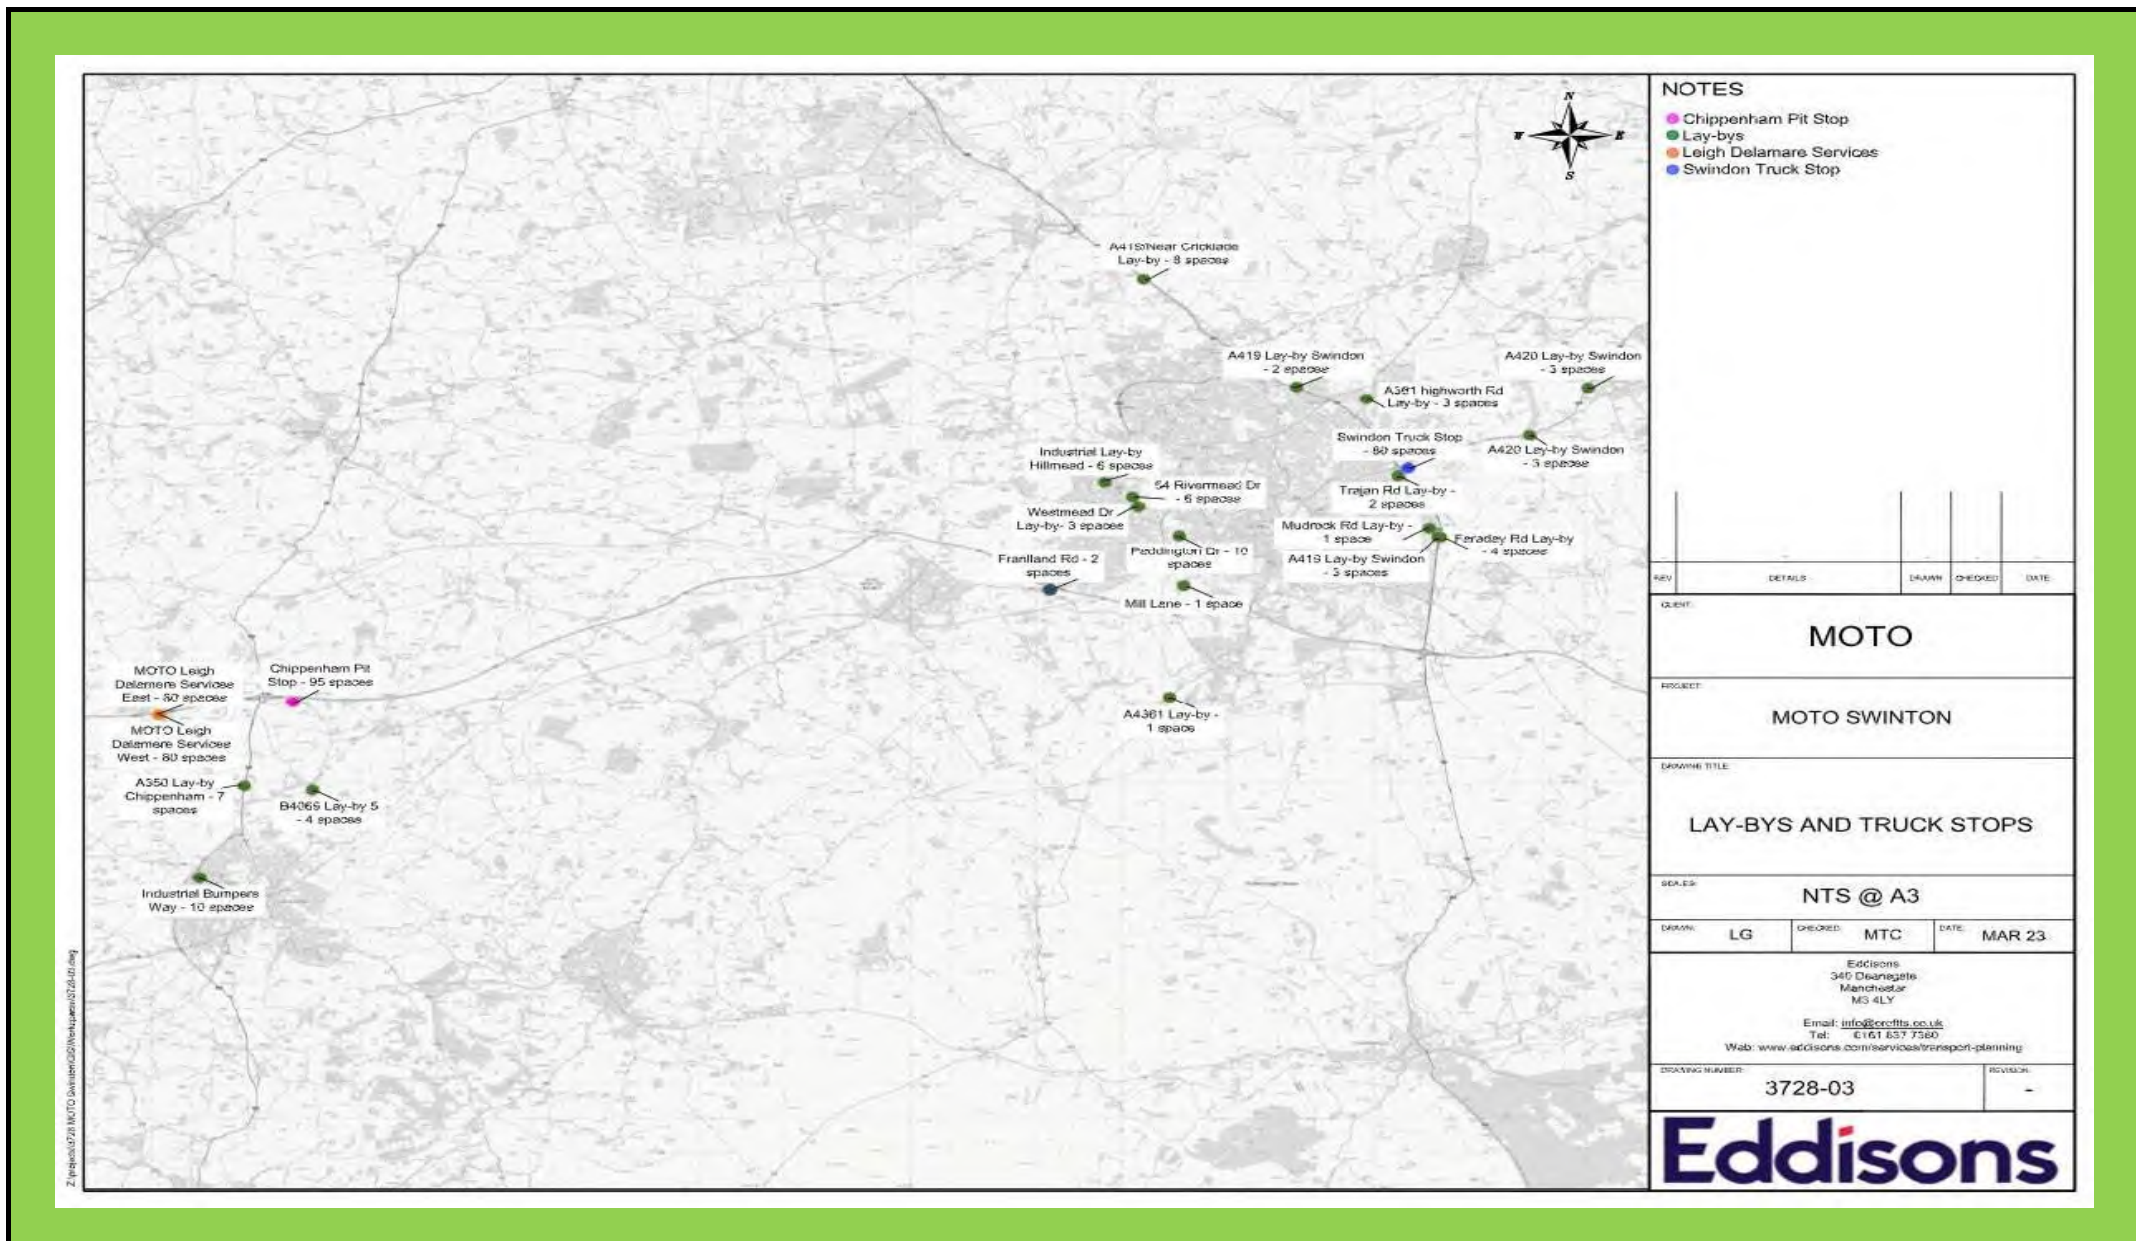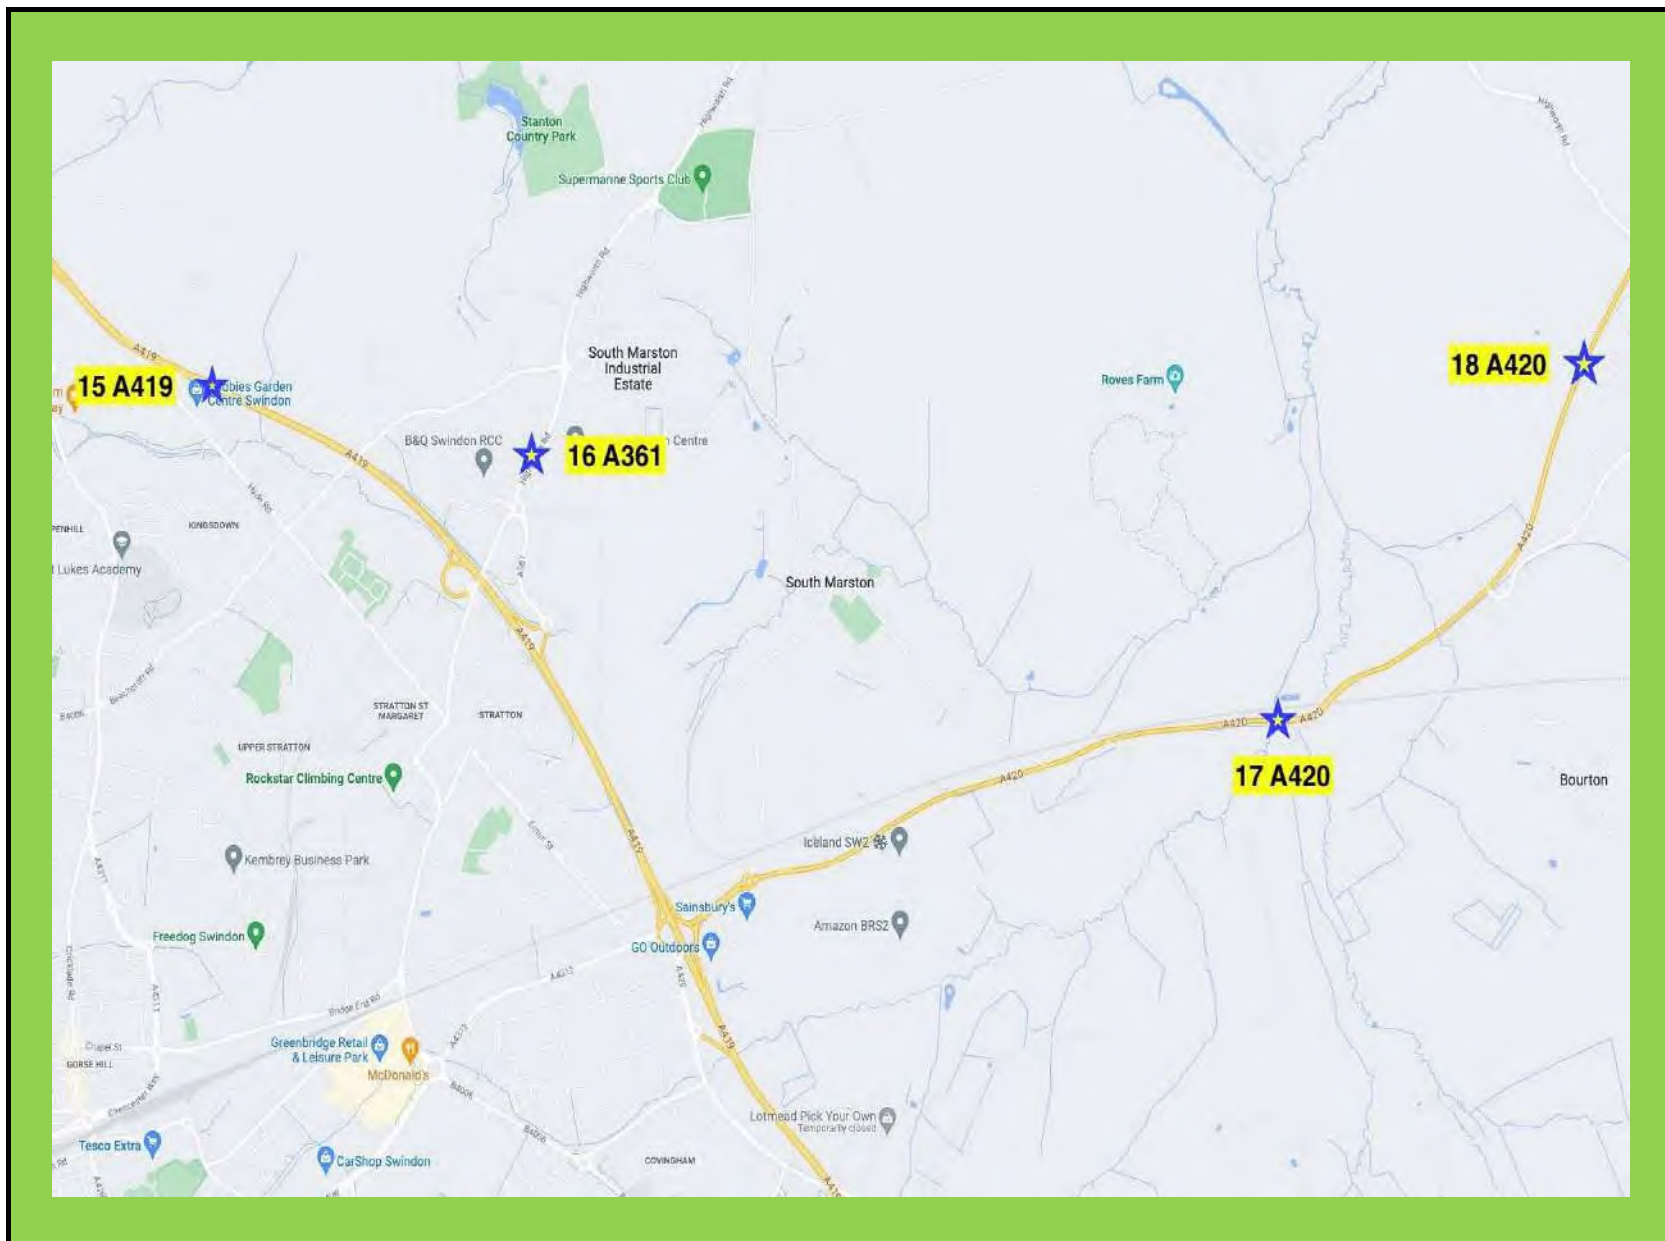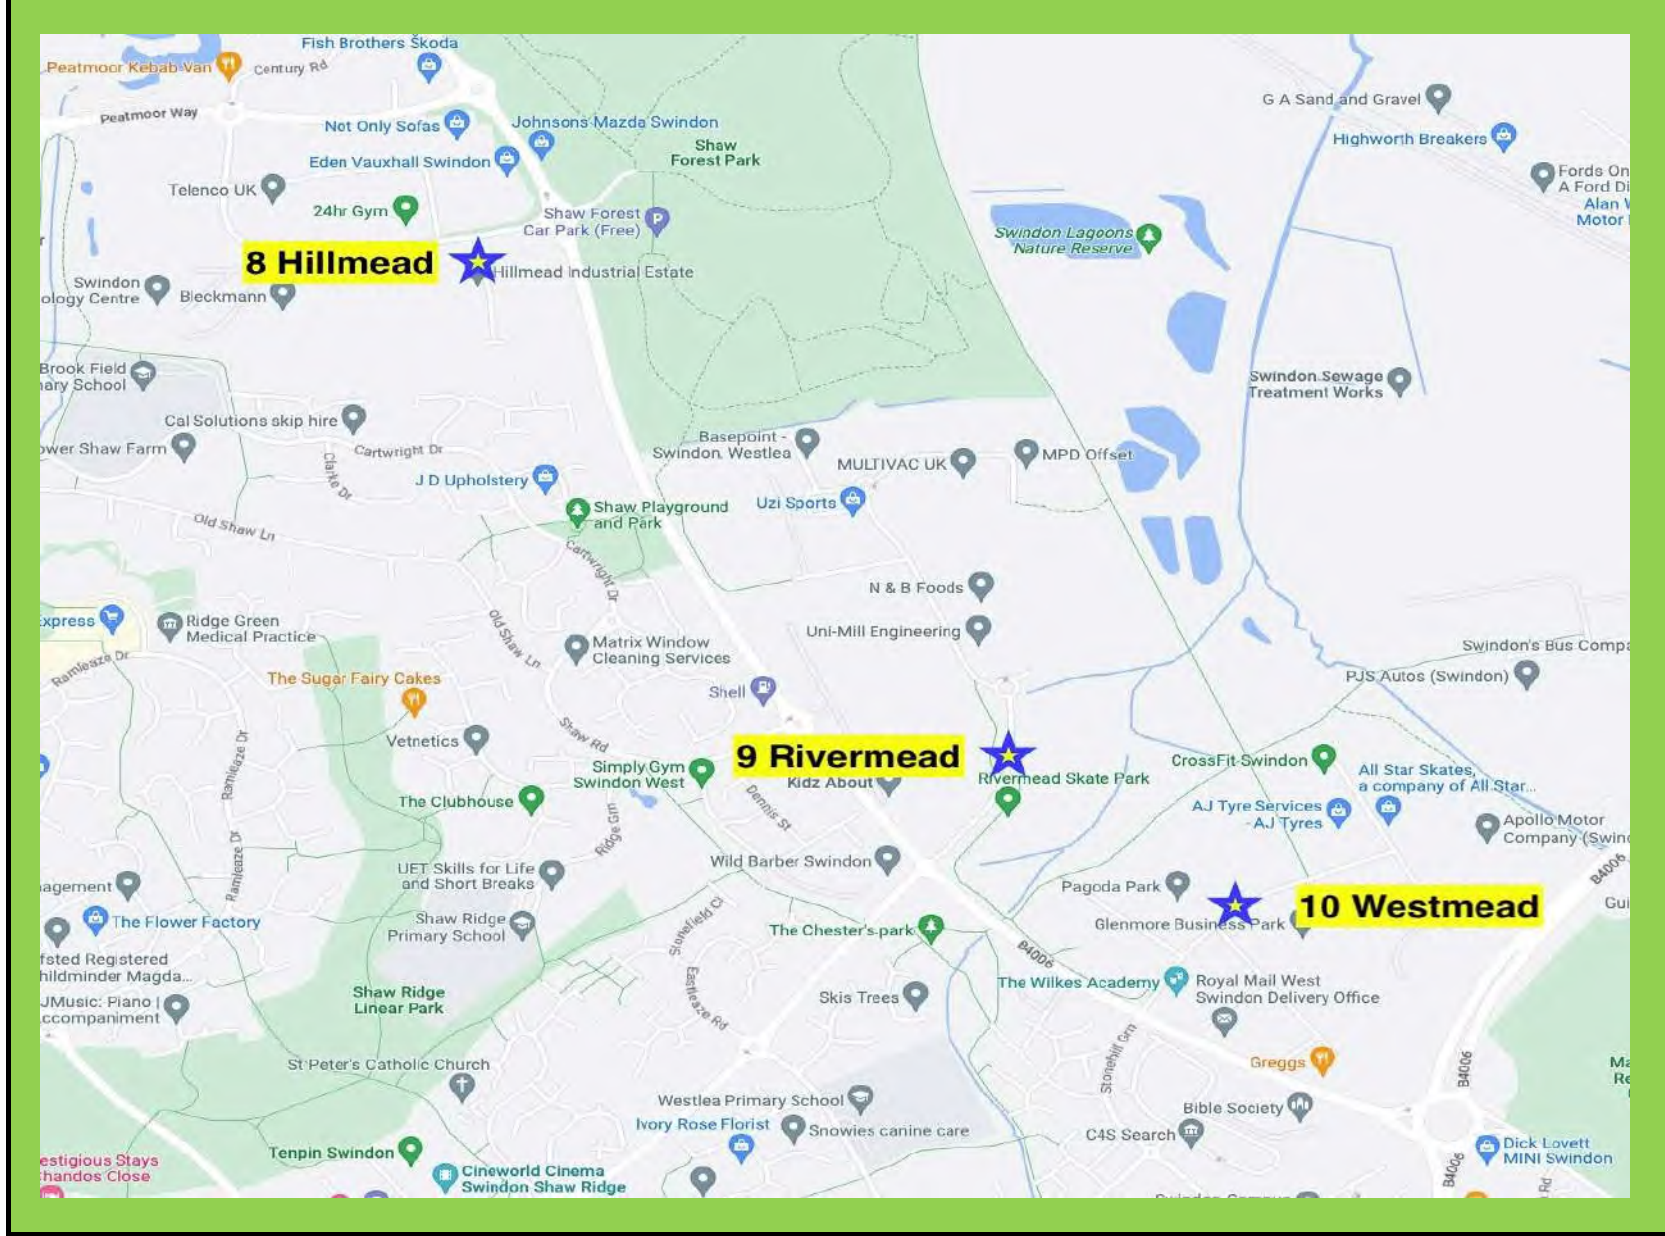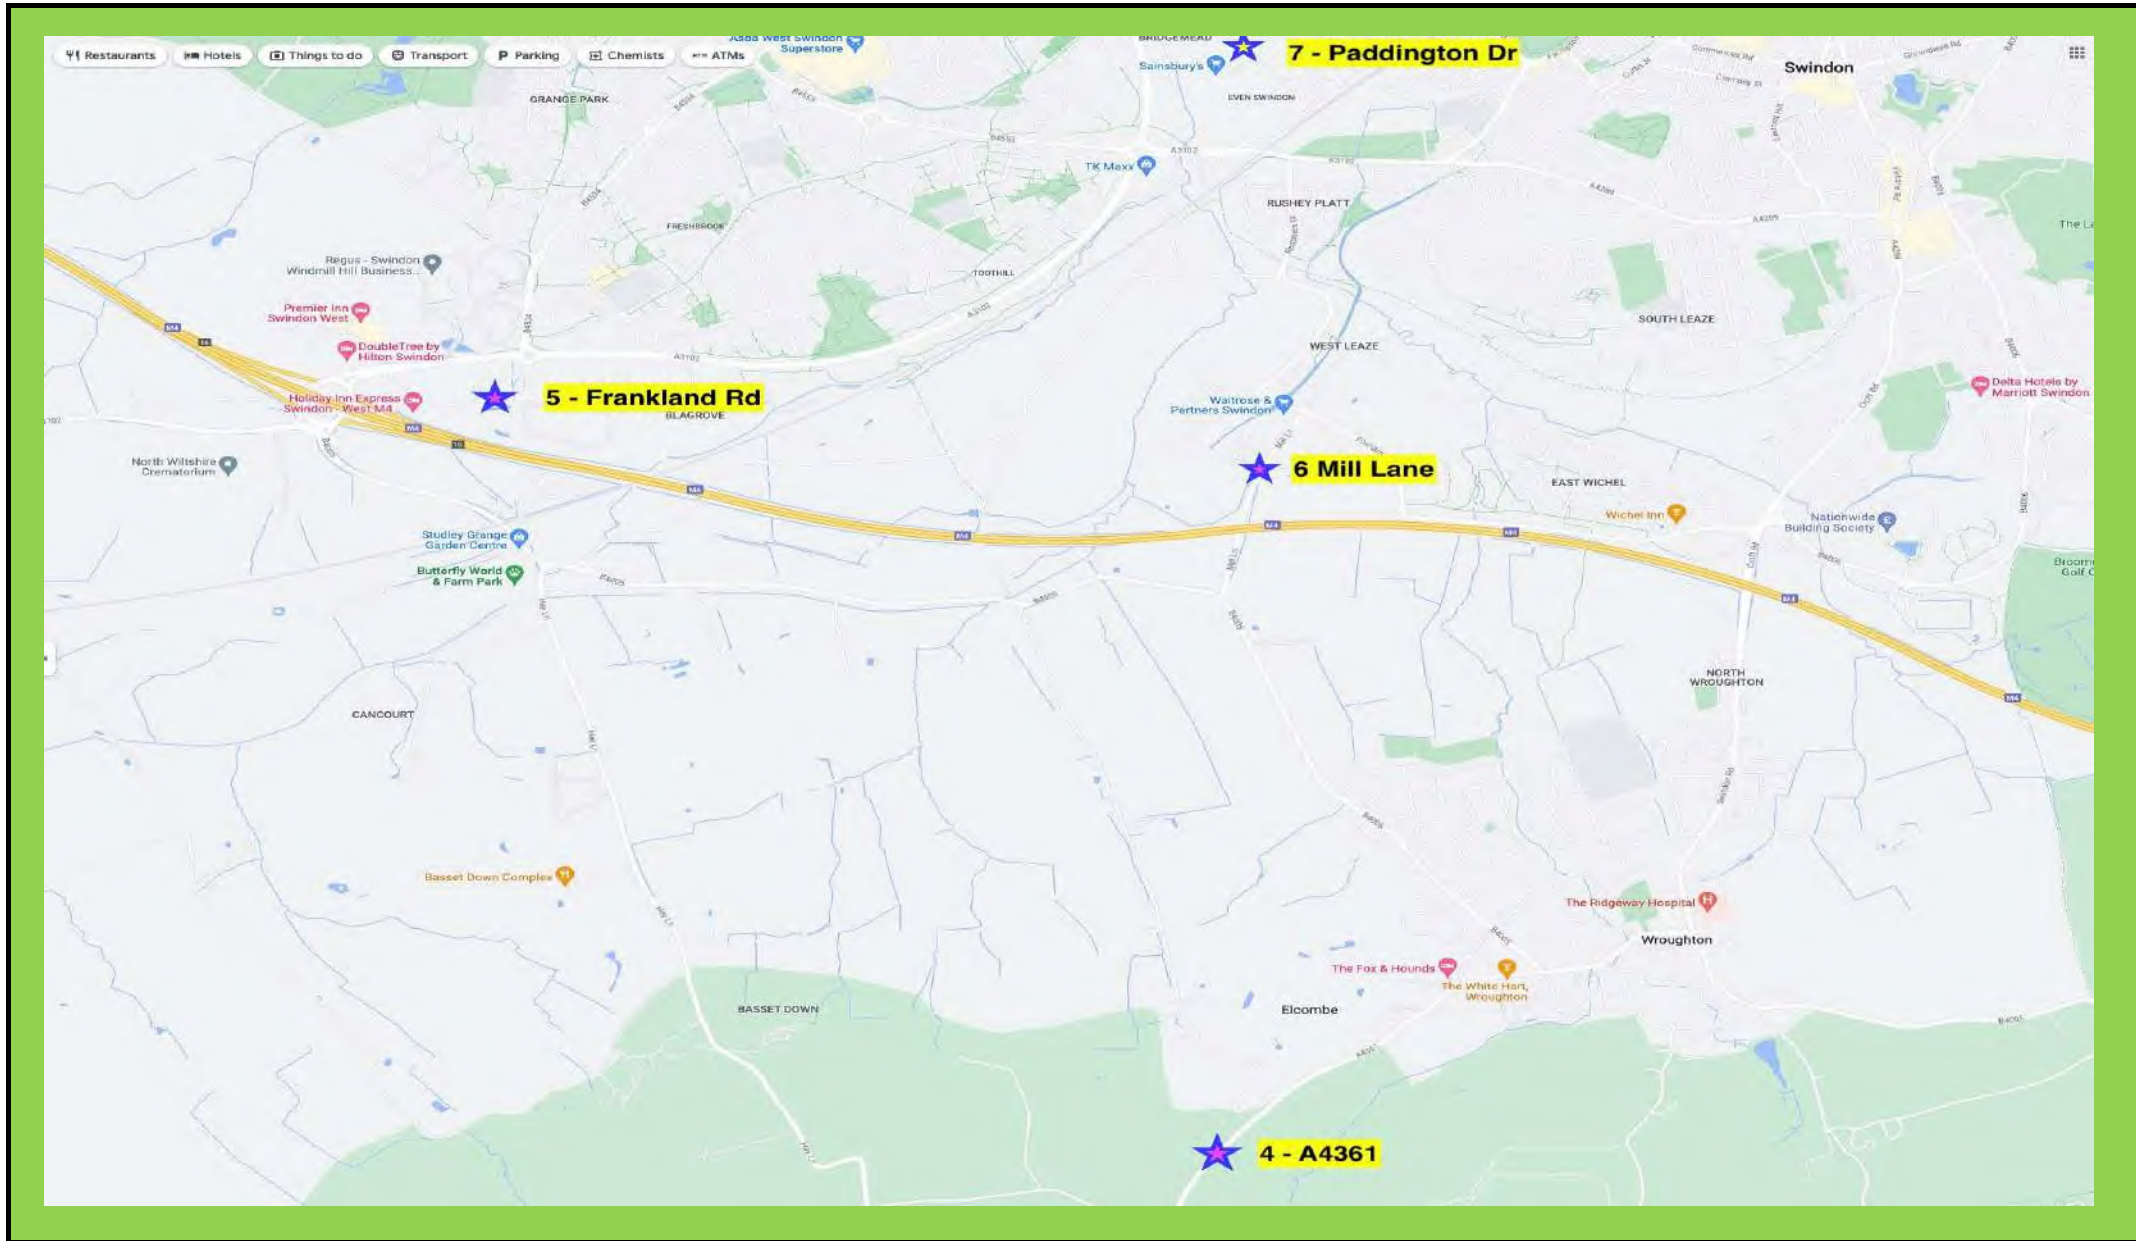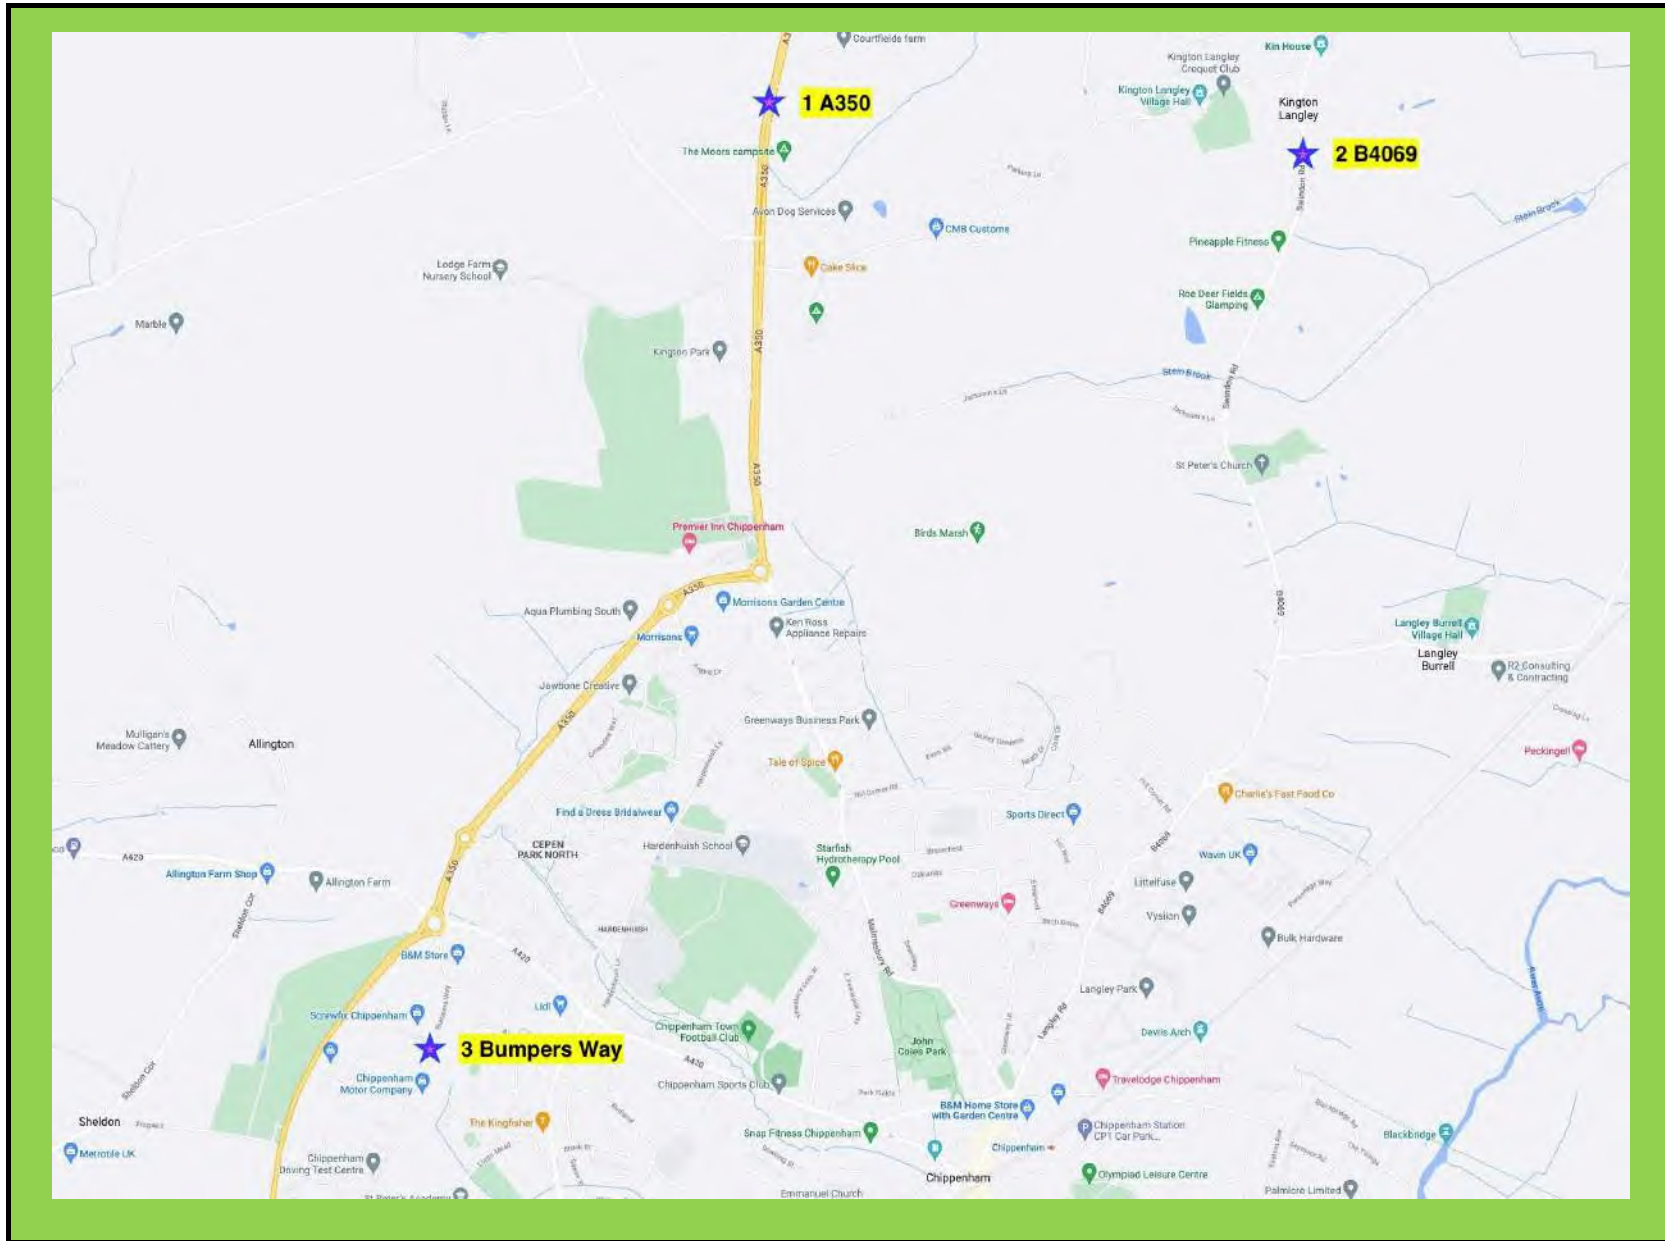

SWINDON LAYBY SURVEY

	Total HGV's Maximum	Total HGV's Average	
Mar-23	92	76	
Apr-23	80	63	
May-23	72	61	
Sep-23	72	50	
Oct-25	101	92	0

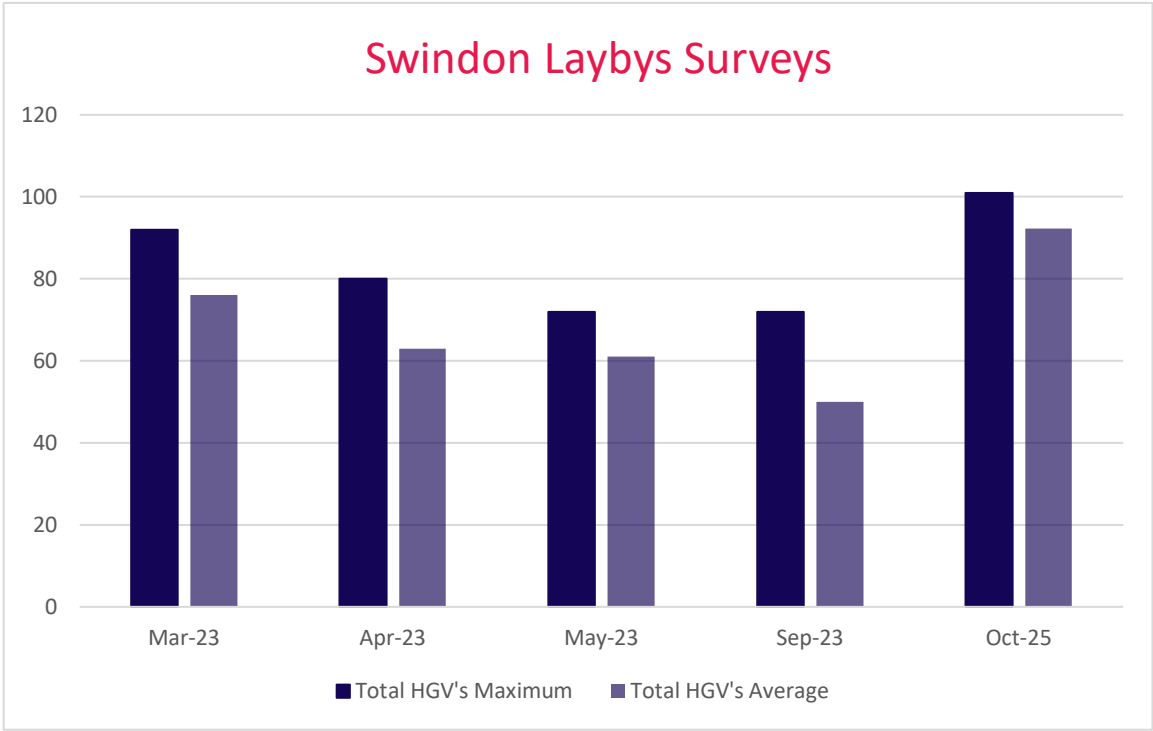

LAYBY NO.	SPACES	LOCATION OF PARKED HGV'S
1	10	A350 Eastern Layby
2	4	B4069 Swindon Road Lay-bys
3	10	Industrial Bumpers Way
4	1	A4361 Western Layby
5	20	Frankland Road – Industrial Estate
6	2	Mill Lane Western Layby
7	10	Paddington Drive – Industrial Estate
8	6	Hillmead – Industrial Estate
9	6	Rivermead Drive – Industrial Estate
10	6	Westmead Drive – Industrial Estate
11	4	Faraday Road – Industrial Estate
12	10	Murdock Road – Industrial Estate
13	10	A419 Lay-bys
14	5	Trajan Road - A420 (Merlin Way)
15	3	A419 – Northern Layby
16	3	A361 – Western Layby
17	8	A420 – Northern Layby
18	3	A420 – Western Layby
19	8	A419 - ???
20	4	A350- ???

APPENDIX 2

Stage 1 Road Safety Audit – Proposed Site Access



Eddisons

PROPOSED MOTO ACCESS ARRANGEMENTS, B4005, SWINDON

**STAGE 1 – ROAD SAFETY AUDIT
MAY 2025**

Transport Planning /Traffic Surveys/ Road Safety Audits

Tel: +44 (0)2920 667663 Email: admin@go-surveys.co.uk Web: www.go-surveys.co.uk
go-surveys Ltd Registered in England and Wales No:5841452
Registered office: go-surveys Ltd, 72 Plasturton Avenue, Cardiff, CF11 9HJ

REPORT CONTROL

Document:	GS1544-2025 - Moto Access Arrangements, B4005, Swindon - Stage 1 RSA - Final.docx
Client:	Eddisons
Job Number:	gs-1544-2025
File Origin:	/Users/go-surveys/Road Safety Audits/GS1544 - Moto Access Arrangements, B4005, Swindon - Stage 1 RSA/GS1544-2025 - Moto Access Arrangements, B4005, Swindon - Stage 1 RSA - Final.docx

Document Checking:			
Primary Author:	T Brooks	Initialled:	TB
Contributor:	R Lister	Initialled:	RL
Reviewed By:	Initialled:		

Document Reference and Revision			
Issue	Date	Status	Checked for Issue
1	14/05/2025	Draft	R Lister
2	16/05/2025	Final	T Brooks
3			
4			

Contents

1	INTRODUCTION.....	2
2	ROAD SAFETY AUDIT FINDINGS FROM RSA 1	5
	PROBLEM 1	5
	PROBLEM 2	5
	PROBLEM 3	5
	PROBLEM 4	6
	PROBLEM 5	6
	PROBLEM 6	6
	PROBLEM 7	7
	PROBLEM 8	7
	PROBLEM 9	8
	PROBLEM 10	8
3	AUDIT STATEMENT	9

Appendices

Appendix A – List of drawings and documents supplied for audit.

Appendix B – Location plan of identified problems.


1 INTRODUCTION

- 1.1 This report presents the findings from a Stage 1 Road Safety Audit (RSA) undertaken on the proposed access arrangements to a Moto Service Station on land to the north of the B4005, Swindon that will include a 4 arm 55 metre Inscribed Circle Diameter (ICD) roundabout.
- 1.2 The audit was carried out by the following:
- | | |
|--|-------------------------------------|
| Tristan Brooks | - Road Safety Audit Team Leader |
| BSc (Hons), MBA, CMILT, MCIHT, MSoRSA, | |
| HE RSA Cert. of Competency | |
|
R Lister |
- Road Safety Audit Team Member |
| BSc (Hons), MSc, MRTPI, MCIHT, MSoRSA | |
- 1.3 The RSA was commissioned by Eddisons (the designers of the scheme) who provided the audit information and although there was no formal 'audit brief' the RSA team has accepted that sufficient information has been provided to undertake the Stage 1 RSA. The audit team have been approved by Eddisons acting as effective project sponsor. The overseeing organisation is Wiltshire County Council.
- 1.4 The site visit was undertaken on Saturday 3rd May 2025 between 15:20 - 16:05 and comprised a walk and drive throughs of the scheme (where available). During the site visit both the weather and carriageway surface were dry. Traffic in the vicinity of the scheme was moderate. No pedestrians or cyclists were observed during the site visit.
- 1.5 The highway network in the vicinity of the scheme(s) is subject to a 40mph speed limit and in part has street lighting.
- 1.6 A review of the Personal Injury Collision (PIC) data in the vicinity of the scheme(s) between 01/01/2019 and 31/12/2023 (based on information in the Crashmap database) has indicated that during this period there has been no PICs recorded in the immediate vicinity of the proposed of the proposed access arrangements.
- 1.7 The drawings and documents supplied for audit are listed in **Appendix A**. An annotated drawing showing the locations of the problems identified is provided in **Appendix B**.
- 1.8 The terms of reference of the audit are as that described in DMRB GG/119 Guidelines on Road Safety Audits – Rev 2. This standard has been used for guidance only. The exception to GG/119 is the inclusion (if applicable) of a notes/observation section at the end of the report and inclusion of an illustration of the proposed scheme(s) instead of a written description. The audit team has examined and reported only on the road safety implications

of the scheme as presented and has not examined or verified the compliance of the designs to any other criteria.

- 1.9 The scope of the RSA is limited to the proposed external access arrangements as illustrated in **Figure 1**. At the request of the designers of the scheme, it has been requested that the scheme be considered 'with' and 'without' the inclusion of Arm D of the proposed roundabout that will provide access to the adjacent agricultural land. It is noted that no scheme drawings have been provided for review as part of the without Arm D option, although it is understood that this would not alter the general geometric design of the roundabout and if Arm D is excluded, the existing agricultural access to the south-west of the proposed roundabout will be retained, and if this option is progressed this would be subject to additional RSA.

Figure 1: Scope of scheme subject to RSA.

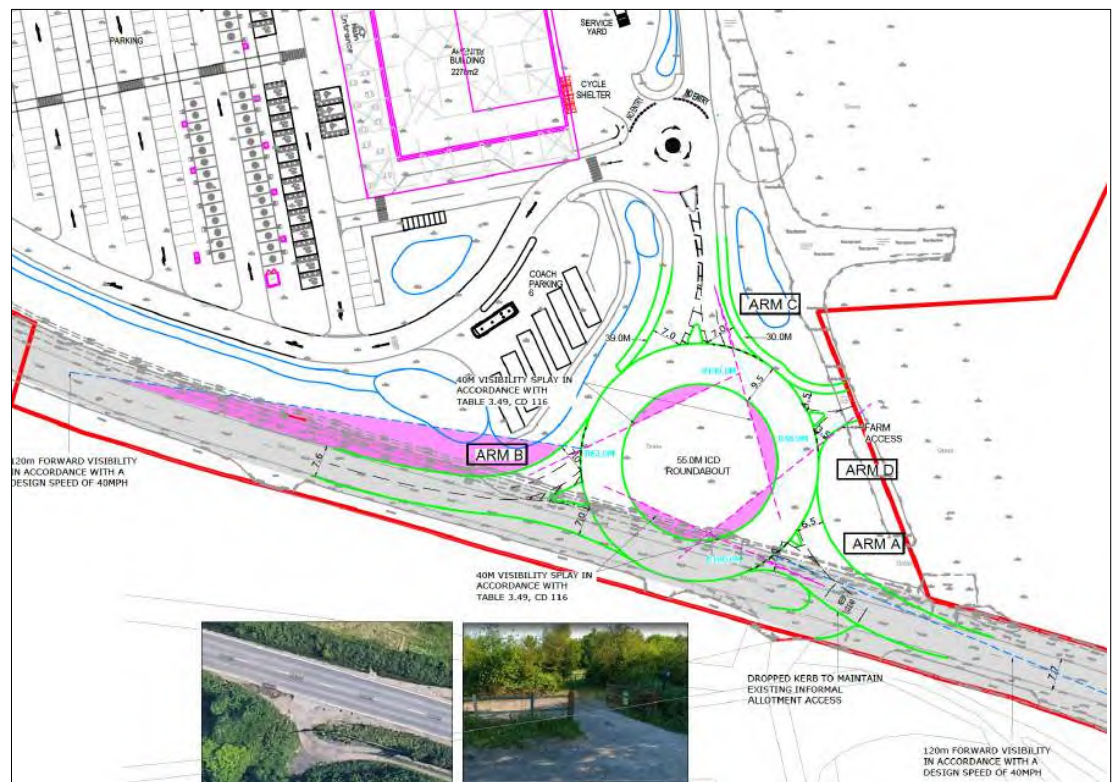

- 1.10 The audit team would note that the internal site access arrangements do not form part of the scope of this RSA.
- 1.11 The audit team understand that no previous RSAs have been undertaken on the scheme and they have been advised that there are no departures from standard within the design of the scheme.

- 1.12 The recommendations included within this report should not be regarded as being prescriptive design solutions to the problems raised. They are intended only to indicate a proportionate and viable means of eliminating or mitigating the identified problem, in accordance with GG/119. There may be alternative methods of addressing a problem which would be equally acceptable in achieving the desired elimination or mitigation and these should be considered when responding to this report.

2 ROAD SAFETY AUDIT FINDINGS FROM RSA 1

PROBLEM 1

LOCATION: Proposed roundabout.

SUMMARY: Vehicle encroachment into adjoining lanes may result in side-swipe type collisions.

- 2.1 The vehicle swept path analysis for a 18.5 metre FTA vehicle (or similar size vehicle) provided for review as part of the RSA indicates that that for a number of movements throughout the roundabout this vehicle type would have to encroach into the adjacent lane. Encroachment into the adjacent lane could potentially result in side-swipe type collisions.

RECOMMENDATION

- 2.2 It is recommended that the proposed junction arrangement/geometries are revised to remove this problem.

PROBLEM 2

LOCATION: Proposed roundabout – B4005 eastbound and westbound approaches.

SUMMARY: Risk of 'see-through' for approaching drivers could result in loss of control type collisions.

- 2.3 The proposed junction layout may result in 'see-throughs' for drivers approaching the roundabout from the B4005 (east and west) due to excessive forward visibilities. This could potentially result in drivers not appreciating the new carriageway alignment due to the 'see-through' which could result in them approaching the junction at speed which could result in loss of control type collisions or failure to give-way type collisions.

RECOMMENDATION

- 2.4 It is recommended that appropriate landscaping or similar is provided throughout the scheme to remove the potential for 'see throughs'.

PROBLEM 3

LOCATION: Global.

SUMMARY: Potentially restricted visibility to the right for drivers entering/approaching the roundabout could result in an increased risk of failure to give-way type manoeuvres which could result in side impact type collisions.

- 2.5 It is unclear if sufficient visibility to the right for drivers entering the roundabout can be achieved. Restricted visibility to the right for drivers entering/approaching the roundabout could result in an increased risk of failure to give-way type manoeuvres which could result in side impact type collisions.

RECOMMENDATION

- 2.6 It is recommended that the visibility to the right for drivers entering/approaching the roundabout be reviewed and amended if insufficient.

PROBLEM 4

LOCATION: Global.

SUMMARY: Potentially restricted circulatory visibility for drivers negotiating the roundabout could result in an increased risk of rear-end shunt type collisions.

- 2.7 It is unclear if sufficient circulatory visibility for drivers negotiating the roundabout can be achieved. Restricted circulatory visibility could result in an increased risk of rear-end shunt type collisions.

RECOMMENDATION

- 2.8 It is recommended that the circulatory visibility for drivers negotiating the roundabout be reviewed and amended if insufficient.

PROBLEM 5

LOCATION: Global.

SUMMARY: Potentially restricted circulatory visibility for drivers negotiating the roundabout could result in an increased risk of rear-end shunt type collisions.

- 2.9 It is unclear if sufficient circulatory visibility for drivers negotiating the roundabout can be achieved. Restricted circulatory visibility could result in an increased risk of rear-end shunt type collisions.

RECOMMENDATION

- 2.10 It is recommended that the circulatory visibility for drivers negotiating the roundabout be reviewed and amended if insufficient.

PROBLEM 6

LOCATION: Global.

SUMMARY: Potential omission of street lighting could result in an increased risk of collisions throughout the scheme.

- 2.11 No information has been provided with regard to the proposed street lighting provision throughout the scheme. The omission of street lighting could result in an increased risk of collisions throughout the junction due to the poor conspicuity of the junction during the hours of darkness.

RECOMMENDATION

- 2.12 It is recommended that street lighting be provided throughout the scheme.

PROBLEM 7

LOCATION: Proposed vehicle crossover to allotment site.

SUMMARY: Potentially restricted visibility for vehicle accessing/egressing the allotment site could increase the risk of rear-end shunt or side impact type collisions.

- 2.13 No information has been provided with regard to the level of intervisibility for a vehicle accessing and egressing the allotment site, or to a rear of a vehicle if turning right into the allotment site. Restricted visibility for vehicle accessing/egressing the allotment site could increase the risk of rear-end shunt or side impact type collisions.

RECOMMENDATION

- 2.14 It is recommended that sufficient visibilities can be achieved to/from vehicles accessing/egressing the allotment site.

PROBLEM 8

LOCATION: Agricultural site access Arm D of the roundabout and circulatory carriageway.

SUMMARY: Potential for detritus within the carriageway could increase the risk of loss of control type collisions.

- 2.15 It is unclear what if any measures will be implemented to limit the potential for detritus from the use of the agricultural access (Arm D of the Roundabout) by agricultural vehicles from being inadvertently deposited from within the circulatory carriageway of the proposed roundabout which could increase the risk of loss of control type collisions, with the risks exacerbated for powered two wheel vehicles/cyclists.
- 2.16 The audit team note that the occurrence of detritus within the carriageway will be similar to that of the use of the existing agricultural access although would note that detritus within the circulatory carriageway of the proposed roundabout is likely to pose a greater risk of loss of control type collisions.

RECOMMENDATION

- 2.17 It is recommended that measures be implemented to address this problem.

PROBLEM 9

LOCATION: Retained existing agricultural access option.

SUMMARY: The retained agricultural access could result in rear-end shunt type collisions or head on type collisions.

- 2.18 The option of retaining the agricultural access at its existing location to the south-west of the proposed roundabout may result in agricultural vehicles waiting within the carriageway of the B4005 due to the requirement to open/close a gate when accessing or egressing the field due to the limited offset of the gate from the carriageway or layby provision which could result in rear-end shunt type collisions or head on type collisions.

RECOMMENDATION

- 2.19 It is recommended that the existing agricultural access is to be retained at this location measures be incorporated into the design of the scheme to address the problem identified e.g. offsetting the gate by a sufficient distance to permit an agricultural vehicle to wait off the carriageway when accessing/egressing the site.

PROBLEM 10

LOCATION: Roundabout Arm C.

SUMMARY: Length of the proposed link between the proposed B4055 roundabout and internal mini roundabout could increase the risk of rear end shunt type collisions.

- 2.20 No junction capacity assessments have been provided for review as part of the RSA. It is unclear therefore if the length of the northbound link on Arm C to the internal mini roundabout is sufficient to accommodate the forecast trip attraction to the proposed development without potentially blocking back onto the circulatory carriageway of the B4055 roundabout, which could increase the risk of rear-end shunt type collisions.

RECOMMENDATION

- 2.21 It is recommended that junction capacity assessments be undertaken to determine if the length of the proposed northbound link between the B4055 roundabout and internal mini roundabout is sufficient to avoid any blocking back of the circulatory carriageway of the B4055 roundabout.

3 AUDIT STATEMENT

3.1 We certify that this audit has been carried out in accordance with GG/119 unless otherwise noted.


Signed:



Date: 16 May 2025

T Brooks – BSc (Hons), MBA, CMILT, MCIHT, MSoRSA,
HE RSA Cert of Competency
Audit Team Leader
go-surveys Ltd
72 Plasturton Avenue
Cardiff
CF11 9HJ

Signed:



Date: 16 May 2025

R Lister - BSc (Hons), MSc, MRTPI, MCIHT, MSoRSA
Audit Team Member
go-surveys Ltd
72 Plasturton Avenue
Cardiff
CF11 9HJ



APPENDIX A

List of Drawings and Documents Provided for Audit

3728-F04 - Rev I


Proposed Site Access Plan

PIC Data

1st January 2019 – 31st December 2023

APPENDIX B

Location of Identified Problems

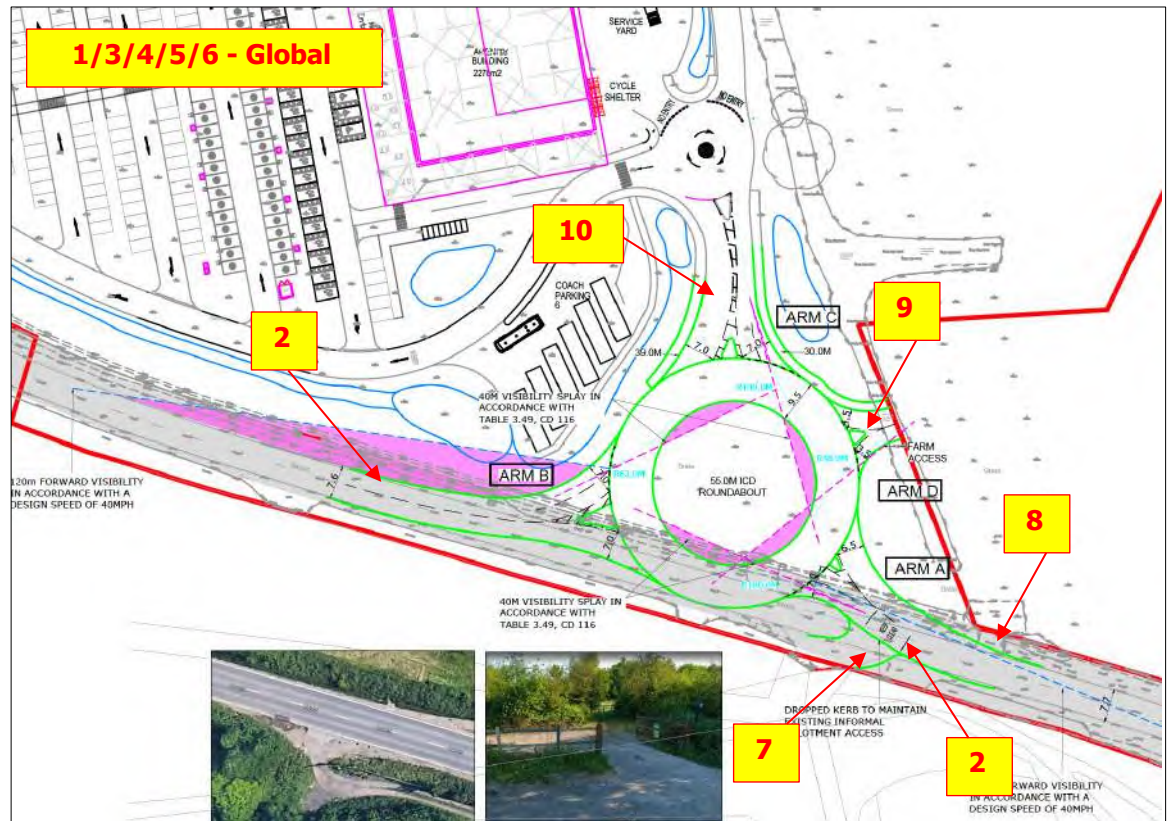

ROAD SAFETY AUDIT (RSA) DESIGNERS RESPONSE FORM

RSA Ref No : GS1544-2025

RSA Stage : 1

RSA Auditors : Go Surveys

Scheme : MOTO Swindon

Response By: Eddisons Transport Planning & Design

Problem No. in RSA Report	Problem Accepted (Yes/No)	Recommended Measure Accepted (Yes/No)	Alternative Measure / Design Team Response
1	Yes	Yes	Problem accepted, one lane entries have been provided to stop any encroachment into adjacent lanes.
2	Yes	Yes	Problem accepted, refer to 915-205 Parameter Plan for further details of the native woodland buffer planting for the central island. As part of the detailed design stage 'new roundabout ahead' signage will be provided for 3 months following construction.
3	Yes	Yes	Problem accepted, 3728-01 (Visibility Plan) shows 40m visibility splays to the right in accordance with Table 3.49, CD 116. Splays are to be kept clear of obstructions over 600mm.
4	Yes	Yes	Problem accepted, 3728-01 (Visibility Plan) shows 40m circulatory visibility splays in accordance with Table 3.49, CD 116. Additional note added to GA confirming that at least 2.0m of the roundabout central island is to be planted with low level vegetation to prevent visibility issues occurring as per Para 3.55.1, CD 116.
6	Yes	Yes	Problem accepted, at detailed design stage a street lighting assessment will be undertaken to confirm exact requirements.
7	Yes	Yes	Problem accepted. While this is an informal and lightly trafficked access, adequate visibility (2.4x120m) to the east of the allotment entrance can be achieved for approaching vehicles shown on 3728-01 (Visibility Plan). Vehicle speeds are expected to be lower near the roundabout, and visibility onto the roundabout will be maintained free of obstructions.

8	Yes	Yes	Problem accepted, the proposals include an extended section of formal highway surfacing leading up to the farm gate, which should help reduce the risk of detritus being carried onto the public highway compared to the current arrangement. Additionally, under the Highways Act 1980, it is an offence to deposit mud or other materials on the highway (Section 148 and Section 161). Therefore, it will be the responsibility of the farm owner to ensure that no such material is deposited on the public highway as a result of farm operations.
9	Yes	Yes	Problem accepted, Due to the issues associated with the current farm access—particularly the lack of storage space in front of the existing gate and the potential for rear shunt type accidents due to the existing farm accesses proximity to the proposed roundabout exit —we are recommending that the existing farm access is closed. Instead, the farm will be accessed directly from the roundabout, where increased off-carriageway stacking space is provided and more formal access from the roundabout can be provided. Appropriate signage, gating and potential surfacing material will be agreed as part of the detailed design to ensure the new farm access is not a visual distraction for people intending to travel on the B4005. As a result of the proposals, the issue is not applicable to the proposed scheme, as it is resolved through the relocation of the farm access.
10	Yes	Yes	Problem accepted, this issue is not applicable at this stage, as the internal highway layout is submitted in outline only and will be subject to a future reserved matters application. Notwithstanding this, the proposed internal roundabout functions effectively as a free-flow arrangement, with minimal conflicting movements (the only conflicting movement is people exit the MSA wishing to go back into the MSA). As such, no significant queuing is expected to occur at this location.

Name Leon Blythe

Signed:

Leon Blythe

Position Highway Engineer

Eddisons Transport Planning &
340 Deansgate
Manchester
M3 4LY

Date: 02.06.2025

Eddisons

APPENDIX 3

Parking Calculations

Month	24hr ADT	24hr %>6.6m	24hr AWT	24hr %>6.6m	18hr ADT	18hr %>6.6m	18hr AWT	18hr %>6.6m	16hr ADT	16hr %>6.6m	16hr AWT	16hr %>6.6m	12hr ADT	12hr %>6.6m	12hr AWT	12hr %>6.6m
Jan	30062	17.9	5381	30590	22.1	28930	17	29362	21.2	28549	16.9	29137	21.2	24790	16.7	25313
Feb	35018	16.1	5638	35625	20.2	33445	15	33848	19	32696	14.9	33138	18.9	28145	14.6	28350
Mar	35318	17.8	6287	35747	21.1	33567	16.5	33849	19.8	32741	16.4	33030	19.7	28188	16.2	28411
Apr	39143	14.9	5832	40682	17.8	37402	13.8	38766	16.6	36477	13.7	37829	16.5	31365	13.5	32461
May	39440	16.6	6547	40309	18.9	37472	15.4	38183	17.7	36519	15.4	37258	17.6	31226	15.2	31824
Jun	42098	14.5	6104	41665	17.7	40070	13.5	39480	16.6	38924	13.4	38419	16.6	33183	13.4	32689
Jul	41547	14.6	6066	42203	17.9	39439	13.5	39891	16.7	38251	13.5	38758	16.7	32432	13.4	32792
Aug	45299	13.9	6297	45328	16.5	43150	12.9	43044	15.5	41823	12.9	41826	15.4	35391	12.8	35379
Sep	41497	15.1	6266	40959	17.9	39404	14.1	38760	16.8	38349	14	37789	16.7	32741	13.9	32170
Oct	39421	14.4	5677	40449	18.3	37501	13.3	38261	17.1	36531	13.2	37353	17	31293	12.9	31886
Nov	38576	16.1	6211	38589	19.5	36671	14.9	36493	18.2	35763	14.7	35621	18.1	30887	14.4	30696
Dec	36932	13.6	5023	39140	15.9	35261	12.4	37310	14.6	34422	12.2	36432	14.4	30079	11.7	31657
Avg	38695	15.5	5998	39273	18.7	36859	14.3	37270	17.5	35920	14.3	36382	17.4	30810	14.1	31135
Site Hours	8463															
Number of	358															
1a. AADF (1	30810															
1b. AADF (1	35920															
1c. AADF (1	36859															
2a. AAWF (1	31135															
2b. AAWF (1	36382															
2c. AAWF (1	37270															
3a. peak d	51775															
3b. peak d: #####																
3c. peak hc	4457															
3d. peak hc #####																
4a. AADF (Two way) 16 Hr																
4b. AADF (Two way) 24 Hr																
5. CRF																
6. Stress																
7a. % vehic	15.46%															
7b. % vehic	18.66%															
Annual report for 2023 for Siteld : 2785																
Month	24hr ADT	24hr %>6.6m	24hr AWT	24hr %>6.6m	18hr ADT	18										

[illegible]

Annual report for 2022 for Siteld : 3043

Month	24hr ADT	24hr %>6.6m	24hr AWT	24hr %>6.6m	18hr ADT	18hr %>6.6m	18hr AWT	18hr %>6.6m	16hr ADT	16hr %>6.6m	16hr AWT	16hr %>6.6m	12hr ADT	12hr %>6.6m	12hr AWT	12hr %>6.6m	
Jan	29490	12.5	3686	31035	15.3	28336	11.4	29755	14.1	27554	11.1	28997	13.9	23919	10.8	25270	13.5
Feb	35125	11.4	4004	36577	13.9	33727	10.2	35057	12.7	32751	10	34116	12.4	28249	9.8	29474	12.2
Mar	34684	12.5	4336	35796	14.5	33172	11.3	34168	13.3	32165	11.1	33171	13	27639	10.8	28566	12.8
Apr	39142	10.4	4071	41662	12.2	37573	9.4	39964	11.1	36431	9.2	38797	10.9	31272	9	33312	10.7
May	39009	11.6	4525	40602	12.9	37333	10.5	38843	11.8	36142	10.3	37647	11.6	30744	10.2	32047	11.5
Jun	40622	10.3	4184	41797	12.2	38702	9.4	39846	11.2	37378	9.3	38548	11.1	31794	9.1	32836	11
Jul	41266	10.1	4168	42523	12.1	39443	9.2	40680	11.1	38112	9.1	39443	11	32301	9	33500	11
Aug	43704	9.5	4152	44363	11.2	41796	8.7	42453	10.3	40426	8.6	41135	10.1	34457	8.5	35060	10.1
Sep	40517	10.5	4254	41137	12.2	38812	9.6	39396	11.2	37528	9.4	38188	11	31919	9.3	32481	11
Oct	38746	10.1	3913	40378	12.6	37147	9.1	38641	11.6	35930	9	37480	11.4	30745	8.8	32176	11.3
Nov	38207	11.1	4241	39133	13.1	36650	10	37475	11.9	35508	9.8	36383	11.7	30474	9.5	31232	11.4
Dec	37133	9.5	3528	39672	10.9	35693	8.4	38141	9.8	34581	8.2	36978	9.6	30132	7.8	32112	9.2
Avg	38137	10.8	4119	39556	12.8	36532	9.8	37868	11.7	35375	9.6	36740	11.5	30303	9.4	31505	11.3

Site Hours 8627

Number of 364

1a. AADF (30303

1b. AADF (35375

1c. AADF (36532

2a. AAWF (31505

2b. AAWF (36740

2c. AAWF (37868

3a. peak d: 55299

3b. peak d: #####

3c. peak hc 4685

3d. peak hc #####

4a. AADF (Two way) 16 Hr

4b. AADF (Two way) 24 Hr

5. CRF

6. Stress

7a. % vehic 10.80%

7b. % vehic 12.76%

Annual report for 2023 for Siteld : 3043

Month	24hr ADT	24hr %>6.6m	24hr AWT	24hr %>6.6m	18hr ADT	18hr %>6.6m	18hr AWT	18hr %>6.6m	16hr ADT	16hr %>6.6m	16hr AWT	16hr %>6.6m	12hr ADT	12hr %>6.6m	12hr AWT	12hr %>6.6m
Jan	33438	11.3	35069	13.2	32108	10.2	33637	12	31154	10	32691	11.8	26800	9.8	28167	11.6
Avg	33438	11.3	35069	13.2	32108	10.2	33637	12	31154	10	32691	11.8	26800	9.8	28167	11.6

Site Hours 716

Number of 31

1a. AADF (26800

1b. AADF (31154

1c. AADF (32108

2a. AAWF (28167

2b. AAWF (32691

2c. AAWF (33637

3a. peak d: 40999

3b. peak d: #####

3c. peak hc 3541

3d. peak hc #####

4a. AADF (Two way) 16 Hr

4b. AADF (Two way) 24 Hr

5. CRF

6. Stress

7a. % vehic 11.31%


7b. % vehic 13.17%

WEBTRIS Data Calculations - January 2022 - December 2022

Count Point 3335B
Description MIDAS site at M4/3335B_Eastbound

Month	ADT 24hr	%>6.6m	ADT >6.6m
Jan-22	30062	17.9	5381
Feb	35018	16.1	5638
Mar	35318	17.8	6287
Apr	39143	14.9	5832
May	39440	16.6	6547
Jun	42098	14.5	6104
July	41547	14.6	6066
Aug	45299	13.9	6297
Sep	41497	15.1	6266
Oct	39421	14.4	5677
Nov	38576	16.1	6211
Dec	36932	13.6	5023
Average	38696	15	5944

39002

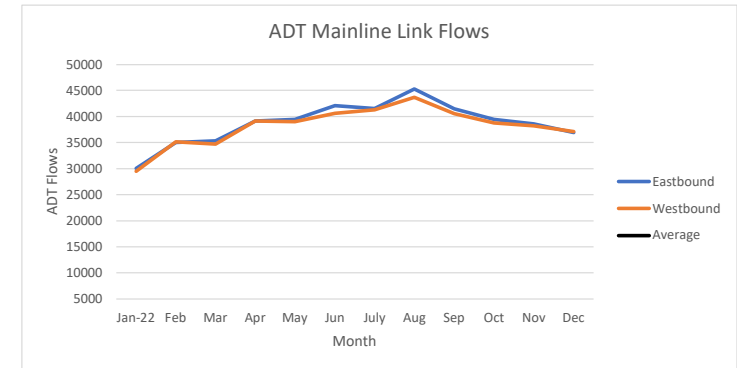


Count Point 3319A
Description MIDAS site at M4/3319A_Westbound

Month	ADT 24hr	%>6.6m	ADT >6.6m
Jan-22	29490	12.5	3686
Feb	35125	11.4	4004
Mar	34684	12.5	4336
Apr	39142	10.4	4071
May	39009	11.6	4525
Jun	40622	10.3	4184
July	41266	10.1	4168
Aug	43704	9.5	4152
Sep	40517	10.5	4254
Oct	38746	10.1	3913
Nov	38207	11.1	4241
Dec	37133	9.5	3528
Average	38137	11	4088

39552

	Two-way	Two-Way HGV	Two Way LGV	Avg
Jan-19	59552	9067	50485	76833
Feb	70143	9642	60501	76833
Mar	70002	10622	59380	76833
Apr	78285	9903	68382	76833
May	78449	11072	67377	76833
Jun	82720	10288	72432	76833
July	82813	10234	72579	76833
Aug	89003	10448	78555	76833
Sep	82014	10520	71494	76833
Oct	78167	9590	68577	76833
Nov	76783	10452	66331	76833
Dec	74065	8550	65515	76833
Average	76833	10032	66801	76833

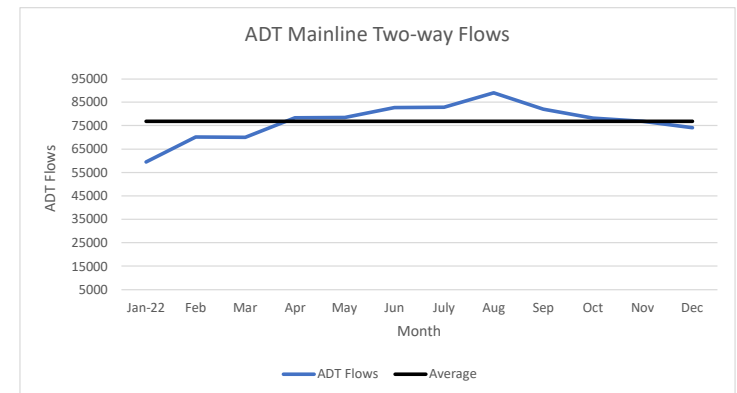

Parking Requirements		Motorway Service Area (MSA)			Motorway Rest Area = MSA / 2	
		2022	2033		2022	2033
Light Vehicles		78555	90589			
HGV and Coach		10448	12049			
		89003	102638			
Cars	0.5%	393	453		196	226
HGV	1.0%	104	120		52	60
Abnormal Load	minimum 1	1	1		1	1
Coach	0.1%	10	12		5	6
Caravan/Motorhome	0.015%	12	14		6	7
Motorcycle	0.015%	12	14		6	7
Lodge/Hotel	1 space per 2 bedrooms	0	0		0	0
Disabled car users (minimum of 5)	5.0%	20	23		10	11
Disabled Caravan (minimum of 1)	5.0%	1	1		0	0

NTM Temporo Growth Factor 2022 -2033 (Motorways Wiltshire)

Average Day

1.1532

APPENDIX 4

Framework Travel Plan

Proposed Motorway Rest Area
M4 Junction 16, Swindon, Wiltshire

September 2023

TRAVEL PLAN



Eddisons

REPORT

DOCUMENT:	Travel Plan
PROJECT:	Proposed Motorway Rest Area, M4 Junction 16, Swindon, Wiltshire
CLIENT:	MOTO Hospitality Ltd
JOB NUMBER:	3728
FILE ORIGIN:	Z:\projects\3728 MOTO Swindon\Docs\Reports\3728.TP.01.docx

DOCUMENT CHECKING:

Primary Author:	MTC	Initialled:	MTC
Contributor	SM	Initialled:	SM
Review By:	PJW	Initialled:	PJW

Issue	Date	Status	Checked for Issue
1	08-09-23	First Draft	MTC
2			
3			
4			

CONTENTS

1	INTRODUCTION	1
1.1	Background.....	1
1.2	Planning Policy.....	1
2	OBJECTIVES AND TARGETS.....	4
2.1	Objectives	4
2.2	Targets.....	4
2.3	Site Assessment.....	5
3	ACCESSIBILITY BY NON CAR MODES.....	7
3.1	Introduction.....	7
3.2	Access on Foot.....	7
3.3	Access by Cycle	8
3.4	Access by Bus	9
3.5	Accessibility by Rail.....	10
3.6	Accessibility Summary	10
4	TRAVEL PLAN MANAGMENT	11
4.1	Travel Plan Coordinator.....	11
5	TRAVEL PLAN MEASURES.....	12
6	MONITORING AND REVIEW.....	14
7	REMEDIAL MEASURES	16
8	FUNDING	17
9	ACTION PLAN	18

PLANS (See Transport Assessment)

1 INTRODUCTION

1.1 Background

1.1.1 This Travel Plan (TP) has been prepared by Eddisons on behalf of Moto Hospitality Limited (Moto) for a new motorway rest area (MRA) on land adjacent to Junction 16 of the M4 in Swindon, Wiltshire. Moto is the leading provider of services on the UK's motorway network with sites in England, Scotland and Wales, with service areas across 45 locations. Moto proposes to expand its service offer at locations where there are gaps in the strategic highway network to meet the safety and welfare needs of the public and HGV drivers.

1.1.2 The proposals would provide motorway service area with amenities for up to 242 cars and 62 HGV drivers. including showers and toilets, a hot food cafeteria, a lounge area and retail space.

Moto has a mission statement which states:

"We aim to be the nation's favourite break when travelling by delivering great brands and exceptional service to every customer. We continually strive to improve our operations and to create a rewarding working environment for our employees whilst delivering superior returns for our shareholders."

1.1.3 Consistent with that mission statement, a travel plan is proposed to achieve a sustainable development and enable staff to choose alternatives to single-occupancy car-use and promote greener, cleaner travel choices. In order for a travel plan to be successful it needs to be tailored to suit the needs of the particular location in question, and have the full backing of management and staff at all levels.

1.2 Planning Policy

1.2.1 The National Planning Policy Framework (NPPF) promotes the achievement of sustainable development. Paragraph 113 states:

“All developments that will generate significant amounts of movement should be required to provide a travel plan,.”

1.2.2 The Government’s Planning Practice Guidance sets out the requirements for Travel Plans. The guidance at paragraph 3 of section 42 states:

“Travel Plans are long-term management strategies for integrating proposals for sustainable travel into the planning process.”

1.2.3 Paragraph 6 points out travel plans can positively contribute to:

- encouraging sustainable travel;
- lessening traffic generation and its detrimental impacts;
- reducing carbon emissions and climate impacts;
- creating accessible, connected, inclusive communities;
- improving health outcomes and quality of life;
- improving road safety; and
- reducing the need for new development to increase existing road capacity or provide new roads.

1.2.4 Paragraph 9 provides guidance on when travel plans are needed; amongst the considerations to be taken into account are:

- the scale of development and its potential for additional trip generation;
- existing intensity of transport use; and
- the cumulative impacts of multiple developments within a particular area.

1.2.5 Paragraph 11 advises:

“Travel Plans should set explicit outcomes rather than just identify processes to be followed (such as encouraging active travel or supporting the use of low emission vehicles). They should address all journeys resulting from a proposed development by anyone who may need to visit or stay and they should seek to fit in with wider strategies for transport in the area.”

- 1.2.6 MRAs allow the opportunity to provide stopping points on the motorway for the safety and welfare of the travelling public and HGV drivers. The provision of MRAs assists in achieving sustainable travel by keeping vehicles on the motorway, or in the case of junction site alongside the motorway. This avoids motorists from leaving the motorway in search of places to stop for rest and refreshment which can involve substantial additional mileage and add to local traffic congestion. Providing motorists/HGV drivers with the opportunity to stop on their motorway journey reduces congestion, unnecessary mileage, and additional trips. This in turn reduces air pollution and saves on finite fuel resources making journeys shorter and more efficient.
- 1.2.7 These measures go a long way to achieving the objectives of a travel plan, however for a MRA, there is potential to specifically address employee travel. It is proposed that this Travel Plan forms the basis of discussions with Wiltshire Council (the Council), in its role as local highway authority.

2 OBJECTIVES AND TARGETS

2.1 Objectives

2.1.1 The objectives of this Travel Plan are:

- to encourage sustainable travel;
- to lessen traffic generation;
- to reduce carbon emissions;
- to improve road safety;
- to encourage the use of public transport; and
- to maximise the use of car sharing.

2.2 Targets

2.2.1 Prior to the opening of the development, the actual travel patterns of the staff are not known. A baseline travel survey is proposed within three months of the opening which will establish existing travel patterns against which the targets can be judged.

2.2.2 The interim targets have been set based on experience gained elsewhere by Moto.

2.2.3 These are detailed in **Table 2.1** below:

Target No	Details
1	To achieve a 5% reduction in vehicle driver mode share during the AM and PM peak hours, within three years of baseline.
2	To achieve at least 5% car sharing by members of staff within three years of baseline.
3	To achieve at least 5% of employee trips by public transport within three years of baseline

Table 2.1 – Interim Targets

3 SITE ASSESSMENT

Site Location

- 3.1.1** The site is located on the outskirts of Swindon, approximately 5 kilometres to the southwest of the town centre.
- 3.1.2** The site is bound to the north by the M4 Motorway, to the south by the B4005, to the west Junction 16 of the M4 and to the east by undeveloped land.
- 3.1.3** The location of the site in relation to the surrounding area is shown on **Plan 1** of the accompanying Transport Assessment (TA).

Existing Highway Network

- 3.1.4** The site is located in close proximity to the primary route network, namely Junction 16 of the M4.
- 3.1.5** To the northwest of the site, the B4005 provides direct access to the M4 motorway at Junction 16 via a five-arm signalised roundabout. The B4005 is subject to a 40mph speed limit where it passes the site and is street lit on the approach to Junction 16 only.
- 3.1.6** Junction 16 links the M4 to the nearby towns of Swindon (to the north of the site via the A3102) and to Royal Wooten Bassett (to the southwest via the A3102 Swindon Road).
- 3.1.7** A small layby is located on the B4005 site frontage. This layby will be retained as part of the Proposed Development.

Development Proposals

- 3.1.8** The proposals would provide motorway rest area with associated amenities for up to 242 cars and 62 HGV drivers. Amenities will include showers and toilets, a hot food cafeteria, a lounge area and retail space.

- 3.1.9** Vehicular access to the site would be gained via the creation of a new 55 metre ICD roundabout on the B4005.
- 3.1.10** It is not considered that a development of this type will offer significant local customer demand to warrant a dedicated public transport service, cycle lanes or footpaths on the local road network upon opening.
- 3.1.11** Nevertheless, the connectivity of the site by other modes of travel should be considered to ensure that unnecessary staff related trips are not induced via the strategic road network.
- 3.1.12** In the following section, the accessibility of the site has been assessed in relation to the potential for travel by alternative, more sustainable, modes of transport to the motor vehicle as part of the TA, recognising that the primary purpose of an MRA to serve drivers who are using the strategic road network.

4 ACCESSIBILITY BY NON CAR MODES

4.1 Introduction

4.1.1 In order to accord with the aspirations of the NPPF and Local Planning Policy, any new proposals should extend the choice in transport and secure mobility in a way that supports sustainable development.

4.1.2 New proposals should therefore attempt to influence the mode of travel to the development in terms of gaining a shift in modal split towards non-car modes, thus assisting in meeting the aspirations of current national and local planning policy.

4.1.3 The accessibility of the proposed site has been considered by the following modes of transport:

- accessibility on foot;
- accessibility by cycle;
- accessibility by bus; and
- accessibility by rail.

4.2 Access on Foot

4.2.1 It is important to create a choice of direct, safe and attractive routes between where people live and where they need to travel in their day-to-day life. This philosophy clearly encourages the opportunity to walk whatever the journey purpose and also helps to create more active streets and a more vibrant neighbourhood.

4.2.2 The pedestrian infrastructure in the vicinity of the site is currently very limited, however, given the nature of the proposed land use, there will be minimal demand to warrant travel to the site by foot.

- 4.2.3** A new shared cycleway / footway is proposed along the site frontage on the B4005 to link the site to the existing pedestrian crossing facilities at Junction 16 and the nearest bus stop on the A3102. In addition, pedestrian crossing facilities will be provided internally within the site to link the car parking areas to the proposed amenity building.

4.3 Access by Cycle

- 4.3.1** An alternative mode of travel to the site could be achieved by bicycle.
- 4.3.2** Clearly, the new advice contained within the Highway Code, which was updated on 29th January 2022, will improve the safety of vulnerable road users including cyclists, pedestrians, and horse-riders. Most of the new advice relates to where cyclists should position themselves within the lane in various traffic conditions and motorists being required to give cyclists priority in slow moving traffic and locations where there is insufficient room for vehicles to overtake cyclists safely, allowing 1.5-metres for cyclists when overtaking them.
- 4.3.3** The Cycling England document 'Integrating Cycling Into Development Proposals' advises that 'For short trips, [cycle links] can give cyclists significant advantages over car users in terms of convenience and journey time... Most cycle journeys for non-work purposes and those to rail stations are between 0.5 and 2 miles, but many cyclists are willing to cycle much further. For work, a distance of 5 miles should be assumed.'
- 4.3.4** This distance equates to a journey of around 40 minutes based on a leisurely cycle speed of 12 kilometres per hour and would encompass Royal Wootton Bassett, Common Platt, Hook, Lydiard Millicent and Swindon.
- 4.3.5** National Cycle Route 45 is located approximately 2 kilometres to the north of the site in Blagrove off Franklands Road. This route links to Swindon town centre and many of its surrounding suburbs providing an opportunity to assist with commuting trips to and from the site.

4.3.6 The development proposals will provide cycle parking facilities along with lockers and changing facilities for staff.

4.3.7 The site can, therefore, be considered as being accessible by cycle.

4.4 Access by Bus

4.4.1 An effective public transport system is essential in providing good accessibility for large parts of the population to opportunities for work, education, shopping, leisure and healthcare in the town and beyond.

4.4.2 The nearest bus stop to the site is located along the A3102 Swindon Road, immediately to the west of the development site. This stop consists of a bus stop layby and pole with service information.

4.4.3 A summary of the services available from the nearest bus stops from the development site is provided in Table 4.1 below.

Service No.	Route	Monday - Friday			Saturday			Sun
		Pre 08:00	08:00-17:00	Post 17:00	Pre 08:00	08:00-17:00	Post 17:00	
55	Chippenham - Swindon	9 services	10 minutes	18 services	5 services	20 minutes	10 services	30 minutes
99	Chippenham - Malmesbury - Wootton Bassett -	2 services	60 minutes	3 services	-	60 minutes	2 services	-

Table 4.1 Existing Bus Services Operating in the Vicinity of the Site

4.4.4 As can be seen from Table 4.1, the nearest bus stops to the site provides various services throughout the day to destinations such as Chippenham, Swindon and Royal Wooten Bassett.

4.4.5 The above services operate from around 4:45am to around 23:45pm, making travel by public transport a real alternative to travelling by car for commuting trips.

4.4.6 It is therefore concluded that the site is accessible by bus for locally employed staff.

4.5 Accessibility by Rail

4.5.1 The nearest railway station to the site is Swindon station. This station can be accessed by a 15-minute bus journey on service 55 or by a 26-minute cycle. The station is managed by Great Western Railway and has 4 platforms, offering 13 services per hour to destinations such as London and Swansea.

4.5.2 This provides commuting opportunities to and from the site as part of a multi-model trip.

4.6 Accessibility Summary

4.6.1 The proposals have been considered in terms of accessibility by non-car modes for the proposed development.

4.6.2 The following conclusions can be drawn from this section of the report:

- Footway provisions will be improved as part of the development proposals to link the site to the nearby bus stops.
- The site is accessible by cycle for locally employed staff.
- The bus and rail services available in the area will help to encourage employees to travel to and from the site by public transport.

4.6.3 In light of the above, it is considered that the site is accessible and will cater for needs of the development's staff and assist in promoting a choice of travel modes other than the private car.

5 TRAVEL PLAN MANAGMENT

5.1 Travel Plan Coordinator

5.1.1 The Travel Plan Coordinator has a crucial role in ensuring that the Travel Plan is implemented, managed, monitored and reviewed over time. The Travel Plan Coordinator will coordinate the on-going development and management of the Travel Plan, including further measures, raising awareness, monitoring and review. It is anticipated the Travel Plan Coordinator will be a senior member of the management team at the services.

5.1.2 The role of the Travel Plan Coordinator will include:

- acting as a point of contact;
- marketing and promoting the Travel Plan;
- providing sustainable travel information to staff;
- monitoring and reviewing the Travel Plan;
- liaison with the Council, transport operators and specialist groups;
- arranging for travel surveys to be undertaken of staff;
- arranging Personal Travel Planning, where required; and
- submitting an annual monitoring report to the Council.

6 TRAVEL PLAN MEASURES

6.1.1 The proposed Travel Plan measures focus on maximising the site's accessibility and sustainability as part of the development proposals.

6.1.2 Marketing and promotion of the Travel Plan will form part of the implementation of the Travel Plan, and this will include the distribution of Travel Information to new staff.

Travel Information

6.1.3 Travel Information will be made known to all staff at the proposed development with the intention of encouraging staff to engage in more sustainable modes of transport. The Travel Information is expected to include:

- details of bus services including routes, fares and timetables; and
- journey planning websites.

Public Transport Measures

6.1.4 Good public transport provision is important to achieving sustainable transport targets. By encouraging staff to use existing bus services, additional revenue will be generated and the quality of services should improve.

6.1.5 Public transport use will be encouraged through the following measures:

- providing travel information for local services;
- encouraging improved bus services; and
- providing details of promotions and potential discounted tickets for local bus operators.

Car Sharing

- 6.1.6** When two or more people share a car, and travel together, it can result in considerable cost savings and other benefits. Car sharing not only reduces an individual's transport cost by fuel costs being shared, but also reduces the number of cars on the roads, provides a real solution to transport problems of rural areas, and reduces the need for a private car.
- 6.1.7** The Travel Plan Coordinator will ensure that all staff are advised of the financial savings which can be achieved through car sharing and will examine ways of introducing potential car sharers to one another. Where appropriate car sharing initiatives will be introduced.

7 MONITORING AND REVIEW

- 7.1.1** An effective monitoring and review process is important to establish how successful the Travel Plan has proved. Monitoring involves collecting data and information, and the review process involves the consideration of these details to determine whether or not the Travel Plan targets have been met.
- 7.1.2** As part of the monitoring process it is important to establish the baseline conditions. It is proposed a baseline travel survey of employees will be undertaken within three months of the opening of the proposed development. The Travel Plan Coordinator will be responsible for organising the survey, coordinating the results and submitting a report of survey to the Council within one month of completion of the survey.
- 7.1.3** Based on the monitoring and review process, it will then be necessary for the Travel Plan Coordinator, in conjunction with the Council, to decide what, if any, amendments are required to the Travel Plan.
- 7.1.4** For the on-going management of the Travel Plan to be successful and to deliver the desired outcomes, it is important that the parties involved in the delivery of the Travel Plan, which means Moto together with the Travel Plan Coordinator and the Council, work effectively in partnership. It is recognised that certain outcomes are dependent on others such as the improvement to bus services.
- 7.1.5** Monitoring of travel patterns over time, to ascertain whether the initiatives of the Travel Plan are proving successful and whether there has been a shift to more sustainable modes of travel, requires on-going travel surveys to be undertaken.
- 7.1.6** It is proposed that annual monitoring takes place for a minimum period of three years commencing no later than 15 months after first opening. On this basis a total of four annual surveys will be conducted when the baseline travel survey is taken into account.

- 7.1.7** The precise format of the baseline travel survey and annual monitoring survey will be agreed with the Council before being undertaken. The travel survey will be used to establish reasons why people drive and to identify barriers to sustainable travel that could be addressed.
- 7.1.8** The results of the travel surveys will be analysed and the factors influencing travel behaviour will be investigated. If the target modal share of car use is not met then it may be necessary to review what remedial measures need to be implemented to mitigate the impact of any under achievement. The Travel Plan Coordinator, in conjunction with the Council, will decide what, if any, amendments are required to the Travel Plan.

DRAFT

8 REMEDIAL MEASURES

8.1.1 In the event that the Travel Plan is shown to be underachieving a remedial strategy needs to be outlined, which considers measures to help get the Travel Plan 'back on track'. Remedial measures are intended to achieve modal shift and mitigate the impact of any under achievement in meeting targets.

8.1.2 A set of potential remedial measures, to be triggered in the event that measures mentioned above fail to meet the required Travel Plan targets, could include the following:

- extending the appointment of the Travel Plan Coordinator and monitoring for a further two years;
- additional active marketing and promotion of sustainable travel information;
- offering Personal Travel Planning to staff; and
- liaising with the Council and bus operators over potential bus voucher scheme for staff.

8.1.3 The remedial measures are different to the Travel Plan measures, and the exact nature of what, if any, remedial measures are required will be identified through the monitoring and review process in conjunction with the Council.

9 FUNDING

- 9.1.1** It is anticipated that a planning obligation will be completed that secures the funding of the Travel Plan. The funding will include for the services of the Travel Plan Coordinator, the cost of the annual surveys as well as provision for 'remedial' funds to cover the cost of measures required in the event the Travel Plan does not meet the required targets.

DRAFT

10 ACTION PLAN

10.1.1 An action plan needs to be incorporated into the Travel Plan to outline the actions required to implement the Travel Plan, who is responsible for implementing the action, and a deadline for completion. The proposed Travel Plan Action Plan is set out in Table 10.1 below.

Action/ Objective	Measure	Indicator	Responsibility	Timescale
All	Appoint a Travel Plan Coordinator	TPC appointed	Moto	At least 3 months before opening
Encourage sustainable travel	Provide details of public transport services in Travel Information	Details included and updated in Travel Information	TPC	Before opening and on appointment of all staff
Lessen traffic generation	Provide details of car sharing scheme			Within 3 months of opening
	Provide details of public transport services in Travel Information			Before opening and on appointment of all staff
Reduce carbon emissions	Encourage car sharing			Within 3 months of opening
	Provision of EV charging points	As part of the proposed development	Moto	Before opening
Improve road safety	Provide parking and other facilities to comply with DfT Circular 02/2013			
Encourage use of sustainable travel	Pedestrian improvements to link the site to the nearby bus stops	S278 agreement		
Maximise the use of car sharing	Develop car sharing initiative	Details included in Travel Information	TPC	Within 3 months of opening
Remedial measures	To be agreed with the Council	TBC	TPC and Council	Annually, and no later than 3 years and 3 months after opening

Table 10.1 – Action Plan

APPENDIX 5

Local Model Validation Report



National Highways

M4 JUNCTION 16

Local Model Validation Report





National Highways

M4 JUNCTION 16 VISSIM MODEL

Local Model Validation Report

TYPE OF DOCUMENT (VERSION) PUBLIC

PROJECT NO. 70090207

DATE: APRIL 2023

WSP

2 London Square

Cross Lanes

Guildford, Surrey

GU1 1UN

Phone: +44 148 352 8400

WSP.com

QUALITY CONTROL

Issue/revision	First issue	Revision 1	Revision 2	Revision 3
Remarks	Final			
Date	25 April 2023			
Prepared by	Richard Prag			
Signature				
Checked by	Zoltan Tosaki			
Signature				
Authorised by	Andy Beel			
Signature				
Project number	70090207			
Report number	70090207-TP-RP-001			
File reference	\\Central Data\\Projects\\70090xxx\\70090207 - 570435 - M4 J16 VISSIM model\\03 WIP\\Reporting\\LMVR			

CONTENTS

1	INTRODUCTION	1
1.1	BACKGROUND	1
1.2	REPORT STRUCTURE	1
2	DATA COLLECTION	2
2.1	TRAFFIC SURVEYS	2
2.2	WEBTRIS DATA AND IMPACT OF COVID-19	4
2.3	FEBRUARY 2023 TRAFFIC SURVEY	7
2.4	MOVA DATA	9
3	MODEL DEVELOPMENT	10
3.1	INTRODUCTION	10
3.2	NETWORK DEVELOPMENT	10
3.3	TRAFFIC MATRIX DEVELOPMENT	14
4	TRAFFIC ASSIGNMENT, CONVERGENCE AND CALIBRATION	17
4.1	DYNAMIC ASSIGNMENT	17
4.2	CONVERGENCE	17
4.3	CALIBRATION	17
5	CALIBRATION AND VALIDATION RESULTS	21
5.2	TRAFFIC FLOW CALIBRATION RESULTS	22
5.3	JOURNEY TIME VALIDATION RESULTS	26
6	SUMMARY	28

TABLES

Table 2-1 – ANPR sites	3
Table 3-1 – Bus routes within the model area	13
Table 3-2 - VISSIM peak hour demand matrix totals	16
Table 5-1 – Traffic flow calibration criteria	22
Table 5-2 – Overall flow calibration: AM 07:30 – 08:30	23
Table 5-3 – Overall flow calibration: PM 16:30 – 17:30	23
Table 5-4 – Overall flow calibration: AM 08:00 – 09:00	24
Table 5-5 – Overall flow calibration: PM 17:00 – 18:00	24
Table 5-6 – Journey time validation results for observed AM and PM peak hours	27
Table 5-7 – Journey time validation results for traditional AM and PM peak hours	27

FIGURES

Figure 1-1 - M4 Junction 16 layout	1
Figure 2-1 - M4 junction 16 WebTRIS sites	4
Figure 2-2 - Westbound mainline	5
Figure 2-3 - Eastbound mainline	5
Figure 2-4 – Eastbound off-slip	6
Figure 2-5 – Eastbound on-slip	6
Figure 2-6 - Westbound off-slip	7
Figure 2-7 - Westbound on-slip	7
Figure 2-8 – February 2023 survey locations	8
Figure 3-1 - M4 J16 network and link structure detail	10
Figure 3-2 – M4 J16 VISSIM model zone structure	11
Figure 4-1 - Signal phases between Lydiard Fields and junction 16	19
Figure 4-2 – A3102 queueing on approach to M4 J16, looking east through the Lydiard Fields	20
Figure 4-3 - A3102 exit from M4 J16, blocking back through the junction in the PM peak	20

Figure 4-4 – A3102 exit from M4 J16 looking westbound towards Wootton Bassett, PM peak	20
Figure 5-1 - Flow calibration all flows AM 07:30 - 08:30 (all vehs)	23
Figure 5-2 - Flow calibration all flows PM 16:30 - 17:30 (all vehs)	24
Figure 5-3 - Flow calibration all flows AM 08:00 - 09:00 (all vehs)	25
Figure 5-4 - Flow calibration all flows PM 17:00 - 18:00 (all vehs)	25
Figure 5-5 - Journey time routes	26

1 INTRODUCTION

1.1 BACKGROUND

WSP was commissioned by National Highways to develop a new VISSIM microsimulation model of Junction 16 of the M4. It is intended that the model will be used to assess the impacts of development and infrastructure proposals on the operation of the junction. This Local Model Validation Report (LMVR) describes the data collection exercise, model development, calibration, and validation processes to build the 2021 base year VISSIM model.

M4 junction 16 is a grade-separated signalised motorway junction to the south-west of Swindon. As well as providing access to the M4, it connects the A3102 between Swindon and Royal Wootton Bassett, and the B4005 to the south-east of the junction. Lydiard Fields is a signalised crossroads just to the east of junction 16 and is included in the model due to interaction between the two junctions. The junction layout is shown in Figure 1-1.

Figure 1-1 - M4 Junction 16 layout



1.2 REPORT STRUCTURE

The report is structured as follows:

- Chapter 2: Traffic Data collection.
- Chapter 3: Model development process.
- Chapter 4: Assignment, convergence and calibration.
- Chapter 5: Calibration and validation results.
- Chapter 6: Summary.

2 DATA COLLECTION

New traffic surveys were undertaken by Intelligent Data Collection (IDC) to gather the data necessary to build and validate the new base year model. Surveys were originally scheduled for late November 2021 and commenced on this basis but had to be repeated due to technical issues. The repeat surveys took place at the next available opportunity, Wednesday 1st December 2021. Longer term counts were undertaken for two consecutive weeks covering 23rd November – 6th December 2021 including the survey day.

The surveys were undertaken at a time of no restrictions associated with the Covid-19 pandemic – with the surveys completed before a move to ‘Plan B’ measures announced on 8th December 2021. Whilst the surveys were not fully undertaken during a neutral month, with the turn count survey undertaken on 1st December, comparisons have been made to available November 2021 WebTRIS data to justify its use. Section 2.2 contains this analysis and indicates that the December survey data is broadly comparable to the average traffic level during November 2021. On this basis we consider it acceptable to use the December survey data for this project.

Further traffic surveys were undertaken during February 2023 to review westbound traffic demands on the A3102 heading towards Lydiard Fields from Swindon and exiting junction 16 towards Royal Wootton Bassett.

2.1 TRAFFIC SURVEYS

The following surveys were commissioned at both M4 junction 16 and the Lydiard Fields crossroads:

- Junction turning counts (MCCs)
- Automatic number plate recognition (ANPR)
- Queue lengths
- Video counts (in lieu of Automatic Traffic Counters)

The MCC and ANPR surveys were both undertaken on 1st December 2021, with video counts undertaken between 23rd November 2021 and 6th December 2021 on the M4 eastbound off-slip and westbound off-slip and Frankland Road. The MCC and ANPR surveys provided processed data for a 12-hour period from 07:00-19:00. Table 2-1 provides an overview of ANPR camera locations.

Additionally, data was downloaded from the WebTRIS database for sites on the slip roads and along the M4 mainline. This data was used for comparison against the survey data, building the matrix and conducting a comparison between pre- and post-Covid traffic levels.

National Highways provided MOVA files, specifications and data for the controllers on the two junctions and this was used to program MOVA operation in the VISSIM model, using PCMOVA.

Table 2-1 – ANPR sites

Site	Location	Date
1	A3102 west entry	1/12/2021
2a	A3102 west at stop line	1/12/2021
2b	M4 westbound on-slip	1/12/2021
2c	M4 eastbound off-slip, at stop line	1/12/2021
2e	M4 J16 northern circulatory	1/12/2021
2f	A3102 east near stop line	1/12/2021
2g	M4 J16 eastern circulatory	1/12/2021
2h	M4 westbound off-slip at stop line	1/12/2021
2i	B4005 near stop line	1/12/2021
3	A3102 eastbound exit into Lydiard Fields	1/12/2021
4a	A3012 east near Blagrove Roundabout	1/12/2021
5	B4005 near Hay Lane	1/12/2021

It should be noted that there was no ANPR data collected on the M4 eastbound on-slip; whilst this location was specified in the Survey Specification, the surveyor found that they could not safely install a camera at the requested location. Some other ANPR sites also returned low capture rates, and the methodology to account for ANPR issues is discussed in detail in section 3.3.

2.1.1 TOMTOM DATA FOR JOURNEY TIMES

To complement the ANPR data in the matrix development process and journey time validation, TomTom data was procured for the period of 9th November – 2nd December 2021 (Tuesdays, Wednesdays and Thursdays) for passenger vehicles.

The received data included average journey time across sections covering the M4 junction 16 model network area. These sections were then compiled into full routes.

2.2 WEBTRIS DATA AND IMPACT OF COVID-19

The Covid-19 pandemic led to a significant impact on travel demand across the country. In some areas this has continued to an extent due to increased homeworking. Therefore, it was necessary to investigate long term traffic flows around the junction to see if flows have now stabilised, and if the December 2021 survey day can be considered representative.

There are various WebTRIS sites around junction 16 for the M4 mainline and off-slips. Figure 2-1 shows their location. Data was downloaded for November 2021 (closest neutral month to the survey day), the same month in 2019 to compare with pre-pandemic traffic levels, and November 2022 for the most recent comparable period. Data was also downloaded for the actual survey day, 1st December 2021. Comparisons for all four slips and two mainline sites are shown in Figure 2-2 to Figure 2-7, with data presented for an average weekday (Tuesday – Thursday).

The graphs show that the average November 2021 flows are generally lower in the peak periods than the equivalent for 2019, significantly so in some cases. The data also shows that, while the survey day was not in a neutral month, traffic levels are comparable to the average November 2021 level.

Comparison with November 2022 data indicates some growth in flow on the westbound off-slip during the AM peak hour in particular. This may reflect a gradual increase in traffic levels post-Covid, noting the large areas of employment to the north of Junction 16. For this reason, it is recommended that traffic levels are reviewed at the time of any future use of the model, to confirm any change in traffic levels from those surveyed in 2021. Based on the outcome of this review, it may be necessary to develop a Reference Case model that reflects prevailing slip road traffic levels at the time of use.

Figure 2-1 - M4 junction 16 WebTRIS sites



Figure 2-2 - Westbound mainline

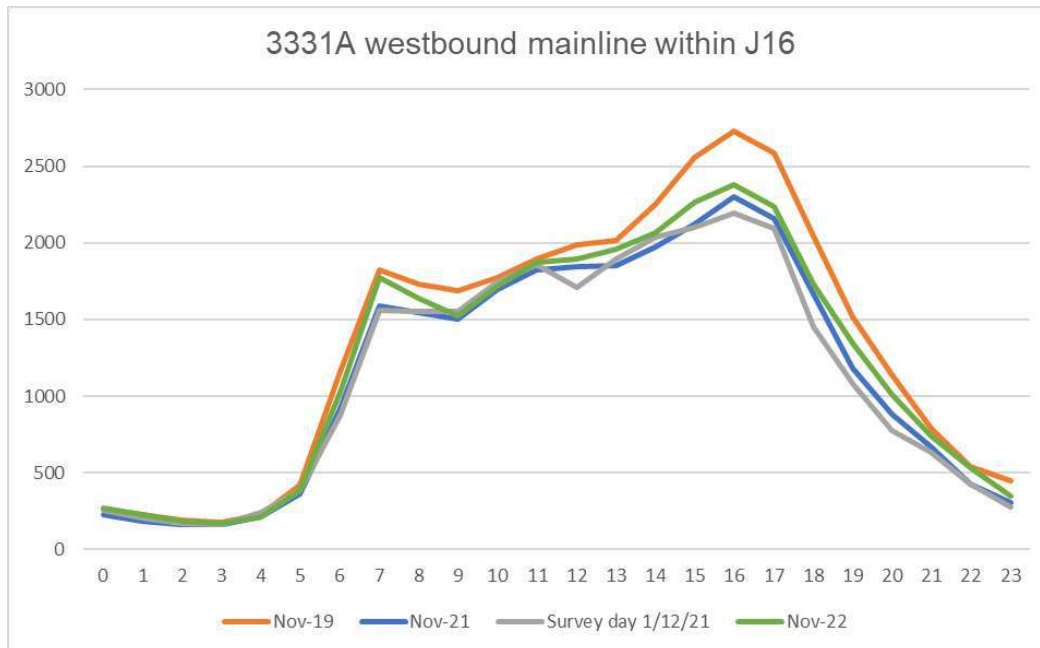


Figure 2-3 - Eastbound mainline

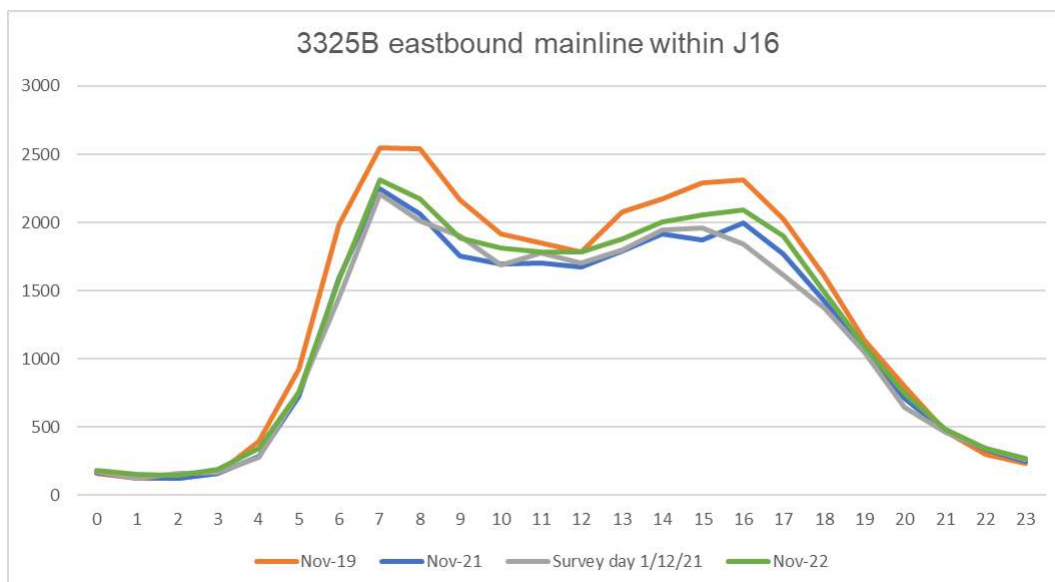


Figure 2-4 – Eastbound off-slip

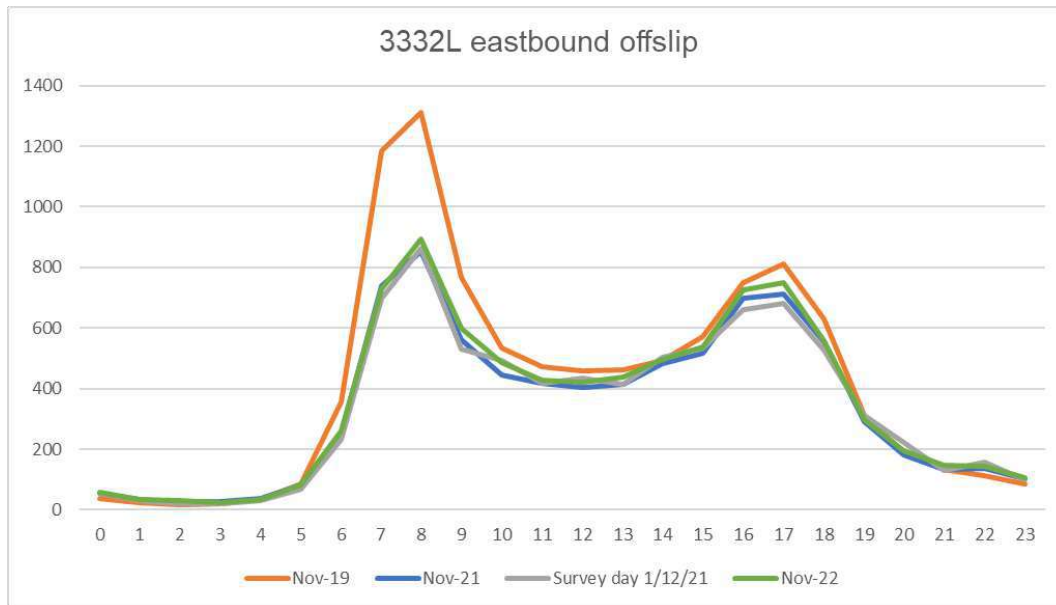


Figure 2-5 – Eastbound on-slip

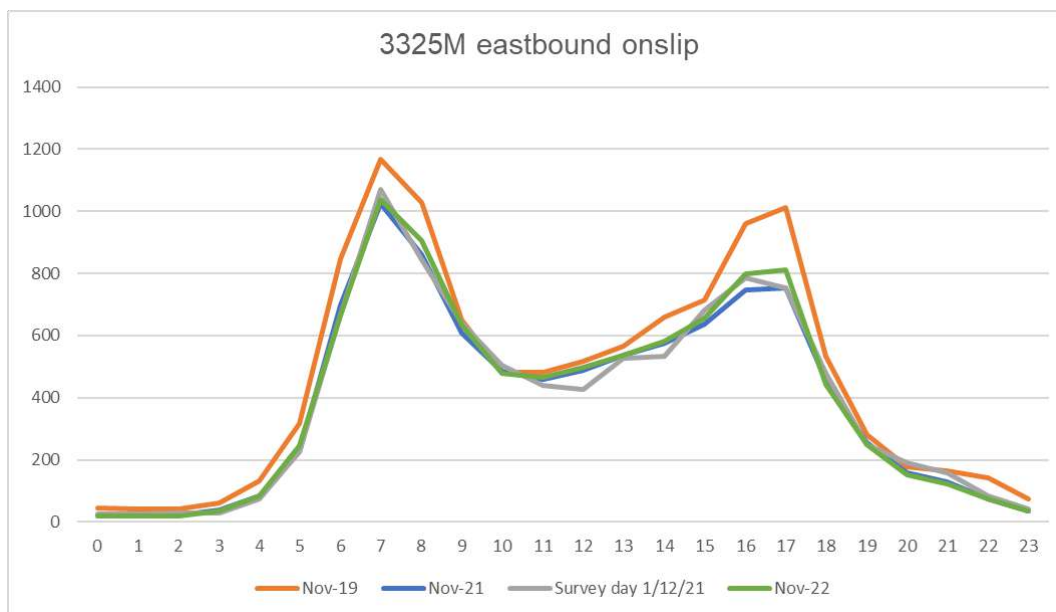


Figure 2-6 - Westbound off-slip


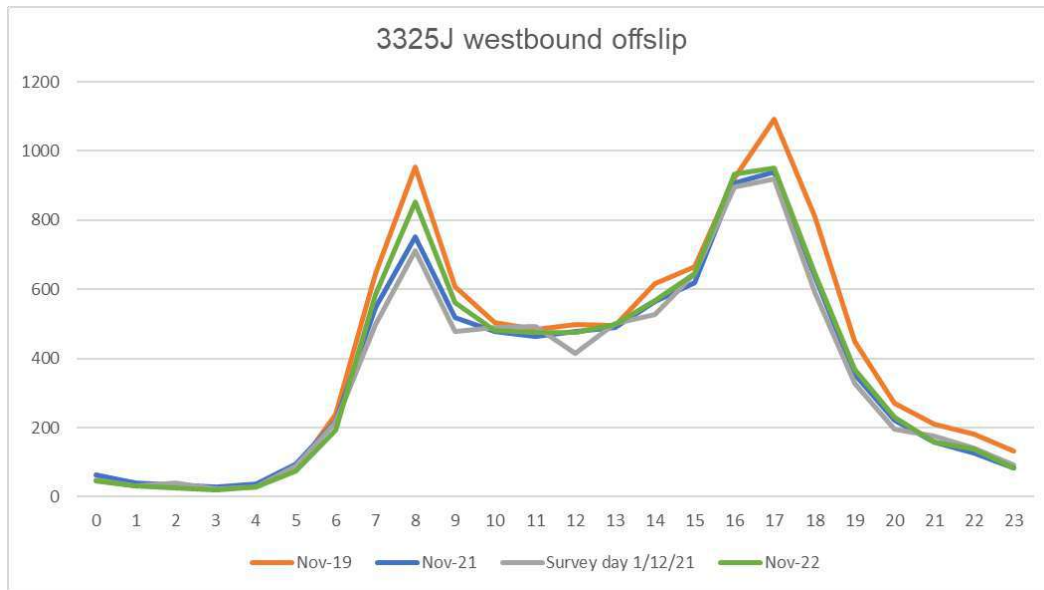


Figure 2-7 - Westbound on-slip

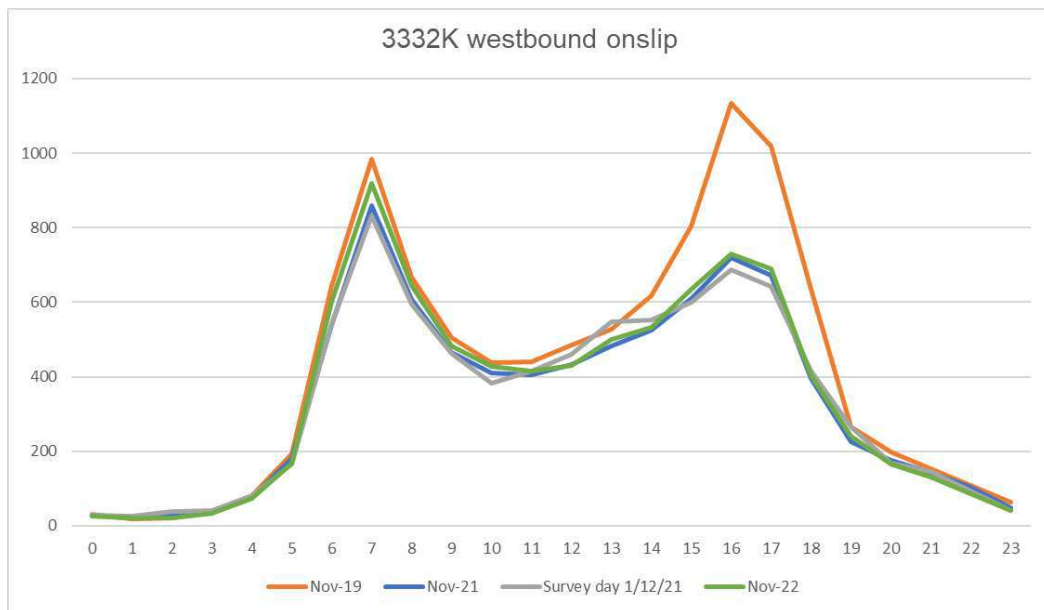

2.3 FEBRUARY 2023 TRAFFIC SURVEY

During the review of survey footage it was evident that on the day of the 1st December 2021 survey there was notable congestion in the PM peak on the A3102 Swindon to Royal Wootton Bassett movement. There appeared to be exit blocking downstream of the westbound merge on exit from junction 16 to the A3102. This in turn caused queuing back through junction 16 and Lydiard Fields. It is not clear whether the constraint related to the volume of traffic merging on exit and link capacity of the downstream A3102, or a downstream blockage; survey video coverage did not show

conditions to the west of the merge point. Subsequent site observations during the PM period did identify slower moving traffic exiting the merge to travel west towards Royal Wootton Bassett, however the scale of congestion recorded on the survey day was not observed again. November 2021 camera footage for the A3102 approach to Lydiard Fields did not show the same level of queueing on the A3102 approach to junction 16 on other days during the two-week survey period. On this basis, the level of westbound queueing on the survey day does not appear to be typical conditions.

As a result of the observed congestion on 1st December 2021, long queues formed on the A3102 exiting Swindon. Whilst queues had cleared by around 18:00, this issue will have impacted the profile of traffic entering the Lydiard Fields junction and M4 junction 16 from the A3102 Swindon direction.

To better understand typical flow characteristics leaving Swindon in the PM peak period and provide further observations of merging activity towards Royal Wootton Bassett, further traffic surveys were undertaken in February 2023. These comprised week-long video link counts for the A3102 westbound carriageway at three locations: 1) to the west of the A3102 Blagrove Roundabout east of junction 16, 2) on the westbound exit from junction 16 towards Royal Wootton Bassett, and 3) on the A3102 towards RWB (near the Sally Pussey's Inn pub). Data at locations 1) and 2) was collected by video survey, with data at location 3) collected via ATC equipment. The locations are shown in Figure 2-8 below.

Figure 2-8 – February 2023 survey locations



Video survey data was gathered over seven days between Monday 20th and Sunday 26th February 2023 inclusive during school term time, with classified data supplied for 07:00-09:00 and 16:00-18:15. The ATC was installed to coincide with the video survey, but the equipment was damaged and so it was reinstalled to record data between 9th and 14th March 2023 inclusive.

The data for the A3102 westbound carriageway to the west of Blagrove roundabout was used to review the observed flow profile from the 1st December 2021. Video footage for the westbound exit

from junction 16 towards Royal Wootton Bassett was also used to review coding of vehicle behaviour at the exit merge. As per site observations, the footage identified some vehicle interaction and slowing at the merge, but not the same scale of delay and blocking back as recorded during the 1st December 2021 survey.

2.4 MOVA DATA

Both Junction 16 and the Lydiard Field junction operate under MOVA adaptive signal control. The following data was provided by National Highways for each of the junctions:

- Junction layout drawings
- MOVA Datasets (.mds files)
- Controller specifications (TOPAS 2500 forms)
- MOVA link diagram
- MOVA log data (including detector status information)

This information was used to develop MOVA Tools files of the junctions and a PCMOVA linker file for use with PCMOVA 3, a MOVA-emulator software. This means that the operation of MOVA in the VISSIM model should closely replicate the on-ground MOVA performance for these junctions.

In addition, analysis of the MOVA log data was used to support the calibration and validation of the Vissim base model. The MOVA link drawing is shown at Appendix A.

3 MODEL DEVELOPMENT

3.1 INTRODUCTION

This chapter describes the development of the model network and the traffic demand for the 2021 base year VISSIM model.

The model development process consists of the network development, matrix building, calibration, convergence, and model validation processes, which are iterative and inter-dependent processes.


3.1.1 GUIDANCE

For microsimulation modelling, Transport for London (TfL)'s Traffic Modelling Guidelines (Version 4.0, TfL, 2021) is the most comprehensive and widely accepted guidance document, and this has been followed as far as practicable in the development of the M4 J16 model.

3.2 NETWORK DEVELOPMENT

VISSIM 2022-04 was used to develop the network. Bing maps satellite imagery was used to develop the network, using the in-built mapping service in VISSIM, cross referencing with other online aerial maps and the videos from the 2021 traffic survey. Roads and junctions were coded in detail, with particular attention paid to lane discipline and lane changes at the complex junctions, to provide realistic representation of vehicle behaviour and interaction.

Figure 3-1 - M4 J16 network and link structure detail

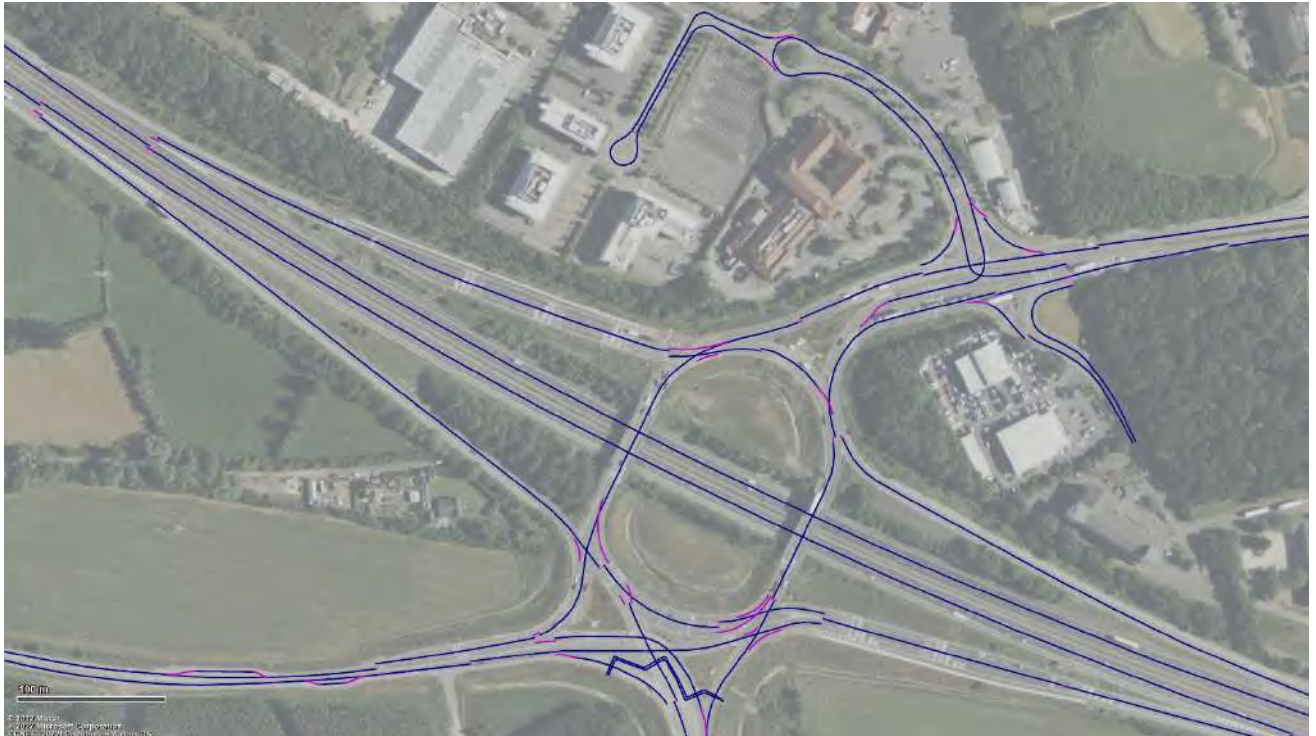

3.2.1 LINK STRUCTURE


The link and connector structure was developed to represent realistic vehicle movements through the junctions.

Lane change and emergency stop distances were reviewed and updated to reflect observed vehicle behaviour on junction approaches. The lane change parameter sets out when a vehicle will begin to attempt to change lanes on the approach to a junction, preparing for their upcoming turn. The Emergency Stop distance specifies the last possible position for a vehicle to change lanes. For each connector these values have been reviewed and set to provide realistic simulation of lane changing within the network.

3.2.2 ZONE STRUCTURE

In VISSIM, a zone is defined as a point at which the vehicles enter and exit the model, so where links are truncated at the extremities of the model, a zone is defined. The 2021 base year model consists of 7 zones, based on the extent of the November 2021 traffic surveys.

Figure 3-2 – M4 J16 VISSIM model zone structure

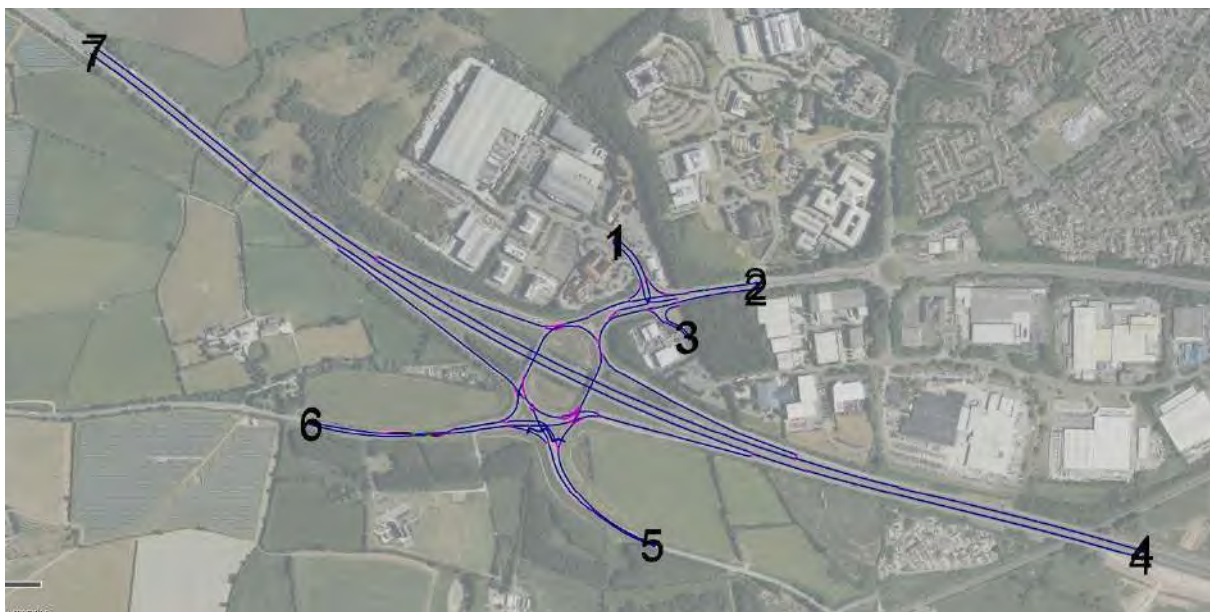

3.2.3 SPEED, ACCELERATION AND DECELERATION DISTRIBUTIONS

Speed limits were applied according to the current local and national speed limits, and Reduced Speed Areas were coded where realistic vehicle speeds are lower than the actual limits, for example across junctions, on bends, or on narrow roads. Speed profiles for the different speed limit areas are derived from ONS¹ database for free flow speeds.

The pre-set acceleration and deceleration profiles within VISSIM are representative for the UK vehicle fleet, and these profiles were kept unchanged.

¹ ONS: Office for National Statistics

3.2.4 PRIORITY RULES AND CONFLICT AREAS

In the model network, most stop-lines are managed by traffic signals and therefore priority rules and conflict areas were not required at these points. However, they were coded to replicate yellow box behaviour where these are located, and to manage conflicts arising from different streams of traffic blocking back across opposing lanes.

3.2.5 MODEL TIME PERIODS

Analysis of the survey data for both junction 16 and the Lydiard Fields Crossroads indicated that the peak hours of traffic demand were:

- AM 07:30 – 08:30
- PM 16:30 – 17:30

It is likely that the model will be used to test prospective developments near junction 16, therefore the modelled periods will need to run until 09:00 and 18:00 respectively to cover the traditional network peak hours. Each peak period model therefore includes a 1.5hr validated modelled period and a 15-minute warm-up period prior to the peak hour, during which traffic is loaded onto the network. This ensures that the model contains a realistic level of traffic and is therefore representative of normal traffic conditions at the start of the peak period. The model also includes a 15-minute cool-down period during which traffic still in the network at the end of the peak hour leaves the model network. Demand within the 15-minute warm-up and cool-down periods was based on surveyed values during each period.

The whole modelled periods are:

- AM 07:15 – 09:15
- PM 16:15 – 18:15

3.2.6 VEHICLE CLASSIFICATIONS

The VISSIM model has separate vehicle inputs for each vehicle class, enabling the distinctive behaviour of each class to be defined. The classes used are:

- Cars and taxis
- LGV
- OGV1
- OGV2

Buses were modelled separately, as scheduled services.

3.2.7 PUBLIC TRANSPORT

Public Transport (PT) was coded into the model as a series of PT Stops and PT Lines, representing bus stops and bus routes respectively. Bus routes and timetables were sourced via the service operators' websites and bus times sites and matched with bus stops in the area using Google Maps. Table 3-1 shows the services included in the model.

Information on passenger numbers and bus dwell times was not available, therefore buses were assigned a random, normally distributed dwell time of 20 seconds average, with lower and upper bounds of zero and 40 seconds.

Table 3-1 – Bus routes within the model area

VISSIM Name	Service Number	Route/ Direction
31/31A eastbound	31/31A	Malmesbury – Swindon
31/31A westbound	31/31A	Swindon - Malmesbury
54 eastbound	54	Royal Wootton Bassett - Swindon
54 westbound	54	Swindon – Royal Wootton Bassett
55 eastbound	55	Royal Wootton Bassett – Swindon
55 westbound	55	Swindon – Chippenham
55 westbound via Canberra House	55	Chippenham – Swindon
99 eastbound	99	Chippenham – Swindon
99 westbound	99	Swindon – Chippenham

3.2.8 SIGNAL TIMINGS

The signal operation within the VISSIM model has been modelled using PCMOVA 3, a MOVA emulator software that allows MOVA signal control to be closely replicated in VISSIM. This has been developed in combination with the traffic signals data provided by National Highways (see subsection 2.4, p9).

Controller setup information such as phasing/staging information was taken from the TOPAS 2500 controller specification and was cross referenced with the latest junction drawing to ensure validity before being coded into the model. Detection was input based on drawings provided by National Highways and checked against the detector measurements in the MOVA dataset to refine against construction detailing.

In-depth analysis was undertaken of the linking that was implemented at and between the junctions to ensure that on-street conditions could be replicated in the VISSIM model. The MOVA link diagram was used to get a high-level understanding of the linking that was designed for the junctions. Further details on the operation were then obtained from the MOVA dataset, which provided the detail of how this specifically operated on street, and the controller specification, which included the logic used to implement these conditions.

Once a greater understanding of the linking and the associated timers was achieved, a MOVA Tools file was developed. This was done to replicate everything already provided in the MOVA dataset, while also providing MOVA 8 special conditioning functionality that utilises TRL's latest MOVA 8 features. All controller special conditioning related to MOVA was replicated in the MOVA Tools file.

An associated PCMOVA Linker file was then developed to allow the signal operation to be run with the VISSIM model, including all linking and special conditioning.

3.3 TRAFFIC MATRIX DEVELOPMENT

3.3.1 OVERVIEW

This chapter describes procedures used to develop the base year trip matrices for the VISSIM traffic model using the datasets that were described in Chapter 2.

The development of the trip matrices from the various data sources is described, including how the datasets were utilised for various Origin-Destination (OD) pairs and combined to form the peak hour matrices. This chapter also describes the profiling of the peak hour matrices to generate 15-minute warm-up and cool down periods either side of the peak hour.

3.3.2 DATA FOR MATRIX DEVELOPMENT

The data for the matrix development used the following datasets:

- Manual Classified Count (MCC) data from 2 sites surrounding M4 J16
- WebTRIS data for the M4 mainline situated within M4 J16 to coincide with the survey day
- Automatic Number Plate Recognition (ANPR) data from 9 sites surrounding M4 J16

The base matrices were developed using the MCC survey data as the primary source. The MCCs provided junction turning proportions for each junction, which, combined with link counts at each zone (where available) were used to generate a synthetic matrix. There were limitations with respect to the reliability of this method as some specific ODs were based solely on proportioned data as opposed to matched data. This is discussed in more detail below.

Due to camera positioning, ANPR data was unavailable for some specific ODs or had a limited sample rate. The dataset therefore provided known OD movements (where data was robust) which were uplifted to control counts and subsequently subtracted from the synthetic matrix prior to balancing the matrix to the origin/destination totals. MCC data has been utilised where OD movements were not captured.

MCC data and ATC data was also utilised for model calibration and validation, described in more detail in Chapter 4.

3.3.3 MATRIX DEVELOPMENT PROCESS

The matrix development process involved 5 main stages:

- **Stage 1:** Develop observed trip matrices using ANPR data
- **Stage 2:** Generate synthetic matrices from MCC and ATC data
- **Stage 3:** Integrate observed and synthetic matrices to create 'Prior Matrices'
- **Stage 4:** Refine prior matrices to reach observed origin/destination totals for each zone
- **Stage 5:** Calculate profiling factors from ATC data to generate warm-up and cool-down matrices

The methodology for each stage is detailed below:

3.3.3.1 STAGE 1: Development of matrices from ANPR data

The first stage in the process involved the development of observed trip matrices from the ANPR data. Combining the sample rates for each OD movement a sample rate matrix for each 15-minute band was generated. In some cases, sample rates for some OD pairs were limited, and prevented the uplift of observed ANPR trips to their respective control counts. Matches picked up by the ANPR cameras were converted into 15-minute band matrices.

3.3.3.2 STAGE 2: Generate synthetic matrices from MCC data

MCC flows for each vehicle class and time segment were combined with the proportion of vehicles making each turn. At this stage, any flow discrepancies between junctions were identified. The prior synthetic matrices were then built for each vehicle type and time period. The target total in-flow for each Origin Zone was multiplied by each relevant turning proportion encountered through the network until reaching the Destination Zone. This process was repeated for each OD until the overall matrix was populated with Actual Flows.

3.3.3.3 STAGE 3: Integrate observed and synthetic matrices

Given the relatively small nature of the network, some OD pairs could be completed after entering only one junction. Therefore, these trips could be considered 'observed' as opposed to calculated or synthetic. Once identifying these observed trips from the MCC matrix, these were considered 'fixed' OD pairs. These fixed OD pairs were removed from the ANPR matrix as this trip data is more reliable than uplifted ANPR data. The origins were constrained back to the MCC control count minus the fixed trips. This involved calculating a factor between the ANPR row total and MCC row total and applying this to each OD. It should be noted that the control count was based on vehicle class, therefore it is at this point the ANPR matrix was classified.

The ANPR matrix and the fixed MCC matrix were combined to produce one fixed matrix. The remaining OD pairs were tabulated and were considered the unfixed or un-Furnished trips that need refinement to match the row and column totals.

3.3.3.4 STAGE 4: Refine prior matrices

Matrices were then Furnessed according to WebTAG criteria to balance row and column totals. Once the prior matrix was Furnessed, the observed data was re-added to the prior matrix. The totals as well as the OD distribution were compared to the synthetic matrix only to check for any oddities.

15-minute warm-up and cool-down matrices were developed in the same way.

Table 3-2 show the matrix totals for the observed AM and PM peak hours (07:30-08:30 and 16:30-17:30) along with the traditional peak hours (08:00-09:00 and 17:00-18:00) across each vehicle class.

Table 3-2 - VISSIM peak hour demand matrix totals

	Observed Peak Hour		Traditional Peak Hour	
Vehicle class	AM 07:30-08:30	PM 16:30-17:30	AM 08:00-09:00	PM 17:00-18:00
Car	6,713	7,086	6,400	7,211
LGV	1,952	1,589	1,856	1,247
OGV1	174	116	210	79
OGV2	226	149	233	134
Total	9,065	8,940	8,699	8,670

4 TRAFFIC ASSIGNMENT, CONVERGENCE AND CALIBRATION

4.1 DYNAMIC ASSIGNMENT

In the M4 J16 model, traffic is introduced to the network using the “dynamic assignment” feature of VISSIM, rather than static routing. With dynamic assignment, vehicles are loaded onto the network in the form of a matrix specific to a vehicle type in 15-minute time-periods. Each individual vehicle is then able to choose its own route between its given origin and destination, based on the available paths within the model. While there is no actual route choice in the M4 J16 model, dynamic assignment makes it easier to construct and edit demand matrices, and this is particularly useful for forecasting.

Although there is no actual route choice, there are alternative routes between points in the model, given there are grade separated junctions (e.g. U-turning at the motorway roundabout to turn from A3102 east to Lydiard Fields). Unrealistic routes like these were banned either by closing edges, using route closures or by restricting the choice of routes in dynamic assignment to the quickest route.

4.2 CONVERGENCE

Model convergence is an iterative process whereby at the end of each model run the travel time costs are adjusted, and for the subsequent model run the adjusted generalised cost figures are used for each route when traffic distribution is calculated. Ideally, after each convergence model run the traffic volumes and travel times on each route will change less, and eventually they will not yield significant differences regarding flow and travel time results from run to run. The network can then be described as converged, behaving in a consistent manner and the operational performance of the model will not change if further runs are carried out.

Convergence is usually carried out on a model with dynamic assignment, however the M4 J16 model does not need converging due to the lack of route choice. Paths were checked to make sure there was only a single route available for each OD pair. This means that traffic assignment and distribution will not change from run to run.

4.3 CALIBRATION

4.3.1 PARAMETER SETTING

Model calibration involves ensuring the model represents the on-site and video footage observed conditions and driving behaviour by adjusting model inputs and parameters. This process involved examination of the network, checking for coding errors, and improving the performance of the model compared to observed data. Those adjustments included, but were not limited to, the following:

- Checking priority rules and conflict area parameters and locations to replicate observed driving behaviour.
- Separate priority rules for HGVs to consider the larger size and slower acceleration of such vehicles.
- Adjustment of link and connector structure to better reflect lane-changing and vehicle interaction.
- Placement and adjustment of reduced speed areas, with appropriate speed distributions, coded onto sections of links to ensure traffic behaviour is realistic.

- Desired speed decisions were placed around the network to ensure traffic obeyed the relevant speed limit for specific roads.

4.3.1.1 Merging behaviour

A special merging driving behaviour was developed for areas of the model where significant lane-changing happened, for example at a merge from two lanes to one lane, or an area where vehicles need to get into specific lanes to make turns. In VISSIM, vehicles attempt to maintain a desired distance and speed from vehicles in front of them. The default driving behaviours sometimes lead to unrealistic behaviour such as vehicles coming to a stop mid-lane rather than forcing a gap to change lanes.

A bespoke behaviour was therefore developed to make it easier for vehicles to merge. This was based on the Wiedemann '99 model, with the following changes:

- Safety distance reduction factor reduced to 0.2 from 0.6
- Max. deceleration for cooperative braking changed from -3m/s^2 to -9m/s^2
- Cooperative lane change activated; max. speed difference increased from 10.80km/h to 25km/h


This was informed by video footage collected from the December 2021 and February 2023 survey data.

4.3.2 MOVA CONTROL

During the calibration process it became clear that the westbound signals between Lydiard Fields and junction 16 (set up as per the specification) were not operating in the same way as on-street, shown in the survey videos. This is likely because the on-street operation was changed away from the specification after installation. In the model, phase E (shown in Figure 4-1) went red after a specific amount of time, even if there was no demand on phase F. However, it was clear from the survey videos that, on-street, phase E only went red if there was demand on phase F.

In the .mova file, according to the specification, there was a hold command for continuing demand on phase G to hold phase D on green. There was also an option for phase G to hold phase E at green, however this was specified as off. This was changed so that demand on G held both phase E and D on green, which more accurately reflected on-site operation.

Figure 4-1 - Signal phases between Lydiard Fields and junction 16

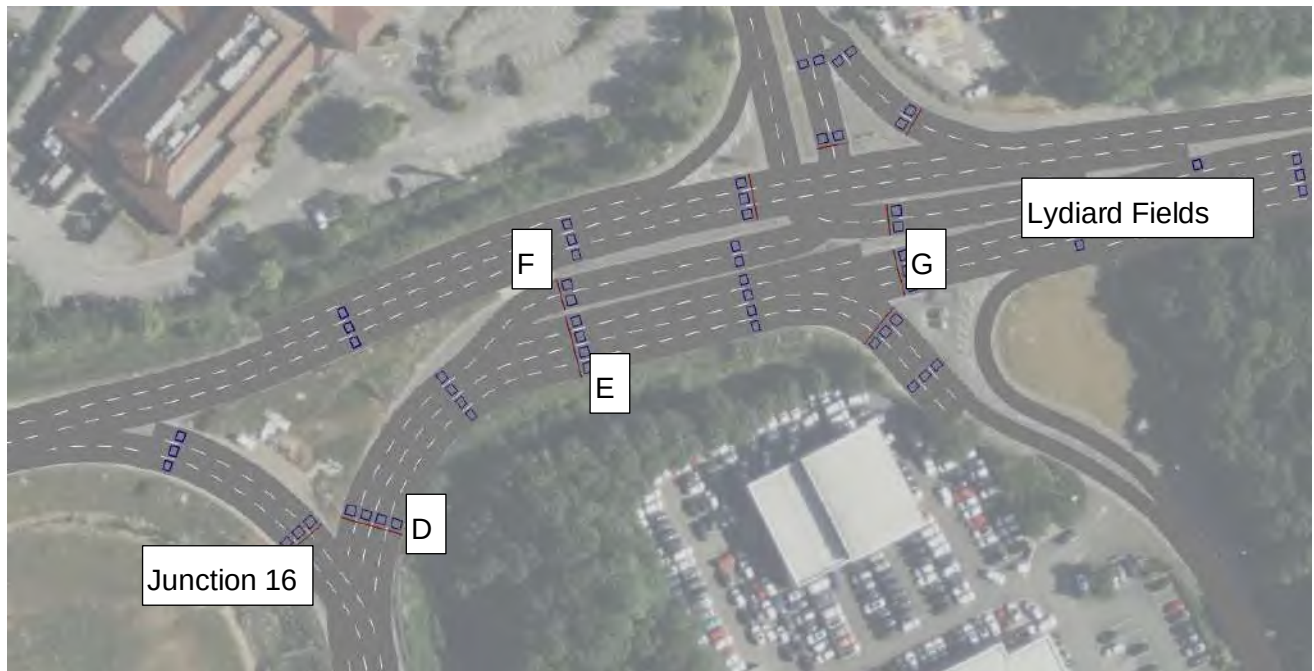

4.3.3 MATRIX ADJUSTMENT USING FEBRUARY 2023 SURVEY DATA

During the model development and calibration process, it became clear that there was significant congestion on the day of the December 1st 2021 survey. In the PM peak, the survey videos showed that there was some blocking back on the A3102 westbound that appeared to emanate from a point downstream of the merge to a single lane (towards Royal Wootton Bassett). This blocking back had a significant effect on the operation of the junction and queue build-up back across the overbridge and along the A3102 through the Lydiard Fields junction. This queuing back is shown in Figure 4-2. Vehicles started queuing back through the junction at around 16:55 and this lasted for about an hour, having cleared by 18:00. This congestion did not appear to affect movements from the other zonal entry points. The exact cause of this congestion was not visible from the survey videos and appeared to occur further west, off the model network. The blocking back is shown in Figure 4-3 to Figure 4-4.

Whilst blocking back cleared by 18:00, this issue impacted the peak hour MCC count at Lydiard Fields, with the recorded peak hour flow likely to be less than the actual demand flow due to the queueing effects. In recognition of this issue, the additional data was collected in February 2023 to understand more typical traffic flow profiles. The February 2023 videos showed that there was no significant congestion on the A3102 exit towards Royal Wootton Bassett.

The resulting data was used to amend the PM matrix by taking the 15-minute profile from the February survey (Tuesday to Thursday average) and applying it to the original 2021 survey total MCC flow between 16:00 and 18:15, for the westbound flow from Swindon at Lydiard Fields. The matrix build Furnessing process was then rerun with the amended data.

Figure 4-2 – A3102 queueing on approach to M4 J16, looking east through the Lydiard Fields



Figure 4-3 - A3102 exit from M4 J16, blocking back through the junction in the PM peak



Figure 4-4 – A3102 exit from M4 J16 looking westbound towards Wootton Bassett, PM peak



5 CALIBRATION AND VALIDATION RESULTS

The process of model validation is iterative with calibration, in the sense that if the validation criteria are not met after a set of model runs, further adjustments are made to the network or the traffic matrices to achieve model validation.

Separate observed datasets were used for the calibration and validation checks. Junction turning counts (from MCC data) were used for model calibration, whilst TomTom journey times were used for model validation. While queue length data is not appropriate for validation, queues were checked visually and compared between the model and survey videos to ensure they were reasonably represented in the model. The traffic model is validated when all criteria for traffic flow and journey time comparisons are met.

5.1.1 MODEL RUNS

Traffic conditions vary day-to-day because of random driver behaviour such as speed selection, lane changing, driver route choice, and bus and parked vehicle dwell times. The stochastic micro-simulation traffic model in VISSIM attempts to replicate this day-to-day random variability by altering individual driver decisions based on random numbers.

The set of random numbers is generated from an initial 'seed' value specified at the start of a simulation run. A single set of random numbers, generated by a single seed value therefore represents one potential outcome, or one day of traffic operation. The actual value of the seed has no significance; however, they must be different from each other to produce a different outcome. Basing results on a single seed value has the potential to bias the overall result.

To reduce potential bias both the AM and PM models were run 20 times as per TfL guidance. A t-test was then performed on the model outputs to determine whether the chosen number of runs was enough to produce a reliable result based on model variability across the runs. The t-test calculated the required number of runs for a 95% confidence interval and the requirement that the margin of error is within 1% of the sample mean.

The t-test was performed using the average travel time per vehicle from the network statistics for each of the 20 AM and PM runs. For both peaks, the results showed that 20 runs was sufficient to produce a reliable result.

The model run results were then averaged for the flow and journey time comparison. Due to the validated period being 1.5hrs long, results are provided for full hours, for both the network peak hours (07:30-08:30, 16:30-17:30) and the traditional peak hours (08:00-09:00, 17:00-18:00).

5.1.2 TRAFFIC FLOW CALIBRATION CRITERIA

Acceptability criteria for the calibration and validation of traffic models are set out in Table 2 of the TAG Unit M3-1 *Highway Assignment Modelling* (May 2020). The criteria for traffic flow calibration are shown in Table 5-1.

Table 5-1 – Traffic flow calibration criteria

Criteria	Description	Acceptability guideline
Flow	Individual flows within 100 veh/h of counts for flows less than 700 veh/h	>85% of cases
	Individual flows within 15% of counts for flows from 700 to 2700 veh/h	>85% of cases
	Individual flows within 400 veh/h of counts for flows more than 2700 veh/h	>85% of cases
GEH	GEH<5 for individual flows	>85% of cases

TAG Unit M3-1 (May 2020) guidance state that the two criteria ('Flow' and 'GEH') are broadly consistent and traffic flows that meet either criterion should be regarded as satisfactory. This means that either the Flow or GEH criteria should be met in 85% of cases. The GEH statistic is defined in TAG as:

$$GEH = \sqrt{\frac{(M - C)^2}{(M + C)/2}}$$

Where M = modelled value

C = observed value

The GEH statistic considers the size of a number when determining whether another value is significantly different from it. This means large numbers can therefore have larger deviations than smaller numbers and still be acceptably close to one another. Values are considered acceptably close when their GEH is below the value of five. However, TfL Modelling Guidelines recommend that key links within a model should have a GEH of less than three, and this stricter criterion has also been adopted as part of the M4 junction 16 model validation.

5.2 TRAFFIC FLOW CALIBRATION RESULTS

A total of 35 observed turning movements were compared to modelled turning flows during the calibration process. The summary results of the turning flow calibration are shown in Table 5-2 and Table 5-3 for the surveyed AM and PM peak hours respectively and in Figure 5-1 and Figure 5-2. Results for the traditional peak hours are shown in Table 5-4, Table 5-5, Figure 5-3 and Figure 5-4.

This analysis demonstrate that the model achieves the TAG criteria with 100% in both the surveyed AM and PM peaks for 'total vehicle' counts having a GEH value of less than 5. All but one count (97%) also achieves the TfL criterion for GEH under 3 in both the observed and traditional AM peak. The only count that did not achieve this is the turn from M4 west to M4 east (via the offslip and onslip) where nine vehicles were observed to make this movement in the survey; however, the movement has been banned in the VISSIM model to prevent it being chosen as a competing route for all traffic, therefore all vehicles in the model use the mainline. All counts in the PM achieve a GEH of less than 3.

5.2.1 OBSERVED PEAK HOUR RESULTS

Table 5-2 – Overall flow calibration: AM 07:30 – 08:30

	GEH Statistics			Individual Flows		
	GEH < 3	GEH < 5	GEH < 6	f < 700	700 < f < 2700	f > 2700
Calibration	97%	100%	100%	100%	100%	No Data

Table 5-3 – Overall flow calibration: PM 16:30 – 17:30

	GEH Statistics			Individual Flows		
	GEH < 3	GEH < 5	GEH < 6	f < 700	700 < f < 2700	f > 2700
Calibration	100.0%	100.0%	100.0%	100.0%	100.0%	No Data

Figure 5-1 - Flow calibration all flows AM 07:30 - 08:30 (all vehs)


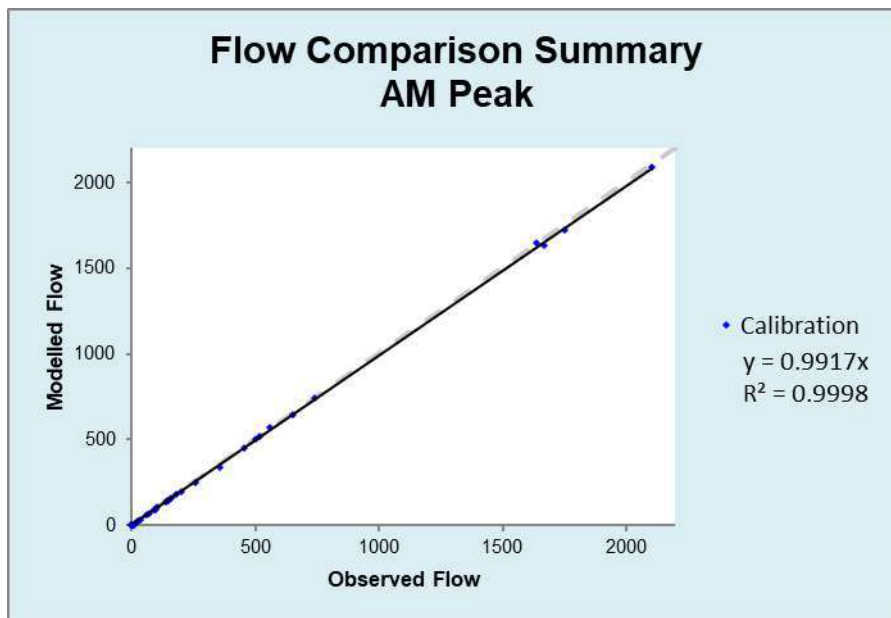


Figure 5-2 - Flow calibration all flows PM 16:30 - 17:30 (all vehs)

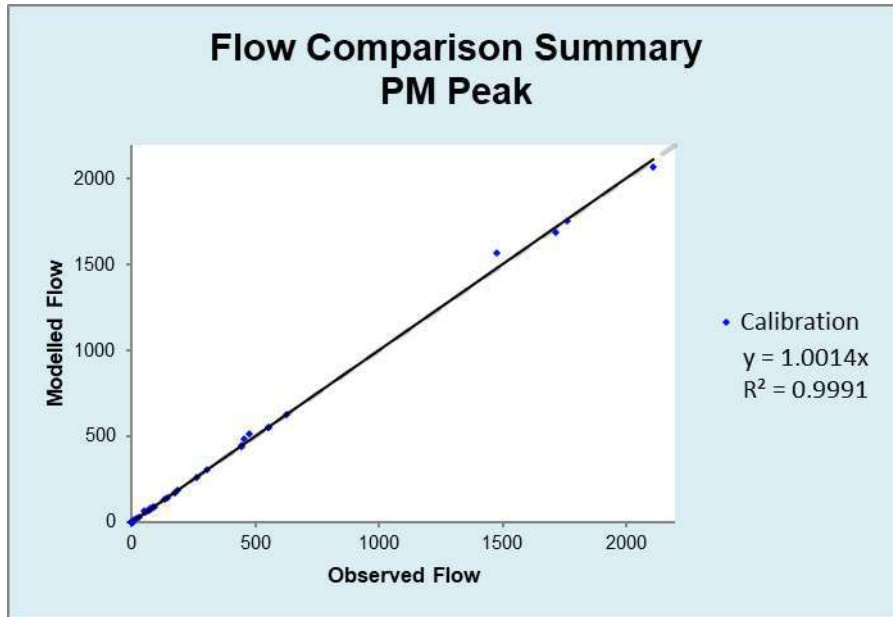

Full calibration results are provided in Appendix B.

5.2.2 TRADITIONAL PEAK HOUR RESULTS

Table 5-4 – Overall flow calibration: AM 08:00 – 09:00

	GEH Statistics			Individual Flows		
	GEH < 3	GEH < 5	GEH < 6	f < 700	700 < f < 2700	f > 2700
Calibration	97%	100%	100%	100%	100%	No Data

Table 5-5 – Overall flow calibration: PM 17:00 – 18:00

	GEH Statistics			Individual Flows		
	GEH < 3	GEH < 5	GEH < 6	f < 700	700 < f < 2700	f > 2700
Calibration	100.0%	100.0%	100.0%	100.0%	100.0%	No Data

Figure 5-3 - Flow calibration all flows AM 08:00 - 09:00 (all vehs)


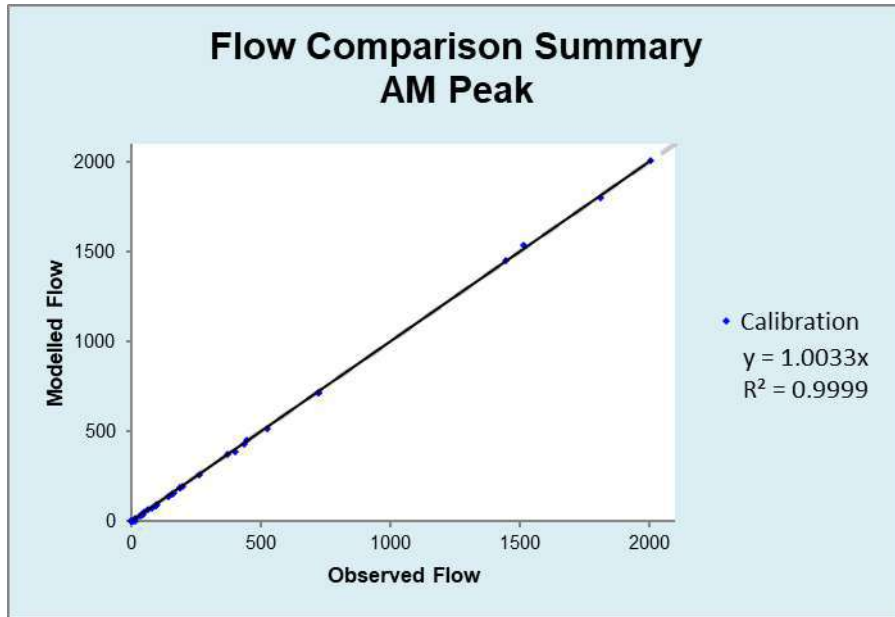


Figure 5-4 - Flow calibration all flows PM 17:00 - 18:00 (all vehs)

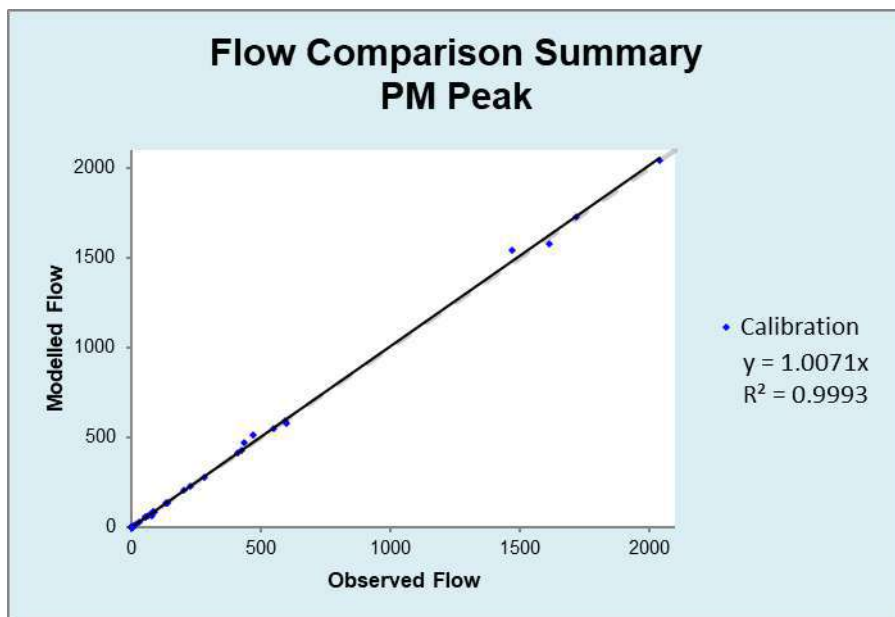

5.2.3 OBSERVED QUEUE DATA

Queues were not part of the formal calibration and validation processes due to the difficulty of measuring on-street queue lengths in the same way as modelled queue lengths. However, where available, queue data was still compared to ensure the model was reasonable in its replication of queues.

5.3 JOURNEY TIME VALIDATION RESULTS

Observed journey times were analysed from the TomTom data collected during the period November 9 to December 2, 2021 (Tuesday to Thursday only, for cars). The TomTom data was collated into six different routes covering the main arms of the junction.

- JT1 Eastbound: A3102 west to A3102 east
- JT1 Westbound: A3102 east to A3102 west
- JT2 eastbound: M4 west to B4005
- JT2 westbound: B4005 to M4 west
- JT3 eastbound: Lydiard Fields to M4 east
- JT3 westbound: M4 east to Lydiard Fields

These routes are shown in Figure 5-5.

Figure 5-5 - Journey time routes



TfL Modelling Guidelines v4.0 requires that modelled journey times should fall within 15% of the observed average on 85% of surveyed journey time routes. The summary results of the journey time validation are presented in Table 5-6, comparing the observed and modelled journey time on each route for the observed peak hours (07:30-08:30 and 16:30-17:30). Full results for all sections are shown in Appendix C.

Table 5-6 – Journey time validation results for observed AM and PM peak hours

	AM 07:30 – 08:30				PM 16:30 – 17:30			
Route	Obs. (s)	Mod. (s)	Diff. (s)	Diff. (%)	Obs. (s)	Mod. (s)	Diff. (s)	Diff. (%)
JT1 EB	126	120	-7	-5.3%	119	116	-4	-3.3%
JT1 WB	130	132	2	1.9%	182	155	-27	-14.9%
JT2 EB	119	115	-5	-3.9%	141	134	-7	-4.9%
JT2 WB	103	97	-6	-6.2%	108	98	-10	-9.0%
JT3 EB	128	116	-12	-9.6%	132	115	-17	-12.9%
JT3 WB	115	107	-8	-6.8%	122	105	-18	-14.4%

Table 5-7 compares the observed and modelled journey times during the traditional peak hours (08:00-09:00 and 17:00-18:00).

Table 5-7 – Journey time validation results for traditional AM and PM peak hours

	AM 08:00 – 09:00				PM 17:00 – 18:00			
Route	Obs. (s)	Mod. (s)	Diff. (s)	Diff. (%)	Obs. (s)	Mod. (s)	Diff. (s)	Diff. (%)
JT1 EB	131	120	-11	-8.2%	118	114	-4	-3.5%
JT1 WB	130	133	3	2.3%	174	155	-19	-10.8%
JT2 EB	119	117	-2	-2.0%	136	133	-3	-1.9%
JT2 WB	105	97	-9	-8.1%	106	98	-8	-7.6%
JT3 EB	125	117	-8	-6.1%	129	114	-15	-11.4%
JT3 WB	116	107	-9	-7.6%	118	104	-14	-11.6%

The tables show that journey time validation in both the observed and traditional peak hours is good, with all modelled routes within 15% of the observed time in both AM and PM.

In conclusion, the flow calibration and journey time validation process indicates that the base model provides an appropriate representation of surveyed conditions during both the observed peak hours and traditional peak hours.

6 SUMMARY

WSP was commissioned by National Highways to develop a new VISSIM microsimulation model of junction 16 of the M4. It is intended that the model will be used to assess the impacts of development and infrastructure proposals on the operation of the junction. This Local Model Validation Report (LMVR) describes the data collection exercise, model development, calibration and validation process to build the 2021 base year VISSIM model.

New traffic surveys were undertaken to develop and validate the base year model, including an ANPR survey, Manual Classified Count (MCC) data, link counts, and queue length observations. Surveys were carried out on 1st December, 2021. Subsequent analysis of available WebTRIS data for the M4 and junction 16 slip roads indicates that the survey day was broadly representative of traffic levels in neutral month of November 2021. To support the ANPR dataset, TomTom data was procured for more accurate journey time validation. Subsequent traffic data was collected in February and March 2023 to better understand merge activity and queuing on exit from junction 16 towards Royal Wootton Bassett, and to provide additional data about the profile of traffic flow demands leaving Swindon during the evening period.

WebTRIS data was also reviewed to compare traffic levels recorded on the survey day with November 2019 and November 2022. The analysis showed a general reduction in traffic levels from November 2019 (pre-Covid) and indicated some post-Covid traffic increases since the date of surveys, principally for the westbound off-slip during the AM peak hour. It is therefore recommended that prevailing background traffic levels are reviewed at the time of any future use of the model, to confirm any change in traffic levels from that surveyed in 2021. Based on the outcome of this review, it may be necessary to develop a Reference Case model that reflects prevailing slip road traffic levels at the time of use.


The VISSIM model matrices were developed from a combination of MCC and ANPR data. To provide flexibility around future assessment periods, the model covers both the observed peak hours (07:30–08:30 and 16:30–17:30) and traditional peak hours (08:00–09:00 and 17:00–18:00). The model showed a very close match to the observed flows. Validation was performed against the observed journey times extracted from the TomTom data for six routes around the junction, with all modelled journey times comparing well to observed values.

The base year VISSIM model therefore provides a suitable base for future forecast and scenario models.

Appendix A

MOVA LINK DRAWING





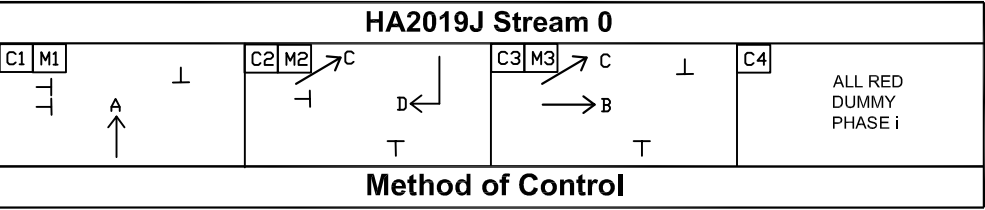


M4 J16 & Lydiards Swindon - HA Area 2

Controller 1 HA2019J

Detector Location, and Mova Lane / Link configuration

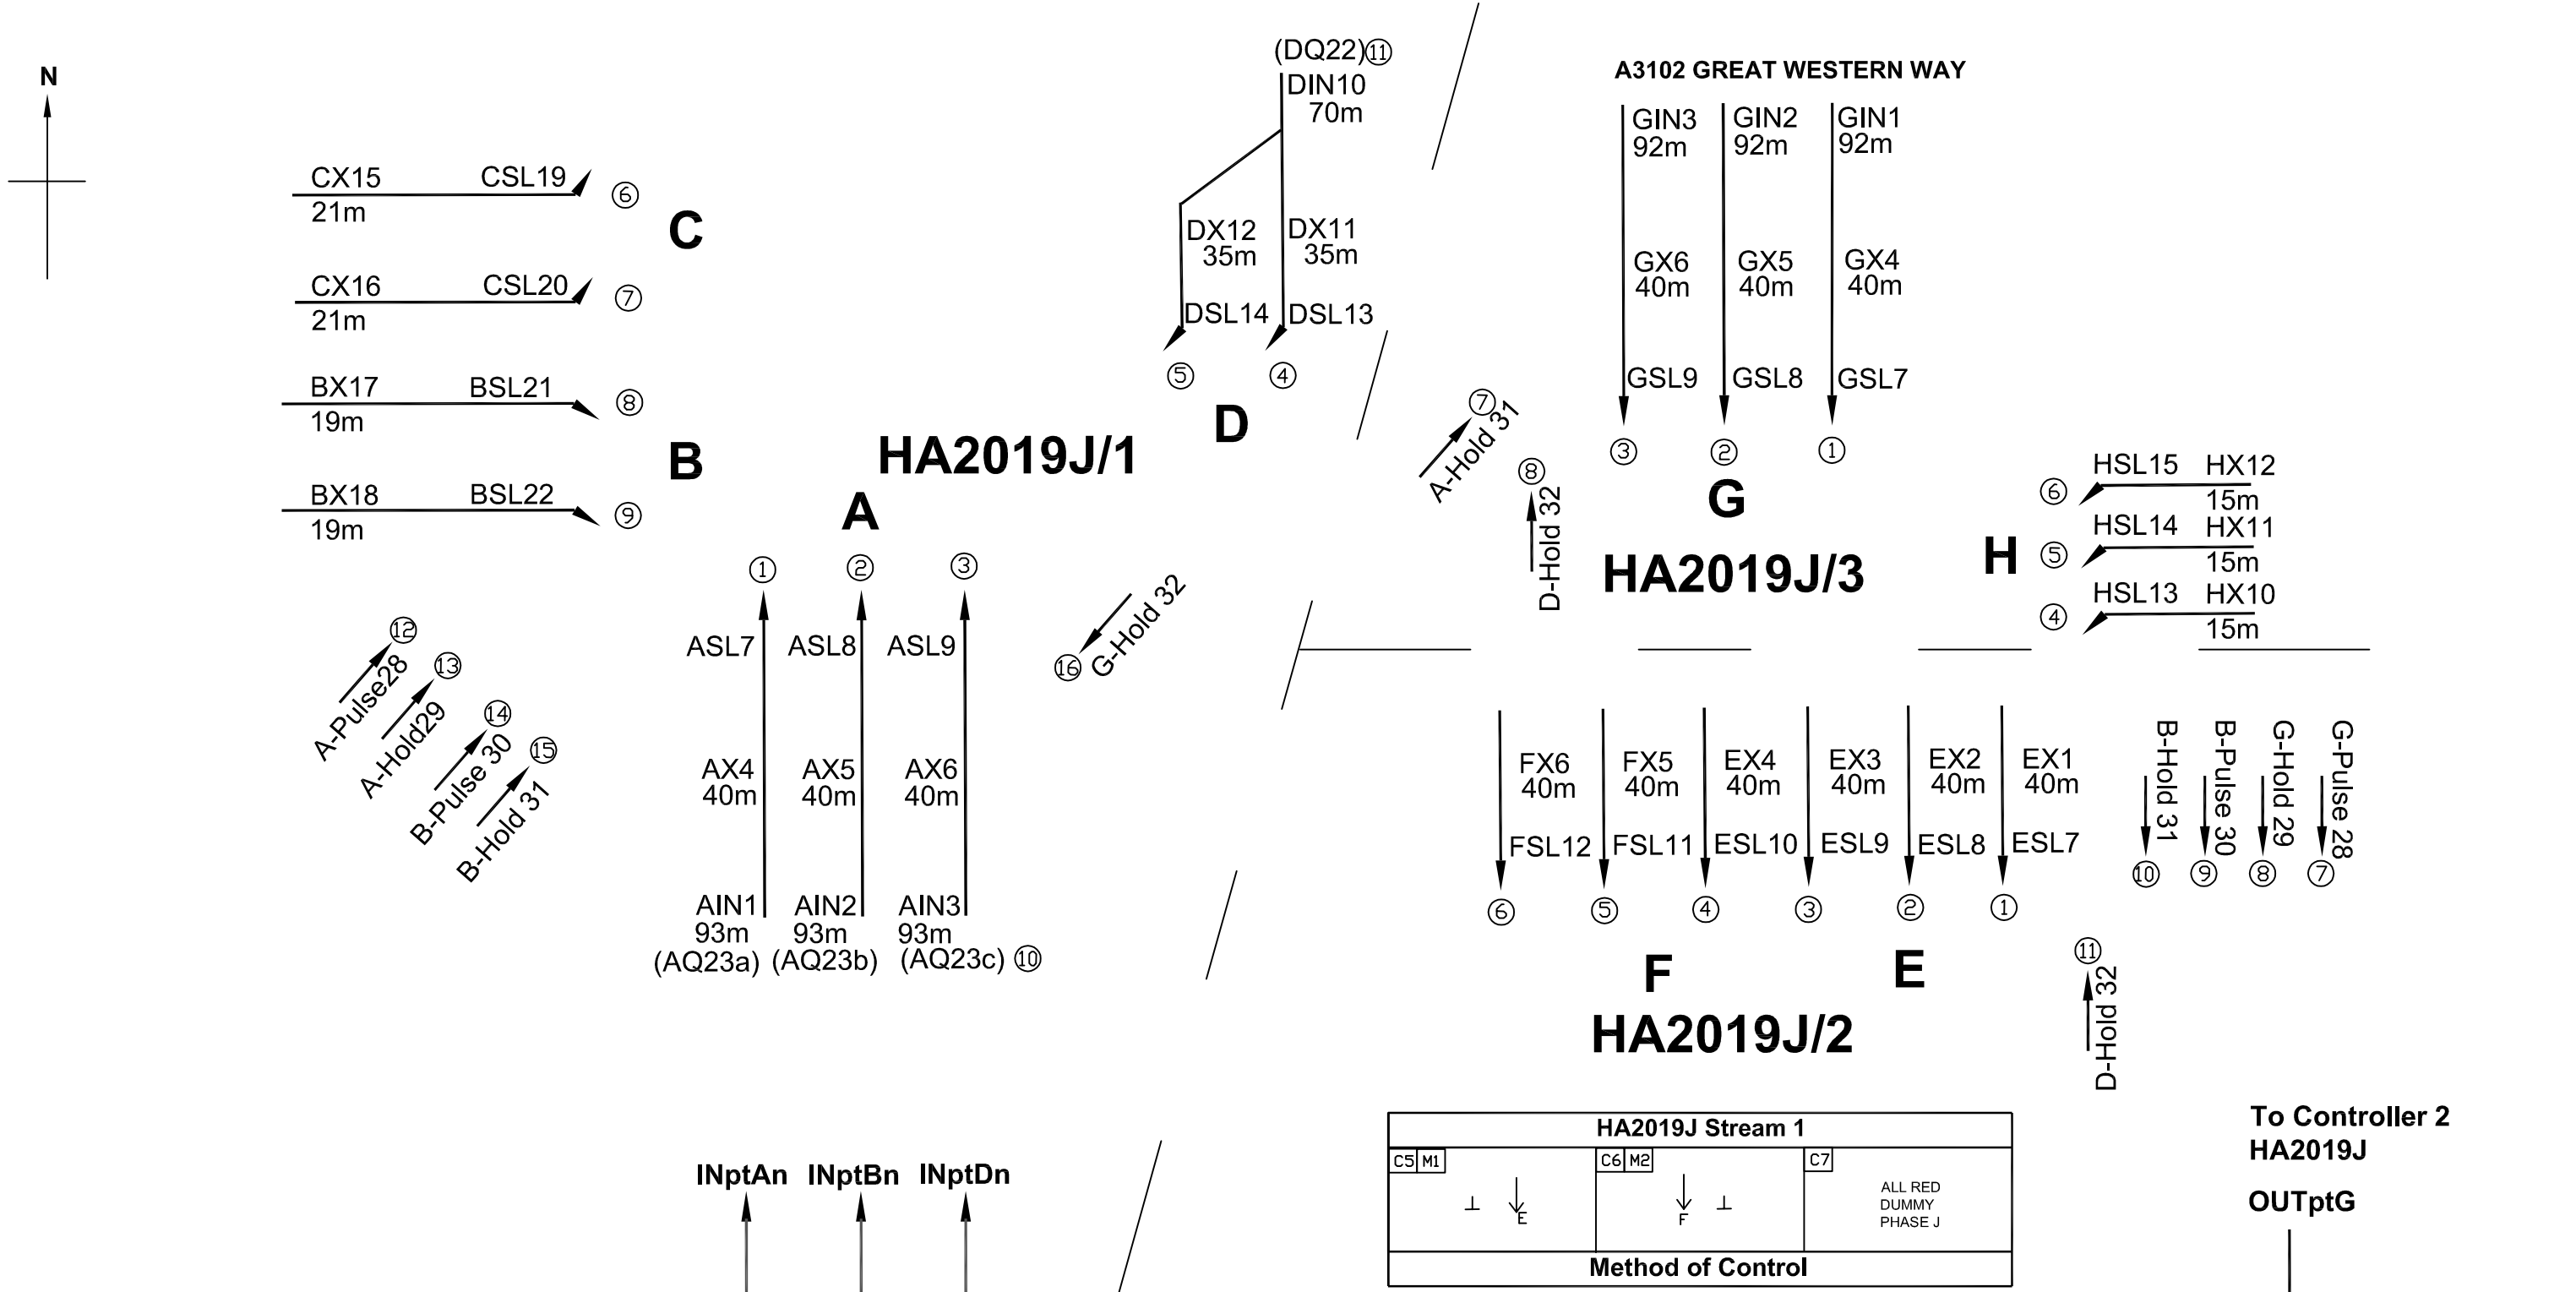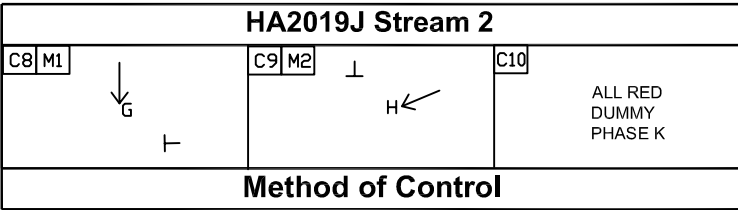



M4 J16 & Lydiards Swindon - HA Area 2
HA2018 - Controller 3
Detector Location, and Mova Lane / Link configuration


To Controller 3
HA2018J
INptBn INptCn INptDn AQn

OUTptCn OUTptHn OUTptLn
From Controller
3 HA2018J

HA2018J South Stream 2		
C9 M1	C9 M2	C10
		ALL RED DUMMY PHASE S
Method of Control		



HA2018J/3

H-Hold 31
H-Pulse 30
C-Hold 29
C-Pulse 28
A-Hold 27
A-Pulse 26
Bn-Bak 32
AQn-Bak 25

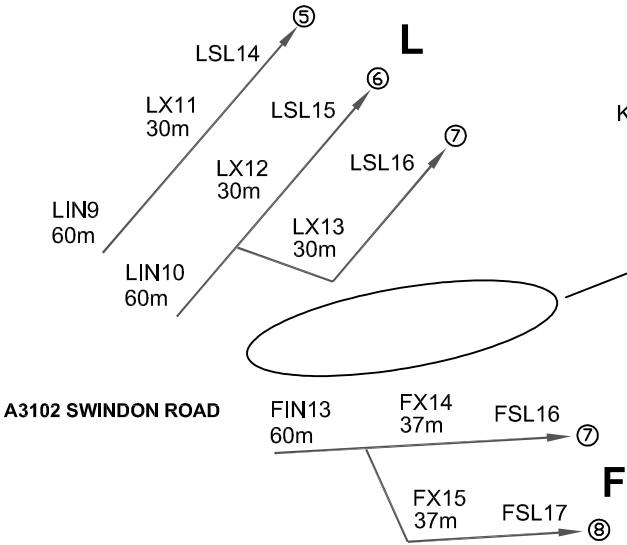


HA2018J South Stream 1			
C4 M1	C5 M2	C6 M3	C7
			ALL RED DUMMY PHASE R
Method of Control			

HA2018J/2

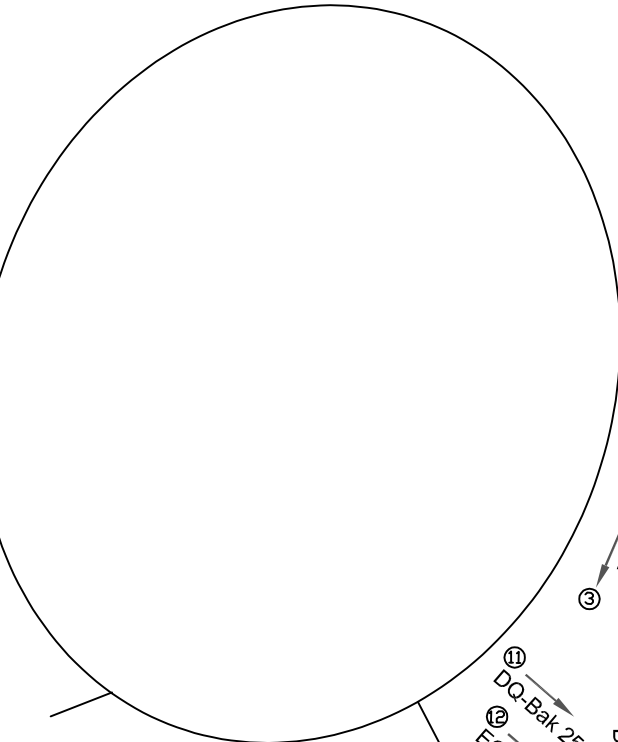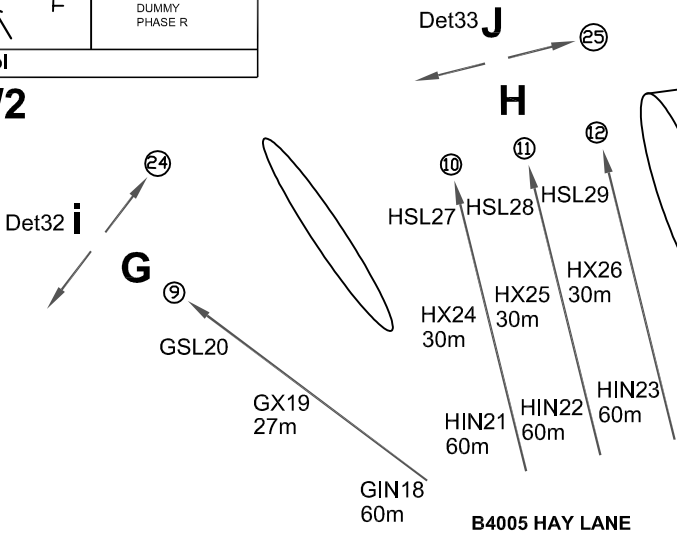

HA2018J South Stream 0		
C1 M1	C2 M2	C3
		ALL RED DUMMY PHASE Q
Method of Control		

HA2018J/1

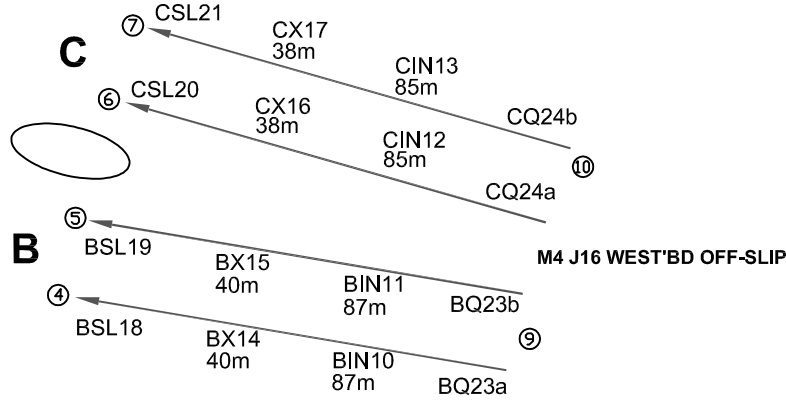

HA2018J South Stream 3		
C11 M1	C12 M2	C13
		ALL RED DUMMY PHASE T
Method of Control		

HA2018J/4

① = Indicates Link / Lane Number

© JSTSM Ltd

Appendix B

FULL CALIBRATION RESULTS



Appendix B.1

**FLOW CALIBRATION, OBSERVED
PEAK HOURS (07:30-08:30 AND
16:30-17:30)**





Vehicle Flow Information
Calibration Statistics
Car Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	10	10	0	-1.0%	0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	183	180	-3	-1.7%	0.2	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	271	252	-19	-7.2%	1.2	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	114	114	0	0.1%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	47	48	1	2.1%	0.1	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	121	118	-3	-2.1%	0.2	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	7	7	0	0.7%	0.0	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	120	119	-1	-1.1%	0.1	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	1	0	-1	-100.0%	1.4	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	78	79	1	0.8%	0.1	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	544	538	-6	-1.0%	0.2	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	348	350	2	0.4%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	52	50	-2	-3.5%	0.3	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	66	65	-1	-0.9%	0.1	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	513	508	-5	-0.9%	0.2	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	5	0	-5	-100.0%	3.2	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	153	151	-3	-1.6%	0.2	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	377	379	2	0.5%	0.1	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	398	413	15	3.7%	0.7	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	1	0	-1	-100.0%	1.4	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	376	381	5	1.4%	0.3	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	1520	1510	-10	-0.7%	0.3	Pass Mid
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	1209	1187	-22	-1.8%	0.6	Pass Mid
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	21	21	0	-0.2%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	1217	1229	12	1.0%	0.3	Pass Mid
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	153	151	-2	-1.5%	0.2	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	24	24	0	0.4%	0.0	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	120	119	-1	-0.9%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	1319	1288	-31	-2.3%	0.9	Pass Mid
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	63	63	0	-0.6%	0.1	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	65	66	1	1.7%	0.1	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	9496	9418	-78	-0.8%	0.4



Vehicle Flow Information
Calibration Statistics
LGV Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	9	9	0	-2.2%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	59	58	-1	-0.9%	0.1	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	61	61	0	-0.2%	0.0	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	28	27	-1	-2.3%	0.1	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	13	13	0	-2.7%	0.1	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	35	36	1	2.1%	0.1	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	2	2	0	2.5%	0.0	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	18	18	0	1.9%	0.1	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	16	17	1	5.6%	0.2	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	97	98	1	0.8%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	87	87	0	-0.1%	0.0	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	17	17	0	-0.6%	0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	21	20	-1	-4.5%	0.2	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	192	192	0	0.1%	0.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	3	0	-3	-100.0%	2.4	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	44	44	0	0.6%	0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	114	114	0	-0.4%	0.0	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	139	143	4	3.0%	0.4	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	1	0	-1	-100.0%	1.4	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	114	114	0	-0.1%	0.0	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	473	472	-1	-0.3%	0.1	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	374	365	-10	-2.6%	0.5	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	1	1	0	0.0%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	374	379	5	1.4%	0.3	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	23	23	0	1.3%	0.1	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	8	6	-2	-28.1%	0.9	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	22	26	4	17.3%	0.8	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	361	360	-1	-0.2%	0.0	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	24	24	0	-1.7%	0.1	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	26	27	1	2.7%	0.1	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	2757	2752	-4	-0.2%	0.2



Vehicle Flow Information
Calibration Statistics
OGV1 Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	2	2	0	0.0%	0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	4	4	0	-5.0%	0.1	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	7	8	1	9.3%	0.2	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	2	2	0	0.0%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	0	0	0		0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	5	5	0	0.0%	0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	0	0	0		0.0	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	1	1	0	0.0%	0.0	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	1	0	-1	-100.0%	1.4	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	5	5	0	-4.0%	0.1	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	4	4	0	-6.3%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	7	7	0	-5.0%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	1	1	0	-30.0%	0.3	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	3	3	0	-5.0%	0.1	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	25	24	-1	-3.4%	0.2	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	1	0	-1	-100.0%	1.4	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	3	3	0	5.0%	0.1	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	5	5	0	-3.0%	0.1	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	3	2	-1	-23.3%	0.4	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	9	8	-1	-11.7%	0.4	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	44	44	0	0.2%	0.0	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	36	34	-2	-5.4%	0.3	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	16	16	0	0.9%	0.0	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	4	4	0	0.0%	0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	2	2	0	0.0%	0.0	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	4	2	-2	-52.5%	1.2	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	37	38	1	3.9%	0.2	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	4	4	0	0.0%	0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	1	0	-1	-100.0%	1.4	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	236	227	-9	-3.7%	0.2



Vehicle Flow Information
Calibration Statistics
OGV2 Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	5	6	1	13.0%	0.3	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	12	9	-3	-24.2%	0.9	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	18	16	-2	-12.8%	0.6	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	0	0	0		0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	1	0	-1	-100.0%	1.4	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	0	0	0		0.4	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	2	1	-1	-42.5%	0.7	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	1	0	-1	-100.0%	1.4	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	5	4	-1	-18.0%	0.4	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	5	4	-1	-20.0%	0.5	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	12	11	-1	-11.7%	0.4	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	0	0	0		0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	2	1	-1	-35.0%	0.5	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	9	16	7	79.4%	2.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	0	0	0		0.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	0	0	0		0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	4	5	1	25.0%	0.5	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	17	12	-5	-28.2%	1.3	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	17	16	-1	-6.2%	0.3	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	64	61	-3	-4.7%	0.4	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	51	46	-5	-10.3%	0.8	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	32	28	-4	-11.7%	0.7	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	1	3	2	200.0%	1.4	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	1	3	2	190.0%	1.4	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	1	1	0	25.0%	0.2	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	33	35	2	5.3%	0.3	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	0	1	1		1.4	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	4	2	-2	-51.3%	1.2	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	297	281	-16	-5.4%	0.6



Vehicle Flow Information
Calibration Statistics
All Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	26	26	0	1.3%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	258	251	-7	-2.6%	0.4	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	357	336	-21	-5.9%	1.1	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	144	143	-1	-0.4%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	61	61	0	-0.6%	0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	161	159	-2	-1.1%	0.1	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	11	10	-1	-6.8%	0.2	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	140	138	-2	-1.4%	0.2	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	2	0	-2	-100.0%	2.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	104	104	0	0.4%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	650	644	-6	-0.9%	0.2	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	454	454	0	-0.1%	0.0	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	70	68	-2	-3.1%	0.3	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	92	90	-2	-2.6%	0.3	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	739	741	2	0.2%	0.1	Pass Mid
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	9	0	-9	-100.0%	4.2	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	200	198	-2	-1.1%	0.1	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	500	502	2	0.4%	0.1	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	557	570	13	2.4%	0.6	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	2	0	-2	-100.0%	2.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	516	519	3	0.6%	0.1	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	2102	2087	-15	-0.7%	0.3	Pass Mid
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	1670	1631	-39	-2.3%	1.0	Pass Mid
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	22	22	0	-0.2%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	1639	1653	14	0.8%	0.3	Pass Mid
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	181	181	0	0.0%	0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	35	35	0	-0.7%	0.0	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	147	148	1	0.6%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	1750	1722	-28	-1.6%	0.7	Pass Mid
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	91	91	0	0.2%	0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	96	95	-1	-1.3%	0.1	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	12786	12679	-107	-0.8%	0.4



Vehicle Flow Information
Calibration Statistics
Car Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	21	21	-1	-2.4%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	343	341	-2	-0.5%	0.1	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	1	0	-1	-100.0%	1.4	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	324	325	1	0.2%	0.0	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	211	210	-1	-0.5%	0.1	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	70	70	0	-0.1%	0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	154	155	1	0.4%	0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	12	13	1	4.6%	0.2	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	109	110	1	1.0%	0.1	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	66	65	-1	-1.0%	0.1	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	506	503	-3	-0.5%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	241	239	-2	-0.9%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	53	53	0	0.6%	0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	62	59	-3	-4.4%	0.4	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	393	391	-2	-0.4%	0.1	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	1	0	-1	-100.0%	1.4	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	155	154	-1	-0.4%	0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	474	473	-2	-0.3%	0.1	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	393	424	31	7.8%	1.5	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	376	399	23	6.2%	1.2	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	1332	1309	-22	-1.7%	0.6	Pass Mid
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	1642	1606	-36	-2.2%	0.9	Pass Mid
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	8	8	0	0.6%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	1236	1313	77	6.2%	2.1	Pass Mid
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	43	61	18	42.9%	2.6	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	58	58	0	-0.5%	0.0	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	35	35	0	0.9%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	1348	1337	-11	-0.8%	0.3	Pass Mid
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	133	132	-1	-0.6%	0.1	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	82	81	-1	-1.6%	0.1	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	9881	9945	63	0.6%	0.4



Vehicle Flow Information
Calibration Statistics
LGV Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	7	7	0	2.1%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	86	88	2	2.3%	0.2	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	97	100	3	3.1%	0.3	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	47	46	-1	-1.2%	0.1	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	16	17	1	3.4%	0.1	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	31	31	0	1.5%	0.1	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	8	8	0	5.0%	0.1	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	21	22	1	3.8%	0.2	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	8	8	0	4.4%	0.1	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	115	116	1	0.9%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	58	61	3	4.7%	0.4	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	12	13	1	5.8%	0.2	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	10	11	1	13.5%	0.4	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	139	140	1	0.4%	0.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	0	0	0		0.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	17	16	-1	-5.0%	0.2	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	71	76	5	6.5%	0.5	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	66	76	10	15.1%	1.2	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	53	60	7	12.9%	0.9	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	320	316	-4	-1.2%	0.2	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	392	386	-6	-1.5%	0.3	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	1	1	0	0.0%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	200	213	13	6.4%	0.9	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	5	5	0	8.0%	0.2	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	11	10	-1	-9.1%	0.3	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	16	16	0	-0.6%	0.0	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	367	371	4	1.2%	0.2	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	10	10	0	0.0%	0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	5	2	-3	-54.0%	1.4	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	2189	2227	38	1.7%	0.3



Vehicle Flow Information
Calibration Statistics
OGV1 Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	2	2	0	0.0%	0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	6	6	0	0.0%	0.0	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	8	11	3	41.3%	1.1	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	2	2	0	0.0%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	1	1	0	0.0%	0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	0	0	0		0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	0	0	0		0.0	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	0	0	0		0.0	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	1	1	0	5.0%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	5	5	0	1.0%	0.0	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	3	3	0	3.3%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	1	1	0	0.0%	0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	1	1	0	0.0%	0.0	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	9	9	0	3.9%	0.1	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	0	0	0		0.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	0	0	0		0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	6	5	-1	-11.7%	0.3	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	6	7	1	14.2%	0.3	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	7	6	-1	-13.6%	0.4	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	26	26	0	1.1%	0.1	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	32	29	-3	-8.0%	0.5	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	15	15	0	1.0%	0.0	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	0	0	0		0.4	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	2	1	-1	-52.5%	0.9	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	1	1	0	0.0%	0.0	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	24	25	1	2.5%	0.1	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	0	0	0		0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	2	2	0	0.0%	0.0	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	159	160	1	0.4%	0.1



Vehicle Flow Information
Calibration Statistics
OGV2 Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	0	0	0		0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	7	7	0	-2.1%	0.1	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	13	11	-2	-11.9%	0.4	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	1	1	0	-15.0%	0.2	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	1	1	0	20.0%	0.2	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	0	0	0		0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	0	0	0		0.4	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	0	0	0		0.0	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	2	2	0	2.5%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	0	0	0		0.0	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	1	1	0	35.0%	0.3	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	0	0	0		0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	4	4	0	3.8%	0.1	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	11	11	0	0.5%	0.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	0	0	0		0.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	0	0	0		0.4	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	1	1	0	0.0%	0.0	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	10	9	-1	-12.5%	0.4	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	17	16	-1	-5.6%	0.2	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	38	39	1	1.9%	0.1	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	46	47	0	1.0%	0.1	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	25	25	0	0.2%	0.0	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	0	0	0		0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	1	1	0	0.0%	0.0	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	1	1	0	25.0%	0.2	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	21	22	1	2.9%	0.1	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	0	0	0		0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	0	0	0		0.0	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	200	199	-1	-0.5%	0.1



Vehicle Flow Information
Calibration Statistics
All Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	30	30	0	-1.2%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	442	442	0	0.0%	0.0	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	1	0	-1	-100.0%	1.4	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	442	448	6	1.2%	0.3	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	261	259	-2	-0.7%	0.1	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	88	89	1	0.7%	0.1	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	185	186	1	0.5%	0.1	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	20	21	1	5.3%	0.2	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	130	132	2	1.4%	0.2	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	77	77	0	-0.3%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	626	624	-2	-0.2%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	303	304	1	0.3%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	66	67	1	1.5%	0.1	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	77	76	-1	-1.6%	0.1	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	552	551	-1	-0.1%	0.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	1	0	-1	-100.0%	1.4	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	172	171	-1	-0.8%	0.1	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	552	554	2	0.4%	0.1	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	475	515	40	8.5%	1.8	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	453	481	28	6.2%	1.3	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	1715	1690	-25	-1.5%	0.6	Pass Mid
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	2111	2068	-44	-2.1%	1.0	Pass Mid
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	9	9	0	0.6%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	1476	1566	90	6.1%	2.3	Pass Mid
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	48	67	19	39.5%	2.5	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	72	70	-2	-3.3%	0.3	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	53	53	0	0.8%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	1760	1754	-6	-0.3%	0.1	Pass Mid
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	143	142	-1	-0.6%	0.1	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	89	85	-4	-4.6%	0.4	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	12430	12531	101	0.8%	0.4

Appendix B.2

**FLOW CALIBRATION, TRADITIONAL
PEAK HOURS (08:00-09:00 AND
17:00-18:00)**





Vehicle Flow Information
Calibration Statistics
Car Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	15	15	0	-1.3%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	185	184	-1	-0.3%	0.0	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	336	327	-9	-2.6%	0.5	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	125	125	0	-0.3%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	37	38	1	2.8%	0.2	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	141	141	0	0.1%	0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	7	7	0	-2.1%	0.1	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	122	119	-3	-2.1%	0.2	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	1	0	-1	-100.0%	1.4	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	62	63	1	1.8%	0.1	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	602	601	-2	-0.2%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	281	287	6	2.2%	0.4	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	45	46	1	1.6%	0.1	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	52	53	1	1.6%	0.1	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	497	495	-2	-0.3%	0.1	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	8	0	-8	-100.0%	4.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	141	142	1	0.6%	0.1	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	401	398	-3	-0.6%	0.1	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	284	299	15	5.3%	0.9	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	2	0	-2	-100.0%	2.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	301	303	2	0.5%	0.1	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	1424	1428	3	0.2%	0.1	Pass Mid
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	1076	1090	14	1.3%	0.4	Pass Mid
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	28	28	0	0.7%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	1043	1052	9	0.9%	0.3	Pass Mid
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	162	162	0	-0.1%	0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	24	22	-2	-7.9%	0.4	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	157	156	-1	-0.5%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	1416	1407	-9	-0.6%	0.2	Pass Mid
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	59	60	1	1.1%	0.1	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	63	63	-1	-0.8%	0.1	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	9098	9111	13	0.1%	0.3



Vehicle Flow Information
Calibration Statistics
LGV Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	8	8	0	3.8%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	56	56	0	0.5%	0.0	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	38	36	-2	-5.4%	0.3	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	28	28	0	-0.4%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	12	12	0	0.4%	0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	20	20	0	2.0%	0.1	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	4	4	0	-3.8%	0.1	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	19	19	0	0.3%	0.0	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	17	17	0	-0.3%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	108	108	0	-0.1%	0.0	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	64	65	1	1.9%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	17	17	0	-0.3%	0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	19	18	-1	-2.9%	0.1	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	194	193	-1	-0.5%	0.1	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	3	0	-3	-100.0%	2.4	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	39	39	-1	-1.3%	0.1	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	113	109	-4	-3.2%	0.3	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	136	130	-6	-4.7%	0.6	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	103	97	-6	-5.4%	0.6	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	454	458	4	0.9%	0.2	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	343	351	8	2.3%	0.4	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	7	7	0	-2.1%	0.1	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	335	338	3	0.8%	0.1	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	29	29	0	0.7%	0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	16	14	-2	-14.4%	0.6	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	25	27	2	8.8%	0.4	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	330	330	0	0.0%	0.0	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	32	32	0	-0.8%	0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	25	24	-1	-3.2%	0.2	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	2594	2587	-7	-0.3%	0.2



Vehicle Flow Information
Calibration Statistics
OGV1 Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	3	3	0	0.0%	0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	5	5	0	-1.0%	0.0	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	8	10	2	20.6%	0.6	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	3	3	0	-1.7%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	0	0	0		0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	1	1	0	-15.0%	0.2	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	1	1	0	-15.0%	0.2	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	0	0	0		0.0	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	1	0	-1	-100.0%	1.4	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	8	8	0	-0.6%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	8	8	0	-2.5%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	11	11	0	-1.8%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	2	2	0	0.0%	0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	3	3	0	-6.7%	0.1	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	17	17	0	2.4%	0.1	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	1	0	-1	-100.0%	1.4	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	4	4	0	0.0%	0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	5	5	0	4.0%	0.1	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	9	9	0	-4.4%	0.1	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	13	13	0	-1.9%	0.1	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	56	57	0	0.4%	0.0	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	43	43	0	0.2%	0.0	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	30	30	0	-0.8%	0.0	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	3	3	0	5.0%	0.1	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	0	0	0		0.5	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	2	2	0	-5.0%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	33	34	1	2.3%	0.1	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	4	4	0	1.3%	0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	2	1	-1	-55.0%	0.9	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	276	275	-1	-0.5%	0.2



Vehicle Flow Information
Calibration Statistics
OGV2 Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	6	6	0	0.8%	0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	14	14	0	0.4%	0.0	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	16	16	0	-1.9%	0.1	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	0	0	0		0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	0	0	0		0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	0	0	0		0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	3	3	0	-8.3%	0.1	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	0	0	0		0.0	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	3	3	0	1.7%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	1	1	0	10.0%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	14	14	0	-2.5%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	0	0	0		0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	2	2	0	0.0%	0.0	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	13	14	1	4.6%	0.2	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	0	0	0		0.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	1	1	0	0.0%	0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	6	6	0	-4.2%	0.1	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	14	14	0	-1.8%	0.1	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	18	17	-1	-5.0%	0.2	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	69	69	0	-0.5%	0.0	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	52	53	1	1.6%	0.1	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	35	36	1	2.0%	0.1	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	0	0	0		0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	1	1	0	15.0%	0.1	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	0	0	0		0.0	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	30	31	1	1.7%	0.1	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	0	0	0		0.4	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	3	1	-2	-66.7%	1.4	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	301	300	-2	-0.5%	0.1



Vehicle Flow Information
Calibration Statistics
All Vehicles
AM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	32	32	0	0.5%	0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	260	260	0	-0.1%	0.0	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	398	388	-10	-2.4%	0.5	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	156	156	-1	-0.3%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	49	50	1	2.2%	0.2	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	162	162	0	0.2%	0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	15	14	-1	-4.7%	0.2	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	141	138	-3	-1.8%	0.2	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	2	0	-2	-100.0%	2.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	90	91	1	1.2%	0.1	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	719	717	-2	-0.2%	0.1	Pass Mid
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	370	377	7	1.9%	0.4	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	64	65	1	1.0%	0.1	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	76	76	0	0.1%	0.0	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	721	719	-2	-0.2%	0.1	Pass Mid
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	12	0	-12	-100.0%	4.9	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	185	185	0	0.2%	0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	525	519	-6	-1.2%	0.3	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	443	451	8	1.8%	0.4	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	2	0	-2	-100.0%	2.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	435	430	-5	-1.2%	0.3	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	2004	2011	7	0.4%	0.2	Pass Mid
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	1515	1537	22	1.5%	0.6	Pass Mid
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	35	35	0	0.1%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	1443	1455	12	0.8%	0.3	Pass Mid
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	194	194	0	0.1%	0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	41	37	-4	-9.5%	0.6	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	184	185	1	0.7%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	1809	1802	-7	-0.4%	0.2	Pass Mid
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	95	96	1	0.6%	0.1	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	93	89	-4	-4.7%	0.5	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	12269	12272	3	0.0%	0.4



Vehicle Flow Information
Calibration Statistics
Car Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	24	23	-1	-2.7%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	332	330	-2	-0.5%	0.1	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	1	0	-1	-100.0%	1.4	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	328	322	-6	-1.8%	0.3	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	1	0	-1	-100.0%	1.4	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	192	192	0	0.0%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	50	51	1	1.6%	0.1	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	184	183	-1	-0.6%	0.1	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	9	9	0	-1.1%	0.0	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	121	120	-1	-1.2%	0.1	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	70	70	0	-0.2%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	502	504	2	0.3%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	225	223	-2	-0.8%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	48	47	-1	-2.1%	0.1	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	70	68	-3	-3.6%	0.3	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	418	417	-1	-0.2%	0.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	1	0	-1	-100.0%	1.4	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	130	127	-3	-2.0%	0.2	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	530	508	-22	-4.1%	1.0	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	410	419	9	2.3%	0.5	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	381	388	7	1.8%	0.3	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	1325	1303	-22	-1.7%	0.6	Pass Mid
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	1669	1690	21	1.2%	0.5	Pass Mid
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	5	5	0	2.0%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	1293	1303	10	0.7%	0.3	Pass Mid
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	76	62	-14	-19.0%	1.7	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	65	64	-1	-1.6%	0.1	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	39	39	0	-0.9%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	1390	1389	-1	-0.1%	0.0	Pass Mid
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	125	126	1	0.4%	0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	80	81	1	0.7%	0.1	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	10094	10060	-34	-0.3%	0.3



Vehicle Flow Information
Calibration Statistics
LGV Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	3	3	0	10.0%	0.2	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	63	64	1	2.1%	0.2	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	86	93	7	8.1%	0.7	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	34	34	0	0.6%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	10	10	0	4.5%	0.1	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	19	20	1	3.7%	0.2	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	2	2	0	17.5%	0.2	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	14	15	1	4.3%	0.2	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	8	8	0	0.0%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	84	85	1	1.7%	0.2	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	51	51	0	-0.1%	0.0	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	6	7	1	9.2%	0.2	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	11	10	-1	-6.8%	0.2	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	116	117	1	0.6%	0.1	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	0	0	0		0.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	6	6	0	5.0%	0.1	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	66	66	0	-0.4%	0.0	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	41	74	33	81.0%	4.4	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	34	60	26	75.3%	3.7	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	240	228	-12	-5.0%	0.8	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	305	292	-13	-4.3%	0.8	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	146	201	55	37.9%	4.2	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	2	2	0	0.0%	0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	6	4	-2	-30.8%	0.8	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	8	9	1	6.9%	0.2	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	298	306	8	2.7%	0.5	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	8	8	0	-3.8%	0.1	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	4	0	-4	-100.0%	2.8	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	1671	1775	104	6.2%	0.6



Vehicle Flow Information
Calibration Statistics
OGV1 Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	1	1	0	0.0%	0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	8	8	0	-1.9%	0.1	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	6	7	1	20.8%	0.5	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	0	0	0		0.3	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	0	0	0		0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	0	0	0		0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	0	0	0		0.0	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	0	0	0		0.0	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	0	0	0		0.3	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	4	4	0	5.0%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	0	0	0		0.4	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	0	0	0		0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	1	1	0	20.0%	0.2	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	3	3	0	0.0%	0.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	0	0	0		0.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	0	0	0		0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	0	0	0		0.9	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	7	9	2	28.6%	0.7	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	6	9	3	50.8%	1.1	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	18	18	0	-1.4%	0.1	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	23	22	-1	-3.3%	0.2	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	11	14	3	30.0%	0.9	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	0	0	0		0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	1	1	0	0.0%	0.0	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	1	1	0	0.0%	0.0	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	13	13	0	2.3%	0.1	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	0	0	0		0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	2	3	1	52.5%	0.7	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	105	115	11	10.3%	0.2



Vehicle Flow Information
Calibration Statistics
OGV2 Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	0	0	0		0.0	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	8	8	0	3.7%	0.1	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	0	0	0		0.0	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	6	7	1	17.5%	0.4	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	0	0	0		0.0	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	1	1	0	0.0%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	1	1	0	0.0%	0.0	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	0	0	0		0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	0	0	0		0.0	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	0	0	0		0.0	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	2	2	0	0.0%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	0	0	0		0.0	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	5	4	-1	-14.0%	0.3	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	0	0	0		0.0	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	2	2	0	12.5%	0.2	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	12	12	0	-0.4%	0.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	0	0	0		0.0	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	0	0	0		0.0	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	0	0	0		0.0	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	8	10	2	28.8%	0.8	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	13	14	1	7.7%	0.3	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	32	31	-1	-3.8%	0.2	Pass Low
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	41	39	-2	-4.0%	0.3	Pass Low
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	0	0	0		0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	18	23	5	28.6%	1.1	Pass Low
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	0	0	0		0.0	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	0	0	0		0.0	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	3	3	0	-3.3%	0.1	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	16	16	0	0.0%	0.0	Pass Low
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	0	0	0		0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	1	1	0	-15.0%	0.2	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	169	175	6	3.7%	0.1




Vehicle Flow Information
Calibration Statistics
All Vehicles
PM Peak

Index	Junction	Name	Origin	Destination	Reference	Observed Flow	Modelled Flow	Difference	% Difference	G.E.H. Value (using hourly flows)	Flow Test (using hourly flows)
1	1	M4 east to B4005	M4 east	B4005	8:34:58	28	28	0	-1.2%	0.1	Pass Low
2	1	M4 east to A3102 west	M4 east	A3102 west	8:34:56	411	411	0	0.0%	0.0	Pass Low
3	1	M4 east to M4 west	M4 east	M4 west	8:34:44	1	0	-1	-100.0%	1.4	Pass Low
4	1	M4 east to A3102 east	M4 east	A3102 east	8:34:17	426	430	4	0.8%	0.2	Pass Low
5	1	M4 east to M4 east	M4 east	M4 east	8:34:31	1	0	-1	-100.0%	1.4	Pass Low
6	1	B4005 to B4005	B4005	B4005	8:42:58	0	0	0		0.0	Pass Low
7	1	B4005 to A3102 west	B4005	A3102 west	8:42:56	227	227	0	0.1%	0.0	Pass Low
8	1	B4005 to M4 west	B4005	M4 west	8:42:44	61	62	1	2.0%	0.2	Pass Low
9	1	B4005 to A3102 east	B4005	A3102 east	8:42:17	203	203	0	-0.2%	0.0	Pass Low
10	1	B4005 to M4 east	B4005	M4 east	8:42:31	11	11	0	2.3%	0.1	Pass Low
11	1	A3102 west to B4005	A3102 west	B4005	8:39:58	135	134	-1	-0.6%	0.1	Pass Low
12	1	A3102 west to A3102 west	A3102 west	A3102 west	8:39:56	0	0	0		0.0	Pass Low
13	1	A3102 west to M4 west	A3102 west	M4 west	8:39:44	80	80	0	-0.1%	0.0	Pass Low
14	1	A3102 west to A3102 east	A3102 west	A3102 east	8:39:17	590	593	3	0.5%	0.1	Pass Low
15	1	A3102 west to M4 east	A3102 west	M4 east	8:39:31	281	279	-2	-0.9%	0.1	Pass Low
16	1	M4 west to B4005	M4 west	B4005	8:16:58	54	54	0	-0.8%	0.1	Pass Low
17	1	M4 west to A3102 west	M4 west	A3102 west	8:16:56	84	81	-3	-3.3%	0.3	Pass Low
18	1	M4 west to M4 west	M4 west	M4 west	8:16:44	0	0	0		0.0	Pass Low
19	1	M4 west to A3102 east	M4 west	A3102 east	8:16:17	549	549	0	-0.1%	0.0	Pass Low
20	1	M4 west to M4 east	M4 west	M4 east	8:16:31	1	0	-1	-100.0%	1.4	Pass Low
21	1	A3102 east to B4005	A3102 east	B4005	8:27:58	136	134	-2	-1.7%	0.2	Pass Low
22	1	A3102 east to A3102 west	A3102 east	A3102 west	8:27:56	596	574	-22	-3.6%	0.9	Pass Low
23	1	A3102 east to M4 west	A3102 east	M4 west	8:27:44	466	513	47	10.0%	2.1	Pass Low
24	1	A3102 east to A3102 east	A3102 east	A3102 east	8:27:17	0	0	0		0.0	Pass Low
25	1	A3102 east to M4 east	A3102 east	M4 east	8:27:31	434	471	36	8.4%	1.7	Pass Low
26	1	M4 mainline eastbound	M4 west	M4 east	8:4:4	1615	1579	-35	-2.2%	0.9	Pass Mid
27	1	M4 mainline westbound	M4 east	M4 west	8:11:11	2038	2043	5	0.3%	0.1	Pass Mid
28	2	A3102 east to Frankland Road	A3102 east	Frankland Road	9:25:29	5	5	0	2.0%	0.0	Pass Low
29	2	A3102 east to A3102 west	A3102 east	A3102 west	9:25:27	1468	1541	73	5.0%	1.9	Pass Mid
30	2	A3102 east to Lydiard Fields	A3102 east	Lydiard Fields	9:25:24	78	64	-14	-18.5%	1.7	Pass Low
31	2	Frankland Road to A3102 west	Frankland Road	A3102 west	9:28:27	72	69	-3	-4.0%	0.3	Pass Low
32	2	A3102 west to Lydiard Fields	A3102 west	Lydiard Fields	9:18:24	51	51	0	0.2%	0.0	Pass Low
33	2	A3102 west to A3102 east	A3102 west	A3102 east	9:18:21	1717	1724	7	0.4%	0.2	Pass Mid
34	2	Lydiard Fields to A3102 east	Lydiard Fields	A3102 east	9:23:21	133	133	0	0.2%	0.0	Pass Low
35	2	Lydiard Fields to A3102 west	Lydiard Fields	A3102 west	9:23:27	87	84	-3	-2.9%	0.3	Pass Low

	Sum Obs.	Sum Mod.	Diff	% Diff	Ave. GEH
Overall Stats	12039	12126	88	0.7%	0.5

Appendix C

JOURNEY TIME VALIDATION




Appendix C.1






**JOURNEY TIME VALIDATION,
OBSERVED PEAK HOURS (07:30-
08:30 AND 16:30-17:30)**



AM Peak 07:30-08:30


Route	Observed AM	Modelled AM	Diff AM	Diff% AM
1 - JT1 - EB1	65	61	-4	-6.1%
2 - JT1 - EB2	21	15	-6	-28.4%
3 - JT1 - EB3	25	25	1	2.5%
4 - JT1 - EB4	16	18	2	15.8%
5 - JT1 - WB1	17	19	2	12.3%
6 - JT1 - WB2	8	8	0	-0.6%
7 - JT1 - WB3	9	9	0	3.7%
8 - JT1 - WB4	28	26	-3	-9.0%
9 - JT1 - WB5	22	21	-1	-6.5%
10 - JT1 - WB6	46	50	4	8.8%
11 - JT2 - EB1	5	5	1	14.2%
12 - JT2 - EB2	41	34	-7	-17.8%
13 - JT2 - EB3	30	37	7	21.6%
14 - JT2 - EB4	28	26	-2	-7.9%
15 - JT2 - EB5	16	13	-2	-15.7%
16 - JT2 - WB1	54	53	-1	-2.0%
17 - JT2 - WB2	15	12	-4	-23.3%
18 - JT2 - WB3	35	33	-2	-5.2%
19 - JT3 - EB1	14	9	-5	-37.1%
20 - JT3 - EB2	75	73	-2	-2.4%
21 - JT3 - EB3	9	6	-2	-26.4%
22 - JT3 - EB4	30	27	-3	-9.8%
23 - JT3 - WB1	3	4	0	10.8%
24 - JT3 - WB2	10	10	0	-4.2%
25 - JT3 - WB3	11	8	-3	-25.5%
26 - JT3 - WB4	30	25	-5	-15.9%
27 - JT3 - WB5	10	11	1	14.7%
28 - JT3 - WB6	21	21	0	-1.0%
29 - JT3 - WB7	17	17	0	-2.2%
31 - JT3 - WB8	12	10	-1	-9.7%





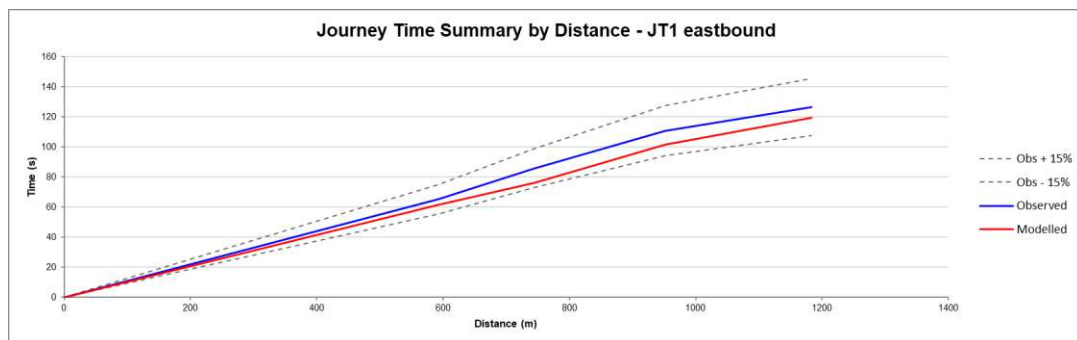


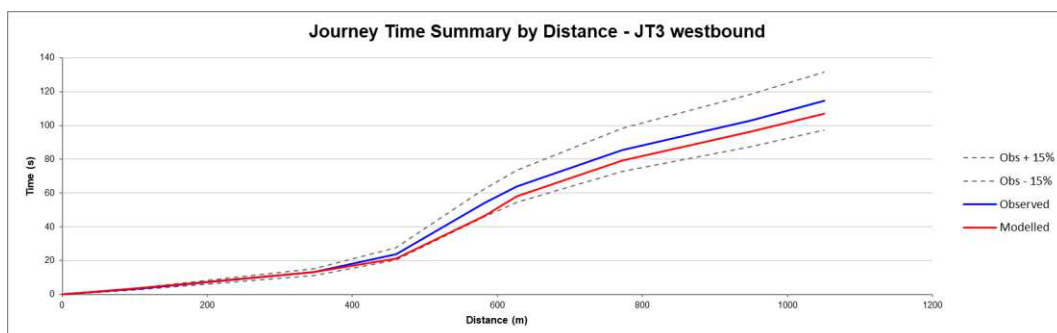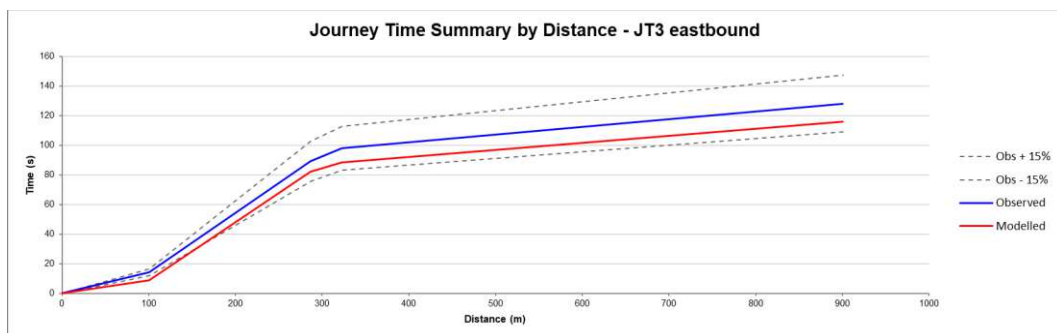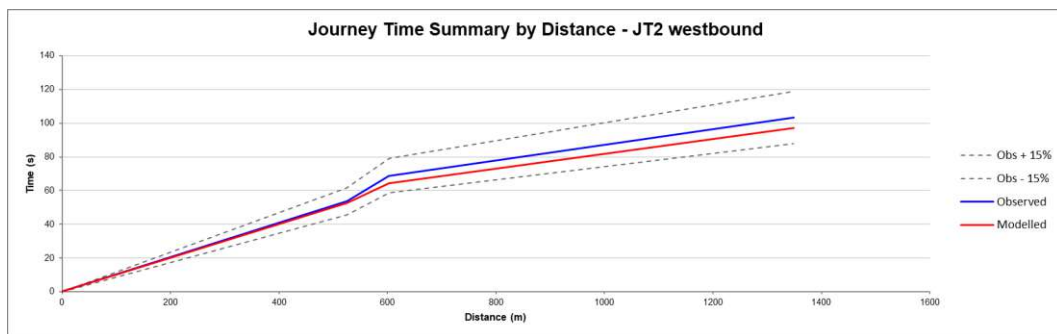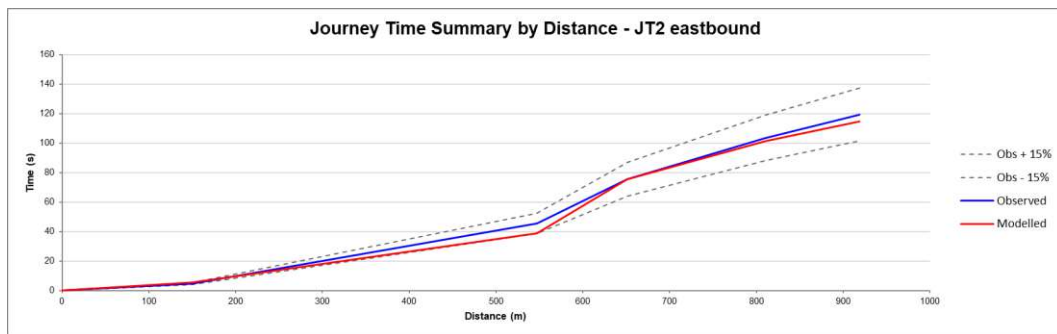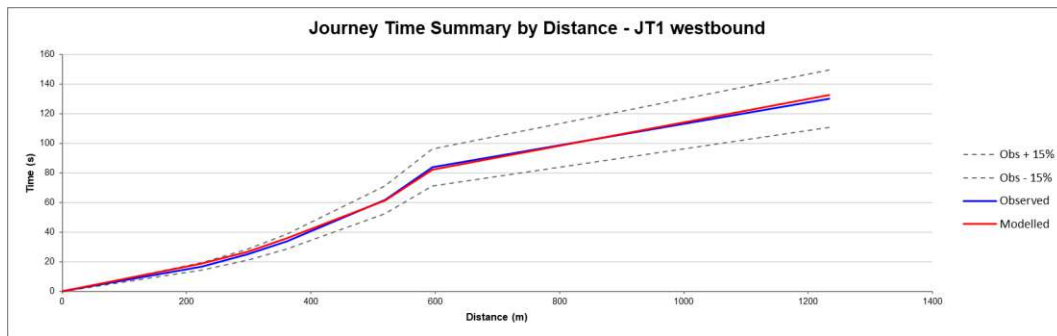

PM Peak 16:30-17:30

Route	Observed PM	Modelled PM	Diff PM	Diff% PM
1 - JT1 - EB1	60	60	0	-0.8%
2 - JT1 - EB2	20	14	-6	-29.6%
3 - JT1 - EB3	23	24	0	1.1%
4 - JT1 - EB4	16	18	2	14.2%
5 - JT1 - WB1	25	21	-5	-17.9%
6 - JT1 - WB2	13	9	-4	-33.3%
7 - JT1 - WB3	14	10	-4	-27.1%
8 - JT1 - WB4	45	37	-8	-17.7%
9 - JT1 - WB5	24	25	0	1.8%
10 - JT1 - WB6	61	54	-7	-11.6%
11 - JT2 - EB1	5	5	0	9.2%
12 - JT2 - EB2	40	33	-7	-18.3%
13 - JT2 - EB3	36	41	5	13.9%
14 - JT2 - EB4	45	41	-4	-9.4%
15 - JT2 - EB5	15	14	-1	-5.8%
16 - JT2 - WB1	58	54	-4	-7.0%
17 - JT2 - WB2	15	12	-3	-22.0%
18 - JT2 - WB3	35	33	-2	-6.6%
19 - JT3 - EB1	12	9	-3	-23.8%
20 - JT3 - EB2	75	73	-2	-2.5%
21 - JT3 - EB3	14	7	-7	-51.7%
22 - JT3 - EB4	32	27	-5	-16.5%
23 - JT3 - WB1	4	4	0	6.8%
24 - JT3 - WB2	11	10	-1	-11.2%
25 - JT3 - WB3	15	8	-7	-45.5%
26 - JT3 - WB4	32	26	-6	-18.2%
27 - JT3 - WB5	10	10	1	6.9%
28 - JT3 - WB6	21	20	-1	-3.4%
29 - JT3 - WB7	17	17	0	-2.8%
31 - JT3 - WB8	14	10	-4	-27.0%

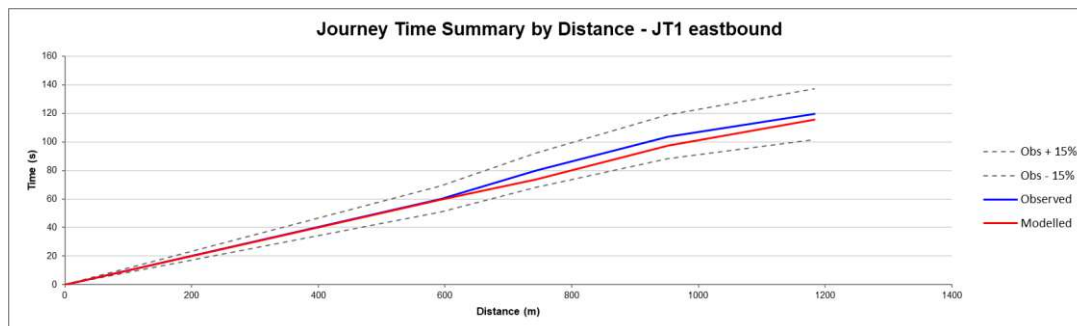

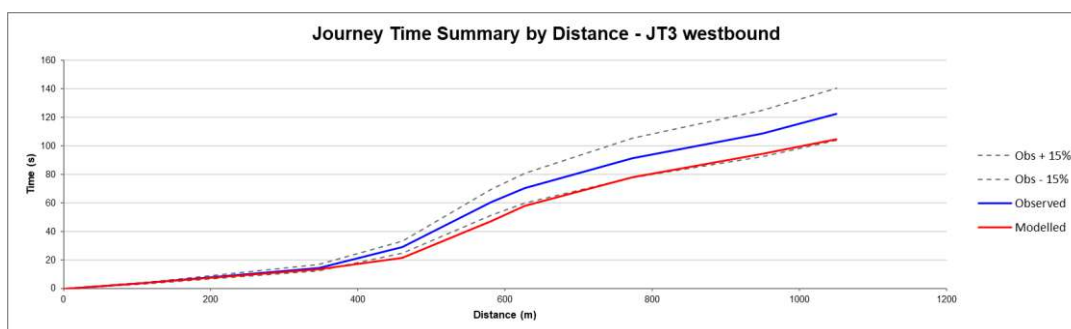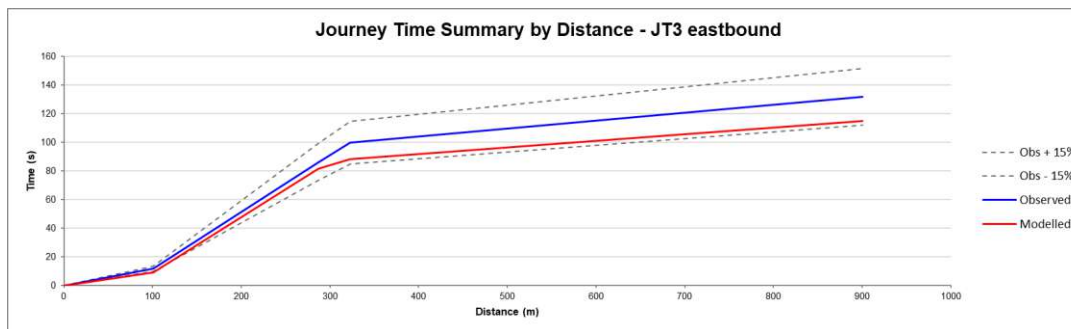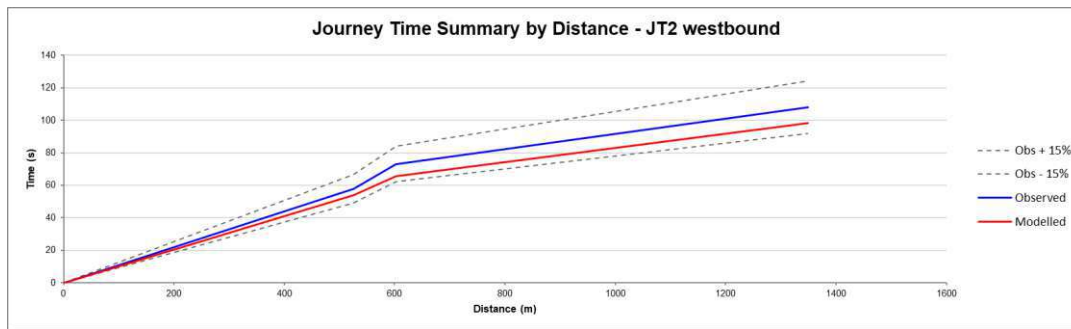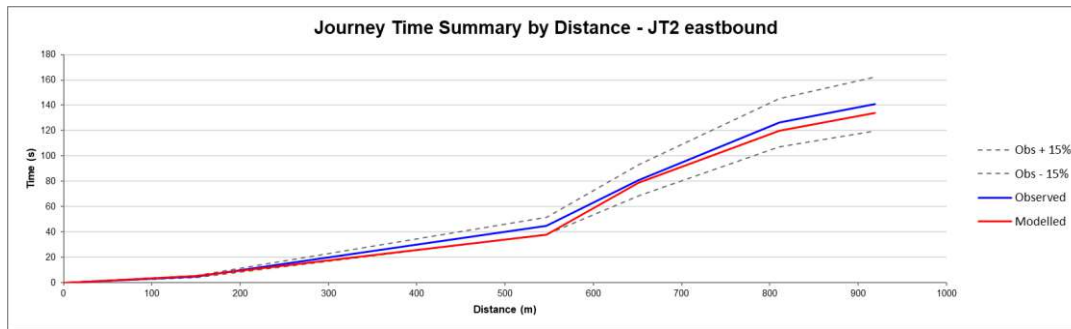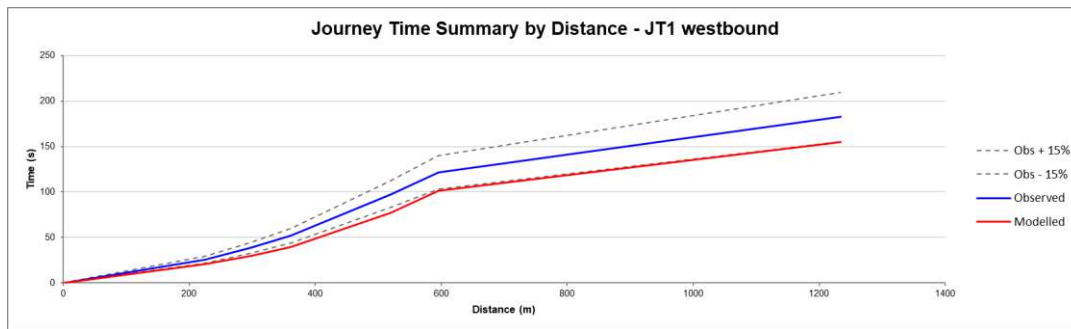


Appendix C.2






**JOURNEY TIME VALIDATION,
TRADITIONAL PEAK HOURS (08:00-
09:00 AND 17:00-18:00)**



AM Peak 08:00-09:00

Route	Observed AM	Modelled AM	Diff AM	Diff% AM
1 - JT1 - EB1	68	62	-6	-8.9%
2 - JT1 - EB2	22	15	-7	-33.3%
3 - JT1 - EB3	25	26	0	1.1%
4 - JT1 - EB4	16	18	2	14.6%
5 - JT1 - WB1	17	19	2	12.3%
6 - JT1 - WB2	8	8	0	1.4%
7 - JT1 - WB3	8	9	0	2.3%
8 - JT1 - WB4	28	26	-2	-6.4%
9 - JT1 - WB5	22	21	-2	-7.0%
10 - JT1 - WB6	47	51	4	8.4%
11 - JT2 - EB1	5	5	1	14.2%
12 - JT2 - EB2	42	34	-8	-18.9%
13 - JT2 - EB3	30	38	8	27.4%
14 - JT2 - EB4	28	26	-2	-6.3%
15 - JT2 - EB5	15	14	-2	-10.7%
16 - JT2 - WB1	56	53	-4	-6.3%
17 - JT2 - WB2	15	12	-3	-21.8%
18 - JT2 - WB3	34	33	-2	-5.1%
19 - JT3 - EB1	14	9	-5	-36.8%
20 - JT3 - EB2	72	75	3	4.1%
21 - JT3 - EB3	8	6	-2	-28.4%
22 - JT3 - EB4	30	27	-3	-9.9%
23 - JT3 - WB1	3	4	0	11.6%
24 - JT3 - WB2	10	10	0	-3.7%
25 - JT3 - WB3	11	8	-3	-26.8%
26 - JT3 - WB4	29	25	-4	-14.7%
27 - JT3 - WB5	10	12	2	20.9%
28 - JT3 - WB6	23	21	-1	-6.4%
29 - JT3 - WB7	18	17	-1	-3.4%
31 - JT3 - WB8	12	11	-2	-12.8%





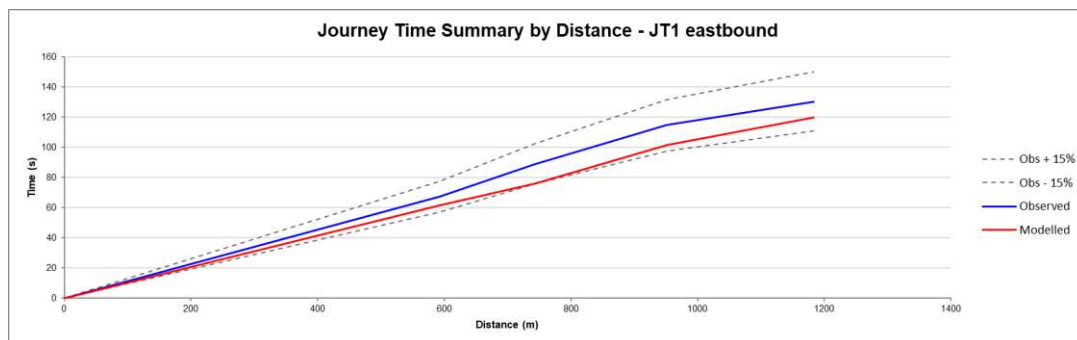


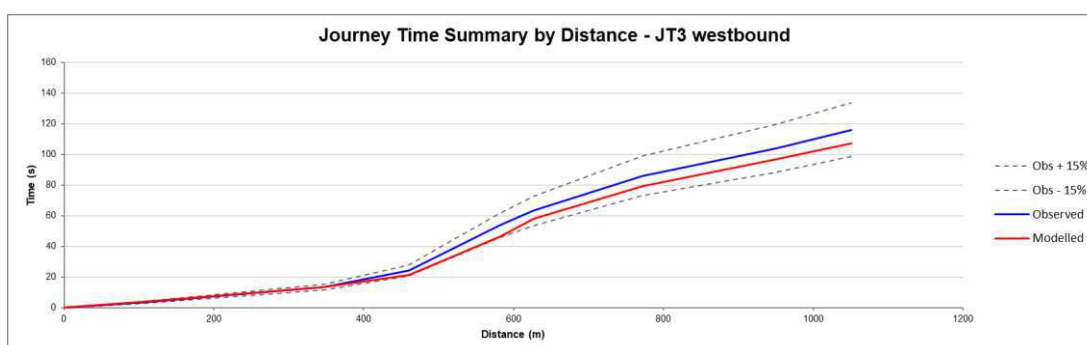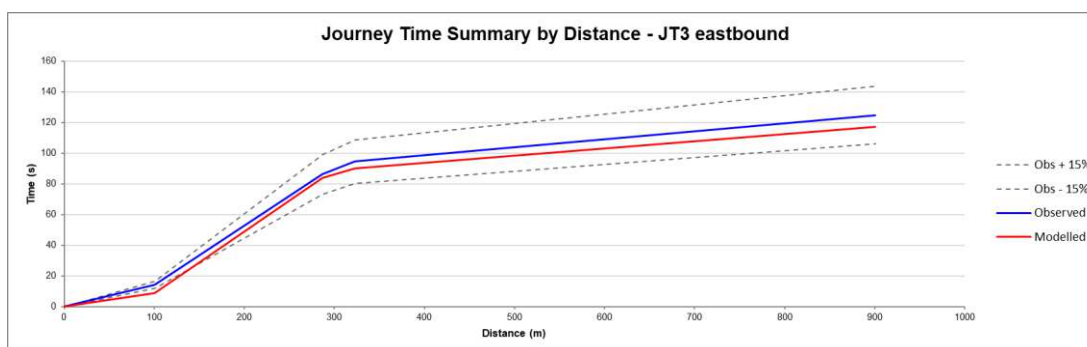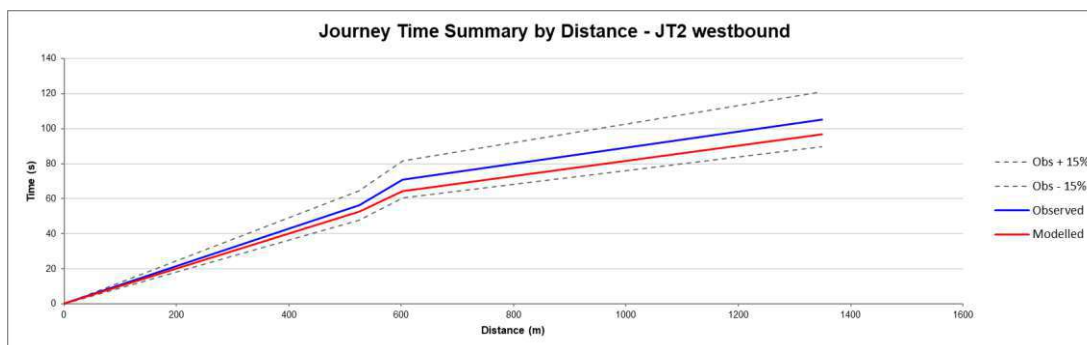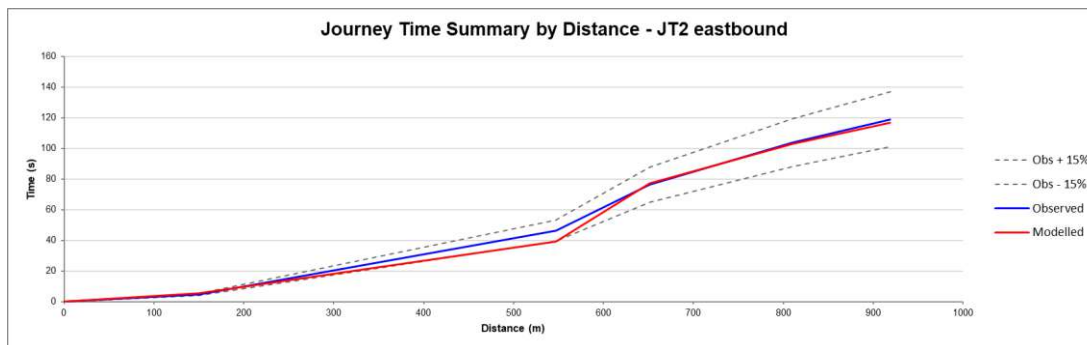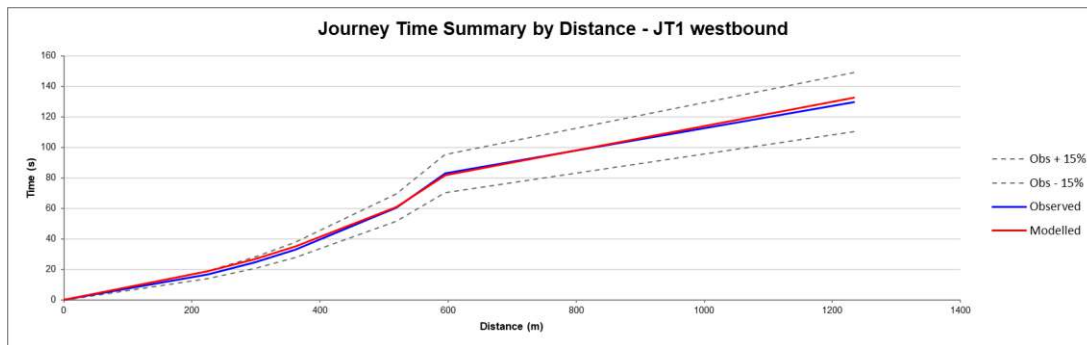

PM Peak 17:00-18:00

Route	Observed PM	Modelled PM	Diff PM	Diff% PM
1 - JT1 - EB1	60	59	-1	-1.5%
2 - JT1 - EB2	19	14	-5	-27.0%
3 - JT1 - EB3	24	23	0	-1.3%
4 - JT1 - EB4	16	18	2	14.1%
5 - JT1 - WB1	25	21	-3	-13.5%
6 - JT1 - WB2	12	10	-3	-22.8%
7 - JT1 - WB3	12	10	-2	-18.8%
8 - JT1 - WB4	41	37	-4	-8.6%
9 - JT1 - WB5	23	23	1	2.6%
10 - JT1 - WB6	61	53	-7	-12.0%
11 - JT2 - EB1	5	5	0	8.7%
12 - JT2 - EB2	39	32	-7	-19.0%
13 - JT2 - EB3	35	41	5	14.2%
14 - JT2 - EB4	41	42	1	2.0%
15 - JT2 - EB5	15	14	-1	-9.2%
16 - JT2 - WB1	57	53	-3	-5.5%
17 - JT2 - WB2	14	12	-3	-18.0%
18 - JT2 - WB3	35	33	-2	-6.7%
19 - JT3 - EB1	13	9	-4	-29.6%
20 - JT3 - EB2	72	72	0	0.0%
21 - JT3 - EB3	12	7	-6	-47.1%
22 - JT3 - EB4	32	27	-5	-16.0%
23 - JT3 - WB1	4	4	0	6.8%
24 - JT3 - WB2	11	10	-1	-11.5%
25 - JT3 - WB3	14	8	-6	-42.8%
26 - JT3 - WB4	30	26	-5	-15.1%
27 - JT3 - WB5	9	10	1	11.5%
28 - JT3 - WB6	20	20	0	1.3%
29 - JT3 - WB7	17	16	-1	-4.5%
31 - JT3 - WB8	13	10	-3	-21.2%



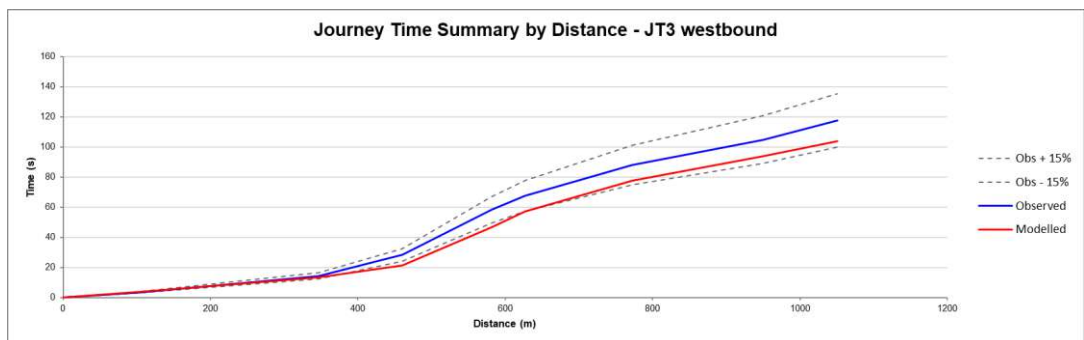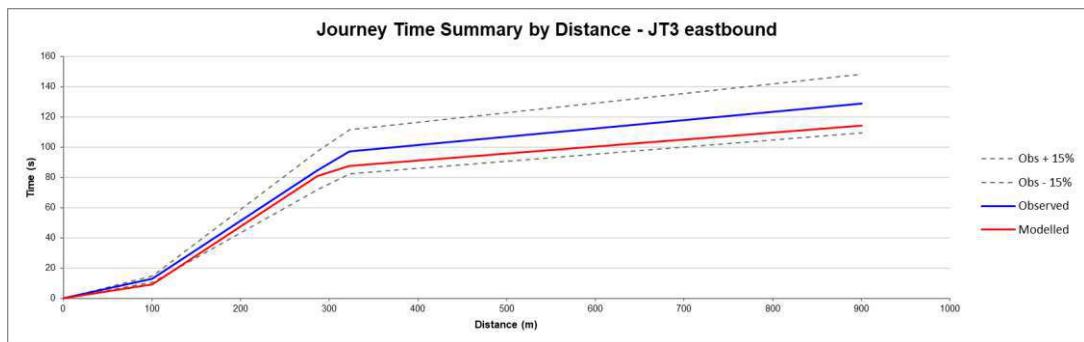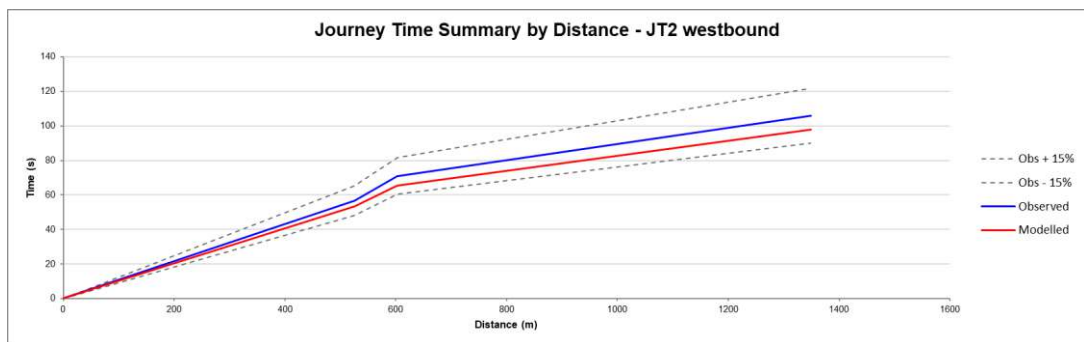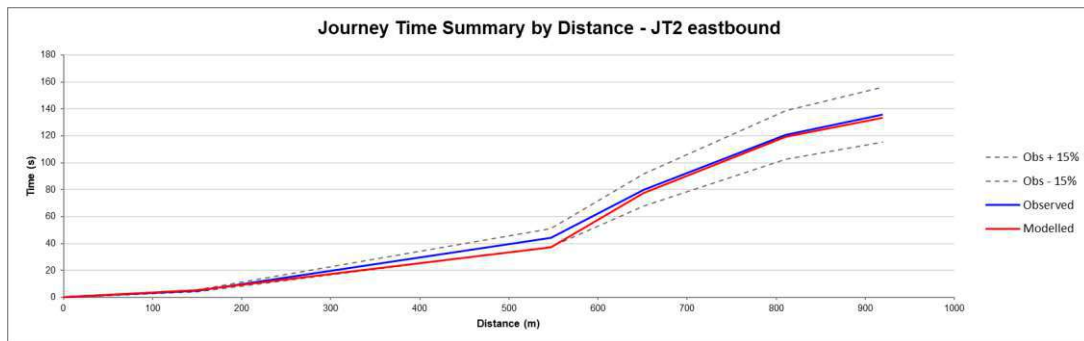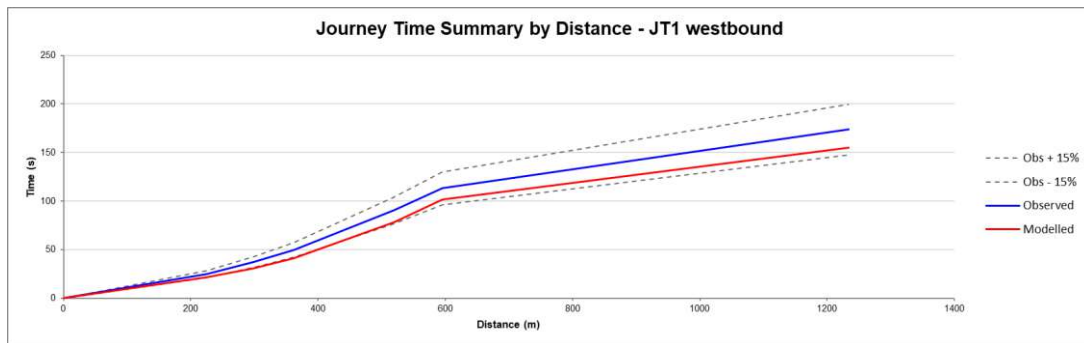



2 London Square
Cross Lanes
Guildford, Surrey
GU1 1UN

wsp.com

M4 junction 16
Project No.: 70090207 | Our Ref No.:
National Highways

WSP
April 2023

APPENDIX 6

Automatic Traffic Count Data

SURVEY CONTROL

Client: Eddisons

Client Contact: Phil Wooliscroft

Survey Location: Swindon

Date(s) of Survey: Friday 18th November 2022 - Thursday 1st December 2022

Notes:

On Site Supervisor(s): Neil Harley

Data Checking: David Cheng

Survey Reference: 22.125 ATC

Status: Final

Date of Issue: 5th December 2022



DRAWING TITLE		MAP REFERENCE		signal surveys Traffic Counts and Car Park Surveys Parkway House, Palatine Road, Northenden, Manchester, M22 4DB Tel 0161 998 4226
JOB TITLE		22.125 SWINDON ATC		
DRAWN BY	DATE	SCALE	REF	
DC	NOV 2022	NTS	FIGURE 1	

Default

Globals

Report Id	CustomList-303
Descriptor	Default
Created by	MetroCount Traffic Executive
Creation Time (UTC)	2022-12-05T14:27:30
Legal	Copyright (c)1997 - 2019 MetroCount
Graphic	
Language	English
Country	United Kingdom
Time	UTC + 0 min
Create Version	5.0.8.0
Metric	Part metric
Speed Unit	mph
Length Unit	metre
Mass Unit	tonne

Dataset

Site Name	Swindon
Site Attribute	[51.541619, -1.848721]
File Name	D:\TDS\2022 - 2023\22.125 Swindon ATC\Swindon 0 2022-12-05 1242.EC0
File Type	Plus
Algorithm	Factory default axle
Description	B4005 [40mph]
Lane	0
Direction	6
Direction Text	6 - West bound A B, East bound B A.
Layout Text	Axle sensors - Paired (Class/Speed/Count)
Setup Time	2022-11-17T13:48:55
Start Time	2022-11-17T13:48:55
Finish Time	2022-12-05T12:42:27
Operator	TDS
Configuration	80 00 14 6a 6a 00 00 00 00 00

Profile

Name	Default Profile
Title	MetroCount Traffic Executive
Graphic Logo	
Header	
Footer	
Percentile 1	85
Percentile 2	95
Pace	10
Filter Start	2022-11-18T00:00:00
Filter End	2022-12-02T00:00:00
Class Scheme	ARX
	F Cls(1-12) Dir(E) Sp(0,100) Headway(J) Span(0 - 100) Lane(0-16)
Low Speed	0
High Speed	100
Posted Limit	40
Speed Limits	40 40 40 40 40 40 40 40 40
Separation	0.000
Separation Type	Headway
Direction	East
Encoded Direction	2

Column

Time [--	24-hour time (0000 - 2359)
Total	Number in time step
Cls 1	Class totals
Cls 2	Class totals
Cls 3	Class totals
Cls 4	Class totals
Cls 5	Class totals
Cls 6	Class totals
Cls 7	Class totals
Cls 8	Class totals
Cls 9	Class totals
Cls 10	Class totals
Cls 11	Class totals
Cls 12	Class totals
Mean	Average speed
Vpp 85	Percentile speed

Friday, 18 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	16	0	16	0	0	0	0	0	0	0	0	0	0	52.2	70.2
0100	3	0	3	0	0	0	0	0	0	0	0	0	0	43	-
0200	3	0	3	0	0	0	0	0	0	0	0	0	0	51.3	-
0300	6	0	4	0	2	0	0	0	0	0	0	0	0	52.9	-
0400	16	0	11	0	5	0	0	0	0	0	0	0	0	50.5	57.9
0500	37	0	30	0	5	0	0	0	0	0	2	0	0	51.2	55.8
0600	160	1	136	1	18	1	1	1	1	0	0	0	0	50	57
0700	401	3	347	0	49	0	1	0	0	0	1	0	0	46.9	52.2
0800	477	2	390	0	79	0	2	1	1	2	0	0	0	46.4	51.9
0900	360	3	317	1	36	1	2	0	0	0	0	0	0	47.7	53.6
1000	402	1	360	2	32	2	2	0	2	1	0	0	0	45.5	51.3
1100	415	3	351	2	54	2	2	0	0	0	1	0	0	45	50.5
1200	402	1	347	3	44	2	2	0	1	1	1	0	0	46.1	52
1300	377	3	330	3	36	0	2	0	3	0	0	0	0	45.7	51.3
1400	389	0	346	3	37	0	1	0	0	2	0	0	0	44.5	50.6
1500	470	5	427	4	30	0	2	0	1	1	0	0	0	46.1	52.8
1600	482	5	440	3	32	1	0	0	1	0	0	0	0	45.7	51.4
1700	406	5	380	0	20	1	0	0	0	0	0	0	0	46.3	52.5
1800	226	1	220	0	5	0	0	0	0	0	0	0	0	48.5	54.7
1900	162	0	155	0	7	0	0	0	0	0	0	0	0	49.2	56.2
2000	92	0	85	0	7	0	0	0	0	0	0	0	0	50.4	56.2
2100	63	0	62	0	1	0	0	0	0	0	0	0	0	47.7	54.4
2200	49	0	45	0	4	0	0	0	0	0	0	0	0	50.7	59.2
2300	35	0	33	0	2	0	0	0	0	0	0	0	0	50.7	58.7
07-19	4807	32	4255	21	454	9	16	1	9	7	3	0	0	46.1	52
06-22	5284	33	4693	22	487	10	17	2	10	7	3	0	0	46.4	52.5
06-00	5368	33	4771	22	493	10	17	2	10	7	3	0	0	46.5	52.6
00-00	5449	33	4838	22	505	10	17	2	10	7	5	0	0	46.5	52.7

Saturday, 19 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	14	0	14	0	0	0	0	0	0	0	0	0	0	53.6	64.4
0100	11	0	11	0	0	0	0	0	0	0	0	0	0	47	62.6
0200	11	0	9	0	2	0	0	0	0	0	0	0	0	46.6	53.8
0300	4	0	4	0	0	0	0	0	0	0	0	0	0	45.2	-
0400	7	0	5	0	2	0	0	0	0	0	0	0	0	52.9	-
0500	17	1	11	1	4	0	0	0	0	0	0	0	0	54.4	63.1
0600	62	0	53	0	7	0	1	1	0	0	0	0	0	49.6	55.7
0700	135	0	121	0	14	0	0	0	0	0	0	0	0	48.9	55.6
0800	230	2	215	0	11	0	1	0	0	0	1	0	0	46.4	52.9
0900	339	2	311	0	23	0	2	0	1	0	0	0	0	46.9	52.8
1000	450	4	427	0	16	3	0	0	0	0	0	0	0	46.3	51.6
1100	508	8	474	3	18	3	0	0	1	1	0	0	0	45.8	51.6
1200	501	6	472	0	17	2	2	0	1	0	1	0	0	46.2	51.3
1300	489	7	463	3	15	0	0	0	0	0	1	0	0	47.1	52.3
1400	487	14	460	1	10	2	0	0	0	0	0	0	0	45.2	51.1
1500	399	6	377	0	14	2	0	0	0	0	0	0	0	46.8	52.5
1600	318	4	301	0	13	0	0	0	0	0	0	0	0	46.9	51.8
1700	266	0	252	1	13	0	0	0	0	0	0	0	0	47.9	53.6
1800	170	0	166	0	4	0	0	0	0	0	0	0	0	47.4	55.1
1900	164	1	157	0	4	1	0	0	0	0	1	0	0	47.4	54.1
2000	88	1	85	0	2	0	0	0	0	0	0	0	0	49.1	56.7
2100	84	3	78	0	3	0	0	0	0	0	0	0	0	48.8	56.4
2200	56	0	55	0	1	0	0	0	0	0	0	0	0	50.1	57.5
2300	48	0	48	0	0	0	0	0	0	0	0	0	0	48.7	58.5
07-19	4292	53	4039	8	168	12	5	0	3	1	3	0	0	46.6	52.3
06-22	4690	58	4412	8	184	13	6	1	3	1	4	0	0	46.7	52.7
06-00	4794	58	4515	8	185	13	6	1	3	1	4	0	0	46.8	52.8
00-00	4858	59	4569	9	193	13	6	1	3	1	4	0	0	46.8	52.9

Sunday, 20 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	18	0	16	0	2	0	0	0	0	0	0	0	0	52.5	64.7
0100	12	0	10	0	1	0	0	0	0	1	0	0	0	50.9	57.9
0200	6	0	6	0	0	0	0	0	0	0	0	0	0	45.5	-
0300	5	0	5	0	0	0	0	0	0	0	0	0	0	52.4	-
0400	7	0	7	0	0	0	0	0	0	0	0	0	0	46.8	-
0500	11	0	10	0	1	0	0	0	0	0	0	0	0	46.5	54.9
0600	24	0	22	0	2	0	0	0	0	0	0	0	0	53.4	60
0700	74	1	67	0	5	0	0	0	1	0	0	0	0	49.8	58
0800	118	0	106	0	11	0	0	0	0	0	1	0	0	49.3	54.7
0900	286	0	273	2	11	0	0	0	0	0	0	0	0	48.6	54.9
1000	380	3	357	0	18	0	0	0	1	0	0	0	1	46.6	51.4
1100	397	1	386	0	10	0	0	0	0	0	0	0	0	46.2	52.2
1200	492	1	477	1	12	0	0	0	0	1	0	0	0	45	51.2
1300	440	2	419	2	17	0	0	0	0	0	0	0	0	42.2	47.7
1400	370	1	355	0	13	1	0	0	0	0	0	0	0	46.4	51.6
1500	318	4	295	0	19	0	0	0	0	0	0	0	0	46	52
1600	245	0	230	1	14	0	0	0	0	0	0	0	0	47	53.3
1700	189	0	186	0	3	0	0	0	0	0	0	0	0	46.4	53.6
1800	115	0	108	0	7	0	0	0	0	0	0	0	0	48.7	56.6
1900	94	0	89	0	5	0	0	0	0	0	0	0	0	48.4	54.1
2000	58	0	53	0	5	0	0	0	0	0	0	0	0	51.4	61.3
2100	43	0	38	1	4	0	0	0	0	0	0	0	0	48.8	54.8
2200	23	0	22	0	1	0	0	0	0	0	0	0	0	45.1	54.8
2300	21	0	19	0	2	0	0	0	0	0	0	0	0	49	56.4
07-19	3424	13	3259	6	140	1	0	0	2	1	1	0	1	46.1	52.3
06-22	3643	13	3461	7	156	1	0	0	2	1	1	0	1	46.3	52.7
06-00	3687	13	3502	7	159	1	0	0	2	1	1	0	1	46.3	52.8
00-00	3746	13	3556	7	163	1	0	0	2	2	1	0	1	46.4	52.9

Monday, 21 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	10	0	10	0	0	0	0	0	0	0	0	0	0	44.3	-
0100	2	0	2	0	0	0	0	0	0	0	0	0	0	50.4	-
0200	1	0	1	0	0	0	0	0	0	0	0	0	0	47.8	-
0300	5	0	4	0	1	0	0	0	0	0	0	0	0	44.8	-
0400	9	0	6	0	3	0	0	0	0	0	0	0	0	48.2	-
0500	32	0	26	0	5	0	0	0	0	0	1	0	0	49.5	54.5
0600	144	3	123	0	17	0	1	0	0	0	0	0	0	48.7	54.7
0700	392	4	341	1	42	0	1	0	1	0	2	0	0	45.9	50.9
0800	439	1	380	0	49	5	1	0	0	2	0	0	1	44.9	50.2
0900	367	1	313	1	43	3	2	0	4	0	0	0	0	44.8	49.7
1000	308	4	260	0	40	1	0	0	2	1	0	0	0	43	49.4
1100	323	1	279	0	35	3	5	0	0	0	0	0	0	44.8	50.1
1200	301	2	263	0	33	2	0	0	0	1	0	0	0	46	51.3
1300	284	2	249	2	27	3	1	0	0	0	0	0	0	44.7	51.2
1400	310	3	267	0	36	1	1	0	1	0	1	0	0	46.1	52.6
1500	371	3	331	3	23	2	8	0	0	1	0	0	0	45.4	51.4
1600	374	3	333	1	33	2	1	0	1	0	0	0	0	45.5	51.7
1700	419	4	391	1	22	1	0	0	0	0	0	0	0	44.6	50.7
1800	222	1	211	3	7	0	0	0	0	0	0	0	0	46.4	52.2
1900	156	1	149	0	6	0	0	0	0	0	0	0	0	47.9	55.1
2000	82	0	76	0	5	0	0	0	0	1	0	0	0	48.9	55.7
2100	59	0	57	0	2	0	0	0	0	0	0	0	0	48.8	57.3
2200	28	0	26	0	1	0	0	0	0	1	0	0	0	47.8	53.7
2300	17	0	16	0	0	0	1	0	0	0	0	0	0	51.1	59.4
07-19	4110	29	3618	12	390	23	20	0	9	5	3	0	1	45.1	50.9
06-22	4551	33	4023	12	420	23	21	0	9	6	3	0	1	45.5	51.3
06-00	4596	33	4065	12	421	23	22	0	9	7	3	0	1	45.5	51.4
00-00	4655	33	4114	12	430	23	22	0	9	7	4	0	1	45.5	51.4

Tuesday, 22 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	9	0	7	0	2	0	0	0	0	0	0	0	0	52.4	-
0100	12	0	8	0	4	0	0	0	0	0	0	0	0	48.4	61.1
0200	3	0	2	0	1	0	0	0	0	0	0	0	0	52.5	-
0300	4	0	2	0	1	1	0	0	0	0	0	0	0	35.3	-
0400	8	0	7	0	1	0	0	0	0	0	0	0	0	52.6	-
0500	29	0	25	0	4	0	0	0	0	0	0	0	0	51.3	58.4
0600	146	2	128	0	15	0	0	0	1	0	0	0	0	49.4	54.9
0700	404	1	353	1	45	1	0	0	2	0	1	0	0	47.4	53.2
0800	502	2	449	3	41	1	3	0	2	0	0	0	1	47.3	53
0900	348	2	300	1	42	0	1	1	1	0	0	0	0	45.6	51.6
1000	354	1	311	1	35	4	0	0	1	0	1	0	0	45.3	50.8
1100	345	0	312	1	27	4	1	0	0	0	0	0	0	45.4	52.2
1200	368	1	325	1	24	8	3	0	3	2	1	0	0	45.1	51
1300	349	6	309	2	29	2	0	0	1	0	0	0	0	46.2	52.4
1400	331	4	282	1	35	3	4	0	0	2	0	0	0	46.4	52.9
1500	346	3	300	2	37	2	1	0	1	0	0	0	0	44.7	51.1
1600	447	4	405	2	35	1	0	0	0	0	0	0	0	45	51.3
1700	497	5	470	0	21	0	0	0	1	0	0	0	0	44.4	49.5
1800	318	2	304	0	11	0	0	0	1	0	0	0	0	45.7	52.6
1900	192	1	181	0	10	0	0	0	0	0	0	0	0	48.5	55.1
2000	105	0	103	0	2	0	0	0	0	0	0	0	0	48.9	56.8
2100	76	0	71	0	5	0	0	0	0	0	0	0	0	50.5	58.2
2200	39	0	37	0	2	0	0	0	0	0	0	0	0	50.1	55.4
2300	24	0	23	0	1	0	0	0	0	0	0	0	0	51.8	56.8
07-19	4609	31	4120	15	382	26	13	1	13	4	3	0	1	45.7	51.8
06-22	5128	34	4603	15	414	26	13	1	14	4	3	0	1	46.1	52.3
06-00	5191	34	4663	15	417	26	13	1	14	4	3	0	1	46.1	52.5
00-00	5256	34	4714	15	430	27	13	1	14	4	3	0	1	46.2	52.5

Wednesday, 23 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	7	0	6	0	1	0	0	0	0	0	0	0	0	46.2	-
0100	3	0	3	0	0	0	0	0	0	0	0	0	0	48.8	-
0200	4	0	4	0	0	0	0	0	0	0	0	0	0	47	-
0300	3	0	2	0	1	0	0	0	0	0	0	0	0	47.7	-
0400	12	0	8	0	4	0	0	0	0	0	0	0	0	52.2	58.9
0500	37	0	33	0	4	0	0	0	0	0	0	0	0	52.4	59.9
0600	146	0	130	0	11	0	1	0	2	1	1	0	0	45.7	52
0700	398	1	357	1	37	0	0	1	1	0	0	0	0	45.2	50.3
0800	558	2	498	2	47	8	0	0	0	1	0	0	0	46	51.3
0900	484	0	415	3	54	8	2	0	1	0	1	0	0	45.3	51
1000	337	3	288	1	31	5	4	0	3	1	1	0	0	44.8	50.4
1100	367	6	311	1	45	0	1	1	0	2	0	0	0	44.6	50.5
1200	381	7	324	1	41	2	4	0	1	0	0	1	0	45.7	51.1
1300	335	1	304	3	23	2	1	0	1	0	0	0	0	46.8	53.6
1400	390	1	341	0	39	3	4	0	2	0	0	0	0	44.5	50.5
1500	384	3	343	3	27	3	3	0	1	1	0	0	0	45.8	51.7
1600	476	2	426	1	44	0	0	0	1	1	1	0	0	45.5	51.3
1700	486	2	459	0	23	2	0	0	0	0	0	0	0	44.9	51.8
1800	261	3	250	0	7	1	0	0	0	0	0	0	0	47.5	54
1900	150	1	142	0	7	0	0	0	0	0	0	0	0	48.3	54.9
2000	119	0	111	1	7	0	0	0	0	0	0	0	0	48.6	55.8
2100	77	0	74	0	3	0	0	0	0	0	0	0	0	47.6	54.8
2200	35	0	34	0	1	0	0	0	0	0	0	0	0	48	54
2300	15	0	15	0	0	0	0	0	0	0	0	0	0	48.5	55.7
07-19	4857	31	4316	16	418	34	19	2	11	6	3	1	0	45.5	51.3
06-22	5349	32	4773	17	446	34	20	2	13	7	4	1	0	45.7	51.7
06-00	5399	32	4822	17	447	34	20	2	13	7	4	1	0	45.7	51.7
00-00	5465	32	4878	17	457	34	20	2	13	7	4	1	0	45.8	51.8

Thursday, 24 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	5	0	5	0	0	0	0	0	0	0	0	0	0	44.2	-
0100	6	0	5	0	1	0	0	0	0	0	0	0	0	43.6	-
0200	7	0	5	0	2	0	0	0	0	0	0	0	0	51.2	-
0300	4	0	3	0	1	0	0	0	0	0	0	0	0	46.9	-
0400	11	0	8	0	2	0	0	0	1	0	0	0	0	52.2	60.6
0500	39	1	34	0	3	0	0	0	1	0	0	0	0	49.1	54.6
0600	125	1	107	0	14	1	1	0	1	0	0	0	0	49.4	56.4
0700	422	1	372	0	41	2	3	0	2	1	0	0	0	46.3	51.9
0800	529	2	460	1	56	3	1	2	1	3	0	0	0	45.9	51.8
0900	411	0	345	1	48	4	4	0	7	2	0	0	0	45.8	52.3
1000	356	0	314	3	30	4	1	0	3	0	1	0	0	45.2	50.6
1100	332	2	294	2	29	2	1	0	0	0	2	0	0	45.5	51.8
1200	182	1	151	2	25	1	2	0	0	0	0	0	0	44	49.4
1300	349	0	313	1	27	2	1	1	2	0	2	0	0	46.2	51.7
1400	368	0	329	0	28	6	2	0	1	1	0	1	0	44.6	50.5
1500	323	1	291	0	25	2	2	0	1	1	0	0	0	45.8	51.8
1600	447	2	404	2	35	0	0	0	2	1	1	0	0	45.7	52.1
1700	483	3	454	1	25	0	0	0	0	0	0	0	0	45.7	51.9
1800	266	1	258	1	6	0	0	0	0	0	0	0	0	47.4	53.9
1900	157	0	150	0	7	0	0	0	0	0	0	0	0	47.8	55.4
2000	110	0	107	0	3	0	0	0	0	0	0	0	0	47.7	55.4
2100	82	0	79	0	3	0	0	0	0	0	0	0	0	51.5	60.3
2200	59	0	58	0	1	0	0	0	0	0	0	0	0	49.8	58.8
2300	25	0	24	0	1	0	0	0	0	0	0	0	0	52	60.5
07-19	4468	13	3985	14	375	26	17	3	19	9	6	1	0	45.7	51.8
06-22	4942	14	4428	14	402	27	18	3	20	9	6	1	0	46	52.1
06-00	5026	14	4510	14	404	27	18	3	20	9	6	1	0	46.1	52.2
00-00	5098	15	4570	14	413	27	18	3	22	9	6	1	0	46.1	52.2

Friday, 25 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	9	0	9	0	0	0	0	0	0	0	0	0	0	52.1	-
0100	3	0	2	0	1	0	0	0	0	0	0	0	0	56.5	-
0200	5	0	4	0	1	0	0	0	0	0	0	0	0	41.2	-
0300	7	0	6	0	1	0	0	0	0	0	0	0	0	40.5	-
0400	17	0	13	0	4	0	0	0	0	0	0	0	0	52.5	67.9
0500	33	0	29	0	4	0	0	0	0	0	0	0	0	49.3	55.4
0600	122	1	105	0	13	0	0	0	3	0	0	0	0	49.7	55.7
0700	397	2	347	0	41	5	1	0	0	0	1	0	0	47	53.5
0800	454	1	383	3	58	1	3	0	4	1	0	0	0	46.2	52.5
0900	369	2	320	2	40	0	2	0	2	1	0	0	0	46.8	52.2
1000	393	0	341	1	40	7	1	1	1	1	0	0	0	45.3	51
1100	385	5	343	1	29	4	3	0	0	0	0	0	0	44.5	51.4
1200	368	2	331	1	30	1	3	0	0	0	0	0	0	45.7	52.4
1300	389	2	348	2	30	1	3	0	3	0	0	0	0	45.5	51.7
1400	485	7	443	3	27	2	2	0	1	0	0	0	0	45.7	51.9
1500	447	4	403	2	28	4	1	0	2	2	1	0	0	46.3	51.7
1600	496	5	457	3	24	4	1	0	1	1	0	0	0	45.2	51.4
1700	452	3	421	0	24	3	0	0	1	0	0	0	0	45.1	51.6
1800	283	2	275	0	5	0	0	0	0	1	0	0	0	47	53.2
1900	150	0	140	0	9	0	0	0	0	1	0	0	0	47	54.3
2000	91	1	82	0	8	0	0	0	0	0	0	0	0	47.3	52.7
2100	67	0	63	0	4	0	0	0	0	0	0	0	0	47.9	54.8
2200	40	0	39	0	1	0	0	0	0	0	0	0	0	47.8	58.3
2300	34	0	33	0	0	0	0	0	0	1	0	0	0	48.2	55.3
07-19	4918	35	4412	18	376	32	20	1	15	7	2	0	0	45.8	52
06-22	5348	37	4802	18	410	32	20	1	18	8	2	0	0	46	52.2
06-00	5422	37	4874	18	411	32	20	1	18	9	2	0	0	46	52.3
00-00	5496	37	4937	18	422	32	20	1	18	9	2	0	0	46.1	52.3

Saturday, 26 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	13	0	13	0	0	0	0	0	0	0	0	0	0	53.8	69.8
0100	8	0	7	0	1	0	0	0	0	0	0	0	0	45.4	-
0200	5	0	5	0	0	0	0	0	0	0	0	0	0	49.2	-
0300	5	0	3	0	2	0	0	0	0	0	0	0	0	51.1	-
0400	12	0	11	0	1	0	0	0	0	0	0	0	0	52.8	65.2
0500	14	0	12	0	2	0	0	0	0	0	0	0	0	49.5	60
0600	49	0	45	0	4	0	0	0	0	0	0	0	0	50.6	56.9
0700	137	0	121	0	13	0	1	0	1	0	1	0	0	48.4	55.8
0800	215	2	193	2	16	0	1	0	1	0	0	0	0	47.2	54.5
0900	315	1	293	1	19	0	0	0	1	0	0	0	0	46.5	52.7
1000	439	0	417	1	19	2	0	0	0	0	0	0	0	45.2	51.2
1100	496	0	470	0	24	2	0	0	0	0	0	0	0	45.7	51.3
1200	507	7	477	2	16	4	0	0	0	0	1	0	0	45.2	51.1
1300	489	4	465	2	16	2	0	0	0	0	0	0	0	44.7	50.3
1400	429	1	414	3	10	0	0	0	1	0	0	0	0	45.4	51.2
1500	372	1	356	0	14	1	0	0	0	0	0	0	0	45	50.2
1600	315	1	306	0	7	0	0	0	1	0	0	0	0	46	51.5
1700	248	0	237	0	11	0	0	0	0	0	0	0	0	46.5	52.9
1800	191	0	180	0	10	1	0	0	0	0	0	0	0	47.5	54.8
1900	127	1	121	0	4	1	0	0	0	0	0	0	0	47.6	56.1
2000	102	1	97	0	4	0	0	0	0	0	0	0	0	48.2	54.1
2100	76	0	76	0	0	0	0	0	0	0	0	0	0	47.4	55.7
2200	47	0	44	0	3	0	0	0	0	0	0	0	0	47	54.3
2300	44	0	44	0	0	0	0	0	0	0	0	0	0	47.3	53.2
07-19	4153	17	3929	11	175	12	2	0	5	0	2	0	0	45.8	51.9
06-22	4507	19	4268	11	187	13	2	0	5	0	2	0	0	45.9	52.2
06-00	4598	19	4356	11	190	13	2	0	5	0	2	0	0	46	52.2
00-00	4655	19	4407	11	196	13	2	0	5	0	2	0	0	46	52.3

Sunday, 27 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	24	0	24	0	0	0	0	0	0	0	0	0	0	50.1	55
0100	11	0	9	0	2	0	0	0	0	0	0	0	0	44	50.5
0200	5	0	5	0	0	0	0	0	0	0	0	0	0	45.7	-
0300	2	0	2	0	0	0	0	0	0	0	0	0	0	47.6	-
0400	5	0	5	0	0	0	0	0	0	0	0	0	0	48.9	-
0500	12	0	10	0	1	0	0	0	1	0	0	0	0	47.5	50.7
0600	26	0	24	0	2	0	0	0	0	0	0	0	0	52.8	60.9
0700	75	0	72	0	3	0	0	0	0	0	0	0	0	49.8	59.4
0800	129	2	118	1	8	0	0	0	0	0	0	0	0	48	55.4
0900	231	3	223	0	5	0	0	0	0	0	0	0	0	46.2	52.6
1000	396	4	377	1	12	0	1	0	0	1	0	0	0	46.1	51.3
1100	464	3	447	2	12	0	0	0	0	0	0	0	0	44.9	50.1
1200	533	1	512	2	13	5	0	0	0	0	0	0	0	44	49.6
1300	459	10	439	0	9	1	0	0	0	0	0	0	0	46.5	52.2
1400	403	1	379	1	19	1	1	0	1	0	0	0	0	46.9	52.3
1500	327	2	316	0	8	1	0	0	0	0	0	0	0	46.7	52.7
1600	291	2	282	1	5	0	0	0	0	0	1	0	0	47.2	53.3
1700	192	0	187	0	5	0	0	0	0	0	0	0	0	48.3	54.8
1800	135	0	132	0	3	0	0	0	0	0	0	0	0	49.9	57.1
1900	99	0	93	0	6	0	0	0	0	0	0	0	0	49.7	56.3
2000	57	0	54	0	3	0	0	0	0	0	0	0	0	48.3	56.2
2100	55	0	53	0	1	1	0	0	0	0	0	0	0	50.6	58.4
2200	33	0	31	0	2	0	0	0	0	0	0	0	0	52.5	60.4
2300	9	0	7	0	2	0	0	0	0	0	0	0	0	47.6	-
07-19	3635	28	3484	8	102	8	2	0	1	1	1	0	0	46.3	52.2
06-22	3872	28	3708	8	114	9	2	0	1	1	1	0	0	46.6	52.6
06-00	3914	28	3746	8	118	9	2	0	1	1	1	0	0	46.6	52.7
00-00	3973	28	3801	8	121	9	2	0	2	1	1	0	0	46.6	52.7

Monday, 28 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	10	0	10	0	0	0	0	0	0	0	0	0	0	51.9	-
0100	4	0	4	0	0	0	0	0	0	0	0	0	0	48.2	-
0200	6	0	6	0	0	0	0	0	0	0	0	0	0	52.8	-
0300	3	0	2	0	1	0	0	0	0	0	0	0	0	59.6	-
0400	13	0	9	0	4	0	0	0	0	0	0	0	0	49.7	55.1
0500	37	1	29	1	5	0	0	0	1	0	0	0	0	50.4	58.6
0600	135	2	121	0	12	0	0	0	0	0	0	0	0	49.1	54.2
0700	378	1	337	2	35	0	3	0	0	0	0	0	0	45.3	50.9
0800	448	0	394	3	42	2	4	0	2	1	0	0	0	45.4	50.4
0900	349	0	295	2	46	1	0	1	2	1	1	0	0	44.2	49.4
1000	345	2	299	2	40	0	1	0	1	0	0	0	0	44.9	51.2
1100	330	4	287	1	22	8	5	0	1	0	2	0	0	44.8	50.9
1200	312	0	277	1	31	3	0	0	0	0	0	0	0	45.9	51.3
1300	348	2	307	1	28	1	2	0	4	2	1	0	0	44.5	50.3
1400	346	2	315	0	23	4	1	1	0	0	0	0	0	45	51.1
1500	431	3	386	2	35	1	1	0	0	1	2	0	0	45	51.2
1600	501	3	469	1	22	4	1	0	1	0	0	0	0	45.2	51
1700	453	3	430	1	18	1	0	0	0	0	0	0	0	45.2	51.1
1800	275	2	261	0	12	0	0	0	0	0	0	0	0	47.6	54.9
1900	136	0	125	0	8	1	0	0	0	1	1	0	0	44.9	52.7
2000	103	2	95	0	6	0	0	0	0	0	0	0	0	45.7	52.1
2100	52	0	52	0	0	0	0	0	0	0	0	0	0	47.7	54
2200	35	0	33	0	2	0	0	0	0	0	0	0	0	47.5	57.3
2300	20	0	18	0	2	0	0	0	0	0	0	0	0	49.6	61.3
07-19	4516	22	4057	16	354	25	18	2	11	5	6	0	0	45.2	51.2
06-22	4942	26	4450	16	380	26	18	2	11	6	7	0	0	45.3	51.4
06-00	4997	26	4501	16	384	26	18	2	11	6	7	0	0	45.4	51.4
00-00	5070	27	4561	17	394	26	18	2	12	6	7	0	0	45.5	51.6

Tuesday, 29 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	11	0	10	0	0	1	0	0	0	0	0	0	0	45.4	50.8
0100	5	0	5	0	0	0	0	0	0	0	0	0	0	48.1	-
0200	10	0	9	0	1	0	0	0	0	0	0	0	0	44.6	-
0300	3	0	2	0	1	0	0	0	0	0	0	0	0	48.6	-
0400	8	0	4	0	4	0	0	0	0	0	0	0	0	43.8	-
0500	32	0	23	0	8	0	0	0	0	0	1	0	0	47.1	54.1
0600	123	1	107	1	13	0	0	0	1	0	0	0	0	48.2	54.5
0700	455	2	402	1	41	3	4	0	0	0	2	0	0	43.8	49
0800	475	1	430	2	39	0	1	0	0	0	2	0	0	44.9	49.9
0900	365	4	300	3	48	2	5	0	1	2	0	0	0	45.2	51.3
1000	387	0	338	0	38	9	0	0	1	1	0	0	0	44.6	51.1
1100	319	0	275	1	30	8	2	0	1	2	0	0	0	46.9	52.8
1200	412	1	373	1	26	9	0	0	2	0	0	0	0	45.3	51.6
1300	352	0	303	2	37	8	2	0	0	0	0	0	0	45.5	51.7
1400	353	2	304	1	35	5	2	0	1	0	2	0	1	45.2	52.4
1500	387	4	338	4	34	5	0	1	0	1	0	0	0	45.5	51.3
1600	440	2	398	1	32	5	0	0	1	1	0	0	0	46.2	52.1
1700	470	2	443	1	22	2	0	0	0	0	0	0	0	44.7	50.6
1800	296	4	276	0	16	0	0	0	0	0	0	0	0	46.8	54
1900	116	1	109	0	6	0	0	0	0	0	0	0	0	47.6	56.4
2000	82	1	76	0	5	0	0	0	0	0	0	0	0	49.2	56
2100	64	1	62	0	1	0	0	0	0	0	0	0	0	48.7	56.8
2200	31	0	29	0	2	0	0	0	0	0	0	0	0	49.5	59.8
2300	17	0	13	0	4	0	0	0	0	0	0	0	0	48.9	56.1
07-19	4711	22	4180	17	398	56	16	1	7	7	6	0	1	45.3	51.4
06-22	5096	26	4534	18	423	56	16	1	8	7	6	0	1	45.5	51.8
06-00	5144	26	4576	18	429	56	16	1	8	7	6	0	1	45.6	51.8
00-00	5213	26	4629	18	443	57	16	1	8	7	7	0	1	45.6	51.8

Wednesday, 30 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	10	0	7	0	2	1	0	0	0	0	0	0	0	47.3	-
0100	5	0	3	0	2	0	0	0	0	0	0	0	0	49.6	-
0200	5	0	4	0	1	0	0	0	0	0	0	0	0	50.9	-
0300	3	0	1	0	2	0	0	0	0	0	0	0	0	58.1	-
0400	11	0	10	0	1	0	0	0	0	0	0	0	0	49.8	56.5
0500	35	1	27	0	6	0	0	0	0	0	1	0	0	48.2	56.1
0600	145	0	129	0	15	0	1	0	0	0	0	0	0	47.5	54.1
0700	405	1	360	1	37	2	4	0	0	0	0	0	0	46.5	51.5
0800	482	0	428	5	41	1	1	0	2	0	3	0	1	46.1	52.1
0900	390	4	338	1	34	5	4	0	2	1	1	0	0	45.6	51.5
1000	340	2	292	3	32	6	2	0	0	3	0	0	0	44.9	49.7
1100	338	3	297	0	28	2	3	0	3	0	2	0	0	44.9	50.4
1200	415	2	375	2	26	6	2	0	0	1	0	1	0	44.5	50.6
1300	357	2	321	2	24	4	3	0	0	1	0	0	0	45.9	52.2
1400	415	0	368	1	38	5	0	0	1	1	1	0	0	45.9	51.8
1500	420	2	375	3	31	3	3	0	1	1	1	0	0	46.3	52.2
1600	504	3	454	1	38	4	1	0	1	1	1	0	0	45.4	51.7
1700	578	1	547	1	24	4	1	0	0	0	0	0	0	45.3	50.9
1800	288	2	278	0	8	0	0	0	0	0	0	0	0	46.3	53.3
1900	162	0	155	2	4	0	1	0	0	0	0	0	0	41.1	47.4
2000	103	0	96	0	6	0	0	0	1	0	0	0	0	40.9	46
2100	81	1	77	0	3	0	0	0	0	0	0	0	0	42.9	49.3
2200	43	0	41	0	2	0	0	0	0	0	0	0	0	44.5	55.1
2300	19	0	15	0	4	0	0	0	0	0	0	0	0	44.8	50.1
07-19	4932	22	4433	20	361	42	24	0	10	9	9	1	1	45.6	51.6
06-22	5423	23	4890	22	389	42	26	0	11	9	9	1	1	45.4	51.4
06-00	5485	23	4946	22	395	42	26	0	11	9	9	1	1	45.4	51.4
00-00	5554	24	4998	22	409	43	26	0	11	9	10	1	1	45.4	51.6

Thursday, 1 December 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	5	0	5	0	0	0	0	0	0	0	0	0	0	46.8	-
0100	5	0	5	0	0	0	0	0	0	0	0	0	0	51	-
0200	5	0	3	0	2	0	0	0	0	0	0	0	0	51.8	-
0300	5	0	3	0	1	0	0	1	0	0	0	0	0	47.4	-
0400	13	0	10	0	2	0	0	0	1	0	0	0	0	46.3	53.4
0500	28	2	24	0	2	0	0	0	0	0	0	0	0	49.9	57.1
0600	116	2	97	0	14	1	2	0	0	0	0	0	0	45.1	51.9
0700	389	1	338	1	48	0	1	0	0	0	0	0	0	44.2	49
0800	462	0	404	1	42	5	4	0	5	0	1	0	0	44	50.7
0900	377	2	323	4	38	2	5	0	1	1	1	0	0	43.5	50.1
1000	318	3	281	1	28	1	2	1	1	0	0	0	0	43.3	49.3
1100	309	1	272	1	24	4	4	0	1	1	0	1	0	42.8	49
1200	373	4	325	2	29	7	4	0	0	1	1	0	0	44.3	49.4
1300	359	6	319	1	23	6	3	1	0	0	0	0	0	43.8	50.3
1400	356	7	305	0	37	4	1	0	1	0	1	0	0	43.7	49.7
1500	364	3	319	4	36	1	0	0	0	1	0	0	0	44.4	50.5
1600	441	2	413	0	23	1	0	0	1	0	1	0	0	43	49.4
1700	506	2	471	1	30	2	0	0	0	0	0	0	0	42.9	48.5
1800	270	1	255	0	14	0	0	0	0	0	0	0	0	45.1	50.7
1900	165	1	152	0	12	0	0	0	0	0	0	0	0	46.5	53.3
2000	125	1	120	0	4	0	0	0	0	0	0	0	0	46.7	53.1
2100	87	0	80	0	6	0	1	0	0	0	0	0	0	45.7	52.4
2200	36	0	33	0	3	0	0	0	0	0	0	0	0	48.5	58.4
2300	22	0	18	0	3	0	1	0	0	0	0	0	0	46.2	55
07-19	4524	32	4025	16	372	33	24	2	10	4	5	1	0	43.7	49.7
06-22	5017	36	4474	16	408	34	27	2	10	4	5	1	0	43.9	50
06-00	5075	36	4525	16	414	34	28	2	10	4	5	1	0	44	50
00-00	5136	38	4575	16	421	34	28	3	11	4	5	1	0	44	50.1

Default

Globals

Report Id	CustomList-122
Descriptor	Default
Created by	MetroCount Traffic Executive
Creation Time (UTC)	2023-08-09T16:01:49
Legal	Copyright (c)1997 - 2019 MetroCount
Graphic	
Language	English
Country	United Kingdom
Time	UTC + 60 min
Create Version	5.0.7.0
Metric	Part metric
Speed Unit	mph
Length Unit	metre
Mass Unit	tonne

Dataset

Site Name	Swindon
Site Attribute	[51.541619, -1.848721]
File Name	D:\2022 - 2023\22.125 Swindon ATC\Swindon 0 2022-12-05 1242.EC0
File Type	Plus
Algorithm	Factory default axle
Description	B4005 [40mph]
Lane	0
Direction	6
Direction Text	6 - West bound A B, East bound B A.
Layout Text	Axle sensors - Paired (Class/Speed/Count)
Setup Time	2022-11-17T13:48:55
Start Time	2022-11-17T13:48:55
Finish Time	2022-12-05T12:42:27
Operator	GW
Configuration	80 00 14 6a 6a 00 00 00 00 00

Profile

Name	Default Profile
Title	MetroCount Traffic Executive
Graphic Logo	
Header	
Footer	
Percentile 1	85
Percentile 2	95
Pace	12.4274
Filter Start	2022-11-18T00:00:00
Filter End	2022-12-02T00:00:00
Class Scheme	ARX
	F Cls(1-12) Dir(W) Sp(0,99) Headway(I) Span(0 - 100) Lane(0-16)
Low Speed	0
High Speed	99
Posted Limit	37
Speed Limits	37 37 37 37 37 37 37 37 37
Separation	0.000
Separation Type	Headway
Direction	West
Encoded Direction	8

Column

Time [--	24-hour time (0000 - 2359)
Total	Number in time step
Cls 1	Class totals
Cls 2	Class totals
Cls 3	Class totals
Cls 4	Class totals
Cls 5	Class totals
Cls 6	Class totals
Cls 7	Class totals
Cls 8	Class totals
Cls 9	Class totals
Cls 10	Class totals
Cls 11	Class totals
Cls 12	Class totals
Mean	Average speed
Vpp 85	Percentile speed

Friday, 18 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	7	0	7	0	0	0	0	0	0	0	0	0	0	48.4	-
0100	6	0	6	0	0	0	0	0	0	0	0	0	0	43.1	-
0200	3	0	3	0	0	0	0	0	0	0	0	0	0	39.9	-
0300	6	0	6	0	0	0	0	0	0	0	0	0	0	44.9	-
0400	11	0	8	0	3	0	0	0	0	0	0	0	0	47.2	55.3
0500	35	1	27	0	6	0	0	0	0	0	1	0	0	47	53.9
0600	130	0	108	0	18	0	1	0	0	1	2	0	0	46.7	53.1
0700	320	5	275	1	33	0	1	0	1	1	3	0	0	44.3	49.5
0800	494	3	435	5	48	1	0	0	1	1	0	0	0	43.1	48.2
0900	312	1	258	2	47	2	1	0	1	0	0	0	0	44.4	49.4
1000	313	2	276	1	30	2	1	0	1	0	0	0	0	43.1	48.2
1100	394	0	342	2	39	3	2	0	1	1	4	0	0	41.8	47.1
1200	386	2	335	3	42	2	2	0	0	0	0	0	0	43.6	48.6
1300	402	4	357	1	37	1	1	0	0	0	1	0	0	42.2	47.4
1400	535	5	477	1	48	0	0	0	0	1	2	0	1	40.2	46.8
1500	519	2	457	3	52	3	1	0	0	1	0	0	0	42.6	47.3
1600	525	3	472	6	40	0	0	0	0	0	4	0	0	42	47.3
1700	451	2	426	4	18	0	0	1	0	0	0	0	0	41.4	46.3
1800	238	1	219	3	14	1	0	0	0	0	0	0	0	42.8	47.3
1900	152	2	139	0	11	0	0	0	0	0	0	0	0	44.5	51.1
2000	83	0	80	0	3	0	0	0	0	0	0	0	0	44.9	50.8
2100	69	0	68	0	1	0	0	0	0	0	0	0	0	44	52.2
2200	46	0	45	0	0	0	0	0	0	0	1	0	0	45.2	52.5
2300	24	0	22	0	2	0	0	0	0	0	0	0	0	46.4	52.9
07-19	4889	30	4329	32	448	15	9	1	5	5	14	0	1	42.5	47.8
06-22	5323	32	4724	32	481	15	10	1	5	6	16	0	1	42.7	48.1
06-00	5393	32	4791	32	483	15	10	1	5	6	17	0	1	42.7	48.1
00-00	5461	33	4848	32	492	15	10	1	5	6	18	0	1	42.8	48.2

Saturday, 19 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	12	0	10	0	2	0	0	0	0	0	0	0	0	46	53.2
0100	9	0	9	0	0	0	0	0	0	0	0	0	0	40	-
0200	6	0	6	0	0	0	0	0	0	0	0	0	0	42	-
0300	6	0	6	0	0	0	0	0	0	0	0	0	0	46.2	-
0400	9	0	7	0	2	0	0	0	0	0	0	0	0	49	-
0500	17	0	15	0	2	0	0	0	0	0	0	0	0	49.2	58.1
0600	40	0	31	0	7	0	0	0	0	0	2	0	0	46	52.2
0700	89	0	77	1	9	0	1	0	1	0	0	0	0	47.1	51.8
0800	178	1	163	0	13	0	0	0	1	0	0	0	0	46.1	53.6
0900	297	2	275	2	14	0	3	0	0	1	0	0	0	44.8	50.4
1000	370	4	345	6	14	0	0	0	1	0	0	0	0	42.7	46.6
1100	421	3	401	0	13	2	0	0	1	0	1	0	0	43.5	48.2
1200	491	9	455	4	21	0	1	0	0	0	1	0	0	41.6	47
1300	461	2	440	4	14	0	0	0	1	0	0	0	0	42.3	47.9
1400	446	5	412	6	22	1	0	0	0	0	0	0	0	41.3	45.7
1500	429	7	406	3	12	0	1	0	0	0	0	0	0	41.5	46.8
1600	424	5	404	4	10	1	0	0	0	0	0	0	0	40.6	44.8
1700	277	3	263	5	6	0	0	0	0	0	0	0	0	41	46.4
1800	152	0	147	0	5	0	0	0	0	0	0	0	0	43	48.6
1900	105	4	95	1	5	0	0	0	0	0	0	0	0	43.3	48.1
2000	55	0	50	0	2	3	0	0	0	0	0	0	0	41.2	49.9
2100	63	1	62	0	0	0	0	0	0	0	0	0	0	42.8	47.5
2200	60	0	60	0	0	0	0	0	0	0	0	0	0	43.7	48.9
2300	50	0	49	0	1	0	0	0	0	0	0	0	0	43.4	53.1
07-19	4035	41	3788	35	153	4	6	0	5	1	2	0	0	42.4	47.8
06-22	4298	46	4026	36	167	7	6	0	5	1	4	0	0	42.4	47.9
06-00	4408	46	4135	36	168	7	6	0	5	1	4	0	0	42.5	47.9
00-00	4467	46	4188	36	174	7	6	0	5	1	4	0	0	42.5	48

Sunday, 20 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	31	3	27	0	1	0	0	0	0	0	0	0	0	41.7	48.4
0100	6	0	4	0	1	0	0	0	0	0	1	0	0	46.8	-
0200	10	0	10	0	0	0	0	0	0	0	0	0	0	50.2	-
0300	3	0	2	0	1	0	0	0	0	0	0	0	0	44	-
0400	3	0	3	0	0	0	0	0	0	0	0	0	0	34.5	-
0500	7	0	7	0	0	0	0	0	0	0	0	0	0	45.9	-
0600	27	0	25	0	2	0	0	0	0	0	0	0	0	45.8	50.2
0700	47	2	42	0	3	0	0	0	0	0	0	0	0	44.8	51.9
0800	88	1	76	0	8	0	1	0	1	0	1	0	0	46.5	55
0900	212	8	194	1	9	0	0	0	0	0	0	0	0	43.8	49.9
1000	283	1	268	0	11	1	0	0	1	0	1	0	0	43.1	49
1100	373	1	359	1	12	0	0	0	0	0	0	0	0	42	47.3
1200	461	9	440	2	10	0	0	0	0	0	0	0	0	42.2	47.2
1300	405	2	393	1	8	0	0	0	1	0	0	0	0	38.9	44.3
1400	372	0	355	2	15	0	0	0	0	0	0	0	0	41.4	46.5
1500	372	1	349	2	19	1	0	0	0	0	0	0	0	41.7	47.1
1600	273	3	264	0	6	0	0	0	0	0	0	0	0	42	47.4
1700	162	1	156	0	5	0	0	0	0	0	0	0	0	41.8	46.7
1800	119	0	114	1	4	0	0	0	0	0	0	0	0	44.2	49.5
1900	82	0	78	0	4	0	0	0	0	0	0	0	0	43.5	51
2000	56	0	54	1	1	0	0	0	0	0	0	0	0	44.1	51.9
2100	33	1	31	0	1	0	0	0	0	0	0	0	0	43.8	48.4
2200	29	0	28	0	1	0	0	0	0	0	0	0	0	41.7	52.2
2300	21	1	18	0	2	0	0	0	0	0	0	0	0	44.9	55.2
07-19	3167	29	3010	10	110	2	1	0	3	0	2	0	0	42	47.5
06-22	3365	30	3198	11	118	2	1	0	3	0	2	0	0	42.1	47.6
06-00	3415	31	3244	11	121	2	1	0	3	0	2	0	0	42.1	47.8
00-00	3475	34	3297	11	124	2	1	0	3	0	3	0	0	42.1	47.8

Monday, 21 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	6	0	6	0	0	0	0	0	0	0	0	0	0	43.4	-
0100	2	0	2	0	0	0	0	0	0	0	0	0	0	40.9	-
0200	2	0	2	0	0	0	0	0	0	0	0	0	0	45.9	-
0300	4	0	2	0	1	0	0	0	0	0	1	0	0	39.7	-
0400	9	0	8	0	1	0	0	0	0	0	0	0	0	49	-
0500	40	0	31	0	8	0	0	0	0	0	1	0	0	45.3	52.1
0600	144	1	128	0	12	0	0	0	2	0	1	0	0	45	49.9
0700	348	3	308	5	27	1	3	0	1	0	0	0	0	42.4	48.2
0800	479	4	427	2	41	2	1	1	0	0	1	0	0	42.3	47.3
0900	336	4	290	3	35	0	1	0	1	0	2	0	0	41.9	46.6
1000	300	1	249	3	44	0	1	0	0	1	1	0	0	40.4	46
1100	268	0	241	2	22	1	0	0	1	0	1	0	0	42.5	47.2
1200	330	0	297	0	29	1	1	0	0	0	2	0	0	42.6	48.1
1300	262	0	227	3	31	1	0	0	0	0	0	0	0	41.3	47.9
1400	301	2	263	0	32	1	0	0	2	0	1	0	0	41.6	47
1500	386	3	335	2	39	1	4	0	0	0	2	0	0	42.2	47.9
1600	420	1	382	2	34	0	0	0	0	0	1	0	0	40.1	45.2
1700	391	6	356	2	27	0	0	0	0	0	0	0	0	40.5	45.5
1800	203	2	191	0	9	0	1	0	0	0	0	0	0	42.1	47.1
1900	125	1	116	0	7	0	0	0	1	0	0	0	0	43.9	49.8
2000	92	0	88	1	3	0	0	0	0	0	0	0	0	43.1	48.5
2100	75	1	70	0	3	0	0	0	0	0	1	0	0	44.1	50.6
2200	32	1	30	0	1	0	0	0	0	0	0	0	0	47	53.5
2300	14	0	13	0	1	0	0	0	0	0	0	0	0	46.9	54.1
07-19	4024	26	3566	24	370	8	12	1	5	1	11	0	0	41.6	47
06-22	4460	29	3968	25	395	8	12	1	8	1	13	0	0	41.9	47.3
06-00	4506	30	4011	25	397	8	12	1	8	1	13	0	0	41.9	47.4
00-00	4569	30	4062	25	407	8	12	1	8	1	15	0	0	42	47.5

Tuesday, 22 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	11	0	11	0	0	0	0	0	0	0	0	0	0	48.1	56
0100	6	0	5	0	1	0	0	0	0	0	0	0	0	45	-
0200	3	0	3	0	0	0	0	0	0	0	0	0	0	48	-
0300	5	0	4	0	1	0	0	0	0	0	0	0	0	36.8	-
0400	9	0	7	0	2	0	0	0	0	0	0	0	0	47.1	-
0500	42	0	36	0	6	0	0	0	0	0	0	0	0	44.9	50.2
0600	144	1	117	0	25	0	0	0	0	0	1	0	0	45	50
0700	382	3	341	3	28	1	4	0	2	0	0	0	0	43.1	48.4
0800	499	1	459	3	32	3	1	0	0	0	0	0	0	43.4	48.4
0900	275	3	233	3	29	3	2	0	2	0	0	0	0	42.5	48.4
1000	285	4	244	0	34	1	1	0	1	0	0	0	0	41.8	47.1
1100	300	2	252	5	34	4	1	0	0	1	1	0	0	41	46.5
1200	345	4	303	2	31	1	1	0	2	1	0	0	0	42.6	48.4
1300	353	3	296	1	44	6	1	0	0	1	1	0	0	42.8	48.2
1400	385	2	341	2	36	2	1	0	1	0	0	0	0	42.8	47.8
1500	435	3	378	2	47	4	0	0	1	0	0	0	0	42.5	47.9
1600	531	3	478	0	43	2	4	0	0	0	1	0	0	40.9	45.5
1700	472	3	436	3	27	2	0	0	0	0	1	0	0	40.7	45.6
1800	263	1	242	1	18	0	0	0	0	0	0	0	1	41.8	46.9
1900	171	1	164	0	5	0	0	0	0	1	0	0	0	43.1	48.9
2000	104	1	102	0	1	0	0	0	0	0	0	0	0	46.6	54.2
2100	92	0	88	0	4	0	0	0	0	0	0	0	0	45.4	50.3
2200	34	1	33	0	0	0	0	0	0	0	0	0	0	45.8	51.5
2300	24	0	22	0	2	0	0	0	0	0	0	0	0	43.8	51.9
07-19	4525	32	4003	25	403	29	16	0	9	3	4	0	1	42.2	47.6
06-22	5036	35	4474	25	438	29	16	0	9	4	5	0	1	42.4	48
06-00	5094	36	4529	25	440	29	16	0	9	4	5	0	1	42.5	48
00-00	5170	36	4595	25	450	29	16	0	9	4	5	0	1	42.5	48

Wednesday, 23 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	6	0	6	0	0	0	0	0	0	0	0	0	0	46.6	-
0100	0	0	0	0	0	0	0	0	0	0	0	0	0	-	-
0200	4	0	4	0	0	0	0	0	0	0	0	0	0	43.7	-
0300	4	0	3	0	1	0	0	0	0	0	0	0	0	45.5	-
0400	8	0	7	0	1	0	0	0	0	0	0	0	0	47	-
0500	33	0	25	1	7	0	0	0	0	0	0	0	0	44.6	52.1
0600	138	2	115	0	17	2	0	0	0	0	2	0	0	42	46.9
0700	358	3	322	3	28	1	0	0	0	1	0	0	0	39.8	44.1
0800	508	4	448	5	45	1	0	0	1	1	3	0	0	42.7	48
0900	346	4	293	1	37	6	2	1	1	0	1	0	0	42.1	46.9
1000	287	0	249	0	32	2	0	1	2	0	0	1	0	42.7	47.5
1100	338	0	298	3	29	2	3	0	1	0	1	0	1	41.8	47.3
1200	347	0	310	3	26	2	3	0	0	1	1	1	0	41.6	46.3
1300	349	1	313	2	31	0	0	0	1	1	0	0	0	41.9	47.8
1400	400	1	338	1	49	4	3	0	2	1	1	0	0	41.5	46.9
1500	443	1	380	5	56	0	0	1	0	0	0	0	0	40.7	46.5
1600	507	3	448	4	47	2	1	0	0	0	2	0	0	40.6	46.4
1700	494	2	450	4	35	1	0	0	1	1	0	0	0	40.3	44.9
1800	262	1	236	2	20	1	0	0	1	0	1	0	0	41.7	46.8
1900	143	1	135	0	6	1	0	0	0	0	0	0	0	44.6	49.8
2000	91	1	86	0	4	0	0	0	0	0	0	0	0	45.2	50.4
2100	76	0	74	0	2	0	0	0	0	0	0	0	0	45.1	50.6
2200	49	0	49	0	0	0	0	0	0	0	0	0	0	45.9	51.6
2300	21	3	18	0	0	0	0	0	0	0	0	0	0	44.6	51.8
07-19	4639	20	4085	33	435	22	12	3	10	6	10	2	1	41.4	46.8
06-22	5087	24	4495	33	464	25	12	3	10	6	12	2	1	41.6	47.1
06-00	5157	27	4562	33	464	25	12	3	10	6	12	2	1	41.7	47.1
00-00	5212	27	4607	34	473	25	12	3	10	6	12	2	1	41.7	47.1

Thursday, 24 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	5	0	5	0	0	0	0	0	0	0	0	0	0	44.6	-
0100	4	0	3	0	1	0	0	0	0	0	0	0	0	45.1	-
0200	4	0	4	0	0	0	0	0	0	0	0	0	0	41.7	-
0300	4	0	3	0	1	0	0	0	0	0	0	0	0	45.6	-
0400	6	0	5	0	1	0	0	0	0	0	0	0	0	48.3	-
0500	40	0	33	0	6	0	1	0	0	0	0	0	0	46.8	53.4
0600	140	0	120	0	17	0	1	0	1	0	1	0	0	43.8	49.3
0700	360	3	327	0	26	0	1	0	0	1	2	0	0	43.4	48.7
0800	499	4	439	6	44	3	2	0	0	0	1	0	0	42	46.6
0900	308	3	257	2	38	2	2	0	1	2	1	0	0	43.7	49.4
1000	314	1	265	2	38	1	1	0	1	3	2	0	0	41.7	46.8
1100	348	1	299	4	38	4	1	0	0	0	1	0	0	41.2	45.7
1200	156	0	146	0	9	0	1	0	0	0	0	0	0	41.4	46
1300	308	2	283	2	20	0	0	0	0	0	1	0	0	42	46.9
1400	393	3	333	5	47	0	0	1	3	0	1	0	0	40.6	45.4
1500	486	1	424	2	52	1	3	1	2	0	0	0	0	41.1	47
1600	484	1	449	1	28	1	1	0	2	1	0	0	0	41.7	46.8
1700	508	2	471	5	28	0	1	0	1	0	0	0	0	39.7	44.4
1800	217	1	206	0	8	1	0	0	0	0	1	0	0	42	45.9
1900	149	0	142	0	7	0	0	0	0	0	0	0	0	44.5	49.7
2000	104	0	100	0	3	1	0	0	0	0	0	0	0	42.9	49.4
2100	86	0	83	0	3	0	0	0	0	0	0	0	0	44.5	49.7
2200	55	0	54	0	1	0	0	0	0	0	0	0	0	44.6	49.9
2300	27	0	27	0	0	0	0	0	0	0	0	0	0	43.1	48.7
07-19	4381	22	3899	29	376	13	13	2	10	7	10	0	0	41.6	46.8
06-22	4860	22	4344	29	406	14	14	2	11	7	11	0	0	41.8	47.1
06-00	4942	22	4425	29	407	14	14	2	11	7	11	0	0	41.9	47.1
00-00	5005	22	4478	29	416	14	15	2	11	7	11	0	0	41.9	47.1

Friday, 25 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	8	0	8	0	0	0	0	0	0	0	0	0	0	47.6	-
0100	4	0	4	0	0	0	0	0	0	0	0	0	0	47.5	-
0200	7	0	5	0	1	1	0	0	0	0	0	0	0	40.7	-
0300	5	0	5	0	0	0	0	0	0	0	0	0	0	36.4	-
0400	8	0	5	0	3	0	0	0	0	0	0	0	0	46.9	-
0500	45	1	34	0	9	0	0	0	0	1	0	0	0	44.9	52.3
0600	120	0	101	1	16	1	1	0	0	0	0	0	0	44.4	50.4
0700	314	3	285	2	22	1	0	0	0	0	1	0	0	44	49.7
0800	469	3	413	1	44	0	3	0	1	1	2	0	1	43.3	48.5
0900	316	6	278	2	23	2	2	0	0	1	2	0	0	44	49.3
1000	325	4	288	1	25	2	0	0	2	1	2	0	0	42.6	48
1100	348	2	315	3	22	1	2	0	2	0	1	0	0	41.6	46.9
1200	360	2	325	2	25	1	3	0	1	1	0	0	0	41.8	46.5
1300	390	6	346	3	32	1	1	0	0	1	0	0	0	41.4	47.3
1400	472	6	416	3	45	1	1	0	0	0	0	0	0	41.7	46.5
1500	554	6	496	5	41	1	0	1	0	2	2	0	0	40.9	45.7
1600	588	0	536	4	42	2	1	0	2	0	1	0	0	40.2	44.8
1700	433	2	413	2	15	0	0	0	1	0	0	0	0	40.7	46
1800	230	1	220	1	8	0	0	0	0	0	0	0	0	41.2	45.3
1900	113	1	107	0	4	1	0	0	0	0	0	0	0	42.7	49.1
2000	76	0	72	0	3	1	0	0	0	0	0	0	0	43.6	49.6
2100	93	1	91	0	1	0	0	0	0	0	0	0	0	42.9	50
2200	57	0	56	0	1	0	0	0	0	0	0	0	0	41.5	47.3
2300	30	1	29	0	0	0	0	0	0	0	0	0	0	45.9	54.2
07-19	4799	41	4331	29	344	12	13	1	9	7	11	0	1	41.8	47.1
06-22	5201	43	4702	30	368	15	14	1	9	7	11	0	1	41.9	47.3
06-00	5288	44	4787	30	369	15	14	1	9	7	11	0	1	42	47.3
00-00	5365	45	4848	30	382	16	14	1	9	8	11	0	1	42	47.3

Saturday, 26 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	13	0	13	0	0	0	0	0	0	0	0	0	0	43.1	48.3
0100	11	0	11	0	0	0	0	0	0	0	0	0	0	42.1	53.1
0200	6	0	6	0	0	0	0	0	0	0	0	0	0	42.8	-
0300	8	0	7	0	1	0	0	0	0	0	0	0	0	46.2	-
0400	6	0	4	0	2	0	0	0	0	0	0	0	0	52	-
0500	23	0	18	0	5	0	0	0	0	0	0	0	0	50	57.8
0600	31	0	25	0	5	0	0	0	1	0	0	0	0	45.7	53.8
0700	99	3	86	0	9	0	0	0	1	0	0	0	0	46.4	53.4
0800	197	2	180	2	12	0	1	0	0	0	0	0	0	45.7	52.2
0900	272	3	256	2	9	1	1	0	0	0	0	0	0	43.8	49.7
1000	359	5	336	2	13	2	0	0	1	0	0	0	0	43.4	48.3
1100	417	1	402	1	13	0	0	0	0	0	0	0	0	42.8	47.8
1200	444	4	420	3	16	0	0	0	0	1	0	0	0	42.4	47.9
1300	428	4	401	2	21	0	0	0	0	0	0	0	0	41.9	47
1400	452	1	434	3	13	0	1	0	0	0	0	0	0	40.7	46.1
1500	435	2	417	3	13	0	0	0	0	0	0	0	0	41	46.2
1600	380	0	359	1	19	1	0	0	0	0	0	0	0	39.8	44.9
1700	240	0	229	0	9	1	1	0	0	0	0	0	0	40.2	46.8
1800	170	0	158	0	11	1	0	0	0	0	0	0	0	42.2	48.9
1900	84	0	82	0	2	0	0	0	0	0	0	0	0	42.9	49.8
2000	72	0	69	0	3	0	0	0	0	0	0	0	0	43.3	51.4
2100	61	0	61	0	0	0	0	0	0	0	0	0	0	40.9	47.8
2200	56	0	55	0	1	0	0	0	0	0	0	0	0	39.5	46.8
2300	26	1	24	0	1	0	0	0	0	0	0	0	0	38.3	45.7
07-19	3893	25	3678	19	158	6	4	0	2	1	0	0	0	42.1	47.7
06-22	4141	25	3915	19	168	6	4	0	3	1	0	0	0	42.1	47.9
06-00	4223	26	3994	19	170	6	4	0	3	1	0	0	0	42.1	47.8
00-00	4290	26	4053	19	178	6	4	0	3	1	0	0	0	42.2	47.9

Sunday, 27 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	24	0	24	0	0	0	0	0	0	0	0	0	0	40.3	46.6
0100	11	0	9	0	2	0	0	0	0	0	0	0	0	40.9	45.4
0200	10	0	10	0	0	0	0	0	0	0	0	0	0	43.3	-
0300	6	0	5	0	1	0	0	0	0	0	0	0	0	46.6	-
0400	6	0	5	0	1	0	0	0	0	0	0	0	0	46.7	-
0500	9	0	9	0	0	0	0	0	0	0	0	0	0	48.9	-
0600	13	0	10	0	3	0	0	0	0	0	0	0	0	43.7	51.1
0700	54	1	48	0	5	0	0	0	0	0	0	0	0	46	52.1
0800	96	0	92	0	4	0	0	0	0	0	0	0	0	45.2	52.4
0900	185	3	173	1	6	1	1	0	0	0	0	0	0	44.4	51.4
1000	287	0	274	0	12	0	0	0	1	0	0	0	0	45.2	50.3
1100	433	4	415	4	8	2	0	0	0	0	0	0	0	42.4	47.5
1200	523	4	502	5	10	2	0	0	0	0	0	0	0	41.5	46.1
1300	410	3	397	4	5	0	0	0	1	0	0	0	0	41.5	47
1400	384	1	355	4	21	2	1	0	0	0	0	0	0	43	48.3
1500	380	1	366	1	12	0	0	0	0	0	0	0	0	42.3	47.4
1600	305	4	289	1	11	0	0	0	0	0	0	0	0	41.8	46.7
1700	165	2	157	0	6	0	0	0	0	0	0	0	0	42.7	48.3
1800	155	0	149	1	4	0	0	0	0	1	0	0	0	43.8	48.7
1900	92	0	91	0	1	0	0	0	0	0	0	0	0	43.8	50.2
2000	65	0	62	0	3	0	0	0	0	0	0	0	0	43.6	50.7
2100	47	1	42	0	4	0	0	0	0	0	0	0	0	45.4	51.3
2200	33	0	32	0	0	1	0	0	0	0	0	0	0	43.9	51
2300	9	1	7	0	1	0	0	0	0	0	0	0	0	45.2	-
07-19	3377	23	3217	21	104	7	2	0	2	1	0	0	0	42.7	48.2
06-22	3594	24	3422	21	115	7	2	0	2	1	0	0	0	42.8	48.3
06-00	3636	25	3461	21	116	8	2	0	2	1	0	0	0	42.8	48.3
00-00	3702	25	3523	21	120	8	2	0	2	1	0	0	0	42.8	48.3

Monday, 28 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	1	0	1	0	0	0	0	0	0	0	0	0	0	48	-
0100	5	0	5	0	0	0	0	0	0	0	0	0	0	40.4	-
0200	3	0	2	0	0	0	0	0	0	1	0	0	0	43.4	-
0300	4	0	4	0	0	0	0	0	0	0	0	0	0	43.4	-
0400	6	0	4	0	2	0	0	0	0	0	0	0	0	48.2	-
0500	39	0	29	0	8	0	0	0	1	0	1	0	0	46.7	54.1
0600	121	1	103	0	15	0	0	0	1	0	1	0	0	45	50.4
0700	349	3	313	5	24	2	1	0	0	0	1	0	0	42.9	48.4
0800	463	1	418	4	33	3	2	0	0	1	1	0	0	42.3	48
0900	321	2	265	3	40	3	4	0	2	0	2	0	0	40.2	46.8
1000	273	5	244	1	17	4	0	0	1	0	1	0	0	42.7	48.7
1100	295	0	263	2	28	1	1	0	0	0	0	0	0	42.9	48.7
1200	298	0	260	2	32	0	1	1	0	1	1	0	0	41.8	46.4
1300	304	2	271	1	25	0	3	0	0	1	1	0	0	41.8	46.3
1400	402	6	345	2	40	2	0	2	1	1	3	0	0	41.9	47
1500	397	2	359	3	26	4	2	0	0	1	0	0	0	41.8	46.6
1600	558	2	498	4	47	2	1	0	2	1	1	0	0	39.1	45.1
1700	455	2	418	5	30	0	0	0	0	0	0	0	0	39.9	44.1
1800	214	1	194	1	18	0	0	0	0	0	0	0	0	42.8	48.2
1900	122	0	118	0	4	0	0	0	0	0	0	0	0	43.9	50.7
2000	103	0	98	1	3	1	0	0	0	0	0	0	0	42.9	50
2100	52	0	50	0	1	0	0	0	0	0	1	0	0	46.4	53.8
2200	35	0	33	0	2	0	0	0	0	0	0	0	0	44.5	50.9
2300	14	1	13	0	0	0	0	0	0	0	0	0	0	41.6	47.8
07-19	4329	26	3848	33	360	21	15	3	6	6	11	0	0	41.5	47
06-22	4727	27	4217	34	383	22	15	3	7	6	13	0	0	41.7	47.3
06-00	4776	28	4263	34	385	22	15	3	7	6	13	0	0	41.7	47.3
00-00	4834	28	4308	34	395	22	15	3	8	7	14	0	0	41.8	47.4

Tuesday, 29 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	11	0	10	0	1	0	0	0	0	0	0	0	0	45.4	52.7
0100	2	0	1	0	0	0	0	0	0	0	1	0	0	42	-
0200	2	0	2	0	0	0	0	0	0	0	0	0	0	39.7	-
0300	9	0	6	0	3	0	0	0	0	0	0	0	0	41.1	-
0400	8	0	4	0	4	0	0	0	0	0	0	0	0	43.6	-
0500	42	0	31	0	10	0	1	0	0	0	0	0	0	43.6	49.1
0600	130	0	115	0	14	0	0	0	0	1	0	0	0	44.8	50.8
0700	389	4	343	1	35	1	2	0	0	0	2	1	0	41.8	47
0800	488	3	446	2	32	2	2	0	0	0	1	0	0	42.2	47
0900	302	1	249	2	43	3	2	0	0	0	2	0	0	40.4	46.5
1000	262	1	220	3	31	3	3	0	1	0	0	0	0	42.4	47.7
1100	315	1	269	5	32	3	3	0	1	0	1	0	0	41.3	47.4
1200	324	1	277	3	29	5	3	1	1	3	1	0	0	41.5	47.2
1300	333	1	290	2	31	5	3	0	0	0	1	0	0	41.7	47
1400	350	2	296	3	39	3	3	1	1	1	1	0	0	41.7	48.2
1500	391	1	352	5	29	2	1	0	0	1	0	0	0	42.1	47.4
1600	518	2	470	4	35	3	2	0	0	0	2	0	0	40.3	45.2
1700	446	1	418	2	23	1	0	1	0	0	0	0	0	40.1	44.6
1800	215	0	200	0	14	1	0	0	0	0	0	0	0	42.9	49.7
1900	140	0	130	0	8	1	0	1	0	0	0	0	0	43.9	49.4
2000	91	1	81	1	8	0	0	0	0	0	0	0	0	45.3	53.4
2100	76	1	72	0	2	0	0	0	0	1	0	0	0	43	48.1
2200	45	1	42	0	2	0	0	0	0	0	0	0	0	44.4	50.4
2300	26	1	24	0	1	0	0	0	0	0	0	0	0	43.2	51.7
07-19	4333	18	3830	32	373	32	24	3	4	5	11	1	0	41.4	47
06-22	4770	20	4228	33	405	33	24	4	4	7	11	1	0	41.7	47.2
06-00	4841	22	4294	33	408	33	24	4	4	7	11	1	0	41.7	47.3
00-00	4915	22	4348	33	426	33	25	4	4	7	12	1	0	41.8	47.3

Wednesday, 30 November 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	8	0	8	0	0	0	0	0	0	0	0	0	0	47.5	-
0100	2	0	1	0	0	0	0	0	0	1	0	0	0	37.6	-
0200	1	0	1	0	0	0	0	0	0	0	0	0	0	40.3	-
0300	3	0	3	0	0	0	0	0	0	0	0	0	0	46.6	-
0400	9	0	8	0	1	0	0	0	0	0	0	0	0	47.9	-
0500	39	0	34	0	5	0	0	0	0	0	0	0	0	47.1	54.6
0600	135	0	116	0	16	2	0	0	0	0	1	0	0	45.1	49.2
0700	365	4	326	2	27	1	2	0	0	1	2	0	0	43	47.9
0800	506	5	456	3	35	0	1	0	3	0	2	1	0	42.3	47.8
0900	298	0	266	0	27	2	1	0	0	1	1	0	0	42.7	48.1
1000	313	1	267	1	37	0	1	1	3	0	2	0	0	41.2	47.8
1100	331	0	283	4	35	0	4	0	1	0	3	0	1	41.4	46.9
1200	332	3	289	0	28	1	4	0	1	3	2	1	0	41.3	45.9
1300	348	0	308	1	32	4	1	0	1	0	1	0	0	42.8	47.9
1400	373	2	323	2	34	6	3	0	1	0	2	0	0	41.8	47.6
1500	448	3	397	4	39	1	1	0	1	0	2	0	0	41.8	47.1
1600	500	1	460	2	33	0	2	0	0	1	0	1	0	41.1	46.2
1700	524	3	484	6	29	0	1	0	0	0	1	0	0	40.4	45.9
1800	255	2	237	0	14	1	1	0	0	0	0	0	0	40.7	46.8
1900	169	1	161	1	5	1	0	0	0	0	0	0	0	38.7	44.5
2000	97	1	94	0	2	0	0	0	0	0	0	0	0	38.8	43.3
2100	80	2	76	0	2	0	0	0	0	0	0	0	0	38.9	45.4
2200	68	0	65	0	3	0	0	0	0	0	0	0	0	35.8	42.4
2300	21	1	19	0	0	0	0	0	0	0	1	0	0	39.8	49.6
07-19	4593	24	4096	25	370	16	22	1	11	6	18	3	1	41.7	47
06-22	5074	28	4543	26	395	19	22	1	11	6	19	3	1	41.6	47
06-00	5163	29	4627	26	398	19	22	1	11	6	20	3	1	41.5	46.9
00-00	5225	29	4682	26	404	19	22	1	11	7	20	3	1	41.6	47

Thursday, 1 December 2022

Time [--]	Total	Cls 1	Cls 2	Cls 3	Cls 4	Cls 5	Cls 6	Cls 7	Cls 8	Cls 9	Cls 10	Cls 11	Cls 12	Mean	Vpp 85
0000	8	0	7	0	1	0	0	0	0	0	0	0	0	50.7	-
0100	2	0	2	0	0	0	0	0	0	0	0	0	0	38.5	-
0200	3	0	2	0	0	0	0	0	0	1	0	0	0	42.4	-
0300	3	0	2	0	1	0	0	0	0	0	0	0	0	53.6	-
0400	10	1	5	0	4	0	0	0	0	0	0	0	0	43.1	-
0500	41	0	34	0	6	0	1	0	0	0	0	0	0	44.5	50.9
0600	111	0	92	0	14	1	3	0	0	0	1	0	0	41.8	46.3
0700	376	3	332	1	32	4	2	1	1	0	0	0	0	41.7	46.6
0800	481	3	431	0	36	5	5	0	0	1	0	0	0	41.8	47.1
0900	292	6	252	4	23	1	2	0	0	1	2	1	0	43.1	48.1
1000	283	1	244	2	26	4	2	0	1	0	3	0	0	42.3	47.8
1100	321	0	281	1	31	2	4	0	1	1	0	0	0	41.6	46.9
1200	324	2	286	0	30	3	1	0	0	1	1	0	0	41.8	47.1
1300	320	2	273	1	36	0	3	1	3	1	0	0	0	42.7	48.4
1400	381	3	330	2	41	0	2	0	3	0	0	0	0	41.2	46.2
1500	412	2	369	3	34	2	0	0	1	1	0	0	0	41.7	47.1
1600	468	1	425	3	36	2	0	0	0	0	1	0	0	41	45.6
1700	438	1	405	2	29	0	1	0	0	0	0	0	0	39.5	44
1800	241	1	225	0	12	3	0	0	0	0	0	0	0	42.2	47.7
1900	166	0	160	0	6	0	0	0	0	0	0	0	0	44.1	49.9
2000	105	0	97	0	8	0	0	0	0	0	0	0	0	42.5	48.5
2100	108	0	98	1	7	1	1	0	0	0	0	0	0	43.5	49.1
2200	55	0	52	0	3	0	0	0	0	0	0	0	0	42.6	48.6
2300	23	0	21	0	1	0	1	0	0	0	0	0	0	42.4	49
07-19	4337	25	3853	19	366	26	22	2	10	6	7	1	0	41.6	46.8
06-22	4827	25	4300	20	401	28	26	2	10	6	8	1	0	41.8	46.9
06-00	4905	25	4373	20	405	28	27	2	10	6	8	1	0	41.8	47
00-00	4972	26	4425	20	417	28	28	2	10	7	8	1	0	41.8	47

APPENDIX 7

TEMPRO Outputs

Dataset Version: 80
Dataset Scenario: Core
Result Type: Trip ends by time period
Base Year: 2023
Future Year: 2027
Trip Purpose Group: All purposes
Time Period: Weekday AM peak period (0700 - 0959)
Trip End Type: Origin/Destination
Alternative Assumptio No

Growth Factor (2027 Data/2023 Data)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	1.0195	1.0317

Future Year (2027) - Base Year (2023)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	73	128

Base Year (2023)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	3,750	4,046

Future Year (2027)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	3,823	4,174

Level	Area	Local Growth Figure
E02006650	Wiltshire 007	1.020424134 Motorway NTM adjustment factor.

Dataset Version: 80
Dataset Scenario: Core
Result Type: Trip ends by time period
Base Year: 2023
Future Year: 2033
Trip Purpose Group: All purposes
Time Period: Weekday AM peak period (0700 - 0959)
Trip End Type: Origin/Destination
Alternative Assumptio No

Growth Factor (2033 Data/2023 Data)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	1.0317	1.0618

Future Year (2033) - Base Year (2023)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	119	250

Base Year (2023)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	3,750	4,046

Future Year (2033)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	3,869	4,296

Level	Area	Local Growth Figure
E02006650	Wiltshire 007	1.098204372 Motorway NTM adjustment factor.

Dataset Version: 80
Dataset Scenario: Core
Result Type: Trip ends by time period
Base Year: 2023
Future Year: 2027
Trip Purpose Group: All purposes
Time Period: Weekday PM peak period (1600 - 1859)
Trip End Type: Origin/Destination
Alternative Assumptio No

Growth Factor (2027 Data/2023 Data)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	1.0299	1.0216

Future Year (2027) - Base Year (2023)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	129	85

Base Year (2023)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	4,330	3,919

Future Year (2027)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	4,459	4,004

Level	Area	Local Growth Figure
E02006650	Wiltshire 007	1.020573377 Motorway NTM adjustment factor.

Motorway

	AM	PM
2023-2027	1.0204	1.0206
2023-2033	1.0982	1.0997

2019-2023

Average Day
0.972239215

Dataset Version: 80
Dataset Scenario: Core
Result Type: Trip ends by time period
Base Year: 2023
Future Year: 2033
Trip Purpose Group: All purposes
Time Period: Weekday PM peak period (1600 - 1859)
Trip End Type: Origin/Destination
Alternative Assumptio No

Growth Factor (2033 Data/2023 Data)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	1.0584	1.0379

Future Year (2033) - Base Year (2023)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	253	149

Base Year (2023)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	4,330	3,919

Future Year (2033)			
Area Description		All purposes	
Level	Name	Origin	Destination
E02006650	Wiltshire 007	4,582	4,068

Level	Area	Local Growth Figure
E02006650	Wiltshire 007	1.099673191 Motorway NTM adjustment factor.

APPENDIX 8

ARCADY Output – B4005 / Proposed Site Access

Junctions 11										
ARCADY 11 - Roundabout Module										
Version: 11.0.0.2177 © Copyright TRL Software Limited, 2024										
For sales and distribution information, program advice and maintenance, contact TRL Software: +44 (0)1344 379777 software@trl.co.uk trlsoftware.com										
The users of this computer program for the solution of an engineering problem are in no way relieved of their responsibility for the correctness of the solution										

Filename: Import of B4005_Site Access Roundabout.j11
Path: Z:\projects\3728 MOTO Swindon\Arcady
Report generation date: 05/11/2025 14:14:57

- »Proposed Site Access - 2027 | With Development Flows | AM
»Proposed Site Access - 2027 | With Development Flows | PM
»Proposed Site Access - 2033 | With Development Flows | AM
»Proposed Site Access - 2033 | With Development Flows | PM

Summary of junction performance

	AM					PM				
	Set ID	Queue (PCU)	Delay (s)	RFC	LOS	Set ID	Queue (PCU)	Delay (s)	RFC	LOS
Proposed Site Access - 2027 - With Development Flows										
Arm 1	D1	7.4	17.44	0.88	C	D2	3.4	8.99	0.75	A
Arm 2		0.6	6.46	0.39	A		0.9	6.97	0.43	A
Arm 3		0.0	0.00	0.00	A		0.0	0.00	0.00	A
Arm 4		1.3	5.27	0.56	A		6.8	18.72	0.88	C
Proposed Site Access - 2033 - With Development Flows										
Arm 1	D3	9.1	20.93	0.90	C	D4	3.8	9.90	0.78	A
Arm 2		0.8	8.35	0.40	A		1.0	7.25	0.44	A
Arm 3		0.0	0.00	0.00	A		0.0	0.00	0.00	A
Arm 4		1.5	5.56	0.58	A		8.6	23.26	0.90	C

Values shown are the highest values encountered over all time segments. Delay is the maximum value of average delay per arriving vehicle.

File summary

File Description	
Title	B4005 / Site Access
Location	Swindon
Site number	
Date	22/08/2023
Version	
Status	TIA
Identifier	
Client	
Jobnumber	3728
Enumerator	EDD\Mark.Cleary
Description	

Units

Distance units	Speed units	Traffic units input	Traffic units results	Flow units	Average delay units	Total delay units	Rate of delay units
m	kph	PCU	PCU	perHour	s	-Min	perMin

Analysis Options

Vehicle length (m)	Calculate Queue Percentiles	Calculate detailed queueing delay	Show lane queues in feet / metres	Show all PICADY stream intercepts	Calculate residual capacity	RFC Threshold	Average Delay threshold (s)	Queue threshold (PCU)	Use simulation for HCM roundabouts	Use iterations for HCM roundabouts
5.75						0.85	36.00	20.00		

Demand Set Summary

ID	Year	Scenario	Time period	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D1	2027	With Development Flows	AM	ONE HOUR	07:15	08:45	15	✓
D2	2027	With Development Flows	PM	ONE HOUR	16:15	17:45	15	✓
D3	2033	With Development Flows	AM	ONE HOUR	07:15	08:45	15	✓
D4	2033	With Development Flows	PM	ONE HOUR	16:15	17:45	15	✓

Analysis Set Details

ID	Name	Include in report	Network flow scaling factor (%)	Network capacity scaling factor (%)
A1	Proposed Site Access	✓	100.000	100.000

Proposed Site Access - 2027 | With Development Flows | AM

Data Errors and Warnings

No errors or warnings

Junction Network

Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	B4005 / Site Access	Standard Roundabout		1, 2, 3, 4	12.22	B

Junction Network

Driving side	Lighting	Network delay (s)	Network LOS
Left	Normal/unknown	12.22	B

Arms

Arms

Arm	Name	Description	No give-way line
1	B4005 (W)		
2	Site Access		
3	Farm Access		
4	B4005 (E)		

Roundabout Geometry

Arm	V - Approach road half-width (m)	E - Entry width (m)	I' - Effective flare length (m)	R - Entry radius (m)	D - Inscribed circle diameter (m)	PHI - Conflict (entry) angle (deg)	Entry only	Exit only
1	3.80	7.00	22.0	30.0	55.0	31.0		
2	3.80	7.00	10.0	25.0	55.0	30.0		
3	3.50	3.50	0.0	10.0	55.0	34.0		
4	3.85	7.00	26.0	14.0	55.0	25.0		

Slope / Intercept / Capacity

Roundabout Slope and Intercept used in model

Arm	Final slope	Final intercept (PCU/hr)
1	0.613	1836
2	0.577	1646
3	0.439	994
4	0.610	1848

The slope and intercept shown above include any corrections and adjustments.

Traffic Demand

Demand Set Details

ID	Year	Scenario	Time period	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D1	2027	With Development Flows	AM	ONE HOUR	07:15	08:45	15	✓

Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (PCU/hr)	Scaling Factor (%)
1		ONE HOUR	✓	1463	100.000
2		ONE HOUR	✓	329	100.000
3		ONE HOUR	✓	0	100.000
4		ONE HOUR	✓	825	100.000

Origin-Destination Data

Demand (PCU/hr)

	To				
	1	2	3	4	
From	1	0	318	0	1145
	2	318	0	0	11
	3	0	0	0	0
	4	814	11	0	0

Vehicle Mix

HV data entry mode	PCU Factor for a HV (PCU)
HV Percentages	2.00

Heavy Vehicle %

	To				
	1	2	3	4	
From	1	0	24	0	5
	2	0	0	0	0
	3	24	0	0	21
	4	6	21	0	0

Results

Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.88	17.44	7.4	C	1342	2014
2	0.39	6.46	0.6	A	302	453
3	0.00	0.00	0.0	A	0	0
4	0.56	5.27	1.3	A	757	1136

Main Results for each time segment

07:15 - 07:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1101	275	8	1831	0.601	1095	849	0.0	1.6	5.267	A
2	248	62	857	1152	0.215	247	246	0.0	0.3	3.972	A
3	0	0	1104	510	0.000	0	0	0.0	0.0	0.000	A
4	621	155	238	1702	0.365	619	865	0.0	0.6	3.520	A

07:30 - 07:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1315	329	10	1830	0.719	1311	1016	1.6	2.7	7.466	A
2	296	74	1026	1054	0.281	295	295	0.3	0.4	4.741	A
3	0	0	1321	414	0.000	0	0	0.0	0.0	0.000	A
4	742	185	285	1673	0.443	741	1036	0.6	0.8	4.093	A

07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1611	403	12	1829	0.881	1594	1244	2.7	7.0	15.571	C
2	362	91	1247	926	0.391	361	358	0.4	0.6	6.357	A
3	0	0	1608	288	0.000	0	0	0.0	0.0	0.000	A
4	908	227	349	1635	0.556	906	1259	0.8	1.3	5.235	A

08:00 - 08:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1611	403	12	1829	0.881	1609	1246	7.0	7.4	17.444	C
2	362	91	1259	919	0.394	362	362	0.6	0.6	6.460	A
3	0	0	1622	283	0.000	0	0	0.0	0.0	0.000	A
4	908	227	350	1634	0.556	908	1271	1.3	1.3	5.266	A

08:15 - 08:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1315	329	10	1830	0.719	1334	1020	7.4	2.9	8.149	A
2	296	74	1044	1044	0.283	297	300	0.6	0.4	4.826	A
3	0	0	1340	406	0.000	0	0	0.0	0.0	0.000	A
4	742	185	287	1673	0.443	744	1054	1.3	0.9	4.123	A

08:30 - 08:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1101	275	8	1831	0.601	1106	854	2.9	1.7	5.427	A
2	248	62	866	1147	0.216	248	249	0.4	0.3	4.008	A
3	0	0	1114	505	0.000	0	0	0.0	0.0	0.000	A
4	621	155	240	1701	0.365	622	874	0.9	0.6	3.543	A

Proposed Site Access - 2027 | With Development Flows | PM

Data Errors and Warnings

No errors or warnings

Junction Network

Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	B4005 / Site Access	Standard Roundabout		1, 2, 3, 4	12.83	B

Junction Network

Driving side	Lighting	Network delay (s)	Network LOS
Left	Normal/unknown	12.83	B

Traffic Demand

Demand Set Details

ID	Year	Scenario	Time period	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D2	2027	With Development Flows	PM	ONE HOUR	16:15	17:45	15	✓

Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (PCU/hr)	Scaling Factor (%)
1		ONE HOUR	✓	1252	100.000
2		ONE HOUR	✓	433	100.000
3		ONE HOUR	✓	0	100.000
4		ONE HOUR	✓	1247	100.000

Origin-Destination Data

Demand (PCU/hr)

	To				
		1	2	3	4
From	1	0	419	0	833
	2	417	0	0	16
	3	0	0	0	0
	4	1233	14	0	0

Vehicle Mix

HV data entry mode	PCU Factor for a HV (PCU)
HV Percentages	2.00

Heavy Vehicle %

	To				
		1	2	3	4
From	1	0	24	0	7
	2	24	0	0	25
	3	0	0	0	0
	4	4	22	0	0

Results

Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.75	8.99	3.4	A	1149	1723
2	0.43	6.97	0.9	A	397	596
3	0.00	0.00	0.0	A	0	0
4	0.88	18.72	6.8	C	1144	1716

Main Results for each time segment

16:15 - 16:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	943	236	10	1830	0.515	938	1235	0.0	1.2	4.503	A
2	326	81	624	1286	0.253	324	324	0.0	0.4	4.635	A
3	0	0	948	578	0.000	0	0	0.0	0.0	0.000	A
4	939	235	312	1657	0.567	933	636	0.0	1.3	5.145	A

16:30 - 16:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1126	281	13	1829	0.616	1123	1479	1.2	1.8	5.703	A
2	389	97	747	1215	0.320	389	388	0.4	0.6	5.398	A
3	0	0	1136	496	0.000	0	0	0.0	0.0	0.000	A
4	1121	280	374	1619	0.692	1117	762	1.3	2.3	7.413	A

16:45 - 17:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1378	345	15	1827	0.755	1372	1799	1.8	3.3	8.758	A
2	477	119	913	1119	0.426	475	474	0.6	0.9	6.921	A
3	0	0	1388	385	0.000	0	0	0.0	0.0	0.000	A
4	1373	343	458	1568	0.875	1357	931	2.3	6.4	16.563	C

17:00 - 17:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1378	345	15	1827	0.755	1378	1815	3.3	3.4	8.985	A
2	477	119	917	1117	0.427	477	477	0.9	0.9	6.973	A
3	0	0	1394	382	0.000	0	0	0.0	0.0	0.000	A
4	1373	343	459	1568	0.876	1371	935	6.4	6.8	18.718	C

17:15 - 17:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1126	281	13	1828	0.616	1132	1502	3.4	1.8	5.844	A
2	389	97	753	1212	0.321	391	392	0.9	0.6	5.448	A
3	0	0	1144	492	0.000	0	0	0.0	0.0	0.000	A
4	1121	280	376	1618	0.693	1139	767	6.8	2.4	8.093	A

17:30 - 17:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	943	236	11	1830	0.515	945	1247	1.8	1.2	4.577	A
2	326	81	629	1283	0.254	327	327	0.6	0.4	4.671	A
3	0	0	955	575	0.000	0	0	0.0	0.0	0.000	A
4	939	235	315	1656	0.567	943	641	2.4	1.4	5.290	A

Proposed Site Access - 2033 | With Development Flows | AM

Data Errors and Warnings

No errors or warnings

Junction Network

Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	B4005 / Site Access	Standard Roundabout		1, 2, 3, 4	14.47	B

Junction Network

Driving side	Lighting	Network delay (s)	Network LOS
Left	Normal/unknown	14.47	B

Traffic Demand

Demand Set Details

ID	Year	Scenario	Time period	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D3	2033	With Development Flows	AM	ONE HOUR	07:15	08:45	15	✓

Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (PCU/hr)	Scaling Factor (%)
1		ONE HOUR	✓	1500	100.000
2		ONE HOUR	✓	329	100.000
3		ONE HOUR	✓	0	100.000
4		ONE HOUR	✓	860	100.000

Origin-Destination Data

Demand (PCU/hr)

		To			
From		1	2	3	4
	1	0	318	0	1182
	2	318	0	0	11
	3	0	0	0	0
	4	849	11	0	0

Vehicle Mix

HV data entry mode	PCU Factor for a HV (PCU)
HV Percentages	2.00

Heavy Vehicle %

		To			
From		1	2	3	4
	1	0	24	0	5
	2	24	0	0	21
	3	0	0	0	0
	4	6	21	0	0

Results

Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.90	20.93	9.1	C	1376	2065
2	0.40	8.35	0.8	A	302	453
3	0.00	0.00	0.0	A	0	0
4	0.58	5.56	1.5	A	789	1184

Main Results for each time segment

07:15 - 07:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1129	282	8	1831	0.617	1122	875	0.0	1.7	5.460	A
2	248	62	884	1136	0.218	246	246	0.0	0.3	5.007	A
3	0	0	1131	498	0.000	0	0	0.0	0.0	0.000	A
4	647	162	238	1702	0.380	645	893	0.0	0.6	3.605	A

07:30 - 07:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1348	337	10	1830	0.737	1344	1048	1.7	2.9	7.947	A
2	296	74	1059	1035	0.286	295	295	0.3	0.5	6.021	A
3	0	0	1354	400	0.000	0	0	0.0	0.0	0.000	A
4	773	193	285	1674	0.462	772	1069	0.6	0.9	4.236	A

07:45 - 08:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1652	413	12	1829	0.903	1630	1282	2.9	8.4	17.922	C
2	362	91	1284	905	0.400	361	358	0.5	0.8	8.178	A
3	0	0	1645	272	0.000	0	0	0.0	0.0	0.000	A
4	947	237	349	1635	0.579	945	1296	0.9	1.4	5.520	A

08:00 - 08:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1652	413	12	1829	0.903	1649	1285	8.4	9.1	20.929	C
2	362	91	1299	896	0.404	362	362	0.8	0.8	8.348	A
3	0	0	1661	265	0.000	0	0	0.0	0.0	0.000	A
4	947	237	350	1634	0.579	947	1311	1.4	1.5	5.561	A

08:15 - 08:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1348	337	10	1830	0.737	1372	1052	9.1	3.1	8.946	A
2	296	74	1081	1022	0.289	297	301	0.8	0.5	6.161	A
3	0	0	1378	389	0.000	0	0	0.0	0.0	0.000	A
4	773	193	287	1672	0.462	775	1091	1.5	0.9	4.271	A

08:30 - 08:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1129	282	8	1831	0.617	1135	880	3.1	1.8	5.654	A
2	248	62	894	1130	0.219	248	249	0.5	0.4	5.060	A
3	0	0	1143	493	0.000	0	0	0.0	0.0	0.000	A
4	647	162	240	1701	0.381	649	902	0.9	0.7	3.633	A

Proposed Site Access - 2033 | With Development Flows | PM

Data Errors and Warnings

No errors or warnings

Junction Network

Junctions

Junction	Name	Junction type	Use circulating lanes	Arm order	Junction Delay (s)	Junction LOS
1	B4005 / Site Access	Standard Roundabout		1, 2, 3, 4	15.23	C

Junction Network

Driving side	Lighting	Network delay (s)	Network LOS
Left	Normal/unknown	15.23	C

Traffic Demand

Demand Set Details

ID	Year	Scenario	Time period	Traffic profile type	Start time (HH:mm)	Finish time (HH:mm)	Time segment length (min)	Run automatically
D4	2033	With Development Flows	PM	ONE HOUR	16:15	17:45	15	✓

Demand overview (Traffic)

Arm	Linked arm	Profile type	Use O-D data	Average Demand (PCU/hr)	Scaling Factor (%)
1		ONE HOUR	✓	1290	100.000
2		ONE HOUR	✓	433	100.000
3		ONE HOUR	✓	0	100.000
4		ONE HOUR	✓	1286	100.000

Origin-Destination Data

Demand (PCU/hr)

		To			
From		1	2	3	4
	1	0	419	0	871
	2	417	0	0	16
	3	0	0	0	0
	4	1272	14	0	0

Vehicle Mix

HV data entry mode	PCU Factor for a HV (PCU)
HV Percentages	2.00

Heavy Vehicle %

		To			
From		1	2	3	4
	1	0	24	0	7
	2	24	0	0	25
	3	0	0	0	0
	4	4	22	0	0

Results

Results Summary for whole modelled period

Arm	Max RFC	Max Delay (s)	Max Queue (PCU)	Max LOS	Average Demand (PCU/hr)	Total Junction Arrivals (PCU)
1	0.78	9.90	3.8	A	1184	1776
2	0.44	7.25	1.0	A	397	596
3	0.00	0.00	0.0	A	0	0
4	0.90	23.26	8.6	C	1180	1770

Main Results for each time segment

16:15 - 16:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	971	243	10	1830	0.531	966	1264	0.0	1.3	4.641	A
2	326	81	652	1270	0.257	324	324	0.0	0.4	4.714	A
3	0	0	977	565	0.000	0	0	0.0	0.0	0.000	A
4	968	242	312	1657	0.584	962	664	0.0	1.4	5.355	A

16:30 - 16:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1160	290	13	1829	0.634	1157	1513	1.3	1.9	5.979	A
2	389	97	781	1195	0.326	389	388	0.4	0.6	5.529	A
3	0	0	1170	481	0.000	0	0	0.0	0.0	0.000	A
4	1156	289	374	1619	0.714	1152	796	1.4	2.5	7.946	A

16:45 - 17:00

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1420	355	15	1827	0.777	1413	1837	1.9	3.7	9.570	A
2	477	119	954	1096	0.435	475	474	0.6	0.9	7.183	A
3	0	0	1429	367	0.000	0	0	0.0	0.0	0.000	A
4	1416	354	458	1568	0.903	1394	972	2.5	7.9	19.532	C

17:00 - 17:15

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1420	355	15	1827	0.777	1420	1857	3.7	3.8	9.901	A
2	477	119	959	1093	0.436	477	477	0.9	1.0	7.245	A
3	0	0	1435	364	0.000	0	0	0.0	0.0	0.000	A
4	1416	354	459	1568	0.903	1413	976	7.9	8.6	23.262	C

17:15 - 17:30

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	1160	290	13	1828	0.634	1167	1543	3.8	2.0	6.161	A
2	389	97	788	1191	0.327	391	392	1.0	0.6	5.584	A
3	0	0	1179	477	0.000	0	0	0.0	0.0	0.000	A
4	1156	289	376	1618	0.714	1180	802	8.6	2.7	8.993	A

17:30 - 17:45

Arm	Total Demand (PCU/hr)	Junction Arrivals (PCU)	Circulating flow (PCU/hr)	Capacity (PCU/hr)	RFC	Throughput (PCU/hr)	Throughput (exit side) (PCU/hr)	Start queue (PCU)	End queue (PCU)	Delay (s)	Unsignalised level of service
1	971	243	11	1830	0.531	974	1277	2.0	1.3	4.725	A
2	326	81	658	1267	0.257	327	327	0.6	0.4	4.754	A
3	0	0	984	562	0.000	0	0	0.0	0.0	0.000	A
4	968	242	315	1656	0.585	973	670	2.7	1.5	5.532	A

APPENDIX 9

M4 Junction 16 – VISSIM Model Results and Forecasting Report

Proposed Motorway Rest Area
M4 Junction 16, Swindon, Wiltshire

November 2025

Forecasting Report

M4 Junction 16 VISSIM Modelling



Eddisons

REPORT

DOCUMENT:	Forecasting Report
PROJECT:	M4 Junction 16 MOTO Swindon
CLIENT:	Moto Hospitality Ltd
JOB NUMBER:	3136
FILE ORIGIN:	Z:\projects\3728 MOTO Swindon\Docs\Reports\M4 J16 Forecasting Report v4.docx

DOCUMENT CHECKING:

Primary Author:	Initialed:	DH
Contributor	Initialed:	MTC
Review By:	Initialed:	MTC

Issue	Date	Status	Checked for Issue
1	05-11-25	For Submission	
2			
3			
4			

CONTENTS

1	INTRODUCTION	2
2	BASE MODEL.....	3
2.2	VISSIM Version and Parameters	3
2.3	Network Structure.....	4
2.4	Network Changes.....	7
	2023 Reference Case	7
	2027 Reference Case	7
	2027 Reference Case + Development.....	8
	2038 (Local Plan) Reference Case	9
	2038 (Local Plan) Reference Case + Development.....	10
	2038 (Local Plan) Reference Case + Development + BMW.....	10
2.5	Summary of Model Adjustments Agreed with National Highways	11
3	VISSIM MODEL FORECASTING	13
3.1	TEMPro growth factors.....	13
3.2	Committed Development.....	13
3.3	Development Demands	14
4	VISSIM MODEL RESULTS	15
4.2	Core Scenario 2027 ref + dev	16
4.3	Sensitivity Scenario 1 2038 ref + dev.....	17
4.4	Sensitivity Scenario 2 2038 ref + dev + BMW.....	18
5	SUMMARY	20

Appendix A – M4 Westbound Off-Slip Mitigation Scheme and Road Safety Audit
Appendix B – BMW Dealership Application – Potential Site Access
Appendix C – VISSIM Model – Full Results Summary

1 INTRODUCTION

- 1.1.1** Eddisons have been commissioned by Moto Hospitality Ltd to undertake VISSIM modelling of a new site at J16 of the M4, South of Swindon. There are a number of scenarios for the core development in 2027, and sensitivity testing in 2038.
- 1.1.2** A base model for the year of 2023 was developed by National Highways for this junction. Details relating to the development of the Base VISSIM model can be found in the Local Model Validation Report (LMVR).
- 1.1.3** The next stage of the model development requires the model to be forecast to future years. For the purpose of this testing, a core year of 2027 has been developed and a sensitivity test of 2038.
- 1.1.4** This document details the development testing methodology, the future year scenarios methodology, assumptions and the results of the testing.
- 1.1.5** The note also provides details on the development, including trip generation and distribution methodology along with site access arrangements and how this has been represented within the VISSIM models.

2 BASE MODEL

2.1.1 The core study area encompasses J16 of the M4, the Eastern and Western approaches of the M4, a short section of the A3102 to the North and Southwest of the motorway junction, and a section of the B4005 to the Southeast (where the Moto site access will enter the network).

2.1.2 National Highways developed the Base VISSIM model for this junction, a copy of the LMVR can be found in the accompanying Transport Assessment. The Base model calibrated and validated to a high and robust standard.

2.2 VISSIM Version and Parameters

2.2.1 The 2023 Model has been updated to VISSIM 2025 SP02. This was the newest available version of the software at the time of forecasting and it was deemed that the updated software still maintained strong correlation to the base. This has been agreed and accepted by National Highways.

2.2.2 The model utilises MOVA signalisation at J16, in the 2023 scenario a shorter green time is utilised, however after consultation with National Highways, a longer green time was utilised for all subsequent model testing.

2.2.3 The peak hours assumed for assessment are, AM 07:30-08:30 and PM 16:30-17:30

2.2.4 Scenario management has been used for all scenarios, as is best practice. All future year scenarios have been developed using the same methodology.

2.2.5 The scenarios of focus in this model are;

- AM 2023 Reference Case.
- PM 2023 Reference Case.
- AM 2027 Reference (Base) Case.
- PM 2027 Reference (Base) Case.

- AM 2027 Reference (Base) Case + Development.
- PM 2027 Reference (Base) Case + Development.

2.2.6 There are also scenarios that have been tested for sensitivity, these are;

- AM 2038 (Local Plan) Reference Case.
- PM 2038 (Local Plan) Reference Case.
- AM 2038 (Local Plan) Reference Case + Development.
- PM 2038 (Local Plan) Reference Case + Development.
- AM 2038 (Local Plan) Reference Case + Development + BMW application.
- PM 2038 (Local Plan) Reference Case + Development + BMW application.

2.2.7 The weight of the forecasting and development impact will be focussed on the 2027 cases.

2.3 Network Structure

2.3.1 The model extent is shown below in Figure 2.1 and the VISSIM models are shown in

2.3.2 Figure **2.2** for the Base, Figure 2.3, for the development access including with the mitigation on the off-slip and Figure 2.4 for the development access, mitigation on the off-slip, mitigation for the local plan and BMW application access included.



Figure 2.1 Model extent

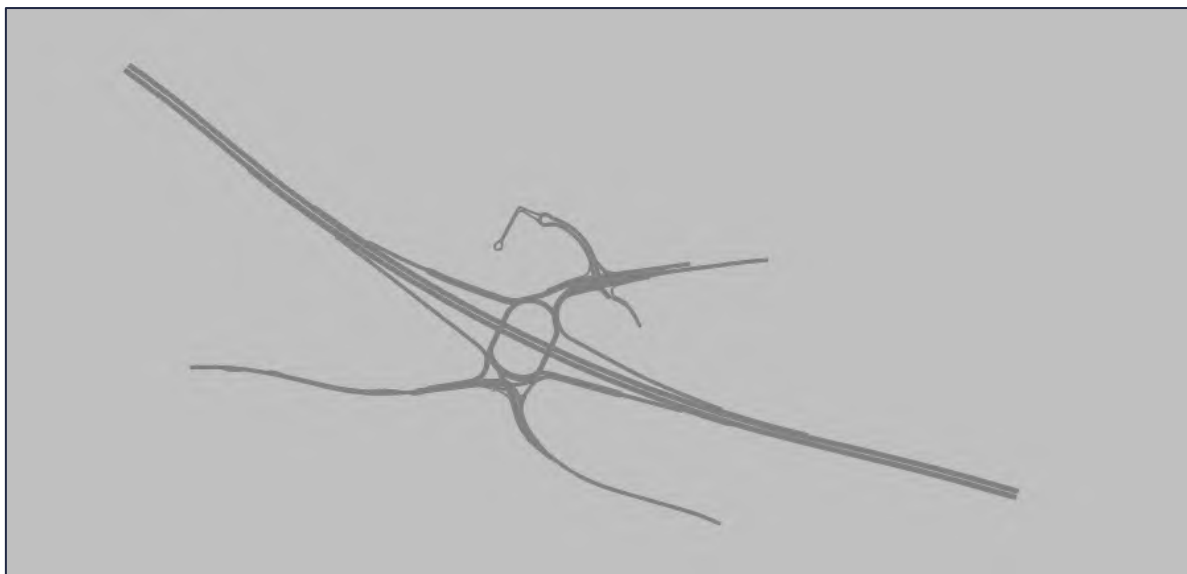


Figure 2.2 VISSIM Base network

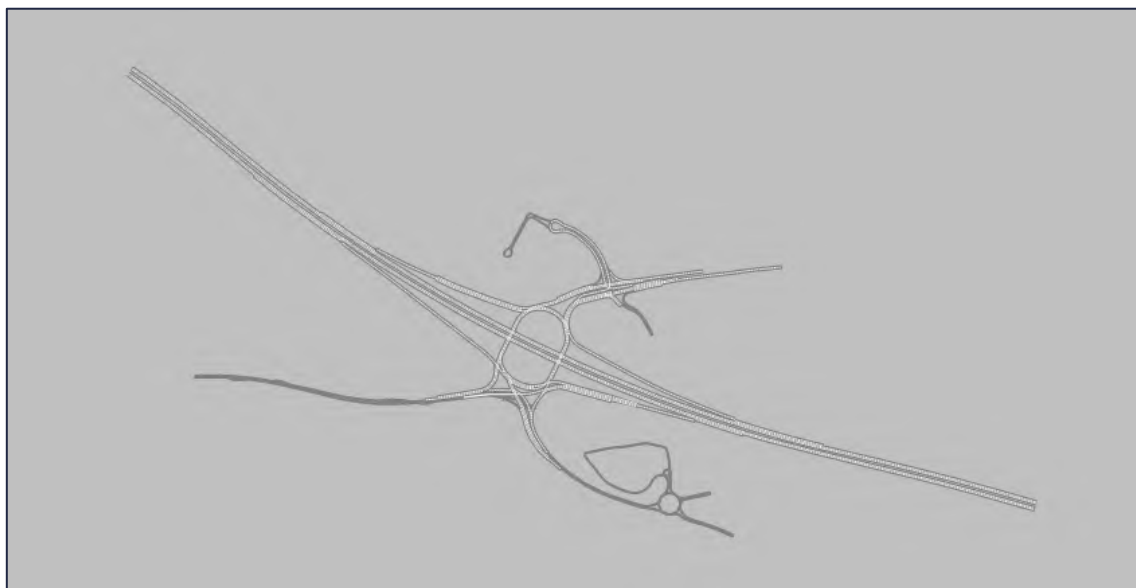


Figure 2.3 VISSIM network with development access

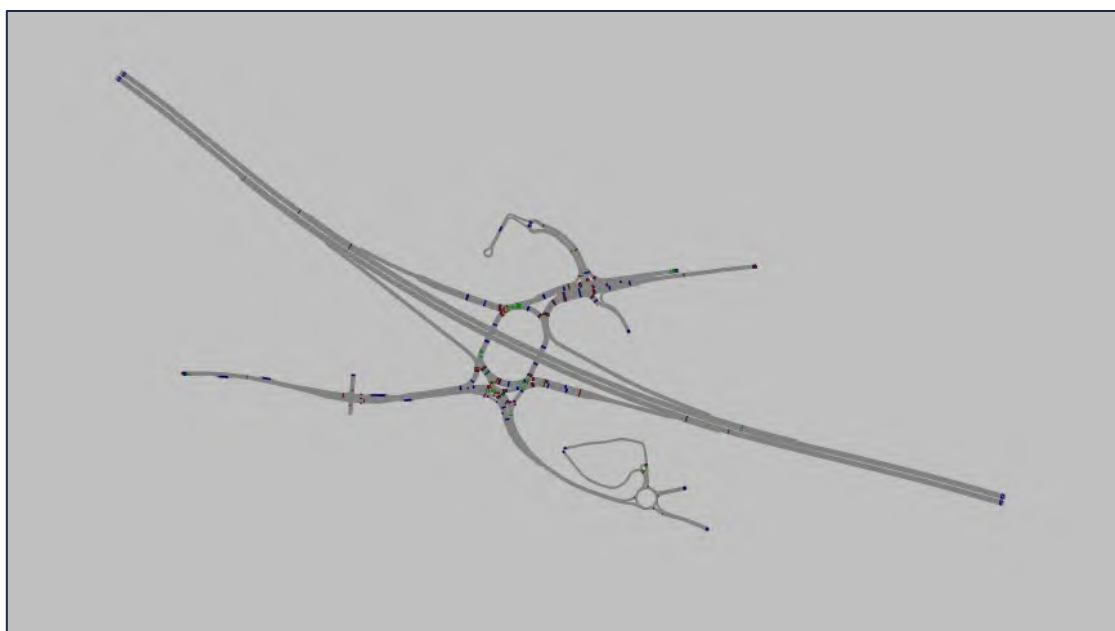


Figure 2.4 VISSIM network with development access and BMW access

2.4 Network Changes

2.4.1 Following post submission discussions with National Highways, a number of changes have been made to the VISSIM model, as detailed below:

2023 Reference Case

2.4.2 Reference case with an unchanged structure, no changes to inter-green timing.

2027 Reference Case

2.4.3 Reference case with altered inter-green timings, background growth and committed development trips have been added to the matrices. This also includes the addition of a yellow box at the end of the West bound off-slip at the Southeast corner of the gyratory. As seen in **Figure 2.5** below.

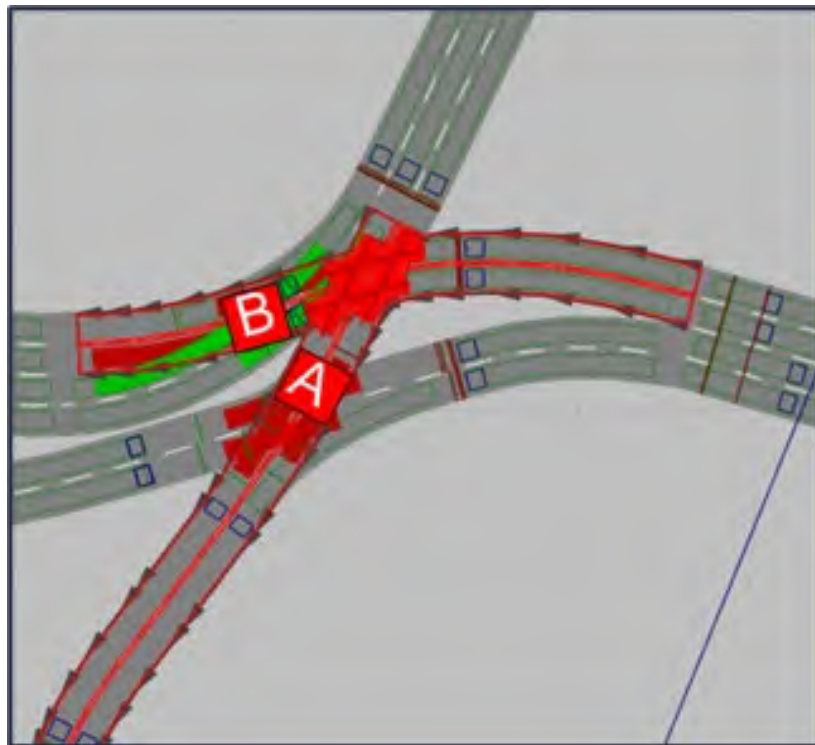


Figure 2.5 – To account for the addition of yellow box junction.

2027 Reference Case + Development

- 2.4.4 The 2027 Reference Case, plus the addition of the Moto development site access Figure 2.6 and M4 West bound off-slip mitigation scheme Figure 2.7.

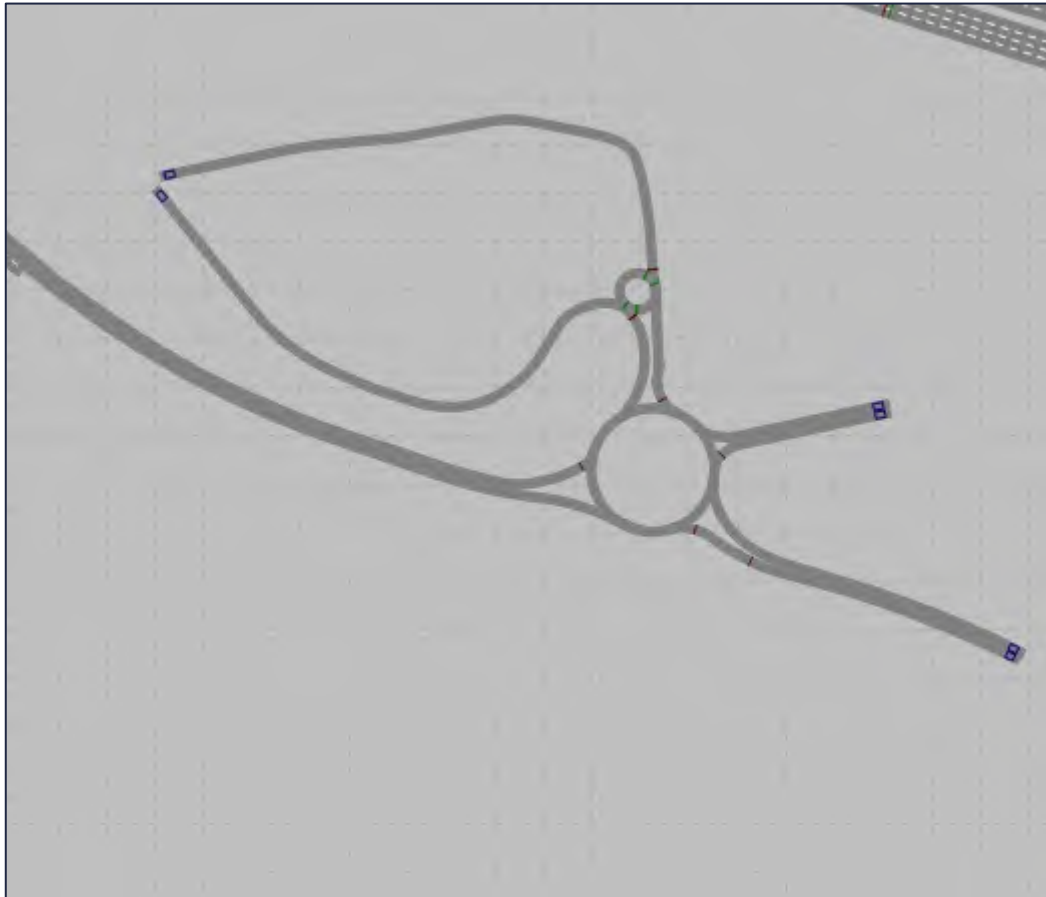


Figure 2.6 Development access roundbout

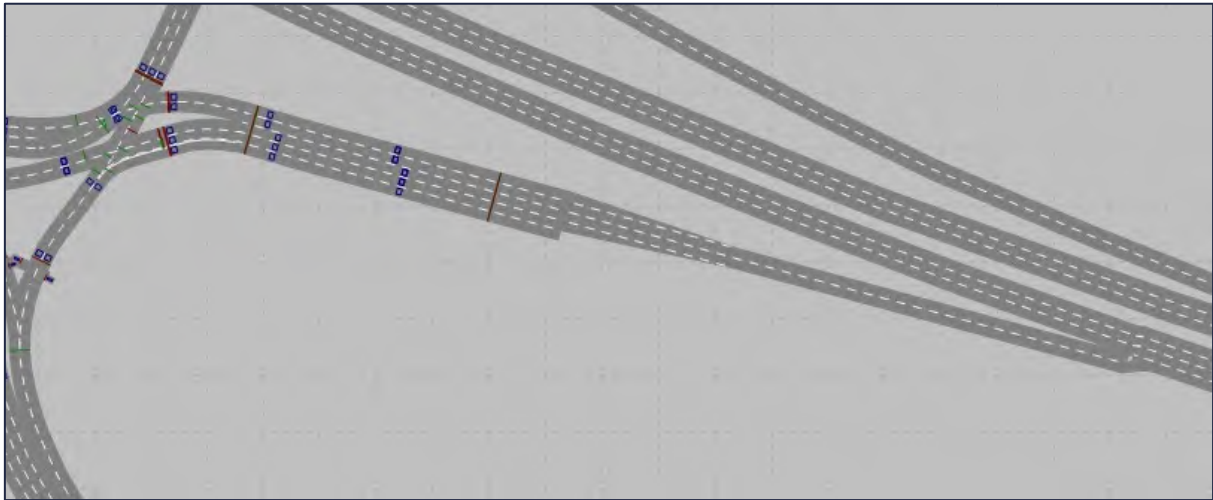


Figure 2.7 M4 Westbound off-slip mitigation

2.4.5 The development access features a new single lane roundabout on the B4005 with access to the development and farmland. Technical drawings for the access can be found in the accompanying Transport Assessment.

2.4.6 The M4 West bound off-slip mitigation scheme adds an additional lane to the M4 West bound off-slip of 120m length from the stop line at the signals, this also rearranges the entrance to the slip road so that the main line feeds into the far left lane, rather than into the right lane, allowing for vehicles to distribute more evenly across the lanes. Technical drawings of the mitigation scheme can be found in **Appendix A**. The proposed scheme has been subject to a Stage 1 Road Safety Audit and agreed with National Highways and Wiltshire County Council.

2038 (Local Plan) Reference Case

2.4.7 This is a sensitivity reference case with the local plan matrices developed by Wiltshire. There is a mitigation scheme included that has been developed by Wiltshire,

2.4.8 Figure 2.8. This extends the 3 lanes back to accommodate the uplift in volume from the local plan. This also includes the proposed yellow box junction arrangement from **Figure 2.5**.

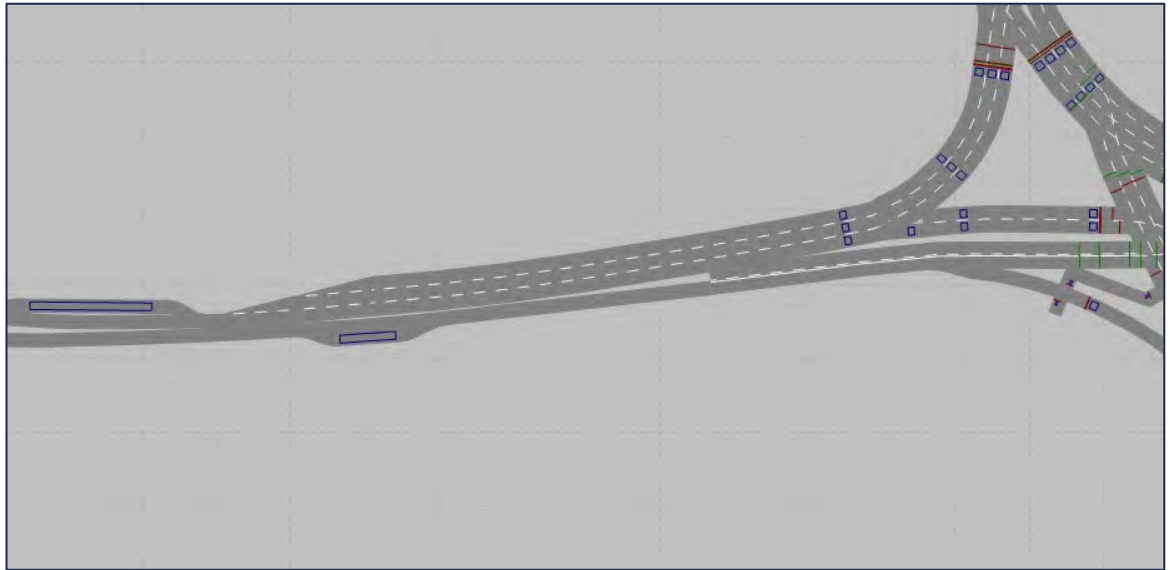


Figure 2.8 Local Plan mitigation scheme

2038 (Local Plan) Reference Case + Development

2.4.9 This is a sensitivity forecast assessment. The local plan matrices and the development matrices are included in this scenario. This includes the addition of the yellow box (**Figure 2.5**), the development access (**Figure 2.6**), the West bound off-slip mitigation (**Figure 2.7**) and the local plan mitigation (**Figure 2.8**).

2038 (Local Plan) Reference Case + Development + BMW

2.4.10 This is a sensitivity forecast assessment. The local plan matrices, plus the development matrices and the matrices for the BMW dealership application on the A3102 Swindon Road are included in this scenarios.

2.4.11 This includes the addition of the yellow box (

2.4.12 **Figure 2.5**), the development access (**Figure 2.6**), the West bound off-slip mitigation (**Figure 2.7**) and the local plan mitigation (**Figure 2.8**).

2.4.13 There is also a new junction proposed for access to the potential BMW dealership in this scenario. It includes a signalised junctions with additional lanes that run through to the local plan mitigation and there is a dedicated right hand turn in for the BMW access and Crematorium access. The current proposed technical plans for this junction can be found in **Appendix B**.

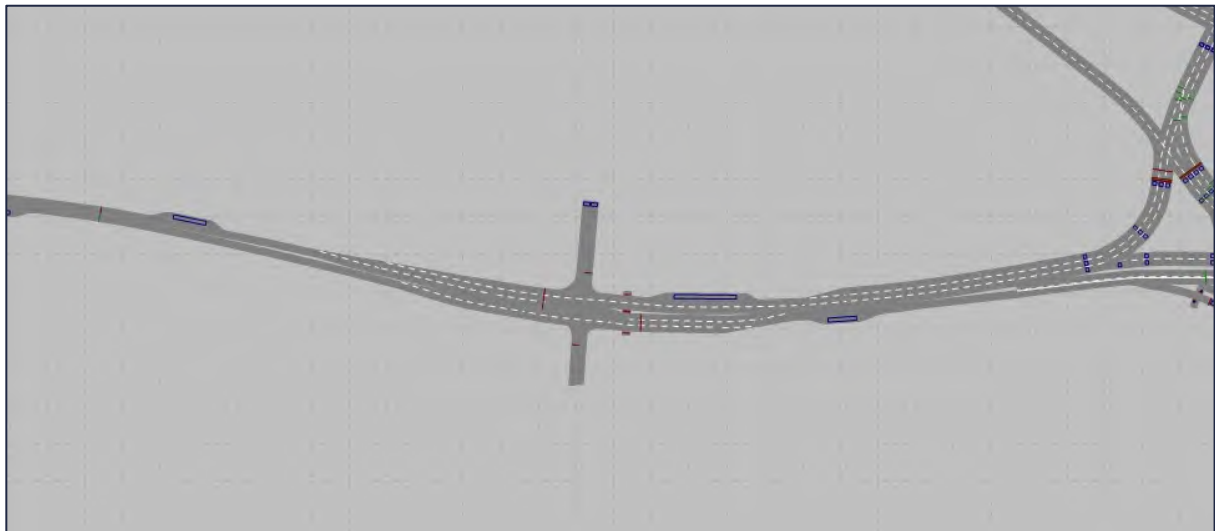


Figure 2.9 BMW Application – Proposed Site Access

2.5 Summary of Model Adjustments Agreed with National Highways

2.5.1 As part of the development process for the forecast years a number of changes were adopted for the model. These are detailed below in Table 2.1.

Table Comment	Modification	Scenarios
Required signal intergreen times to be increased.	Intergreen at the southeast signals increased to 6 seconds for each phase change.	All forecast scenarios. (Excludes 2023 ref cases).
Yellow box utilisation for the southeast corner.	Included yellow box coding	All forecast scenarios. (Excludes 2023 ref cases).
Revised lane allocation on A3102 approach to M4 J16.	Allowed all 3 lanes to connect through on connector 10042.	2038 scenarios.
MSA lane allocation.	Ensured MSA used lane 1 on overbridge and off-slip. Utilising both longer lane change distribution and banning of vehicles.	All + dev scenarios.
Off-slip Priority rule extending beyond stop line.	Ensured priority rule was not beyond stop line.	All scenarios.
Goods vehicles getting stuck and having an unreasonable lane distribution at exit from J16 on the southeast corner.	Changed heavy vehicle banning in lanes in favour of a refined distance distribution for goods vehicles.	All scenarios.
Lane change for off-slip coding.	Changed the connector 10067 to the off-slip	All + dev scenarios.

	nearside lane so that traffic is in the middle of the arrangement in the mitigation scheme.	
Various changes to priority rules around the junction.	Amendments suggest accepted and implemented to improve the general junction performance.	All scenarios.

Table 2.1Summary of discussed modifications

3 VISSIM MODEL FORECASTING

3.1 TEMPro growth factors

3.1.1 There are two future years forecast in the VISSIM model, 2027 and 2038. 2027 is the core scenario testing and 2038 is a sensitivity test to inform wider decision making.

3.1.2 TEMpro 8.1 has been utilised to obtain growth factors to modify background traffic volumes between the 2023 Base years and 2027 forecast. The growth factors are for Wiltshire 007, as this is the geographical location for J16 of the M4. These are derived from a combined value for Origin and Destination.

Date range	AM	PM
2023-2027	1.0204	1.0206
2023-2033	1.0982	1.0997

Table 3.1. TEMPro Growth Factors

3.1.3 The growth for the local plan reference has been calculated through the SATURN Model and attributed to Car, LGV and HGV. The application of traffic growth has been agreed with National Highways.

3.1.4 This growth has been applied to all light vehicle types across the entire simulation period. The reference matrices were input to the model with the grown volumes included, as well as committed development.

3.2 Committed Development

3.2.1 In the 2027 reference, the Witchelstowe development was added to the reference matrices as well as volume for developments at Royal Wooton Bassett. Details of these can be found in the transport assessment. These developments as well as the growth are considered robust in terms of traffic volumes and provide a high stress to the model.

3.2.2 In the 2038 reference Wiltshire provided their local plan matrices that encompassed all the committed development and reduced some of the growth to account for these developments. The 2038 Sensitivity analysis is considered a worst case scenario to understand sensitivities on the network. The 2038 scenario includes SBC delivering the full extent of the Wichelstowe development and a bus gate on Redposts Drive which results in a redistribution of Wichelstowe traffic + general traffic growth and no consideration of potential Regulation 18 non-car accessibility interventions. As such, it is considered that the Sensitivity analysis is unlikely to be fully realised on the network and the bus gate delivery is also within SBC's power not to pursue due to the impacts it would have on Junction 16.

3.2.3 For further information about the committed development, please reference the Transport Assessment.

3.3 Development Demands

3.3.1 Development demands were also developed for this project.

3.3.2 Trip generation for the development was derived from referencing two other sites on the M4. Membury and Leigh Delamere.

3.3.3 Both of these sites are 'online' MSA and as such exhibit much higher turn-in rates than the proposed MRA. Further details of this can be found in the accompanying TA.

		AM	PM
		2027	2027
Lights	Inbound	191	251
	Outbound	191	251
Heavies	Inbound	60	79
	Outbound	60	79

Table 3.2 Development inbound and outbound volumes

3.3.4 Table 3.2 above details the total demand for the modelled periods, these are broken down into 15 minute segments in the matrices and have been included in the "with dev" matrices in the model.

4 VISSIM MODEL RESULTS

- 4.1.1 Complete VISSIM results are provided in **Appendix C**.
- 4.1.2 The below section contains a summary of the forecast impacts.
- 4.1.3 During modelling it was found that there were extended queues on the M4 Westbound off slip, due to this it was decided that mitigation was required in order to alleviate this additional volume coming off of the M4.
- 4.1.4 Figure 4.1 below shows the proposed layout of the junction. In the with dev scenarios there is now an additional lane at the stop line for traffic turning left towards the B4005. The lane extends back 140m. Traffic bound for the services has been allocated to this lane and banned from the others. On the ground this will be done through signage for the services and lane markings.
- 4.1.5 Both lanes turning left then utilise the existing two lanes and merge down as before.

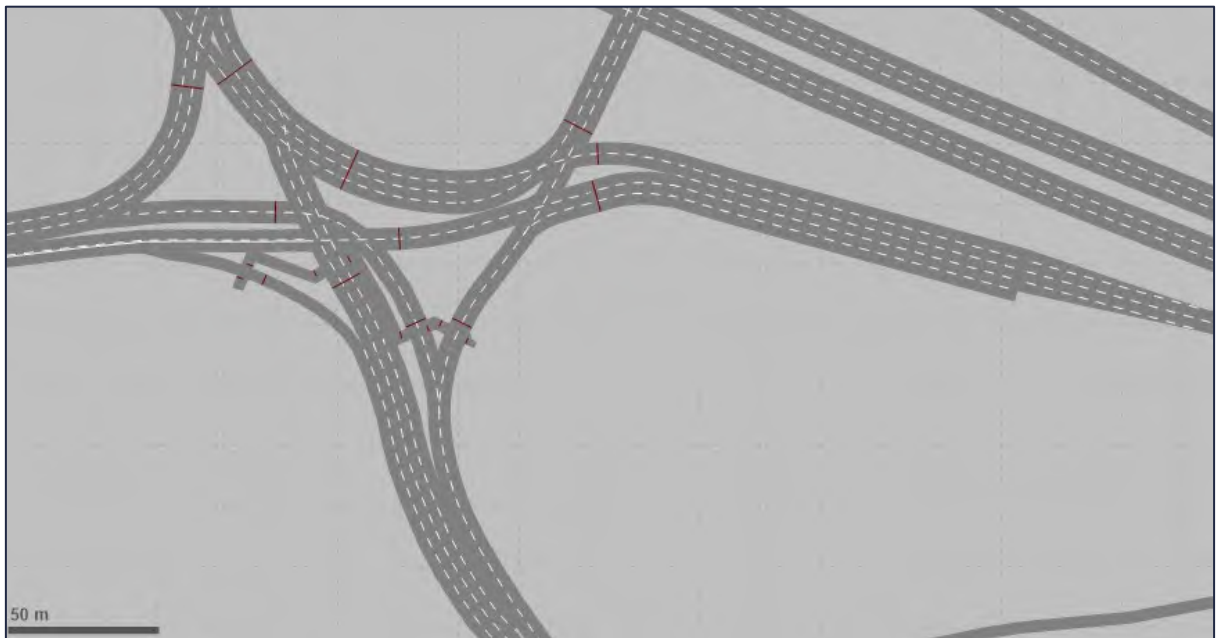


Figure 4.1 New configuration.

4.2 Core Scenario 2027 ref + dev

- 4.2.1** Results show that the inclusion of the Core scenario demands have a negligible impact on the network in both the AM and PM peak periods. Average delay per vehicle increases by 5.3s in the AM and decreases by 8.9s in the PM. As there is an additional roundabout being included for the development access, this is not an unreasonable change to expect in the AM and for the PM the change in balance of vehicles arriving at the gyratory helps reduce the delay of traffic leaving Swindon.
- 4.2.2** With regard to journey times, in the AM the route A3102 EB increases by 28 seconds, the route A3102 WB increases by 1 second, the route M4 EB to B4005 increases by 6 seconds, the route B4005 to M4 WB increases by 8 seconds, the route Lydiard Fields to M4 EB increases by 2 seconds and M4 WB to Lydiard fields increases by 1 second. Most of these increases are negligible. The increase to the A3102 WB route is attributed to the additional traffic from the development, as extra trips are calling the signals on the B4005.
- 4.2.3** In the PM there are significant improvements to journey times. The route A3102 EB decreases by 7 seconds, the route A3102 WB decreases by 95 seconds, the route M4 EB to B4005 decreases by 22 seconds, the route B4005 to M4 WB decreases by 31 seconds, the route Lydiard Fields to M4 EB decreases by 127 seconds and M4 WB to Lydiard fields decreases by 23 seconds. The decreases can be attributed to the reduction in pressure on the eastern side of the gyratory. The mitigation on the off-slip allows for more traffic volume to clear the off-slip and gives more signal time to the traffic leaving Swindon. This has the largest effect on clearing volume leaving Swindon but has wider benefit as there is less capacity constraint. The access roundabout for the development causes some queuing on the B4005. This delays a portion of the volume reaching M4 J16 and places queuing volume before the access roundabout, effectively allowing more traffic to move from the other arms of the gyratory.

4.2.4 With regards to queue lengths, AM maximum queue lengths on the Westbound off-slip decrease by 10m, there is an increase of 10m on the Eastbound off-slip. There is additional queueing on the A3102 Eastbound, with up to 208m of extra queue length. The PM maximum queue lengths on the Westbound off-slip decrease by 34m and there is a decrease of 2m on the Eastbound off-slip. There are decreases in queue lengths of up to 564m on the B4005 leaving Swindon.

4.2.5 It is important to note that the development mitigation ensures that the queues do not exceed the length of the off-slip.

4.3 Sensitivity Scenario 1 2038 ref + dev

4.3.1 Results show that the inclusion of sensitivity scenario 1 demands have a negligible impact on the network in both the AM and PM peak periods. Average delay per vehicle increases by 7.2s in the AM and decreases by 9.8s in the PM. As there is an additional roundabout being included for the development access, this is not an unreasonable change to expect in the AM and for the PM the change in balance of vehicles arriving at the gyratory helps reduce the delay of traffic leaving Swindon.

4.3.2 In regard to journey times, in the AM the route A3102 EB increases by 47 seconds, the route A3102 WB increases by 3 second, the route M4 EB to B4005 increases by 14 seconds, the route B4005 to M4 WB increases by 8 seconds, the route Lydiard Fields to M4 EB increases by 9 seconds and M4 WB to Lydiard fields increases by 14 second. Most of these increases are negligible. The increase to the A3102 WB route is attributed to the additional traffic from the development, as extra trips are calling the signals on the B4005.

4.3.3 In the PM there are significant improvements to journey times with a couple of negligible increases. The route A3102 EB increase by 1 seconds, the route A3102 WB decreases by 108 seconds, the route M4 EB to B4005 decreases by 20 seconds, the route B4005 to M4 WB increases by 6 seconds, the route Lydiard Fields to M4 EB decreases by 124 seconds and M4 WB to Lydiard fields decreases by 53 seconds. The decreases can be attributed to the reduction in pressure on the eastern side of the gyratory. The mitigation on the off-slip allows for more traffic volume to clear the off-slip and gives more signal time to the traffic leaving Swindon. This has the largest effect on clearing volume leaving Swindon but has wider benefit as there is less capacity constraint.

4.3.4 With regards to queue lengths, AM maximum queue lengths on the Westbound off-slip decrease by up to 4m, there is an increase of 11m on the Eastbound off-slip. There is additional queueing on the A3102 Eastbound, with up to 229m of extra queue length. The PM maximum queue lengths on the Westbound off-slip decrease by 180m and there is a decrease of 2m on the Eastbound off-slip. There are decreases in queue lengths of up to 163m on the B4005 leaving Swindon.

4.3.5 It is important to note that the development mitigation ensures that the queues do not exceed the length of the off-slip.

4.3.6 The same offset of queuing before the access roundabout as seen in the 2027 scenario is seen again.

4.4 Sensitivity Scenario 2 2038 ref + dev + BMW

4.4.1 Results show that the inclusion of sensitivity scenario 2 demands have a slightly higher impact on the network in the AM peak period and negligible impact in the PM peak period. Average delay per vehicle increases by 15.1s in the AM and increases by 2.4s in the PM. As there is an additional roundabout and signalised junction being included for the development access, this is not an unreasonable change to expect in the AM and PM. The additional delay from the addition of the signalised junction negates some of the benefits witnessed in the previous scenarios.


- 4.4.2** With regard to journey times, in the AM the route A3102 EB increases by 107 seconds, the route A3102 WB increases by 43 second, the route M4 EB to B4005 increases by 17 seconds, the route B4005 to M4 WB increases by 8 seconds, the route Lydiard Fields to M4 EB increases by 26 seconds and M4 WB to Lydiard fields increases by 2 seconds. The increases are largely attributed to the additional junctions rather than volume increases. The increase to the A3102 EB route is attributed to the additional traffic from the development, as extra trips are calling the signals on the B4005 and to the addition of signals on this route.
- 4.4.3** In the PM there are significant improvements to journey times, however there is also a significant increase seen to journey times on the A3102 EB route. The route A3102 EB increases by 73 seconds, the route A3102 WB decreases by 41 seconds, the route M4 EB to B4005 decreases by 11 seconds, the route B4005 to M4 WB increases by 7 seconds, the route Lydiard Fields to M4 EB decreases by 77 seconds and M4 WB to Lydiard fields decreases by 42 seconds. The decreases can be attributed to the reduction in pressure on the eastern side of the gyratory. The mitigation on the off-slip allows for more traffic volume to clear the off-slip and gives more signal time to the traffic leaving Swindon. This has the largest effect on clearing volume leaving Swindon but has wider benefit as there is less capacity constraint. The increase to the A3102 EB route is attributed to the additional traffic from the development, as extra trips are calling the signals on the B4005 and to the addition of signals on this route.
- 4.4.4** With regards to queue lengths, AM maximum queue lengths on the Westbound off-slip decrease by 12m, there is an increase of 25m on the Eastbound off-slip. There is additional queueing on the A3102 Eastbound, with up to 410m of extra queue length. The PM maximum queue lengths on the Westbound off-slip decrease by 132m and there is a decrease of 2m on the Eastbound off-slip. There are decreases in queue lengths of up to 29m on the B4005 leaving Swindon. There is an addition of 120m of queuing on the A3102 in EB in the PM.
- 4.4.5** It is important to note that the development mitigation ensures that the queues do not exceed the length of the off-slip.

5 SUMMARY


- 5.1.1** Eddisons have been commissioned by Moto Hospitality Ltd to provide microsimulation modelling services in support of a live planning application for a proposed motorway rest area to the Southwest of Swindon at J16 of the M4.
- 5.1.2** This note sets out the VISSIM model methodology for testing, and the results which set out the forecast impact of a development at J16 of the M4 and the surrounding road network.
- 5.1.3** Modelling results suggest that the network can accommodate the forecast traffic growth in the AM and PM, with minimal impact on network performance. In the PM peak there are time savings as a result of the increased capacity on the M4 J16 westbound off slip delay on traffic reaching the junction attributed to the new access roundabout on the B4005.
- 5.1.4** There is no negative impact to mainline flow of the M4 in any scenario that has development and mitigation.
- 5.1.5** It is deemed that the development will have no negative impacts on the strategic network provided the measures detailed are taken.
- 5.1.6** In 2027 no discernible negative impact is observed in the AM and PM. There is some increase to queue length on the A3102 Eastbound approaching Swindon. Overall, the network still performs within its capability.
- 5.1.7** In the sensitivity scenarios the network still performs within its capability with the additional volumes and access junctions. Further sensitivity testing was carried out by National Highways with some alternative lane change distance for the BMW garage junction. This found that under some circumstances queuing back can have some effects on Westbound traffic, however, this was a sensitivity test and does not hold weight with the MOTO or Wiltshire Local Plan applications.

APPENDICES


APPENDIX A

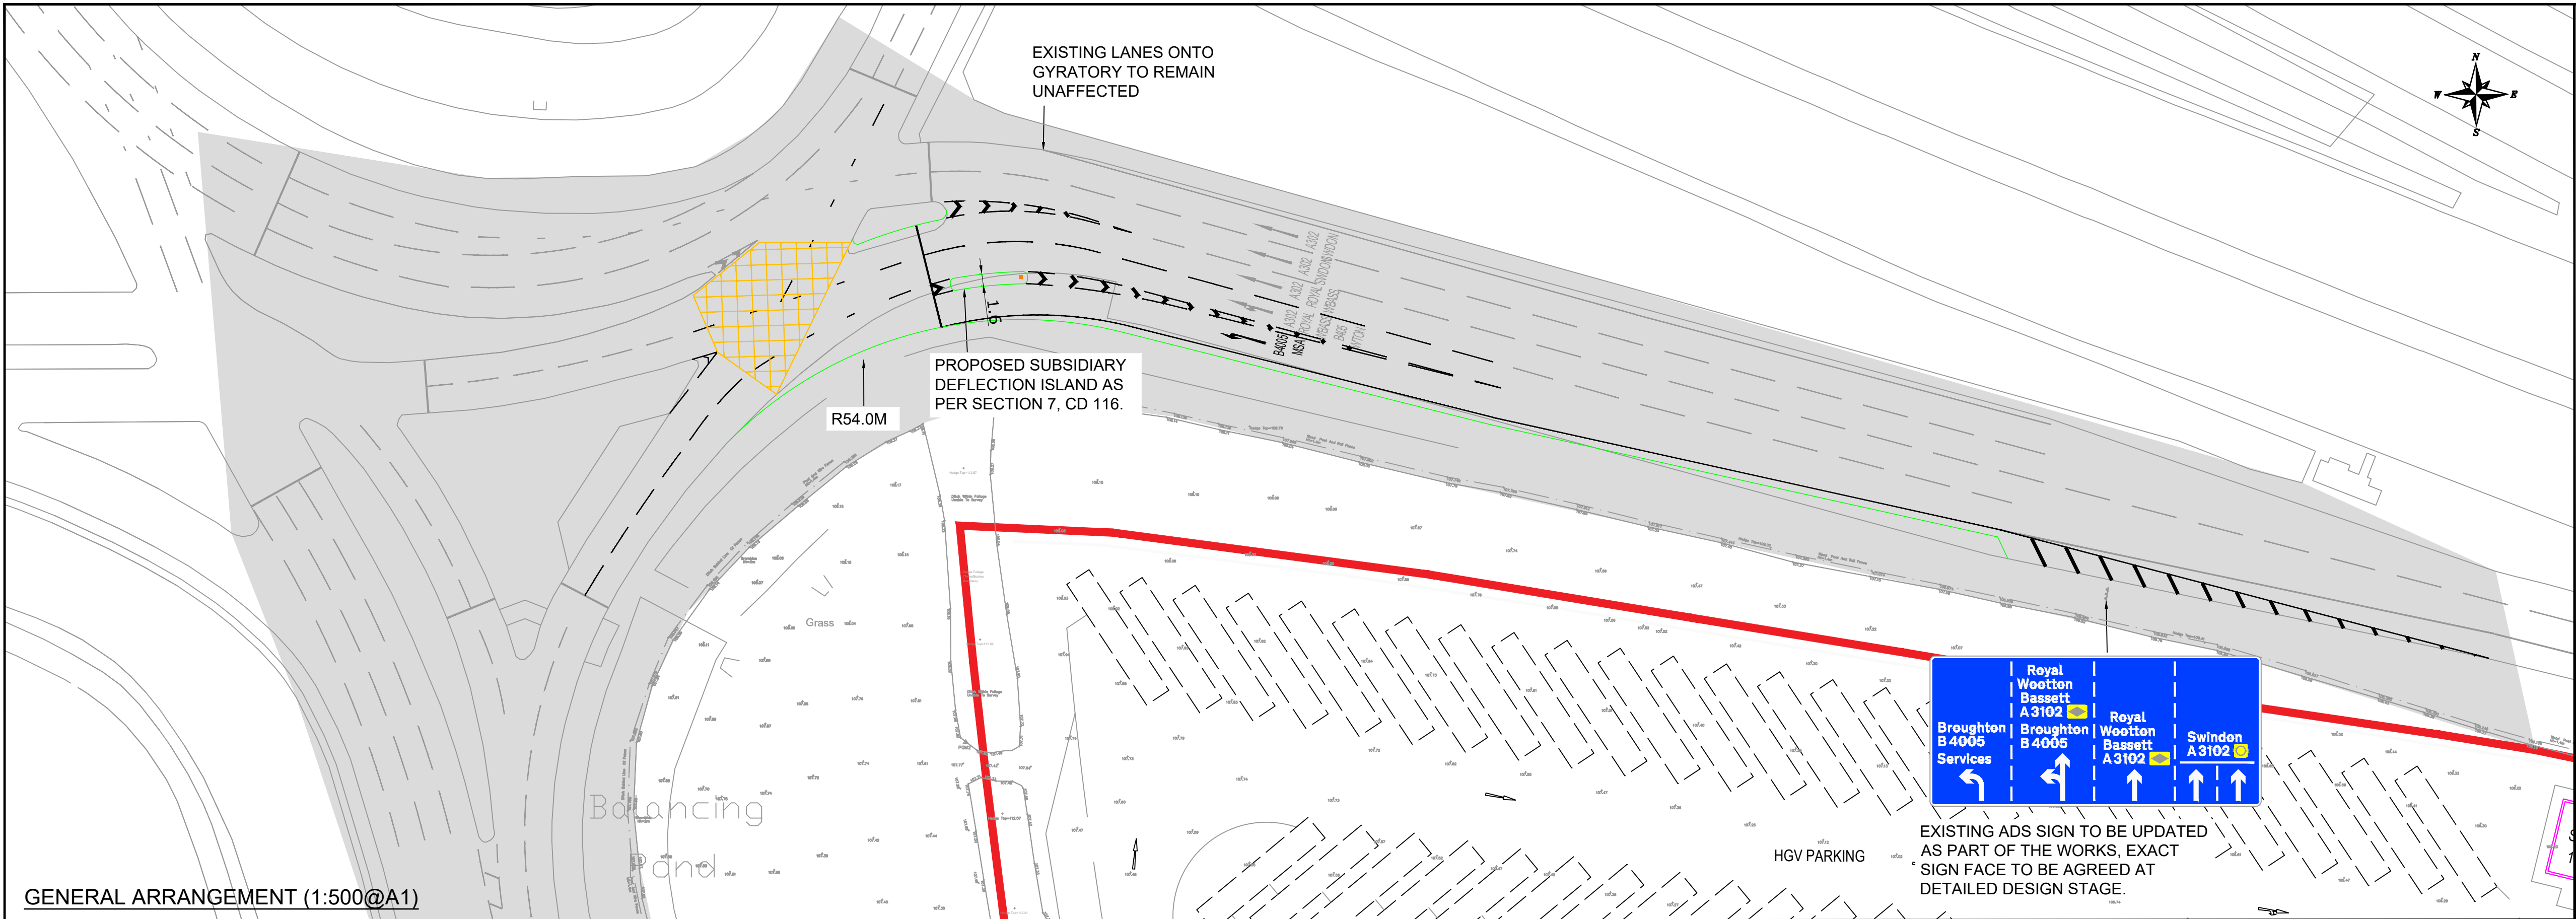


GENERAL ARRANGEMENT (1:500@A1)

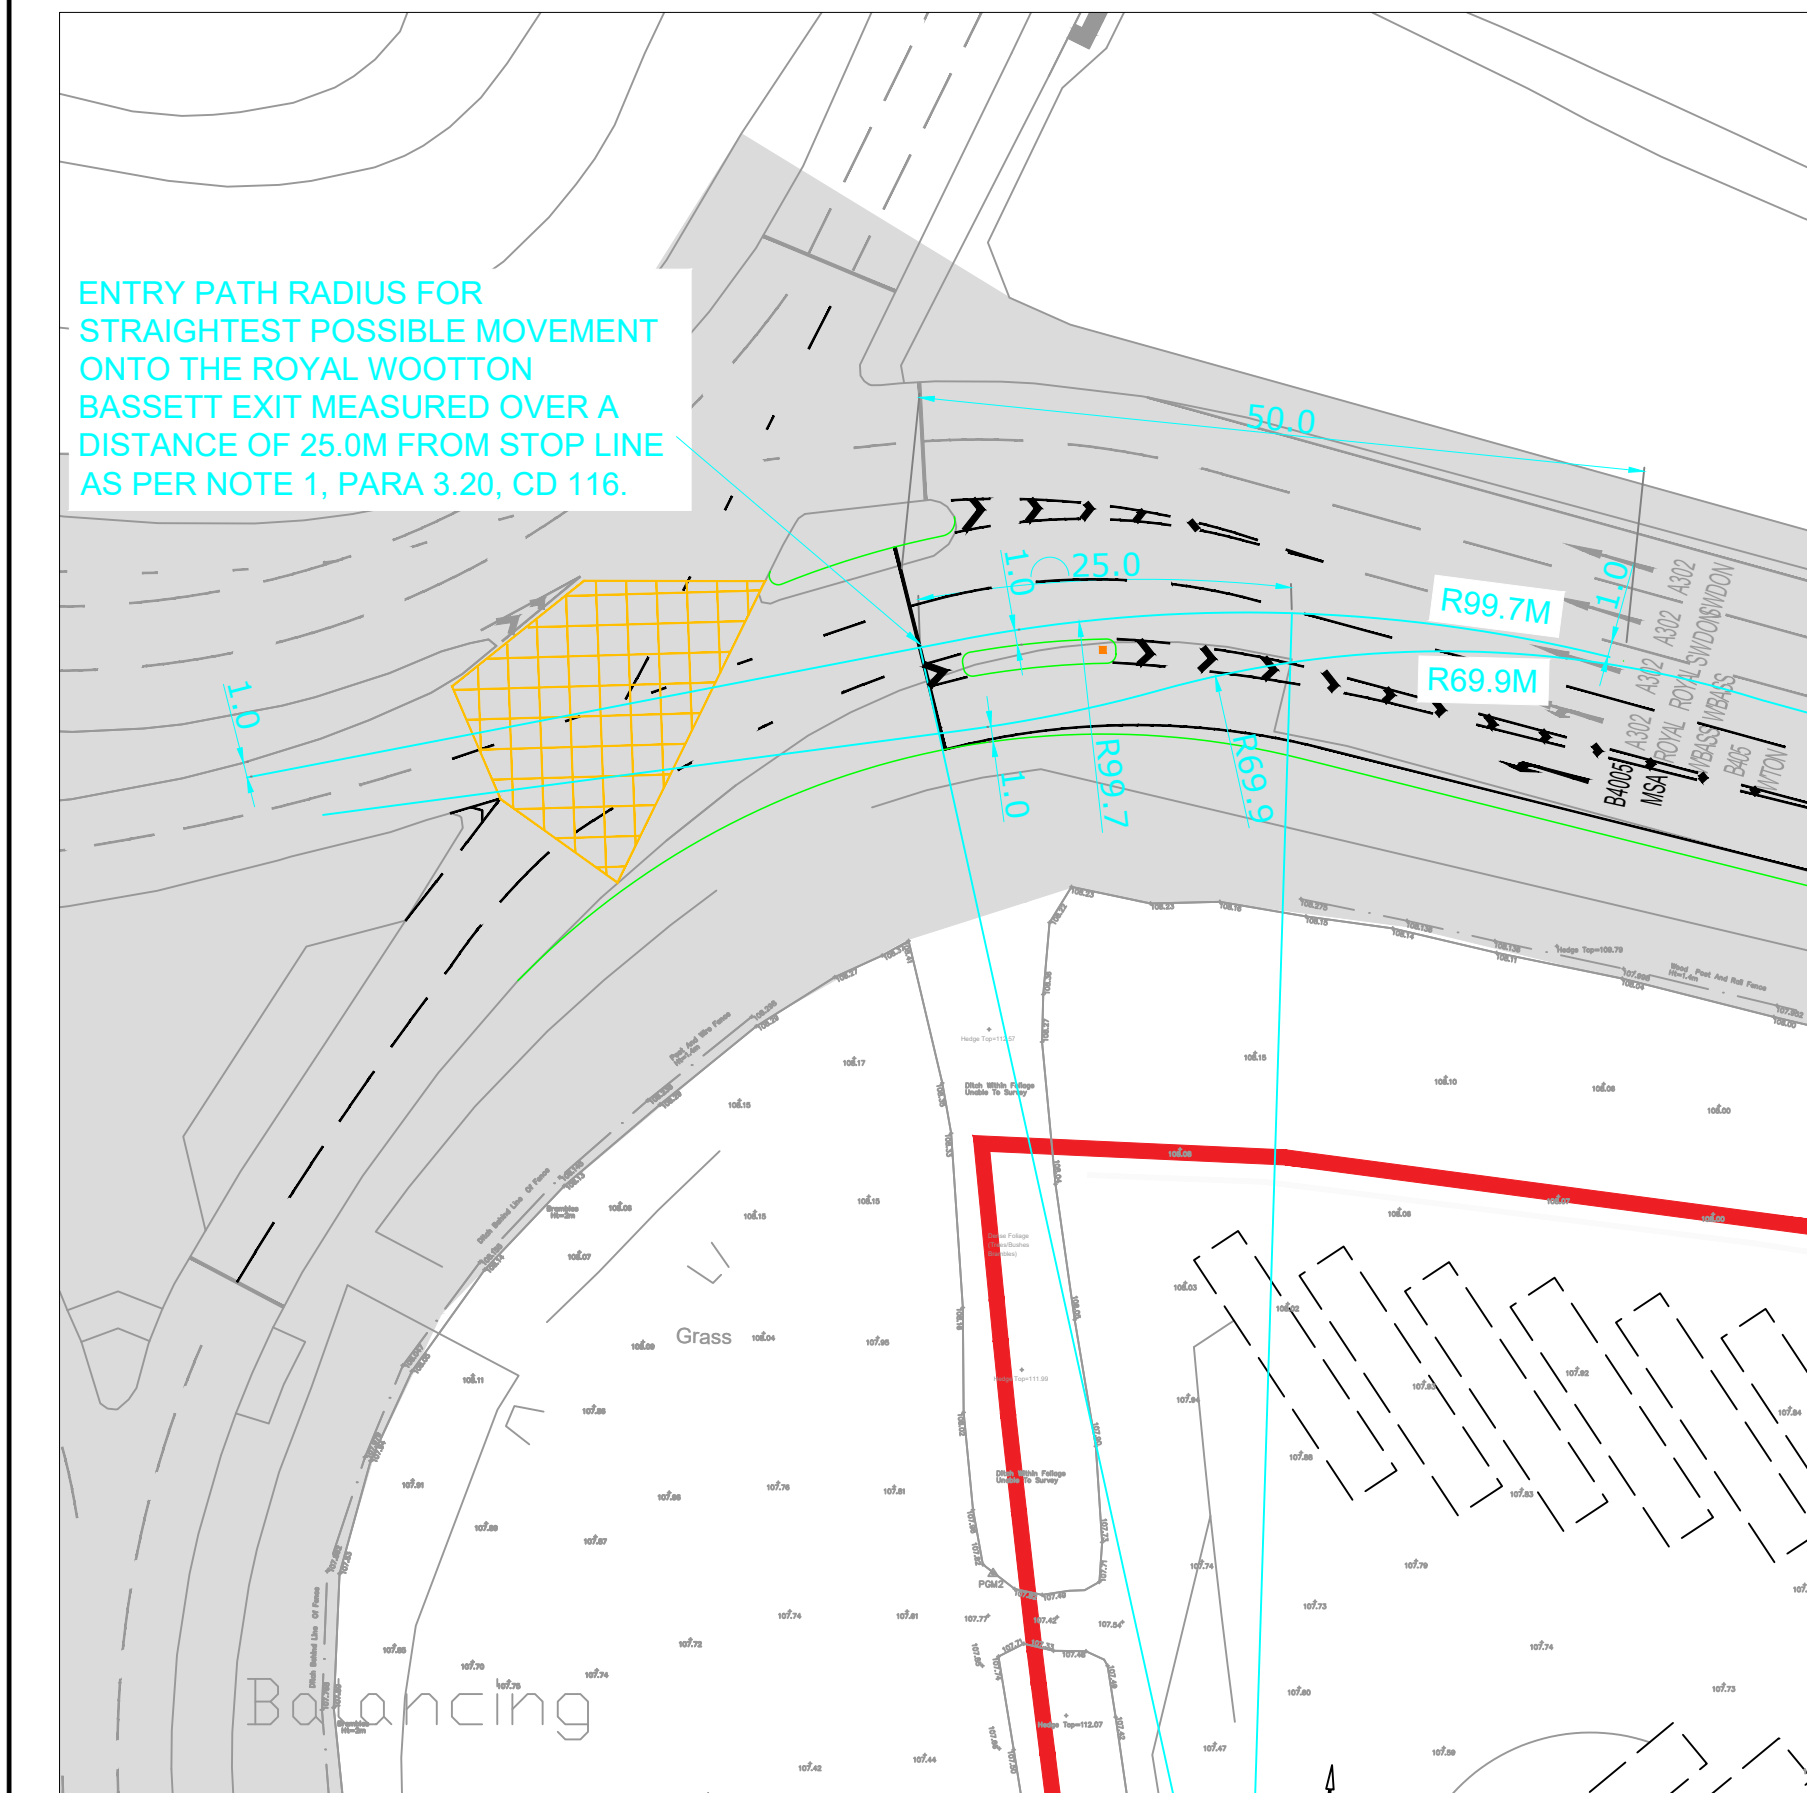


ENTRY PATH RADIUS (1:500@A1)

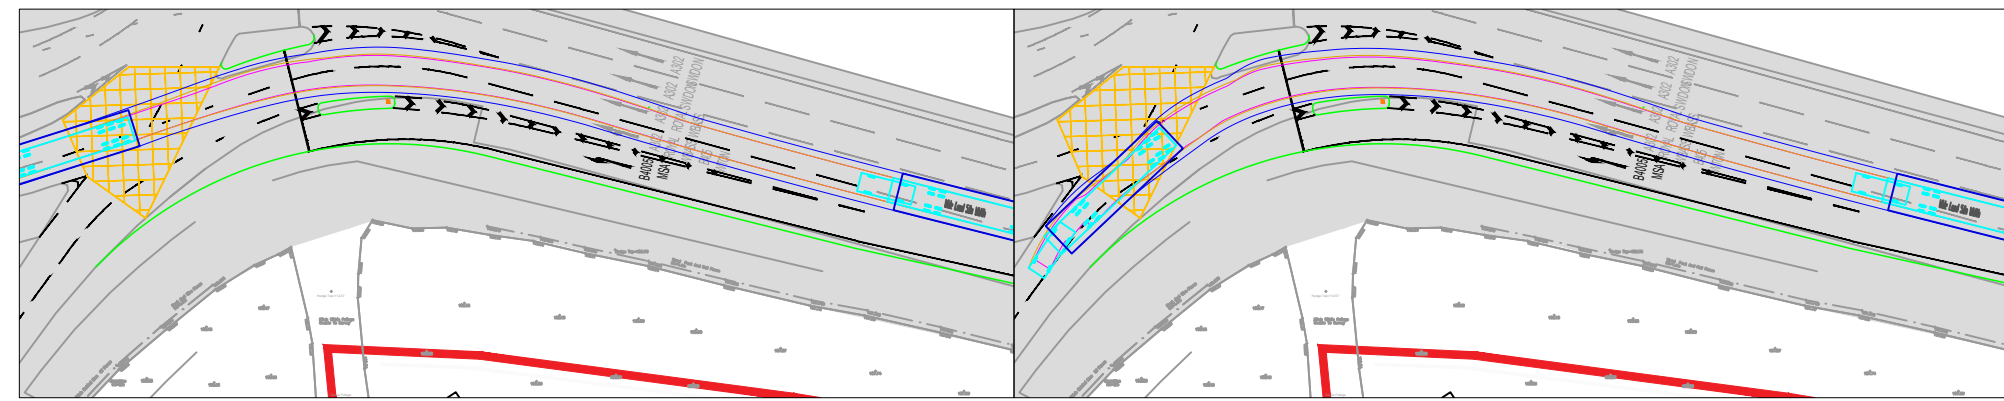

SWEPT PATH ANALYSIS: ABNORMAL LOAD VEHICLE (5.0M WIDTH)

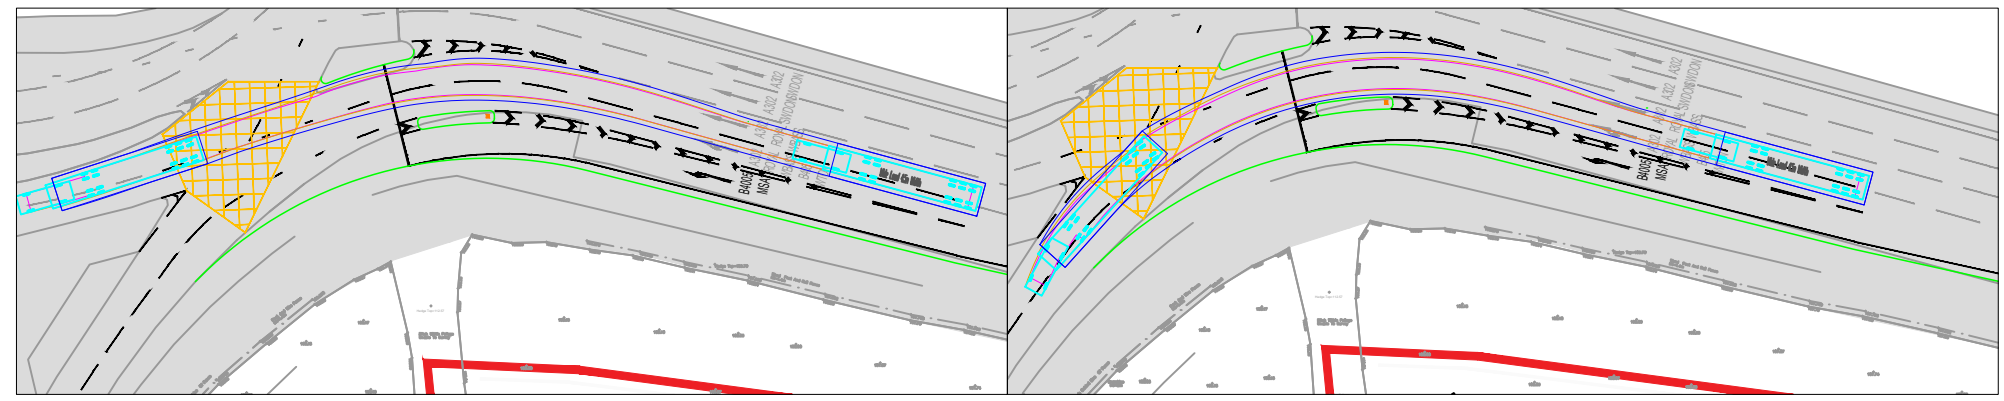

SWEPT PATH ANALYSIS: ABNORMAL LOAD VEHICLE (4.5M WIDTH)

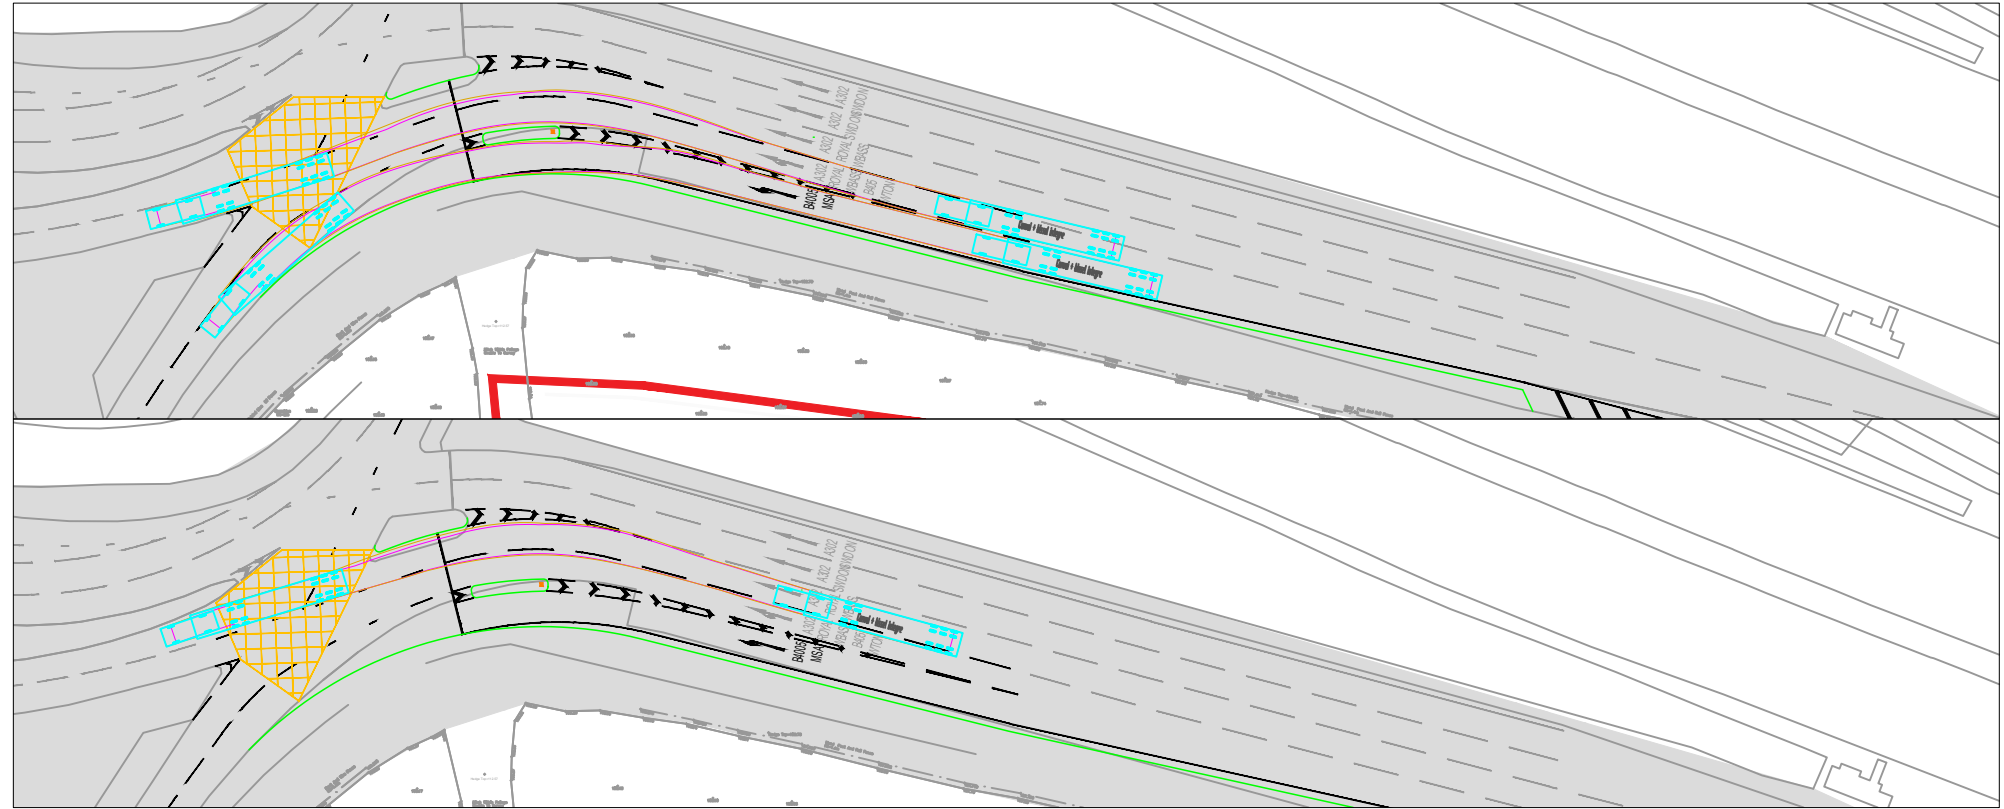

SWEPT PATH ANALYSIS: ABNORMAL LOAD VEHICLE



SWEPT PATH ANALYSIS: FTA

NOTES

THIS IS NOT A CONSTRUCTION DRAWING AND IS FOR INDICATIVE PURPOSES ONLY. THE DRAWING WILL BE SUBJECT TO CHANGE FOLLOWING LOCAL AUTHORITY REVIEW AND CONFIRMATION OF PUBLIC HIGHWAY AND THIRD PARTY LAND BOUNDARIES.

INDICATIVE SITE BOUNDARY
DENOTES NEW KERBS
EXISTING ADOPTED HIGHWAY

LOCAL AUTHORITY: WILTSHIRE COUNCIL
TOTAL AREA OF SITE: 7.27Ha

DMRB DESIGN CHECKLIST			
DESIGN FEATURE	DESIGN REQUIREMENTS	LEFT TURN	NOTES
LANE WIDTHS	MINIMUM WIDTH OF 3.0M AND NO GREATER THAN 4.5M	4.0m LANE WIDTHS	COMPLIES
ENTRY RADIUS (r)	10 - 100M (20M IDEAL)	54m	COMPLIES
STORAGE LENGTH	SEE CAPACITY OF THE JUNCTION. LENGTH OF STORAGE LENGTH SHOULD BE SUFFICIENT TO ALLOW TRUCKS TO STOP AND WAIT FOR THE GREEN LIGHT TO TURN LEFT	80m	COMPLIES (SCOPE TO INCREASE IF REQUIRED)

LEFT TURN SLIP ROAD GEOMETRY

H G E C B A	ABNORMAL LOAD TRACKING ADDED ABNORMAL LOAD TRACKING ADDED AMENDED AS PER NH COMMENTS AMENDED AS PER NH COMMENTS AMENDED AS PER NH COMMENTS MINOR AMENDMENT DMRB CHECKLIST ADDED	LB MTC MTC MTC MTC MTC MTC	JUL 25 JUL 25 JUL 25 JUL 25 JUL 25 JUN 25 MAY 25
----------------------------	---	--	--

REV	DETAILS	DRAWN	CHECKED	DATE
-----	---------	-------	---------	------

CLIENT:

MOTO SWINDON

PROJECT:

MOTO SWINDON

DRAWING TITLE:

PROPOSED M4 WESTBOUND
OFF-SLIP IMPROVEMENT SCHEME

SCALES:
1:1000 @ A1 (UNLESS STATED)

DRAWN:	LB	CHECKED:	MTC	DATE:	MAR 25
--------	----	----------	-----	-------	--------

Eddisons
340 Deansgate
Manchester
M3 4LY
Email: info@eddisons.co.uk
Tel: 0161 837 7380
Web:
www.eddisons.com/services/transport-planning

DRAWING NUMBER:	3728-F13	REVISION:	H
-----------------	----------	-----------	---

Eddisons



Eddisons

PROPOSED HIGHWAYS WORKS, M4 JUNCTION 16, WESTBOUND OFF-SLIP, SWINDON

**STAGE 1 - ROAD SAFETY AUDIT
SEPTEMBER 2025**

Transport Planning /Traffic Surveys/ Road Safety Audits

Tel: +44 (0)2920 667663 Email: admin@go-surveys.co.uk Web: www.go-surveys.co.uk
go-surveys Ltd Registered in England and Wales No:5841452
Registered office: go-surveys Ltd, 72 Plasterton Avenue, Cardiff, CF11 9HJ

REPORT CONTROL

Report Title:	GS1577-2025 - Proposed TRN Highways Works M4 Jct 16 - Stage 1 RSA - Final.docx
Date:	08/09/2025
Document Reference and Revision:	/Users/go-surveys/Road Safety Audits/GS1577 - MOTO Swindon - M4 Jct 16 - Stage 1 RSA/GS1577-2025 - Proposed TRN Highways Works M4 Jct 16 - Stage 1 RSA - Final.docx
Prepared By:	Go-Surveys Ltd
On behalf of:	National Highways

Document Checking:			
Primary Author:	T Brooks	Initialled:	TB
Contributor:	J Preston	Initialled:	JP
Reviewed By:		Initialled:	

Contents

1	INTRODUCTION.....	2
2	ROAD SAFETY AUDIT FINDINGS FROM RSA 1	4
	PROBLEM 1	4
	PROBLEM 2	4
	PROBLEM 3	4
	PROBLEM 4	5
	PROBLEM 5	5
3	AUDIT STATEMENT	7

Appendices

Appendix A – List of drawings and documents supplied for audit.

Appendix B – Location plan of identified problems.

1 INTRODUCTION

- 1.1 This report presents the findings from a Stage 1 Road Safety Audit (RSA) undertaken on the proposed Highways Works at the M4 Junction 16 westbound off-slip/Spittleborough Roundabout. The proposed works would form part of the off-site highways works associated with a proposed outline planning application for a new offline Motorway Service Area (MSA) that will be accessed via the B4005, Swindon, Wiltshire.
- 1.2 The audit was carried out by the following:
- | | |
|--|---------------------------------|
| Tristan Brooks
BSc (Hons), MBA, CMILT, MCIHT, MSoRSA,
HE RSA Cert. of Competency | - Road Safety Audit Team Leader |
| J Preston
MCIHT, MSoRSA | - Road Safety Audit Team Member |
- 1.3 The RSA was commissioned by Huw Morris/ Gaynor Gallacher of National Highways (the overseeing organisation for the Strategic Road Network). The overseeing organisation for the Local Road Network is Wiltshire Council. The RSA brief/Team have been approved by Huw Morris/ Gaynor Gallacher of National Highways and Robert Rossiter of Wiltshire Council.
- 1.4 The RSA brief was accepted by the audit team. The RSA brief was prepared by Eddisons who have designed the scheme.
- 1.5 The site visit was undertaken by the audit team (together) on Friday 1st August 2025 between 18:05 – 19:00 and comprised a walk (where available) and drive-throughs of the area covered by the scheme. During the site visit both the weather and carriageway surface were dry. Traffic in the vicinity of the scheme was considered to be moderate/heavy with queuing observed on the M4 Junction 16 westbound off-slip. No pedestrians or cyclists were observed during the site visit.
- 1.6 The M4 Junction 16 westbound off-slip is subject to the national speed limit for motorways reducing to a 40mph speed limit on the entry to the roundabout and there is street lighting throughout the geographical area of the proposed scheme.
- 1.7 A review of the Personal Injury Collisions (PIC) data between January 2019 and December 2023 (based on information provided in the Crashmap database, which supersedes the information in the RSA brief) has indicated that during this period there has been 3 PICs recorded in the vicinity of the proposed highways works, of which all resulted in injuries that were slight in severity. All 3 of the collisions occurred on the circulatory carriageway.

EXISTING LANES ONTO GYRATORY TO REMAIN UNCHANGED

PROPOSED SUBSIDIARY DEFLECTION ISLAND AS PER SECTION 7, CD 118

R4.0M

BOLLARD

HGV PARKING

EXISTING A&S SIGN TO BE UPDATED AS PART OF THE WORKS. EXACT SIGN FACE TO BE AGREED AT DETAILED DESIGN STAGE.

GENERAL ARRANGEMENT (1:500) (A1)

- GS1577-2025 - Proposed TRN Highways Works M4 Jct 16 - Stage 1 RSA - Final.docx
September 2025

2 ROAD SAFETY AUDIT FINDINGS FROM RSA 1

PROBLEM 1

LOCATION: M4 Junction 16 westbound off-slip.

SUMMARY: Omission of sufficient signage provision may increase the risk of side swipe type collisions.

- 2.1 The scheme drawings indicate that revisions will only be made to the westernmost nearside lane destination sign. Omission of changes to the other relevant lane destination signage on the slip road or on the Advanced Directional Sign (ADS) on the M4 mainline in advance of the slip road may result in drivers being provided with insufficient advance warning as to which lane they need to be in to access the services, which could result in injudicious late lane changes that could increase the risk of side swipe type collisions.

RECOMMENDATION

- 2.2 It is recommended that revisions to all the pertinent ADS and lane destination signage be undertaken and this information be provided for review at the Stage 2 RSA.

PROBLEM 2

LOCATION: M4 Junction 16 westbound off-slip.

SUMMARY: Implications on Vehicle Restraint System (VRS) may result in an increased risk of higher severity outcomes should collisions occur.

- 2.3 The proposed highways works are likely to require alterations to the existing (VRS) on the southern side of the slip road, which may have implications on the level of containment which could affect the severity of outcomes of any collisions involving errant vehicles.

RECOMMENDATION

- 2.4 It is recommended that an assessment of the changes to the VRS be undertaken and if considered relevant to highway safety, mitigation measures be implemented.

PROBLEM 3

LOCATION: M4 Junction 16 westbound off-slip.

SUMMARY: Potentially excessive vehicle queues could increase the risk of rear-end shunt type collisions.

- 2.5 The audit brief indicates that the proposed development will increase the volume of vehicles using the slip road and turning left at the Spittalborough Roundabout onto the B4005. However, no junction capacity assessments have been provided for review and therefore it is unclear if there is sufficient capacity to accommodate the forecast additional volume of

development traffic without potentially resulting in excessive queuing, which could impact vehicles travelling on the M4 westbound mainline which could increase the risk of rear end shunt type collisions.

RECOMMENDATION

- 2.6 It is recommended that junction capacity assessments be undertaken and mitigation be undertaken if the forecast levels of queuing would impact on the running of the M4 westbound mainline.

PROBLEM 4

LOCATION: M4 Junction 16 eastbound off-slip/ circulatory carriageway.

SUMMARY: Potential for increased risk of vehicle collisions due to omission of signage.

- 2.7 The audit brief does not provide any details of what if any signage provision etc is proposed for drivers accessing the facility via the M4 Junction 16 eastbound off-slip. The potential omission of suitable signage etc could increase the risk of collisions on the M4 Junction 16 eastbound off-slip or on the circulatory carriageway of the roundabout due to for example driver confusion as to which lane they should be in if accessing the MSA and making injudicious manoeuvres which could result in side swipe type collisions.
- 2.8 The audit team note that this matter is outside the geographical scope of the scheme presented for audit, but is directly related to the proposals and may have road safety implications.

RECOMMENDATION

- 2.9 It is recommended that appropriate signage etc be provided for drivers accessing the MSA via the M4 Junction 16 eastbound off-slip.

PROBLEM 5

LOCATION: M4 Junction 16 eastbound off-slip.

SUMMARY: Potentially excessive vehicle queues could increase the risk of rear-end shunt type collisions.

- 2.10 The audit brief does not provide any information with regard to the potential increase in traffic movements resulting from the proposed development that will access the MSA facility via the M4 Junction 16 eastbound off-slip nor any junction capacity assessments resulting from increased vehicle movements. It is unclear therefore if there is sufficient capacity to accommodate any additional volume of development traffic without potentially resulting in excessive queuing, which could impact vehicles travelling on the M4 east bound mainline which could increase the risk of rear end shunt type collisions.

- 2.11 The audit team note that this matter is outside the geographical scope of the scheme presented for audit, but is directly related to the proposals and may have road safety implications.

RECOMMENDATION

- 2.12 It is recommended that junction capacity assessments be undertaken and mitigation be undertaken if the forecast levels of queuing would impact on the running of the M4 eastbound mainline/ roundabout circulatory carriageway.

3 AUDIT STATEMENT

3.1 We certify that this audit has been carried out in accordance with GG/119.

Signed:  Date: 08 September 2025	T Brooks – BSc (Hons), MBA, CMILT, MCIHT, MSoRSA, HE RSA Cert of Competency Audit Team Leader go-surveys Ltd 72 Plasturton Avenue Cardiff CF11 9HJ
Signed:  Date: 08 September 2025	J Preston MCIHT, MSoRSA. Audit Team Member go-surveys Ltd 72 Plasturton Avenue Cardiff CF11 9HJ



APPENDIX A

List of Drawings and Documents Provided for Audit

3728.01 RSA1 Brief-S278 M4 J16 – Rev A

Stage 1 RSA Brief – 23rd July 2025 – Including Personal Injury Collision Data/Accident Data
Traffic Flow Data – M4 Westbound slip road only/ Road Safety Auditors CV's/ WCHAR Assessment
Exemption Note/Scheme layout

3728-F13 - Rev H


Proposed M4 Westbound Off slip Improvement Scheme

PIC Data (Crashmap)

Jan 2019-Dec 2023

APPENDIX B

Location of Identified Problems

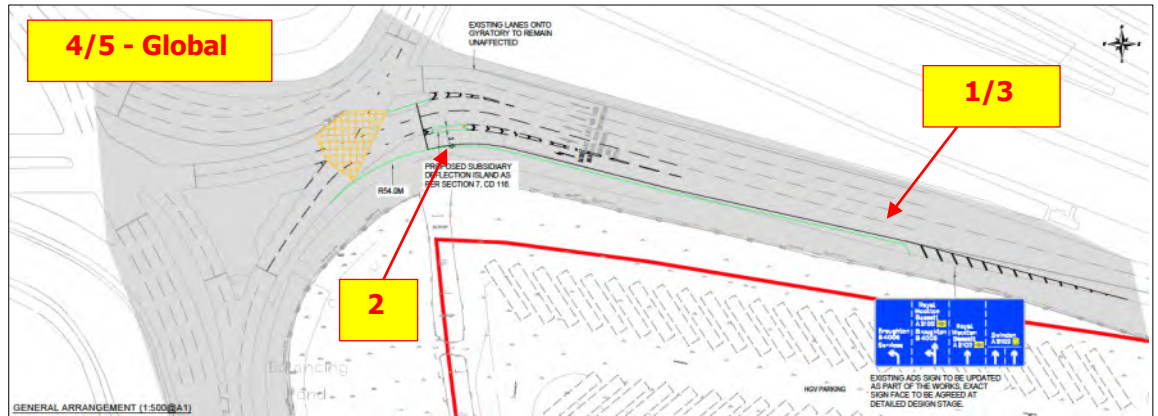

Appendix F. Road safety audit response report template for stages 1, 2 and 3 only

F1 Project details

Provide:

Table F.1 Project details

Report title:	Road Safety Audit Response Stage 1
Date:	09/09/2025
Document reference and revision:	3728.02
Prepared by:	Eddisons
On behalf of:	National Highways/ Wiltshire Council

Table F.2 Authorisation sheet

Project:	MOTO Swindon
Report title:	Road Safety Audit Response Stage 1
Prepared by:	Eddisons
Name:	Leon Blythe
Position:	Senior Engineer
Signed:	
Organisation:	Eddisons
Date:	09/09/2025
Approved by:	
Name:	
Position:	
Signed:	
Organisation:	
Date:	

F2 Introduction**Summary of Scheme**

Eddisons have been instructed by Moto Hospitality Ltd to advise on the traffic and transport issues relating to an outline planning application for a new motorway rest area (MRA) on land adjacent to Junction 16 of the M4 in Swindon, Wiltshire.

The Proposed Development will be served from the M4 via an improved signalised arrangement with an additional left turn lane with subsidiary deflection island onto the B4005 at Spittleborough Roundabout. The proposed highway improvements are shown on plan **3728-F13 Revision H**

The geometric criteria required for the arrangements have been set out in the Design Manual for Roads and Bridges (DMRB). The DMRB forms part of the Manual of Contract Documents for Highway works.

The junction alignment parameters are provided in DMRB documents; CD 109 Highway Link Design; CD 116 Geometric Design of Roundabouts and CD 122 Geometric Design for Grade Separated Junctions.

RSA Report

The site visit was undertaken by the audit team (together) on Friday 1st August 2025 between 18:05 – 19:00 and comprised a walk (where available) and drive-throughs of the area covered by the scheme. During the site visit both the weather and carriageway surface were dry. Traffic in the vicinity of the scheme was considered to be moderate/heavy with queuing observed on the M4 Junction 16 westbound off-slip. RSA 1 report GS1577-2025 was produced, highlighting 5 problems with the scheme.

Details of Representatives from Design Organisation

Leon Blythe
Senior Engineer
Eddisons,
340 Deansgate, Manchester
M3 4LY
leon.blythe@eddisons.com

F3**Key personnel****Table F.3 Key personnel**

Overseeing Organisation:	National Highways: Gaynor Gallacher Assistant Spatial Planner National Highways: Ash House, Falcon Road, Sowton Ind. Estate, Exeter EX2 7LB Gaynor.Gallacher@nationalhighways.co.uk Wiltshire Council: Robert Rossiter Strategic Specialist Major Highways Projects Team Wiltshire Council County Hall, Bythesea Rd, Trowbridge BA14 8JN, United Kingdom Email: robert.rossiter@wiltshire.gov.uk Website: www.wiltshire.gov.uk
RSA team:	Tristan Brooks (as Audit Team Leader), Go Surveys Jon Preston (As Audit Team Member), six: Ten Highways & Traffic
Design organisation:	Leon Blythe Senior Engineer Eddisons, 340 Deansgate, Manchester M3 4LY leon.blythe@eddisons.com 0161 837 7380

F4 Road safety audit decision log

Table F.4 Road safety audit decision log

RSA problem	RSA recommendation	Design organisation response	Overseeing Organisation response	Agreed RSA action
Problem 1: Omission of sufficient signage provision may increase the risk of side swipe type collisions. The scheme drawings indicate that revisions will only be made to the westernmost nearside lane destination sign. Omission of changes to the other relevant lane destination signage on the slip road or on the Advanced Directional Sign (ADS) on the M4 mainline in advance of the slip road may result in drivers being provided with insufficient advance warning as to which lane they need to be in to access the services, which could result in injudicious late lane changes that could increase the risk of side swipe type collisions.	It is recommended that revisions to all the pertinent ADS and lane destination signage be undertaken and this information be provided for review at the Stage 2 RSA.	RSA problem and recommendation accepted by the design organisation. As part of the detailed design stage existing ADS and lane changing signage will be reviewed as part of the signage proposals for the scheme. This will also include the proposals for new signage too.	Response accepted	To be addressed at detailed design
Problem 2: Implications on Vehicle Restraint System (VRS) may result in an increased risk of higher severity outcomes should collisions occur. The proposed highways works are likely to require alterations to the existing (VRS) on the southern side of the slip road, which may have implications on the level of containment which could affect the severity of outcomes of any collisions involving errant vehicles.	It is recommended that an assessment of the changes to the VRS be undertaken and if considered relevant to highway safety, mitigation measures be implemented.	RSA problem and recommendation accepted by the design organisation. As part of the detailed design stage a RRRAP is to be undertaken to confirm the VRS requirements following the modification to the existing alignment of the VRS barrier. VRS proposals to be provided for approval.	Response accepted	To be addressed at detailed design
Problem 3: Potentially excessive vehicle queues could increase the risk of rear-end shunt type collisions. The audit brief indicates that the proposed development will increase the volume of vehicles using the slip road and turning left at the Spittalborough Roundabout onto the B4005. However, no junction capacity assessments have been provided for review and therefore it is unclear if there is sufficient capacity to accommodate the forecast additional volume of development traffic without potentially resulting in excessive queuing, which could impact vehicles travelling on the M4 westbound mainline which could increase the risk of rear end shunt type collisions.	It is recommended that junction capacity assessments be undertaken and mitigation be undertaken if the forecast levels of queuing would impact on the running of the M4 westbound mainline.	RSA problem and recommendation accepted by the design organisation. Junction capacity assessments have been undertaken and are currently with National Highways for their review. Full junction capacity details can be provided upon agreement of the junction modelling with National Highways, prior to Stage 2.	Response accepted	Modelling results to be provided for Stage 2 audit
Problem 4: Potential for increased risk of vehicle collisions due to omission of signage. The audit brief does not provide any details of what if any signage provision etc is proposed for drivers accessing the facility via the M4 Junction 16 eastbound off-slip. The potential omission of suitable signage etc could increase the risk of collisions on the M4 Junction 16 eastbound off-slip or on the	It is recommended that appropriate signage etc be provided for drivers accessing the MSA via the M4 Junction 16 eastbound off-slip.	RSA problem and recommendation accepted by the design organisation. As part of the detailed design stage new signage for the motorway service area will be provided for approval. Signs will be in accordance with Guide to the signing of roadside facilities for motorists on the strategic	Response accepted	To be addressed at detailed design

circulatory carriageway of the roundabout due to for example driver confusion as to which lane they should be in if accessing the MSA and making injudicious manoeuvres which could result in side swipe type collisions. The audit team note that this matter is outside the geographical scope of the scheme presented for audit, but is directly related to the proposals and may have road safety implications.		road network in England'.		
Problem 5: Potentially excessive vehicle queues could increase the risk of rear-end shunt type collisions. The audit brief does not provide any information with regard to the potential increase in traffic movements resulting from the proposed development that will access the MSA facility via the M4 Junction 16 eastbound off-slip nor any junction capacity assessments resulting from increased vehicle movements. it is unclear therefore if there is sufficient capacity to accommodate any additional volume of development traffic without potentially resulting in excessive queuing, which could impact vehicles travelling on the M4 east bound mainline which could increase the risk of rear end shunt type collisions. The audit team note that this matter is outside the geographical scope of the scheme presented for audit, but is directly related to the proposals and may have road safety implications.	It is recommended that junction capacity assessments be undertaken and mitigation be undertaken if the forecast levels of queuing would impact on the running of the M4 eastbound mainline/roundabout circulatory carriageway.	RSA problem and recommendation accepted by the design organisation. Junction capacity assessments have been undertaken and are currently with National Highways for their review. Full junction capacity details can be provided upon agreement of the junction modelling with National Highways, prior to Stage 2.	Response accepted.	Modelling results to be provided for Stage 2 Audit

F5 Design organisation and Overseeing Organisation statements

Include the following statements to be signed by the design organisation and the Overseeing Organisation.

Table F.5 Design organisation statement



On behalf of the design organisation I certify that:	
1) the RSA actions identified in response to the road safety audit problems in this road safety audit have been discussed and agreed with the Overseeing Organisation.	
Name:	Leon Blythe
Signed	
Position:	Highway Engineer
Organisation:	Eddisons
Date:	09/09/25

Table F.6 Overseeing Organisation statement

On behalf of the Overseeing Organisation I certify that: 1) the RSA actions identified in response to the road safety audit problems in this road safety audit have been discussed and agreed with the design organisation; and 2) the agreed RSA actions will be progressed.	
Name:	Huw Morris
Signed:	
Position:	Principal Engineer
Organisation:	National Highways
Date:	24/09/2025

On behalf of the Overseeing Organisation I certify that: 1) the RSA actions identified in response to the road safety audit problems in this road safety audit have been discussed and agreed with the design organisation; and 2) the agreed RSA actions will be progressed.	
Name:	Rob Rossiter
Signed:	
Position:	Strategic Specialist (Transport)
Organisation:	Wiltshire Council
Date:	24/9/25

APPENDIX B

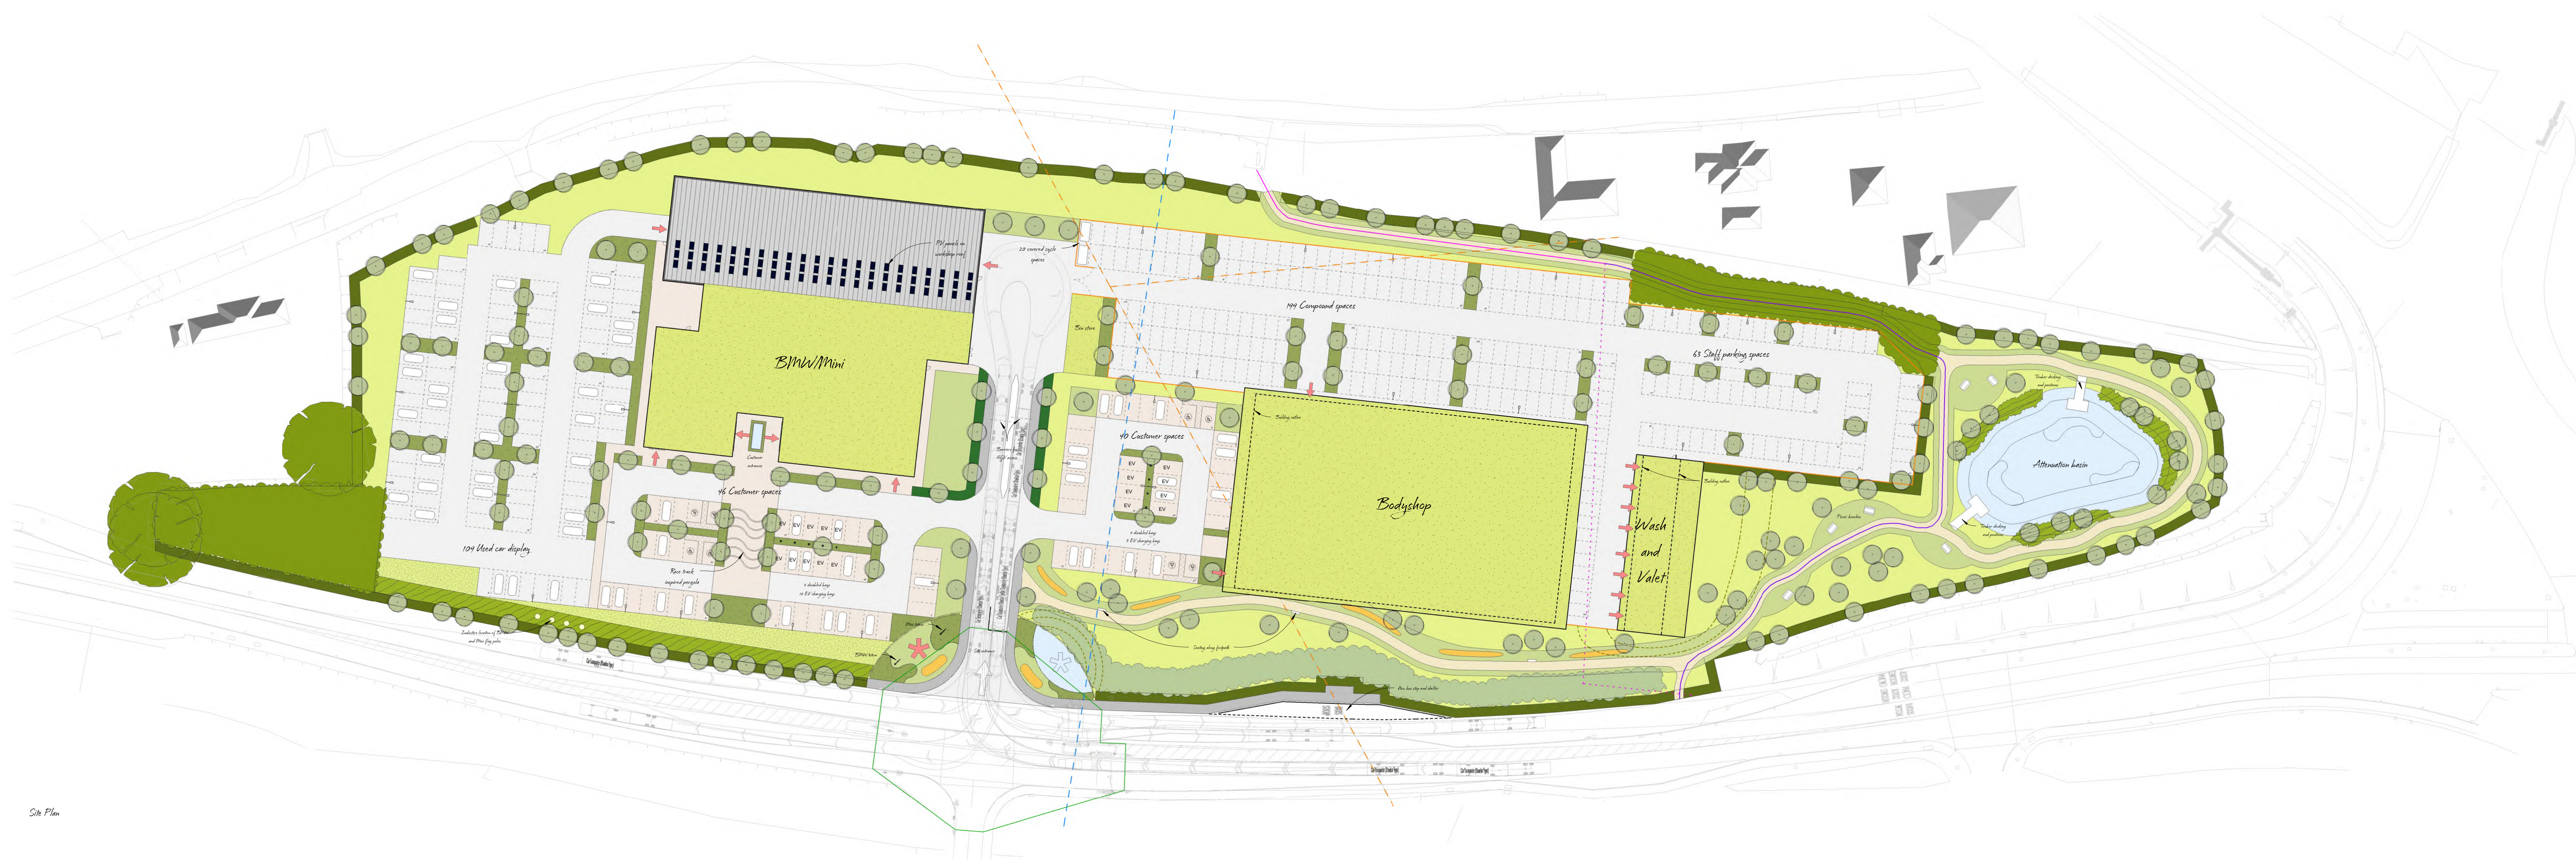

Site Plan

SITE PLAN KEY	
	Charcoal block paving
	Tarmac
	Amenity grass
	Neutral grassland
	Ornamental shrub planting
	Ornamental hedgehog
	Proposed tree
	2.4m high palisade fence
	Existing public right of way
	Existing public right of way to be decommissioned
	Proposed public right of way
	Existing water mains
	Junction intervisibility
	Overhead cables to be redirected underground
	Water feature
	Proposed woodland
	Existing woodland to be enhanced
	Native hedgerow
	Native scrub
	Green roof
	Bully planting
	Water
	Footpath
	Long grassland
	Proposed flag poles
	EV charging point
	Proposed lighting column
	Mounted sculpture
	Proposed contours for mounded earth

REVISIONS	
B	08.10.2024 Compound parking adjusted. Wash and valet moved closer to the Prep Centre. One tree stone removed.
C	21.10.2024 Updated landscape design.
D	10.01.25 Design amendments in accordance with design team.
E	17.01.25 Issued for planning.

CLIENT	DICK LOVETT COMPANIES LTD
PROJECT	JUNCTION 16
DRAWING TITLE	SITE PLAN

DRAWING NUMBER	0062-102
AUGUST 2024	AO
PLANNING	

REV	E
1:500	



APPENDIX C

Run number>>	AVG
--------------	-----

	AM 2023 Ref	AM 2027 Ref	AM 2038 Ref	AM 2027 Ref + Dev	AM 2038 Ref + Dev	AM 2038 Ref+Dev +BMW
	07:30 - 08:30	07:30 - 08:30	07:30 - 08:30	07:30 - 08:30	07:30 - 08:30	07:30 - 08:30
Average Delay per Vehicle in the Network (s)	23.9	29.2	37.0	34.5	44.2	52.2
Average Speed per Vehicle (mph)	59.7	54.8	51.1	50.8	46.6	42.7
Vehicles Active in the Network	401.0	451.0	546.0	509.0	617.0	674.0
Vehicle Trips Completed	10147.0	11167.0	12377.0	11315.0	12459.0	12474.0
Latent Demand at End of Time Period	7.5	65.0	278.1	122.7	388.5	459.3
Total Delay (hrs)	12.0	14.2	20.0	17.9	25.5	31.0
Latent Delay (hrs)	0.4	4.8	22.6	9.3	30.8	35.9

	PM 2023 Ref	PM 2027 Ref	PM 2038 Ref	PM 2027 Ref + Dev	PM 2038 Ref + Dev	PM 2038 Ref+Dev +BMW
	16:30 - 17:30	16:30 - 17:30	16:30 - 17:30	16:30 - 17:30	16:30 - 17:30	16:30 - 17:30
Average Delay per Vehicle in the Network (s)	23.8	66.2	57.2	57.3	47.3	59.5
Average Speed per Vehicle (mph)	60.3	36.6	41.3	40.2	45.3	39.7
Vehicles Active in the Network	362.0	660.0	760.0	639.0	651.0	749.0
Vehicle Trips Completed	10840.0	11564.0	12894.0	11546.0	13003.0	13000.0
Latent Demand at End of Time Period	0.3	440.1	334.3	580.1	670.3	761.1
Total Delay (hrs)	9.0	32.4	37.4	30.6	27.9	37.1
Latent Delay (hrs)	0.0	35.4	26.6	45.9	53.7	59.8

	AM 2023 Ref	AM 2027 Ref	AM 2038 Ref	AM 2027 Ref + Dev	AM 2038 Ref + Dev	AM 2038 Ref+Dev +BMW
	07:30 - 09:00	07:30 - 09:00	07:30 - 09:00	07:30 - 09:00	07:30 - 09:00	07:30 - 09:00
Average Delay per Vehicle in the Network (s)	23.8	30.2	38.0	36.8	48.8	56.6
Average Speed per Vehicle (mph)	59.7	53.9	50.2	49.3	44.1	40.5
Vehicles Active in the Network	401.0	590.0	436.0	419.0	577.0	632.0
Vehicle Trips Completed	14991.0	16562.0	18449.0	16802.0	18522.0	18577.0
Latent Demand at End of Time Period	0.4	24.3	301.4	102.2	462.5	551.3
Total Delay (hrs)	5.3	9.7	13.9	13.7	24.0	28.8
Latent Delay (hrs)	0.0	2.3	25.3	8.8	39.2	46.7

	PM 2023 Ref	PM 2027 Ref	PM 2038 Ref	PM 2027 Ref + Dev	PM 2038 Ref + Dev	PM 2038 Ref+Dev +BMW
	16:30 - 18:00	16:30 - 18:00	16:30 - 18:00	16:30 - 18:00	16:30 - 18:00	16:30 - 18:00
Average Delay per Vehicle in the Network (s)	23.9	67.5	64.3	59.5	51.6	64.3
Average Speed per Vehicle (mph)	60.4	36.1	64.3	39.1	43.3	37.7
Vehicles Active in the Network	296.0	590.0	31.6	556.0	600.0	711.0
Vehicle Trips Completed	15891.0	17117.0	12509.0	17207.0	19292.0	19313.0
Latent Demand at End of Time Period	0.2	525.9	1022.0	721.2	795.2	923.2
Total Delay (hrs)	5.9	27.4	345.2	24.3	26.2	35.2
Latent Delay (hrs)	0.0	44.2	40.6	59.3	65.2	75.9

AM	Run Number >>	AVG
	Vehicle Type >>	All
		VEH5(All)

AM Peak 07:30-08:30									
Model Junction	Junction Description	From	To	AM 2023 Ref	AM 2027 Ref	AM 2038 Ref	AM 2027 Ref + Dev	AM 2038 Ref + Dev	AM 2038 Ref+Dev +BMW
				All	All	All	All	All	All
Juntion 1	Spittleborough Rounabout	A3102 (N)	M4 (E)	536	545	552	546	538	511
		A3102 (N)	B4005 (S)	189	333	340	335	330	313
		A3102 (N)	A3102 (SW)	469	516	510	514	498	500
		A3102 (N)	M4 (W)	551	564	634	563	622	599
		A3102 (N)	A3102 (N)	0	0	0	0	0	0
		M4 (E)	B4005 (S)	29	210	210	310	312	310
		M4 (E)	A3102 (SW)	301	316	395	315	396	421
		M4 (E)	M4 (W)	0	0	0	0	0	0
		M4 (E)	A3102 (N)	482	393	428	392	425	428
		M4 (E)	M4 (E)	2	2	2	2	2	2
		B4005 (S)	A3102 (SW)	189	267	311	269	312	316
		B4005 (S)	M4 (W)	70	133	137	227	231	232
		B4005 (S)	A3102 (N)	180	345	348	347	349	348
		B4005 (S)	M4 (E)	40	101	101	220	218	220
		B4005 (S)	B4005 (S)	0	0	0	0	0	0
		A3102 (SW)	M4 (W)	102	113	151	110	144	152
		A3102 (SW)	A3102 (N)	635	615	570	591	540	541
		A3102 (SW)	M4 (E)	492	506	634	492	604	614
		A3102 (SW)	B4005 (S)	203	329	341	323	326	325
		A3102 (SW)	A3102 (SW)	0	0	0	0	0	0
		M4 (W)	A3102 (N)	829	734	691	729	692	692
		M4 (W)	M4 (E)	0	0	0	0	0	0
		M4 (W)	B4005 (S)	107	308	317	431	439	439
		M4 (W)	A3102 (SW)	94	96	92	96	89	127
		M4 (W)	M4 (W)	2	2	2	2	2	2
Junction 2	Lydiard Field	The Lydiard Beefeater (N)	A3102 (E)	108	109	108	109	109	109
		The Lydiard Beefeater (N)	A3102 (W)	114	116	111	118	108	108
		A3102 (E)	Frankland Rd (S)	16	16	16	16	16	15
		A3102 (E)	A3102 (W)	1598	1805	1903	1809	1859	1783
		A3102 (E)	The Lydiard Beefeater (N)	221	226	216	225	214	196
		Frankland Rd (S)	A3102 (W)	29	30	33	29	33	30
		A3102 (W)	The Lydiard Beefeater (N)	248	250	239	247	235	236
		A3102 (W)	A3102 (E)	1868	1828	1789	1803	1762	1767
Junction 3	B4005/Dev Access Roundabout	Dev Access (N)	Farm Access (NE)	-	-	-	0	0	0
		Dev Access (N)	B4005 (E)	-	-	-	0	0	0
		Dev Access (N)	B4005 (W)	-	-	-	221	218	221
		Farm Access (NE)	B4005 (E)	-	-	-	0	0	0
		Farm Access (NE)	B4005 (W)	-	-	-	0	0	0
		Farm Access (NE)	Dev Access (N)	-	-	-	0	0	0
		B4005 (E)	B4005 (W)	-	-	-	845	895	900
		B4005 (E)	Dev Access (N)	-	-	-	0	0	0
		B4005 (E)	Farm Access (NE)	-	-	-	0	0	0
		B4005 (W)	Dev Access (N)	-	-	-	234	232	230
		B4005 (W)	Farm Access (NE)	-	-	-	0	0	0
		B4005 (W)	B4005 (E)	-	-	-	1158	1168	1150

AM Peak 07:30-09:00									
Model Junction	Junction Description	From	To	AM 2023 Ref	AM 2027 Ref	AM 2038 Ref	AM 2027 Ref + Dev	AM 2038 Ref + Dev	AM 2038 Ref+Dev +BMW
				All	All	All	All	All	All
Juntion 1	Spittleborough Rounabout	A3102 (N)	M4 (E)	784	798	820	799	800	770
		A3102 (N)	B4005 (S)	288	514	533	519	517	496
		A3102 (N)	A3102 (SW)	705	778	778	777	743	746
		A3102 (N)	M4 (W)	758	776	891	775	868	841
		A3102 (N)	A3102 (N)	0	0	0	0	0	0
		M4 (E)	B4005 (S)	45	327	327	476	476	476
		M4 (E)	A3102 (SW)	437	457	575	458	575	612
		M4 (E)	M4 (W)	0	0	0	0	0	0
		M4 (E)	A3102 (N)	735	589	643	590	639	640
		M4 (E)	M4 (E)	2	2	2	2	2	2
		B4005 (S)	A3102 (SW)	284	403	464	406	468	473
		B4005 (S)	M4 (W)	100	195	200	334	337	336
		B4005 (S)	A3102 (N)	296	545	546	549	550	547
		B4005 (S)	M4 (E)	59	152	152	325	319	319
		B4005 (S)	B4005 (S)	0	0	0	0	0	0
		A3102 (SW)	M4 (W)	147	166	220	163	209	221
		A3102 (SW)	A3102 (N)	981	961	901	923	854	858
		A3102 (SW)	M4 (E)	704	729	911	706	871	886
		A3102 (SW)	B4005 (S)	309	522	531	505	508	510
		A3102 (SW)	A3102 (SW)	0	0	0	0	0	0
		M4 (W)	A3102 (N)	1167	1018	1002	1017	1003	1005
		M4 (W)	M4 (E)	0	0	0	0	0	0
		M4 (W)	B4005 (S)	163	468	488	657	673	673
		M4 (W)	A3102 (SW)	141	145	144	146	141	195
		M4 (W)	M4 (W)	3	3	3	3	3	3
Junction 2	Lydiard Field	The Lydiard Beefeater (N)	A3102 (E)	152	154	153	154	154	153
		The Lydiard Beefeater (N)	A3102 (W)	172	174	172	177	168	167
		A3102 (E)	Frankland Rd (S)	31	31	31	31	31	28
		A3102 (E)	A3102 (W)	2313	2632	2803	2639	2725	2639
		A3102 (E)	The Lydiard Beefeater (N)	332	338	328	337	319	298
		Frankland Rd (S)	A3102 (W)	44	45	50	44	49	48
		A3102 (W)	The Lydiard Beefeater (N)	382	389	369	383	363	365
		A3102 (W)	A3102 (E)	2793	2721	2715	2693	2676	2685
Junction 3	B4005/Dev Access Roundabout	Dev Access (N)	Farm Access (NE)	-	-	-	0	0	0
		Dev Access (N)	B4005 (E)	-	-	-	0	0	0
		Dev Access (N)	B4005 (W)	-	-	-	322	313	312
		Farm Access (NE)	B4005 (E)	-	-	-	0	0	0
		Farm Access (NE)	B4005 (W)	-	-	-	0	0	0
		Farm Access (NE)	Dev Access (N)	-	-	-	0	0	0
		B4005 (E)	B4005 (W)	-	-	-	1293	1362	1367
		B4005 (E)	Dev Access (N)	-	-	-	0	0	0
		B4005 (E)	Farm Access (NE)	-	-	-	0	0	0
		B4005 (W)	Dev Access (N)	-	-	-	350	347	347
		B4005 (W)	Farm Access (NE)	-	-	-	0	0	0
		B4005 (W)	B4005 (E)	-	-	-	1802	1821	1803

PM

Run Number >>	AVG
Vehicle Type >>	All



VEHS(All)

				PM Peak 16:30-17:30					
Model Junction	Junction Description	From	To	PM 2023 Ref	PM 2027 Ref	PM 2038 Ref	PM 2027 Ref + Dev	PM 2038 Ref + Dev	PM 2038 Ref+Dev +BMW
				All	All	All	All	All	All
Juntion 1	Spittleborough Rounabout	A3102 (N)	M4 (E)	580	330	465	368	510	485
		A3102 (N)	B4005 (S)	243	336	338	330	374	357
		A3102 (N)	A3102 (SW)	619	526	489	599	540	520
		A3102 (N)	M4 (W)	586	353	486	403	537	507
		A3102 (N)	A3102 (N)	0	0	0	0	0	0
		M4 (E)	B4005 (S)	50	120	111	261	260	256
		M4 (E)	A3102 (SW)	470	495	549	502	588	600
		M4 (E)	M4 (W)	0	0	0	0	0	0
		M4 (E)	A3102 (N)	488	500	513	505	519	521
		M4 (E)	M4 (E)	2	2	2	2	2	2
		B4005 (S)	A3102 (SW)	298	390	471	293	347	344
		B4005 (S)	M4 (W)	110	347	308	382	350	352
		B4005 (S)	A3102 (N)	227	475	420	326	320	321
		B4005 (S)	M4 (E)	19	278	223	333	284	284
		B4005 (S)	B4005 (S)	0	0	0	0	0	0
		A3102 (SW)	M4 (W)	100	101	134	102	137	166
		A3102 (SW)	A3102 (N)	594	621	583	627	584	597
		A3102 (SW)	M4 (E)	330	326	437	332	439	462
		A3102 (SW)	B4005 (S)	214	274	302	282	306	309
		A3102 (SW)	A3102 (SW)	0	0	0	0	0	0
		M4 (W)	A3102 (N)	594	607	679	603	680	678
		M4 (W)	M4 (E)	0	0	0	0	0	0
		M4 (W)	B4005 (S)	103	165	183	288	306	306
		M4 (W)	A3102 (SW)	66	86	102	89	103	115
		M4 (W)	M4 (W)	1	1	1	1	1	1
Junction 2	Lydiard Field	The Lydiard Beefeater (N)	A3102 (E)	181	172	175	181	179	179
		The Lydiard Beefeater (N)	A3102 (W)	148	139	138	145	143	143
		A3102 (E)	Frankland Rd (S)	8	6	8	7	8	8
		A3102 (E)	A3102 (W)	1769	1351	1571	1485	1699	1639
		A3102 (E)	The Lydiard Beefeater (N)	61	37	50	49	61	54
		Frankland Rd (S)	A3102 (W)	113	54	76	77	125	95
		A3102 (W)	The Lydiard Beefeater (N)	83	83	80	82	76	76
Junction 3	B4005/Dev Access Roundabout	A3102 (W)	A3102 (E)	1817	2116	2118	1977	2028	2041
		Dev Access (N)	Farm Access (NE)	-	-	-	0	0	0
		Dev Access (N)	B4005 (E)	-	-	-	0	0	0
		Dev Access (N)	B4005 (W)	-	-	-	268	266	266
		Farm Access (NE)	B4005 (E)	-	-	-	0	0	0
		Farm Access (NE)	B4005 (W)	-	-	-	0	0	0
		Farm Access (NE)	Dev Access (N)	-	-	-	0	0	0
		B4005 (E)	B4005 (W)	-	-	-	1067	1038	1034
		B4005 (E)	Dev Access (N)	-	-	-	0	0	0
		B4005 (E)	Farm Access (NE)	-	-	-	0	0	0
		B4005 (W)	Dev Access (N)	-	-	-	267	268	267
		B4005 (W)	Farm Access (NE)	-	-	-	0	0	0
		B4005 (W)	B4005 (E)	-	-	-	891	974	960

				PM Peak 16:30-18:00					
Model Junction	Junction Description	From	To	PM 2023 Ref	PM 2027 Ref	PM 2038 Ref	PM 2027 Ref + Dev	PM 2038 Ref + Dev	PM 2038 Ref+Dev +BMW
				All	All	All	All	All	All
Juntion 1	Spittleborough Rounabout	A3102 (N)	M4 (E)	811	499	667	543	710	685
		A3102 (N)	B4005 (S)	361	510	529	524	580	557
		A3102 (N)	A3102 (SW)	939	807	740	916	816	787
		A3102 (N)	M4 (W)	820	529	693	582	755	721
		A3102 (N)	A3102 (N)	0	0	0	0	0	0
		M4 (E)	B4005 (S)	80	193	168	404	403	401
		M4 (E)	A3102 (SW)	698	736	809	742	884	905
		M4 (E)	M4 (W)	0	0	0	0	0	0
		M4 (E)	A3102 (N)	734	735	741	740	759	760
		M4 (E)	M4 (E)	2	2	2	2	2	2
		B4005 (S)	A3102 (SW)	399	535	668	436	518	516
		B4005 (S)	M4 (W)	160	510	459	591	538	541
		B4005 (S)	A3102 (N)	330	670	616	465	460	462
		B4005 (S)	M4 (E)	28	410	333	497	431	430
		B4005 (S)	B4005 (S)	0	0	0	0	0	0
		A3102 (SW)	M4 (W)	137	146	197	148	200	244
		A3102 (SW)	A3102 (N)	860	937	866	947	865	874
		A3102 (SW)	M4 (E)	480	498	688	506	692	721
		A3102 (SW)	B4005 (S)	288	403	457	410	463	466
		A3102 (SW)	A3102 (SW)	1	1	0	1	0	0
		M4 (W)	A3102 (N)	873	890	992	888	993	994
		M4 (W)	M4 (E)	0	0	0	0	0	0
		M4 (W)	B4005 (S)	160	258	286	446	477	476
		M4 (W)	A3102 (SW)	93	123	142	124	142	161
		M4 (W)	M4 (W)	1	1	1	1	1	1
Junction 2	Lydiard Field	The Lydiard Beefeater (N)	A3102 (E)	253	240	243	256	251	251
		The Lydiard Beefeater (N)	A3102 (W)	219	216	208	227	218	216
		A3102 (E)	Frankland Rd (S)	17	12	17	16	17	17
		A3102 (E)	A3102 (W)	2555	2046	2310	2213	2471	2404
		A3102 (E)	The Lydiard Beefeater (N)	114	61	90	86	112	98
		Frankland Rd (S)	A3102 (W)	149	81	121	126	174	135
		A3102 (W)	The Lydiard Beefeater (N)	119	121	116	118	110	110
Junction 3	B4005/Dev Access Roundabout	A3102 (W)	A3102 (E)	2675	3107	3100	2919	2968	2977
		Dev Access (N)	Farm Access (NE)	-	-	-	0	0	0
		Dev Access (N)	B4005 (E)	-	-	-	0	0	0
		Dev Access (N)	B4005 (W)	-	-	-	411	410	409
		Farm Access (NE)	B4005 (E)	-	-	-	0	0	0
		Farm Access (NE)	B4005 (W)	-	-	-	0	0	0
		Farm Access (NE)	Dev Access (N)	-	-	-	0	0	0
		B4005 (E)	B4005 (W)	-	-	-	1578	1540	1539
		B4005 (E)	Dev Access (N)	-	-	-	0	0	0
		B4005 (E)	Farm Access (NE)	-	-	-	0	0	0
		B4005 (W)	Dev Access (N)	-	-	-	412	413	414
		B4005 (W)	Farm Access (NE)	-	-	-	0	0	0
		B4005 (W)	B4005 (E)	-	-	-	1374	1506	1485

Run Number >>	AVG
Q Type >>	Max

	Spittleborough Roundabout								Lydiard Field								B4005/Dev Access Roundabout			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
	A3102 west ahead	A3102 west right	B4005 left	B4005 ahead	M5 wb off left	M5 wb off ahead	M5 eb off	A3102 east	GWW eb ahead	GWW eb left	Lydiard Fields right	Lydiard Fields left	GWW wb ahead	GWW wb right	Frankland Road	Dev Access sb	Farm Access wb	B4005 wb	B4005 eb	
AM 2023 Ref	532	31	29	28	60	66	121	73	206	51	24	20	64	32	16	#N/A	#N/A	#N/A	#N/A	
AM 2027 Ref	652	201	39	44	61	62	103	89	180	39	24	19	64	33	13	#N/A	#N/A	#N/A	#N/A	
AM 2038 Ref	493	219	53	49	80	82	67	147	114	13	23	19	363	178	38	#N/A	#N/A	#N/A	#N/A	
AM 2027 Ref + Dev	715	408	47	63	51	54	113	107	168	62	22	23	73	30	15	67	0	125	1	
AM 2038 Ref + Dev	722	366	62	63	77	78	77	148	120	23	23	18	354	231	34	68	0	131	8	
AM 2038 Ref+Dev +BMW	732	629	58	61	68	69	91	150	126	15	20	19	407	301	45	67	0	134	0	

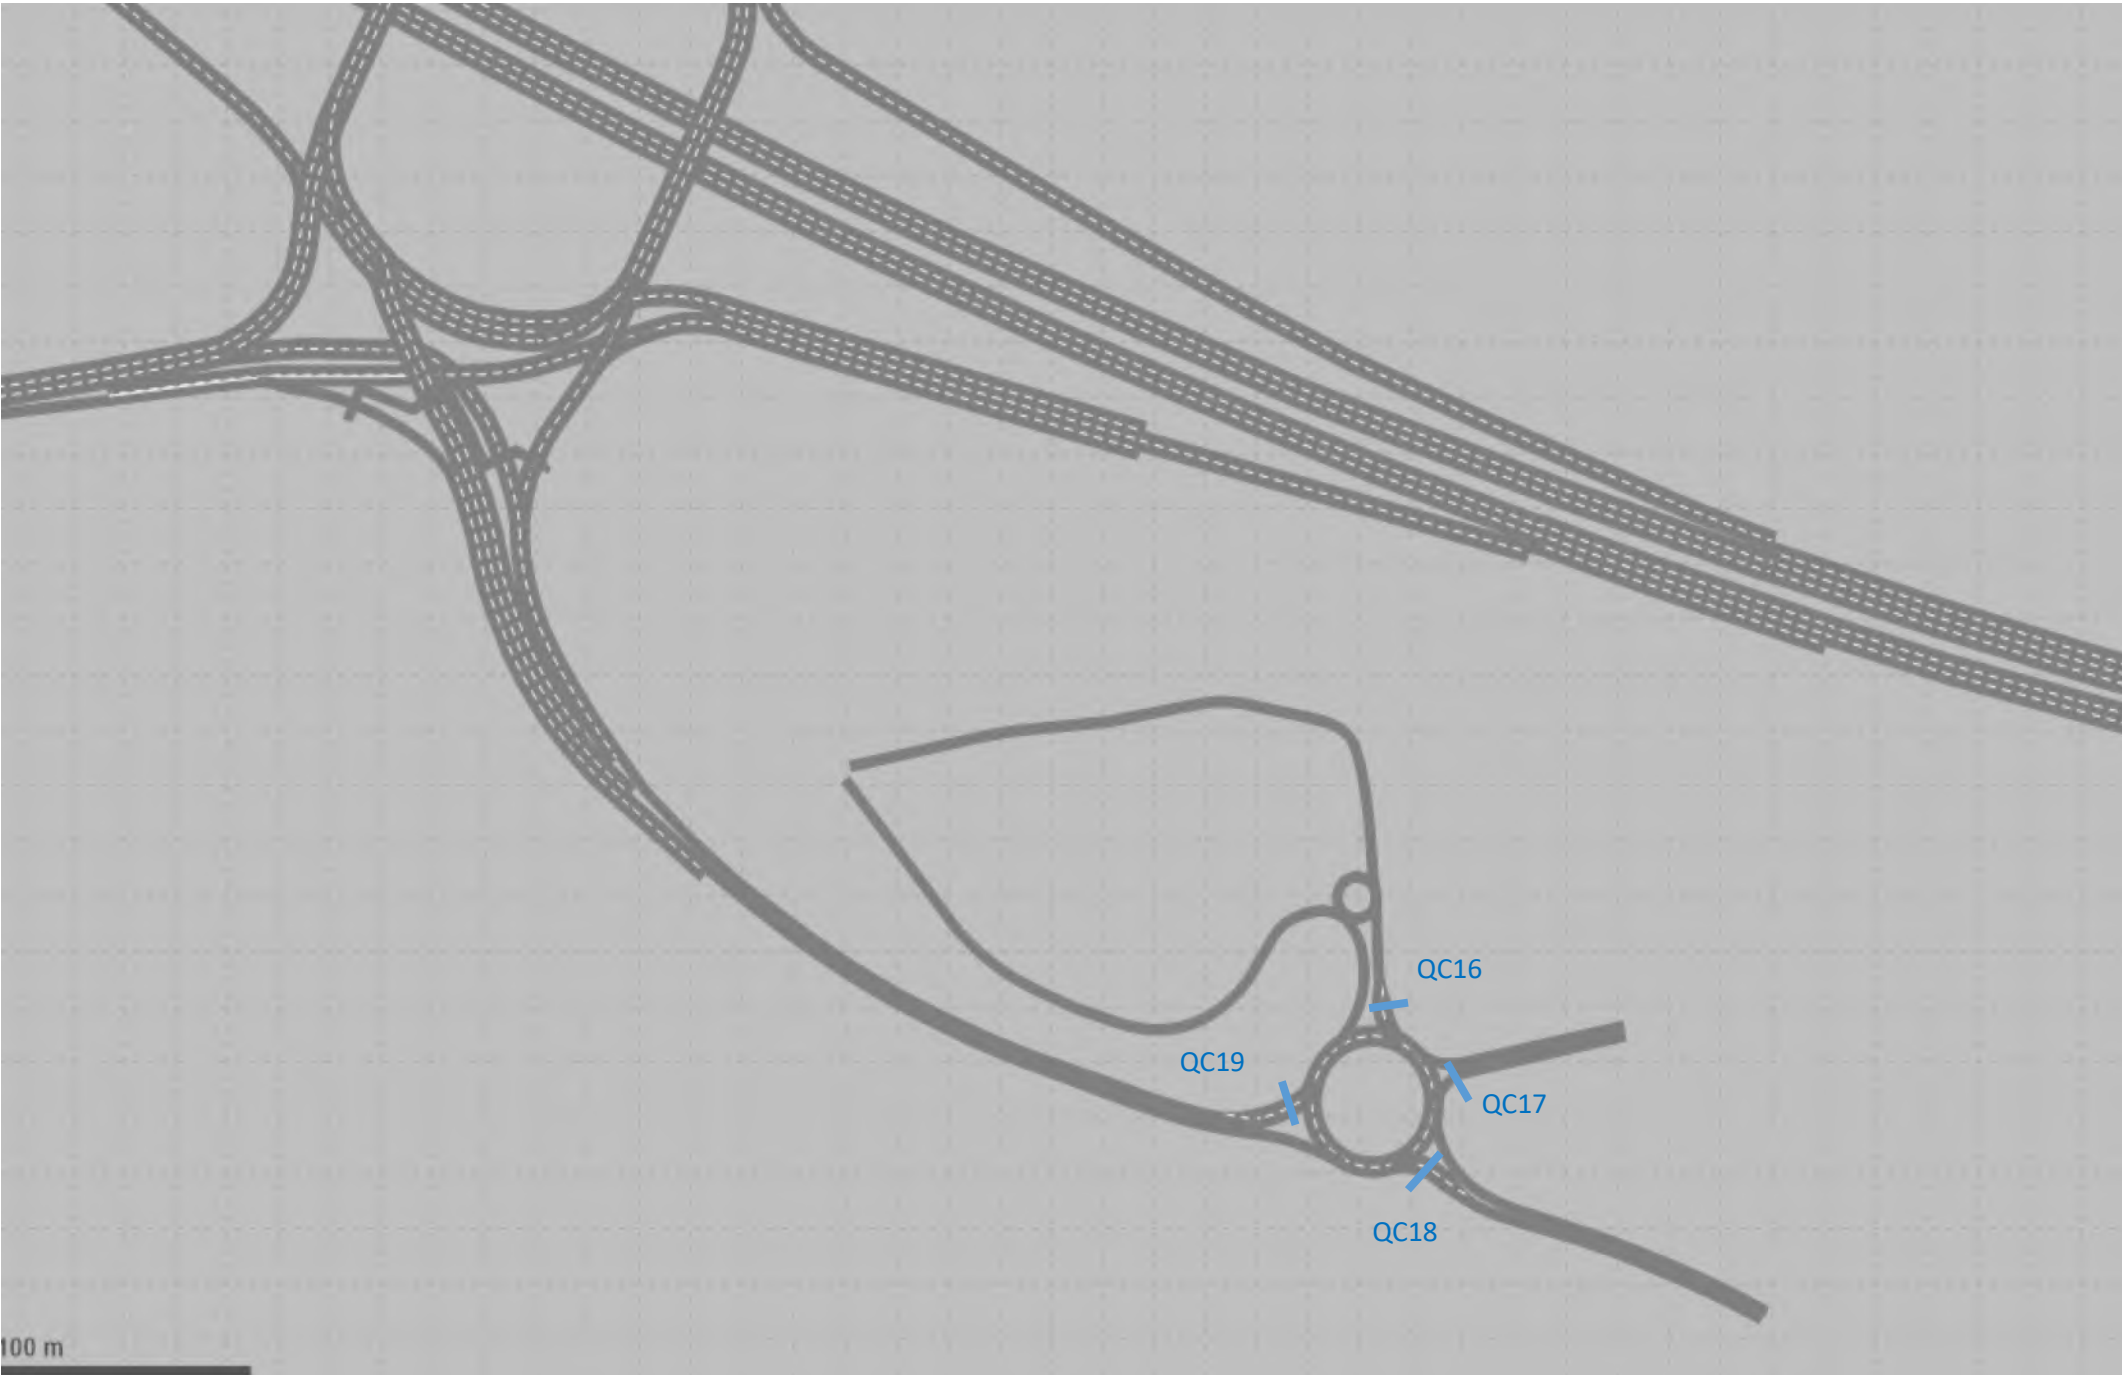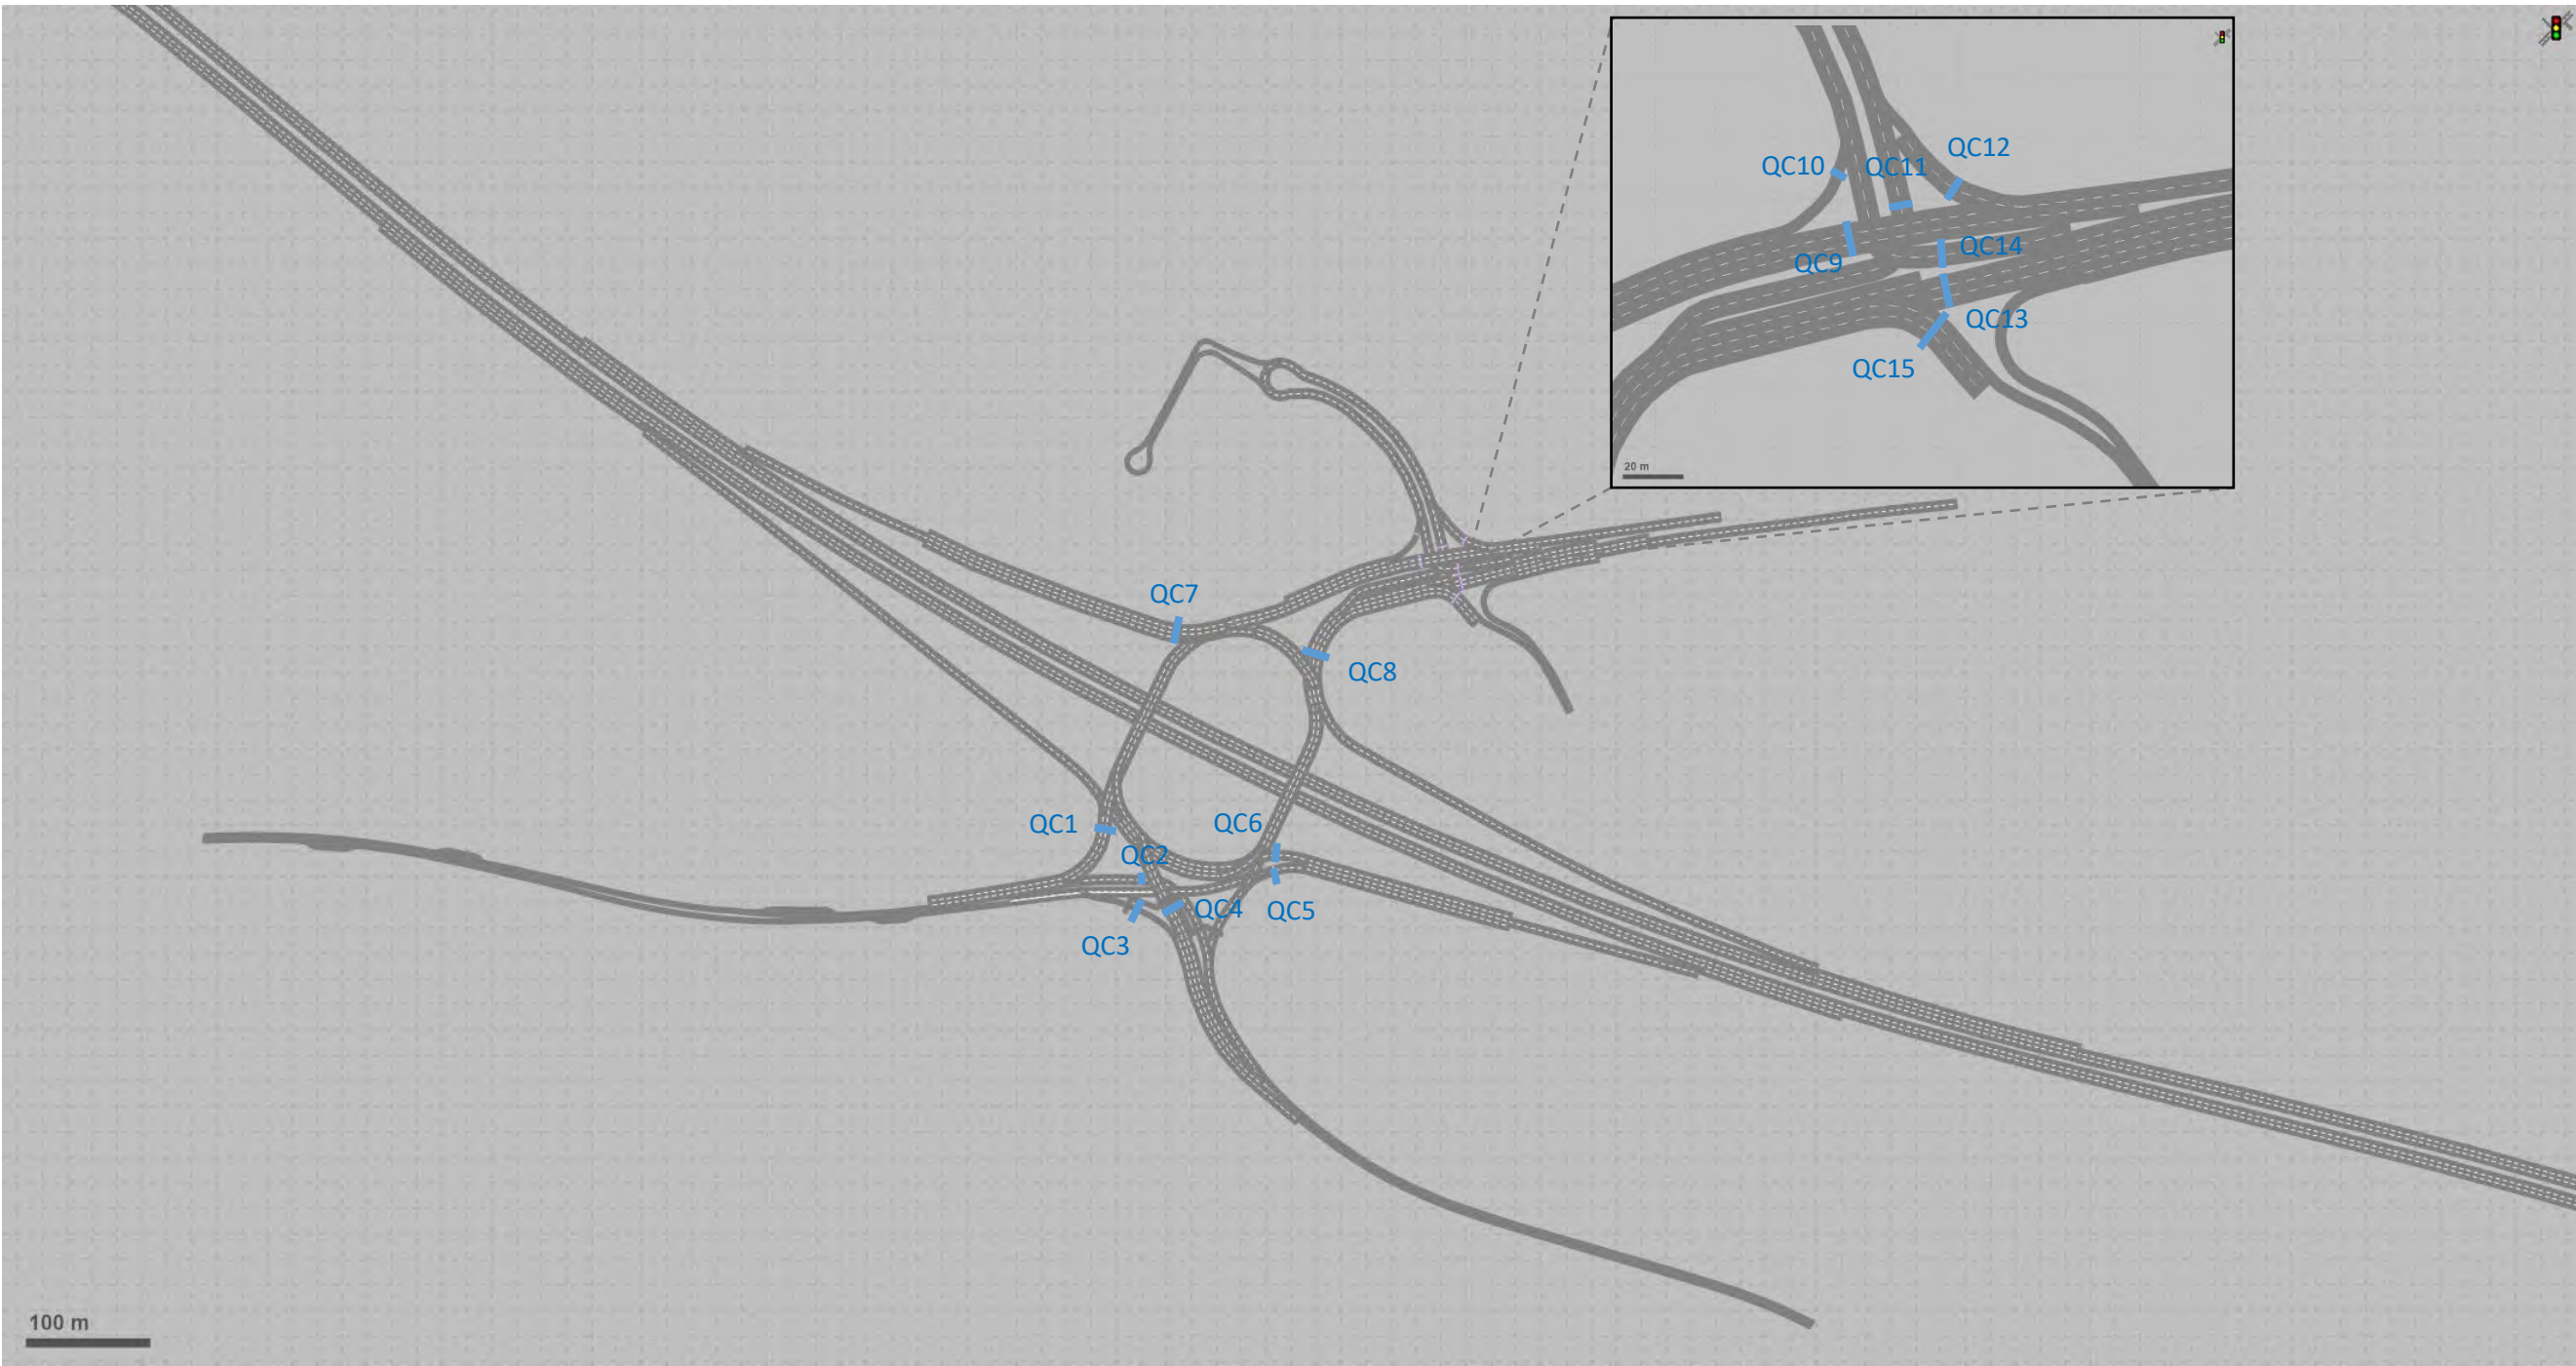


	Additional Queue information 7:30-9:00								Lydiard Field												B4005/Dev Access Roundabout			
	Spittlesborough Roundabout																							
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19					
	A3102 west ahead	A3102 west right	B4005 left	B4005 ahead	M5 wb off left	M5 wb off ahead	M5 eb off	A3102 east	GWW eb ahead	GWW eb left	Lydiard Fields right	Lydiard Fields left	GWW wb ahead	GWW wb right	Frankland Road	Dev Access sb	Farm Access wb	B4005 wb	B4005 eb					
AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref	AM 2023 Ref					
AM 2023 Ref	501	47	28	29	62	68	93	63	172	21	22	14	44	25	8	#N/A	#N/A	#N/A	#N/A					
AM 2027 Ref	699	294	43	46	59	57	76	86	138	17	24	14	53	27	7	#N/A	#N/A	#N/A	#N/A					
AM 2038 Ref	474	253	45	45	68	69	53	141	119	17	21	13	213	84	15	#N/A	#N/A	#N/A	#N/A					
AM 2027 Ref + Dev	735	419	46	60	49	51	81	110	146	21	20	14	56	25	7	68	0	121	0					
AM 2038 Ref + Dev	638	425	55	58	66	68	74	148	113	8	21	13	388	209	16	68	0	133	1					
AM 2038 Ref+Dev +BMW	643	612	53	60	56	58	89	148	115	16	24	13	409	236	36	69	0	120	28					

Run Number >>	AVC
Q Type >>	Max

6

		Spittlesborough Roundabout								Lydiard Field								B4005/Dev Access Roundabout			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	
		A3102 west ahead	A3102 west right	B4005 left	B4005 ahead	M5 wb off left	M5 wb off ahead	M5 eb off	A3102 east	GWW eb ahead	GWW eb left	Lydiard Fields right	Lydiard Fields left	GWW wb ahead	GWW wb right	Frankland Road	Dev Access sb	Farm Access wb	B4005 wb	B4005 eb	
		PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	
PM 2023 Ref	Max	82	26	46	36	124	126	50	79	111	1	22	22	92	12	24	#N/A	#N/A	#N/A	#N/A	
PM 2027 Ref	Max	735	531	657	641	117	119	61	150	133	1	153	113	410	12	130	#N/A	#N/A	#N/A	#N/A	
PM 2038 Ref	Max	750	596	111	94	303	304	71	150	133	1	77	52	401	13	130	#N/A	#N/A	#N/A	#N/A	
PM 2027 Ref + Dev	Max	722	564	93	97	83	85	59	151	113	4	78	42	410	15	130	65	0	146	11	
PM 2038 Ref + Dev	Max	754	679	95	90	122	125	69	147	124	1	33	25	238	15	102	65	0	146	3	
PM 2038 Ref+Dev+BMW	Max	751	715	95	97	171	173	69	147	115	1	31	23	387	12	130	65	0	146	0	

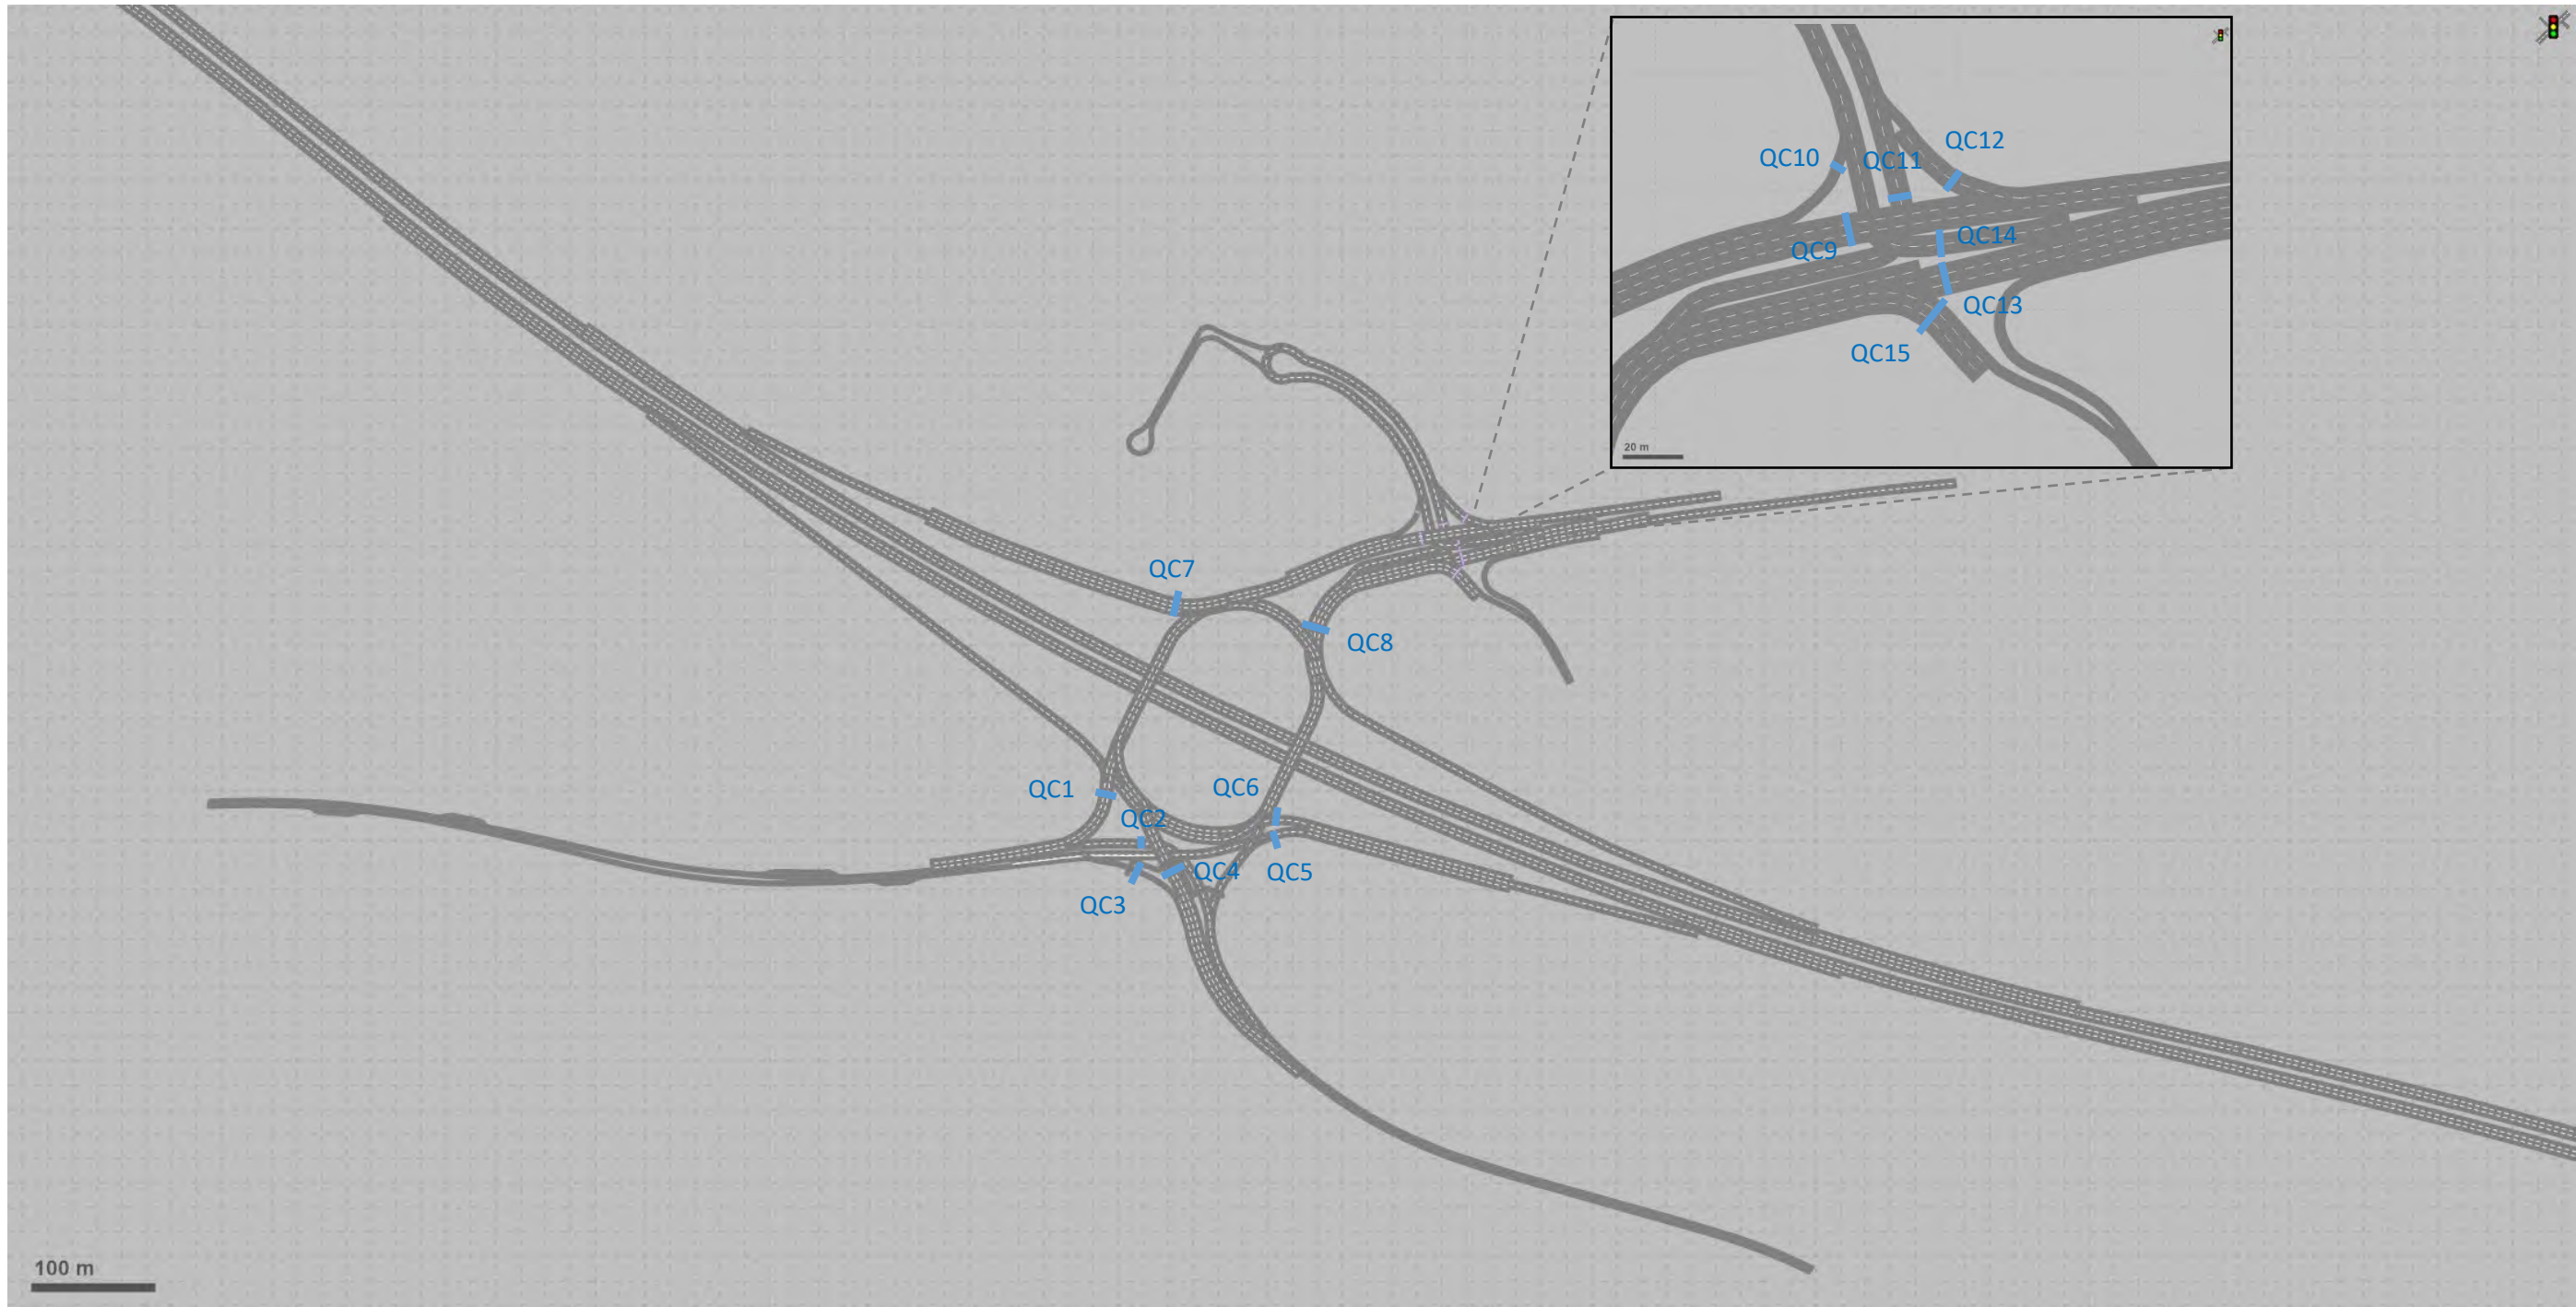

		Additional Queue information 5:30-6:00 Spittlesborough Roundabout									Lydiard Field										B4005/Dev Access Roundabout			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19				
		A3102 west ahead	A3102 west right	B4005 left	B4005 ahead	M5 wb off left	M5 wb off ahead	M5 eb off	A3102 east	GWW eb ahead	GWW eb left	Lydiard Fields right	Lydiard Fields left	GWW wb ahead	GWW wb right	Frankland Road	Dev Access sb	Farm Access wb	B4005 wb	B4005 eb				
		PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref	PM 2023 Ref				
PM 2023 Ref	Max	59	20	35	29	143	144	36	82	97	1	20	17	69	14	13	#N/A	#N/A	#N/A	#N/A				
PM 2027 Ref	Max	714	598	79	70	112	114	49	150	125	1	184	134	411	13	129	#N/A	#N/A	#N/A	#N/A				
PM 2038 Ref	Max	748	681	102	87	478	479	55	150	129	1	112	81	411	52	130	#N/A	#N/A	#N/A	#N/A				
PM 2027 Ref + Dev	Max	663	571	93	97	71	48	148	113	1	73	52	408	15	129	61	0	145	2					
PM 2038 Ref + Dev	Max	749	683	91	89	129	131	56	150	114	1	56	29	338	33	89	65	0	146	0				
PM 2038 Ref+Dev+BMW	Max	752	752	96	91	179	182	60	149	104	2	53	26	404	15	130	60	0	146	1				


Run Numbers>> AVG

	AM 2023 Ref	AM 2027 Ref	AM 2038 Ref	AM 2027 Ref + Dev	AM 2038 Ref + Dev	AM 2038 Ref+Dev +BMW
	0730-0830	0730-0830	0730-0830	0730-0830	0730-0830	0730-0830
1	100	118	113	145	158	216
2	16	14	14	15	16	18
3	27	27	26	27	26	25
4	18	18	18	18	18	18
5	19	19	48	19	50	72
6	8	9	23	9	24	30
7	10	13	25	15	29	33
8	21	29	44	28	42	44
9	27	33	35	32	32	33
10	52	54	55	54	55	62
11	6	6	6	6	6	5
12	41	42	44	45	50	54
13	26	28	36	26	34	35
14	20	26	48	29	56	53
15	16	22	23	24	25	25
16	61	65	67	73	75	75
17	8	8	9	8	8	8
18	33	33	34	33	34	34
19	9	9	9	9	9	9
20	63	68	136	68	142	156
21	8	10	17	11	19	22
22	28	28	29	29	30	30
23	4	4	4	4	4	4
24	10	10	10	12	12	12
25	10	10	15	8	12	10
26	36	31	33	33	46	35
27	11	10	10	10	10	10
28	23	23	23	24	25	26
29	18	18	18	18	18	17
31	11	11	11	11	11	11

JT1 EB	161	177	170	205	217	278
JT1 WB	138	156	130	156	233	278
JT2 EB	109	124	156	130	170	173
JT2 WB	102	106	109	114	118	117
JT3 EB	107	115	191	117	200	216
JT 3 WB	123	118	123	119	137	125

	AM 2023 Ref	AM 2027 Ref	AM 2038 Ref	AM 2027 Ref + Dev	AM 2038 Ref + Dev	AM 2038 Ref+Dev +BMW
	0730-0900	0730-0900	0730-0900	0730-0900	0730-0900	0730-0900
1	103	129	125	152	164	228
2	15	14	14	15	16	18
3	27	27	26	26	26	25
4	18	18	18	18	18	18
5	18	19	46	19	64	84
6	8	9	23	9	29	33
7	10	13	25	15	32	35
8	21	29	45	30	44	45
9	27	32	35	32	32	33
10	52	53	55	54	55	61
11	6	6	6	6	6	6
12	41	42	44	45	51	55
13	26	28	38	27	35	36
14	20	26	49	32	58	55
15	16	22	23	24	26	25
16	61	65	67	73	75	75
17	8	8	9	8	8	8
18	33	33	34	33	34	34
19	9	9	9	9	9	9
20	62	68	142	69	177	202
21	8	9	17	11	21	23
22	28	28	29	29	30	30
23	4	4	4	4	4	4
24	10	10	10	11	12	12
25	11	10	14	8	11	10
26	36	32	34	34	45	35
27	12	10	10	11	11	10
28	23	22	23	24	26	27
29	18	18	18	18	18	18
31	11	11	11	11	11	11

JT1 EB	163	188	183	212	224	289
JT1 WB	138	155	229	159	256	292
JT2 EB	109	123	159	133	176	178
JT2 WB	102	106	109	114	117	117
JT3 EB	107	115	196	118	237	264
JT 3 WB	123	117	123	119	136	125

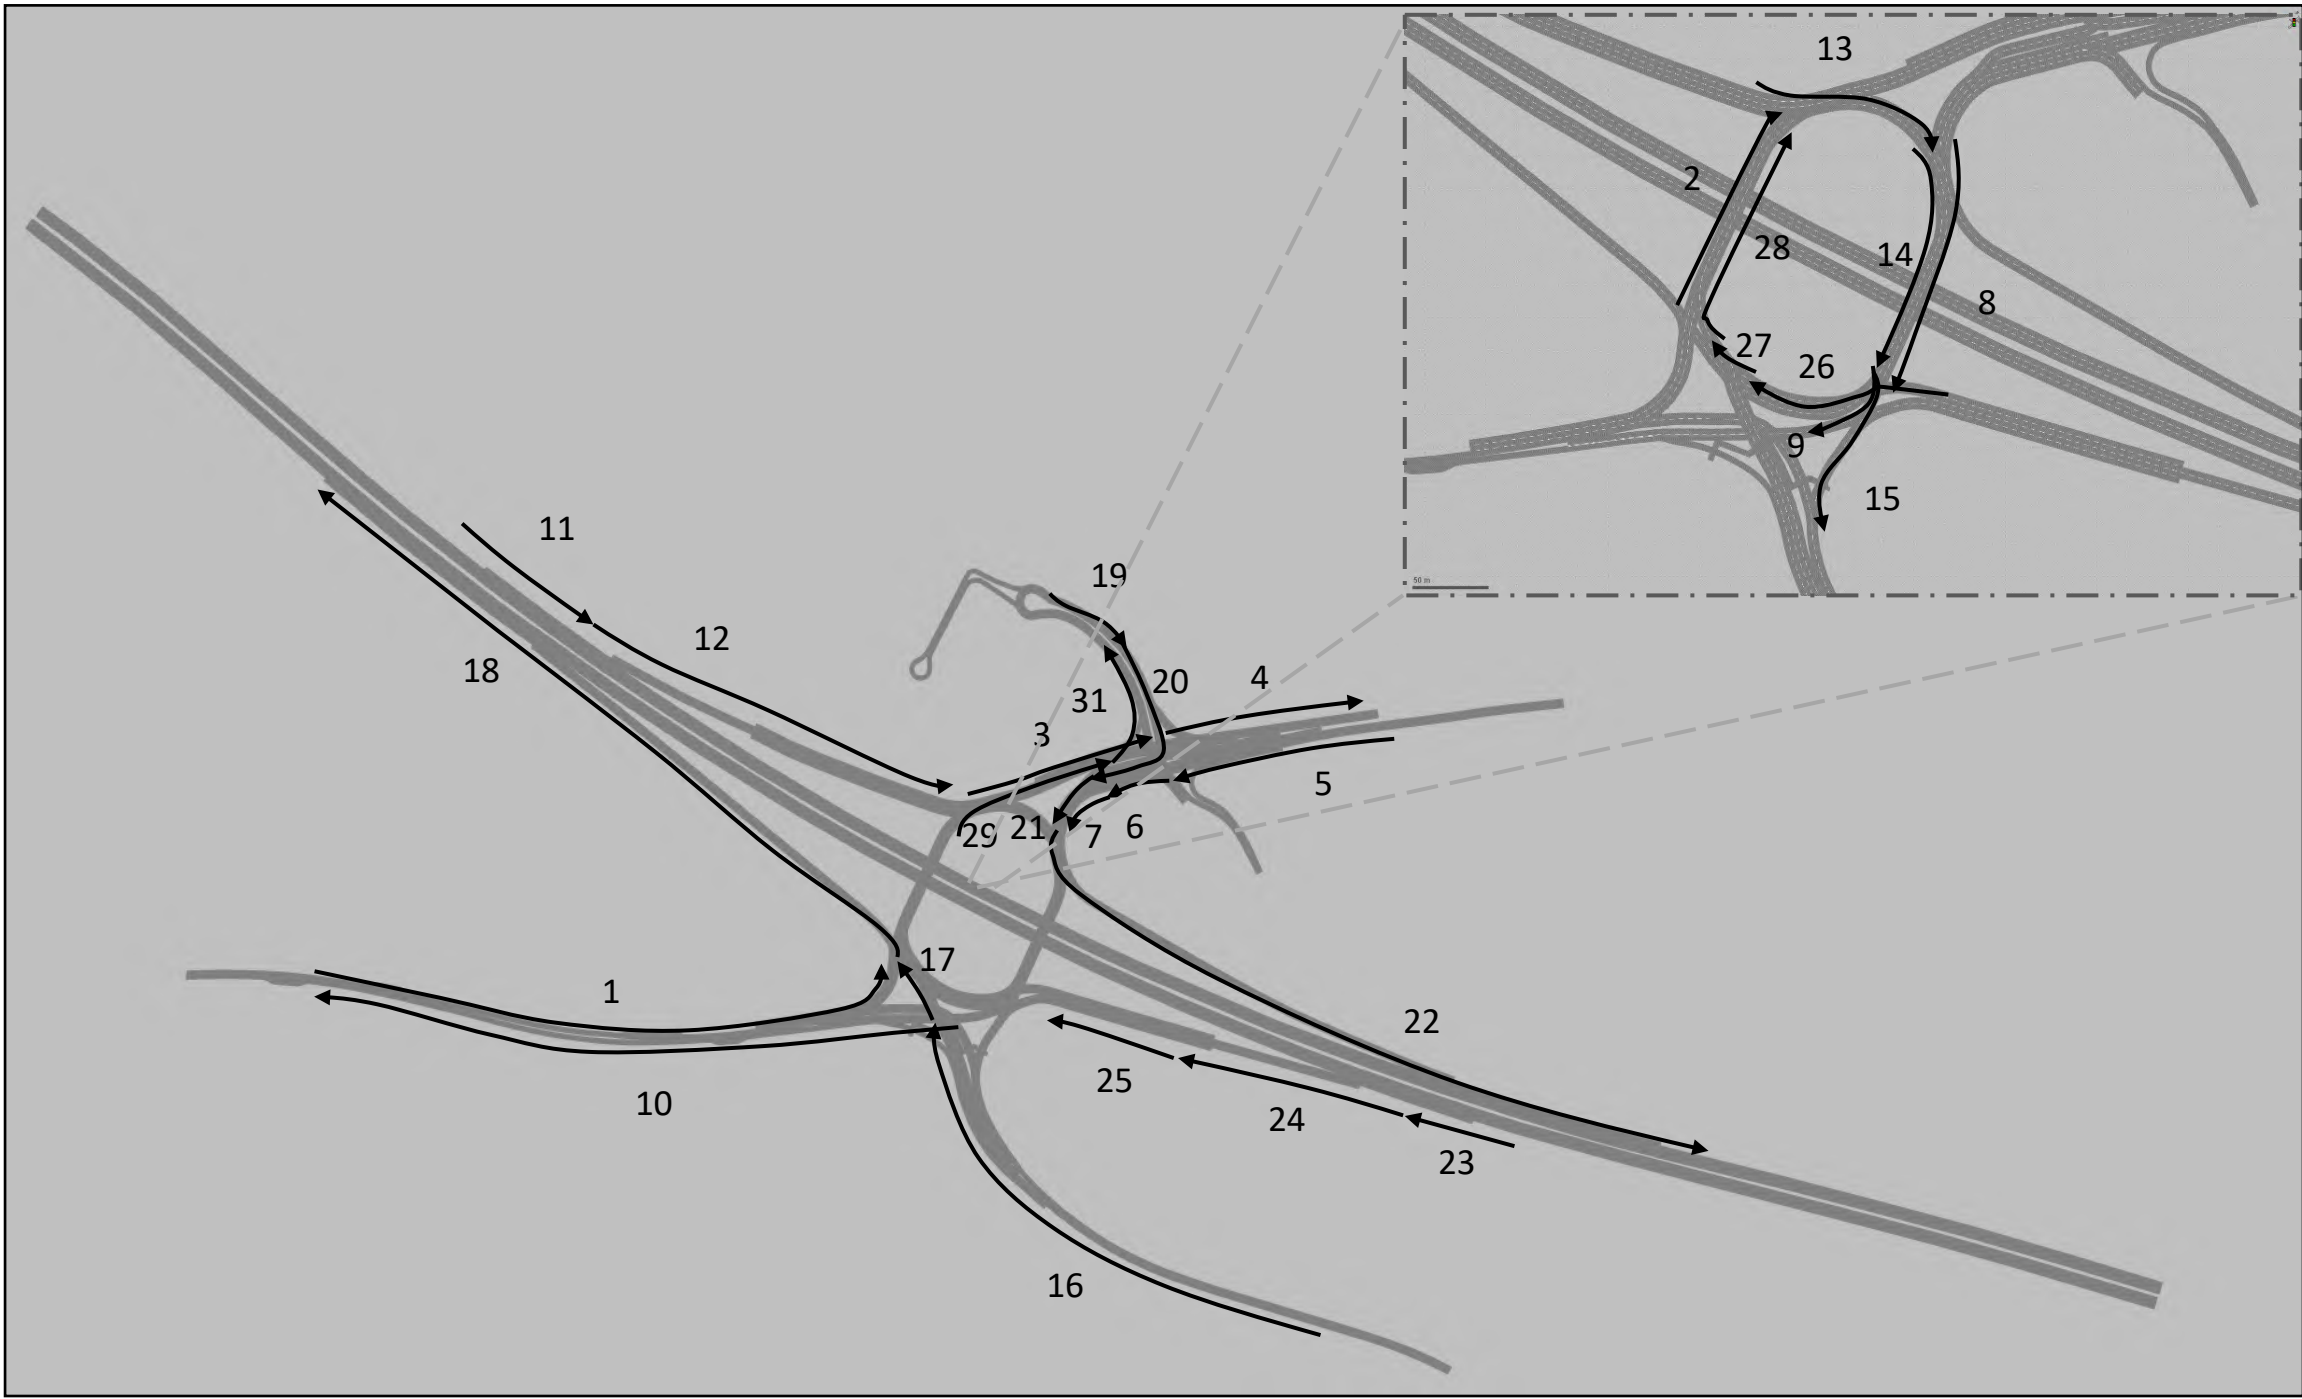


Run Numbers>> AVG

	PM 2023 Ref	PM 2027 Ref	PM 2038 Ref	PM 2027 Ref + Dev	PM 2038 Ref + Dev	PM 2038 Ref+Dev +8MW
	1630-1730	1630-1730	1630-1730	1630-1730	1630-1730	1630-1730
1	73	168	207	162	209	95
2	14	17	16	16	16	88
3	25	25	26	25	25	115
4	18	18	18	18	18	169
5	21	181	107	123	41	138
6	8	50	38	40	21	136
7	9	44	34	37	25	144
8	31	73	62	56	48	115
9	32	41	41	36	36	53
10	57	58	63	60	63	100
11	5	5	6	6	5	307
12	35	44	44	45	44	92
13	11	23	23	40	37	35
14	51	107	96	63	55	35
15	17	22	21	22	23	55
16	63	120	79	88	84	58
17	8	8	8	8	8	80
18	33	33	33	33	34	72
19	9	42	14	12	9	28
20	67	326	258	234	147	12
21	6	27	21	23	17	156
22	27	32	30	30	29	41
23	4	4	4	4	4	365
24	12	11	22	12	13	116
25	27	30	61	15	25	115
26	54	44	38	37	34	43
27	11	11	9	10	9	86
28	21	11	23	23	23	94
29	17	18	19	18	19	119
31	10	10	10	10	10	6

JT1 EB	129	228	267	221	268	467
JT1 WB	159	447	345	352	235	685
JT2 EB	120	201	189	175	166	524
JT2 WB	104	161	120	129	126	209
JT3 EB	110	426	323	299	202	236
JT 3 WB	157	151	187	129	136	946

	PM 2023 Ref	PM 2027 Ref	PM 2038 Ref	PM 2027 Ref + Dev	PM 2038 Ref + Dev	PM 2038 Ref+Dev +8MW
	1630-1800	1630-1800	1630-1800	1630-1800	1630-1800	1630-1800
1	71	175	211	162	214	95
2	14	16	16	16	16	88
3	25	26	26	26	26	112
4	18	18	18	18	18	165
5	21	180	124	136	65	134
6	8	50	40	41	27	133
7	9	43	36	36	29	141
8	31	72	63	56	49	114
9	31	41	41	36	36	52
10	57	58	62	59	62	100
11	5	5	6	5	5	306
12	34	43	43	43	45	91
13	11	23	23	40	37	35
14	51	104	95	61	57	36
15	17	22	22	22	24	57
16	63	106	78	87	84	57
17	8	8	8	8	8	80
18	33	32	33	33	33	70
19	9	62	28	16	12	26
20	68	391	316	268	204	12
21	6	26	22	23	19	153
22	27	32	30	30	29	38
23	4	4	6	4	4	356
24	14	13	64	12	13	115
25	31	33	97	14	28	115
26	56	45	38	37	34	42
27	11	11	9	10	9	82
28	20	23	23	23	23	92
29	17	19	19	18	18	116
31	10	10	10	10	10	6

JT1 EB	127	236	272	222	274	459
JT1 WB	158	443	365	365	268	674
JT2 EB	119	197	189	173	168	525
JT2 WB	104	146	119	128	125	207
JT3 EB	110	512	396	337	264	229
JT 3 WB	164	156	266	127	139	925

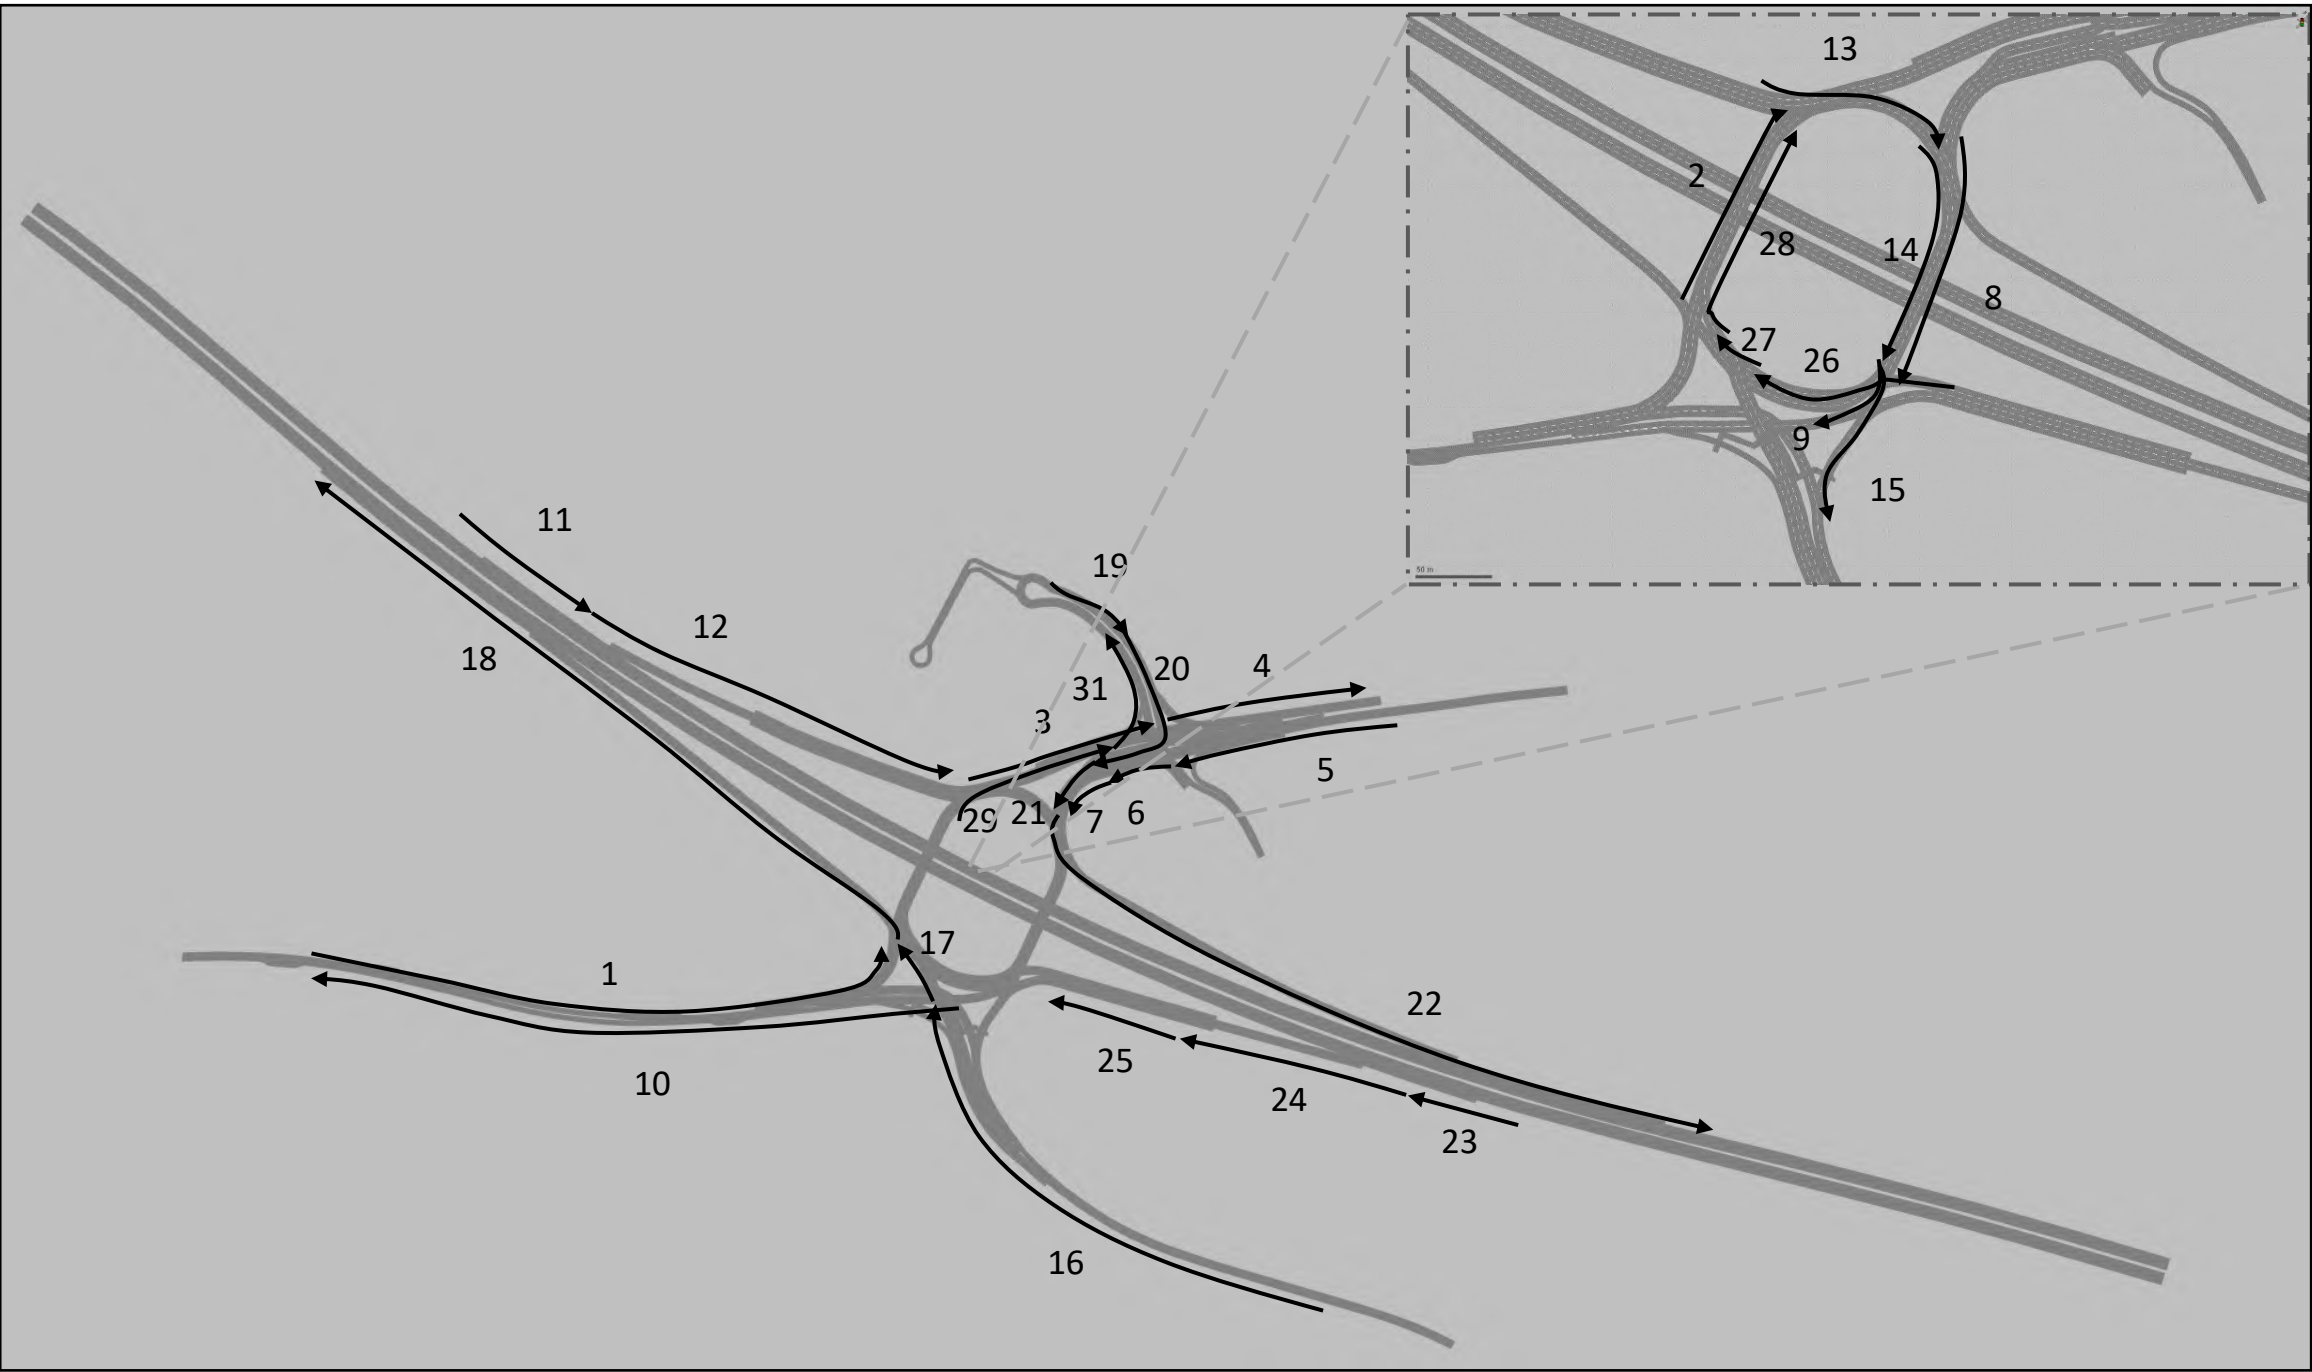


APPENDIX 10

Merge / Diverge Diagrams

From TD22/06, Figure 2/5 MW

M4 Junction 16 - EASTBOUND DIVERGE
AM Peak - All Phases

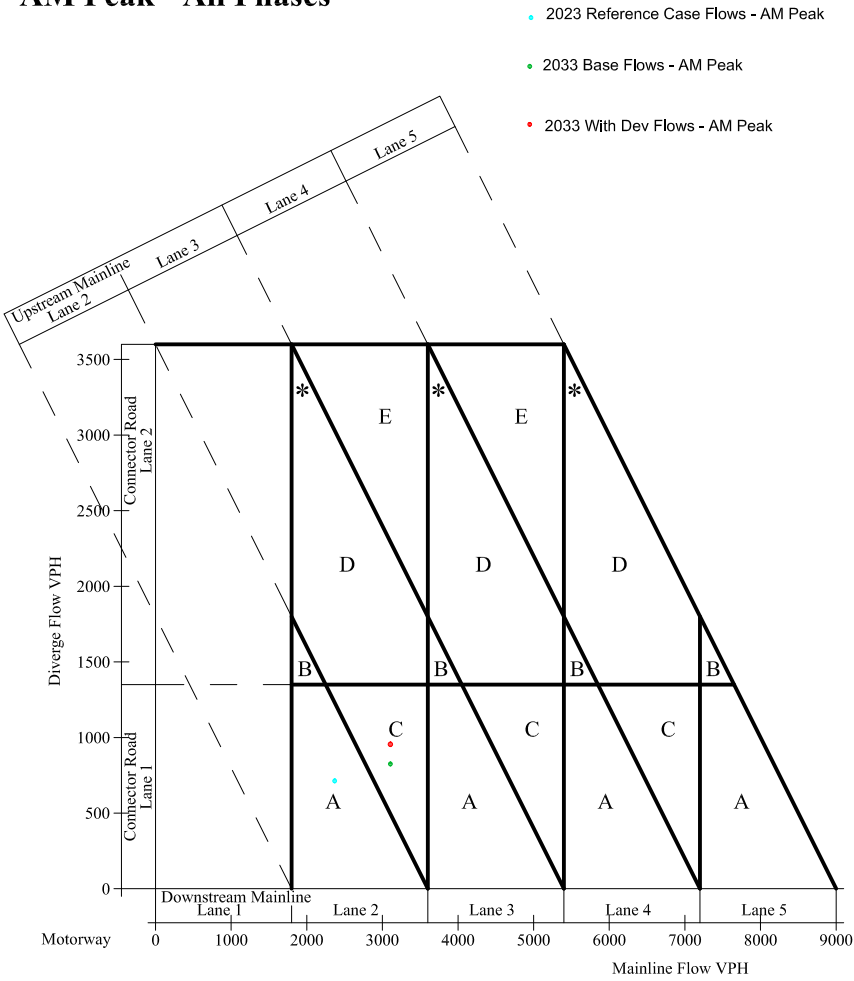


Notes:-
* If Layout D Option 2 is used consider Auxilliary Lane (see paragraph 4.24 of TD22/06).

Motorway Diverging Diagram

From TD22/06, Figure 2/3 MW

M4 Junction 16 - EASTBOUND MERGE
AM Peak - All Phases

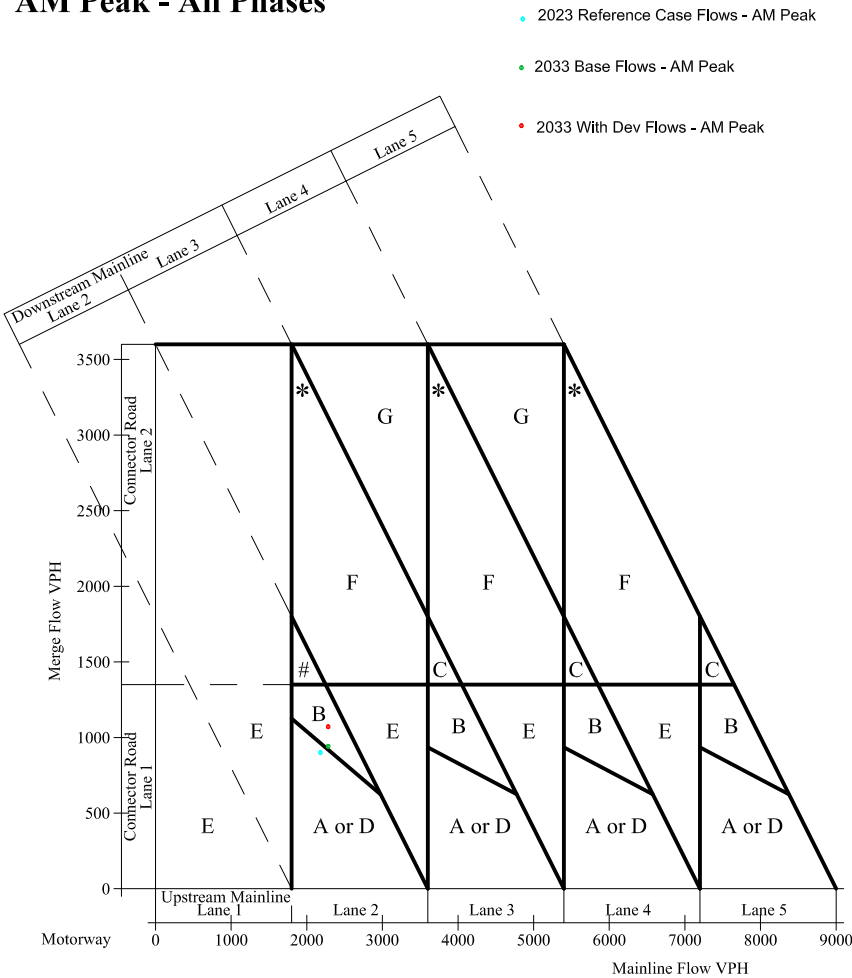


Notes:-

- * If Layout F Option 2 is used consider Auxilliary Lane (see paragraph 4.23 of TD22/06).
- # Area of uncertainty - In this area the choice will depend on the downstream provision. If there is a lane gain then use Layout E or F.

Motorway Merging Diagram

From TD22/06, Figure 2/5 MW

M4 Junction 16 - WESTBOUND DIVERGE
AM Peak - All Phases

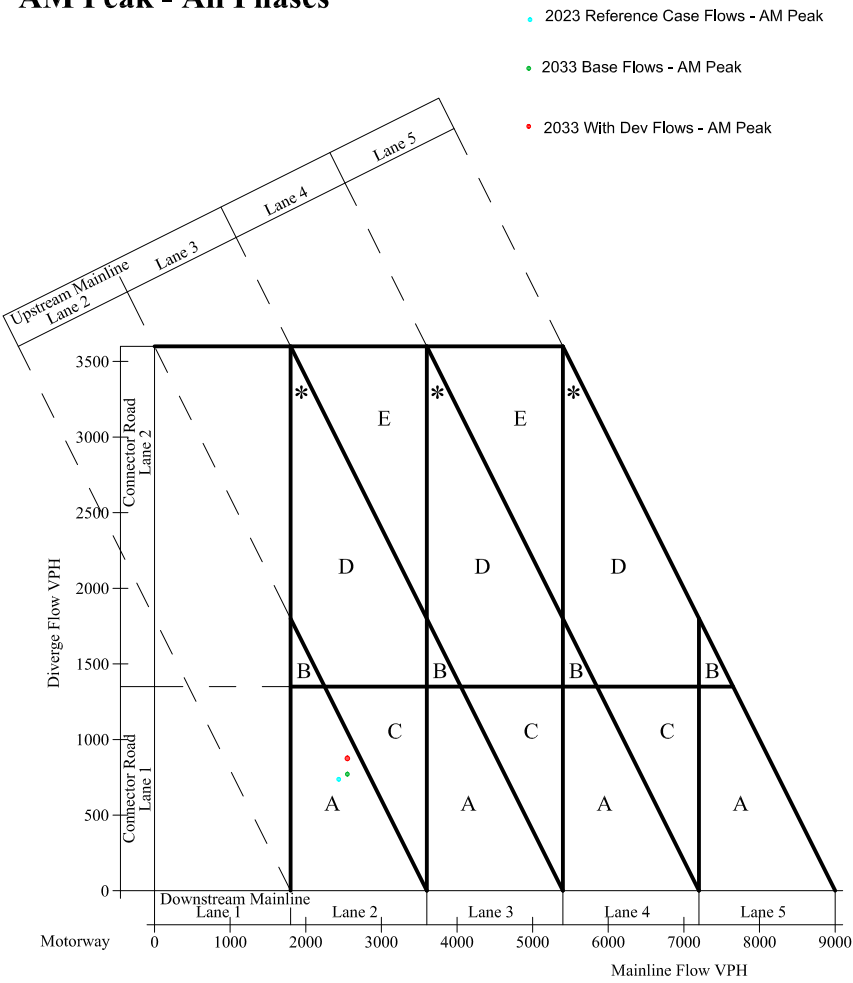


Notes:-
* If Layout D Option 2 is used consider Auxilliary Lane (see paragraph 4.24 of TD22/06).

Motorway Diverging Diagram

From TD22/06, Figure 2/3 MW

M4 Junction 16 - WESTBOUND MERGE
AM Peak - All Phases

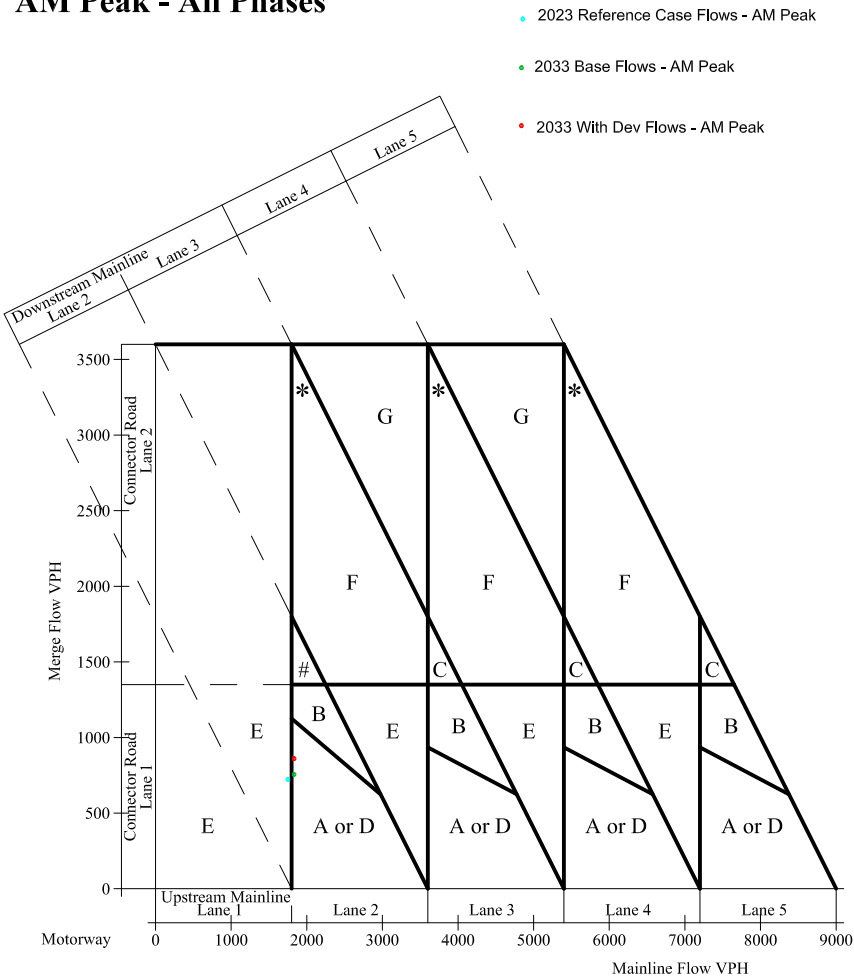


Notes:-

- * If Layout F Option 2 is used consider Auxilliary Lane (see paragraph 4.23 of TD22/06).
- # Area of uncertainty - In this area the choice will depend on the downstream provision. If there is a lane gain then use Layout E or F.

Motorway Merging Diagram

From TD22/06, Figure 2/5 MW

M4 Junction 16 - EASTBOUND DIVERGE
PM Peak - All Phases

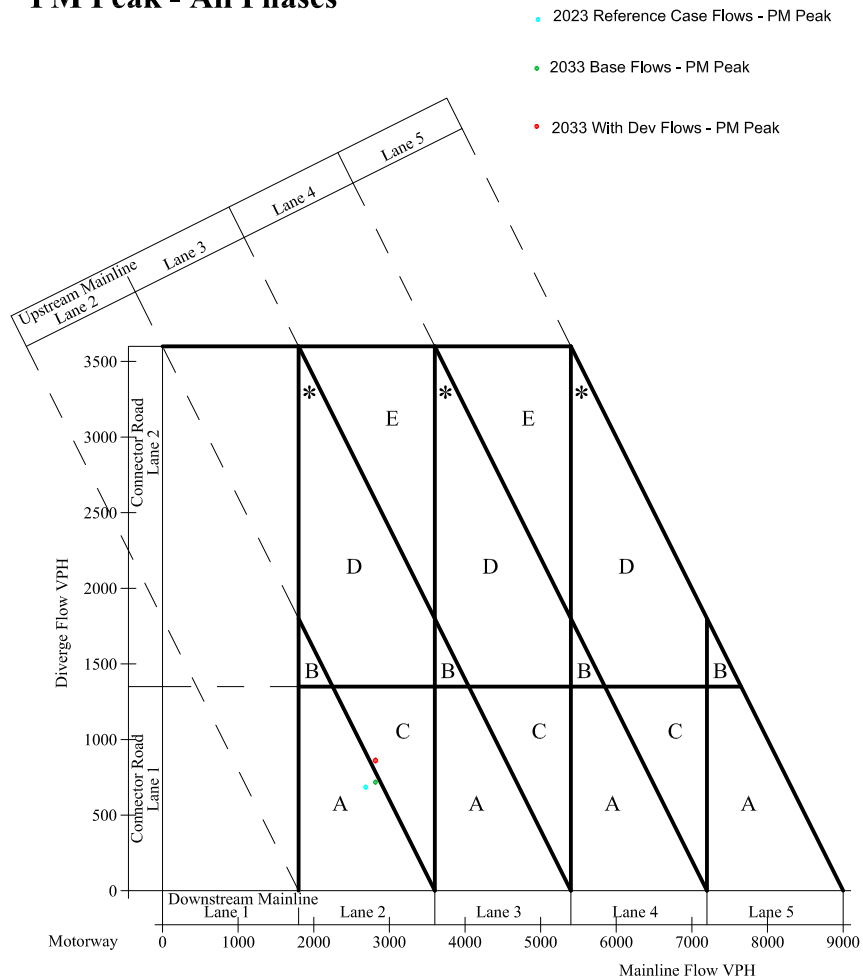


Notes:-

* If Layout D Option 2 is used consider Auxilliary Lane (see paragraph 4.24 of TD22/06).

Motorway Diverging Diagram

From TD22/06, Figure 2/3 MW

M4 Junction 16 - EASTBOUND MERGE
PM Peak - All Phases

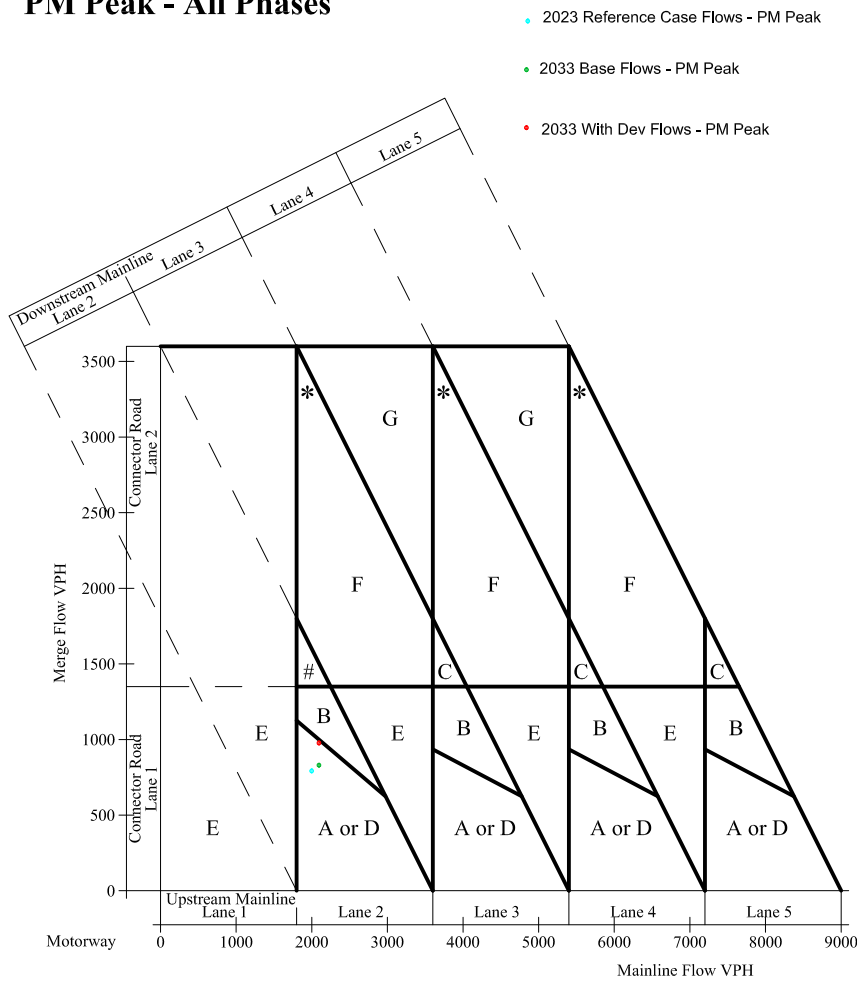


Notes:-

- * If Layout F Option 2 is used consider Auxilliary Lane (see paragraph 4.23 of TD22/06).
- # Area of uncertainty - In this area the choice will depend on the downstream provision. If there is a lane gain then use Layout E or F.

Motorway Merging Diagram

From TD22/06, Figure 2/5 MW

M4 Junction 16 - WESTBOUND DIVERGE
PM Peak - All Phases

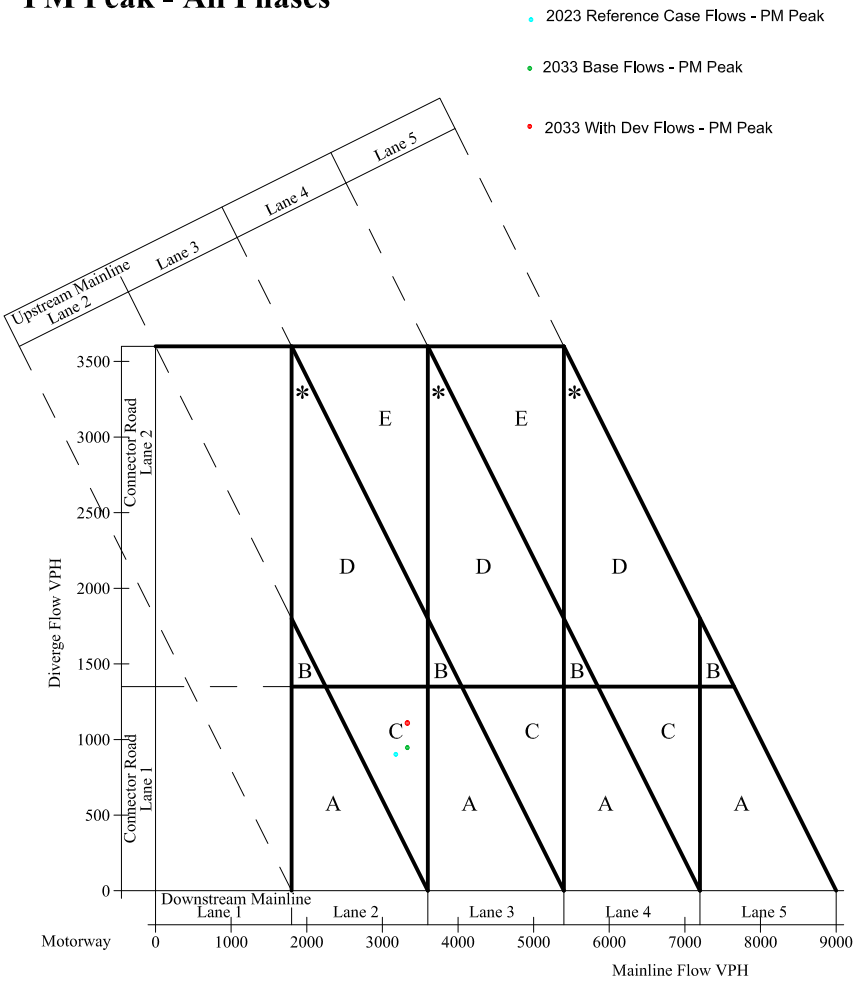

Notes:-

* If Layout D Option 2 is used consider Auxilliary Lane (see paragraph 4.24 of TD22/06).

Motorway Diverging Diagram


APPENDIX 11

Accident Data

M4 J16 Spittelborough

Total collisions in search area: 18 (including 1 fatal or serious)

during 5 years from 2017-01-01 to 2021-12-31

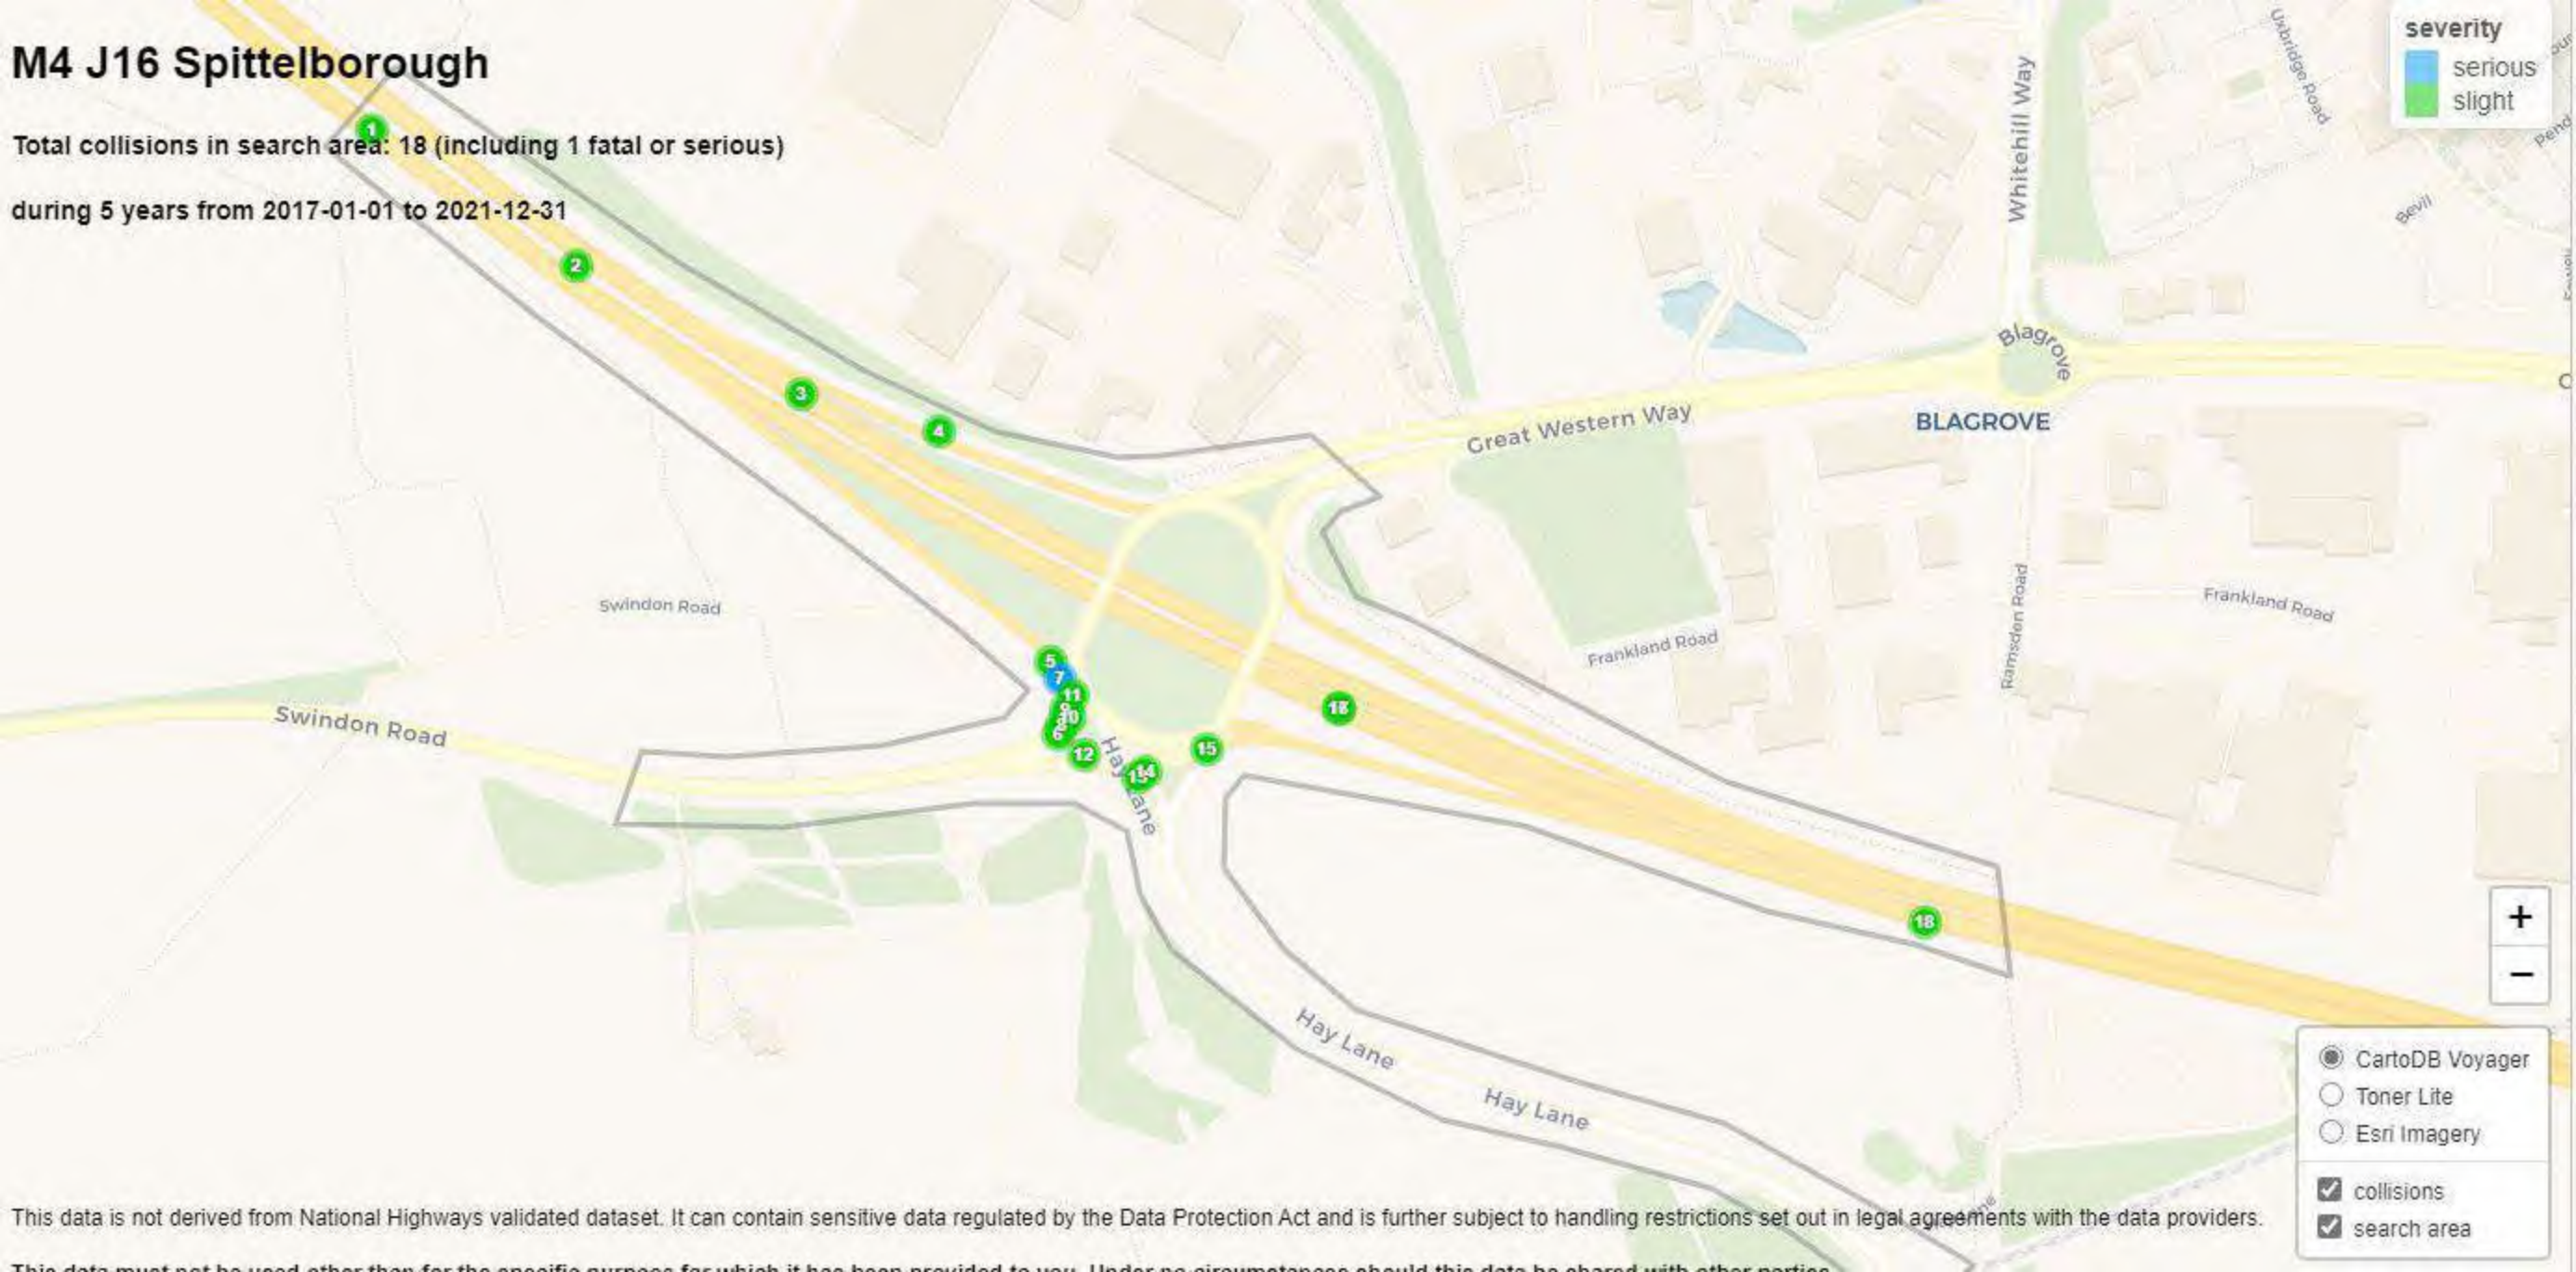

This data is not derived from National Highways validated dataset. It can contain sensitive data regulated by the Data Protection Act and is further subject to handling restrictions set out in legal agreements with the data providers.

This data must not be used other than for the specific purpose for which it has been provided to you. Under no circumstances should this data be shared with other parties.

Collision Summary Report

M4 J16 Spittelborough

Collisions between 01-01-2017 and 31-12-2021

Report Date: 13-06-2023

This data is not derived from National Highways validated dataset. It can contain sensitive data regulated by the Data Protection Act and is further subject to handling restrictions set out in legal agreements with the data providers.

This data must not be used other than for the specific purpose for which it has been provided to you. Under no circumstances should this data be shared with other parties.

Count of collisions by severity and year

year	fatal	serious	slight	Total
2017	0	0	4	4
2018	0	0	1	1
2019	0	1	3	4
2020	0	0	3	3
2021	0	0	6	6
Total	0	1	17	18

Count of collisions by month and year

year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Total
2017	0	0	0	2	1	0	1	0	0	0	0	0	4
2018	0	0	0	0	0	0	0	0	0	0	0	1	1
2019	0	0	1	1	0	0	0	2	0	0	0	0	4
2020	1	0	1	0	0	1	0	0	0	0	0	0	3
2021	0	2	0	0	0	0	0	0	3	1	0	0	6
Total	1	2	2	3	1	1	1	2	3	1	0	1	18

Count of collisions by day and time

hourOfDay	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Total
00:00	0	0	0	0	0	0	0	0
01:00	0	0	0	0	0	0	0	0
02:00	0	0	0	0	0	0	1	1
03:00	0	0	0	0	0	0	0	0
04:00	0	0	0	0	0	0	1	1
05:00	0	0	0	0	0	0	0	0
06:00	0	0	0	0	0	0	0	0
07:00	0	0	0	0	1	0	0	1
08:00	0	0	1	0	0	0	1	2
09:00	0	0	0	0	0	0	0	0
10:00	0	0	1	0	0	0	0	1
11:00	0	0	0	0	0	1	0	1
12:00	0	0	0	0	0	0	0	0
13:00	0	0	0	0	1	0	0	1
14:00	0	1	0	0	1	0	0	2
15:00	0	0	1	0	0	0	0	1
16:00	0	1	1	0	0	0	1	3
17:00	1	0	0	0	0	1	0	2
18:00	0	0	0	0	0	0	0	0
19:00	0	0	0	0	0	0	0	0
20:00	0	0	0	0	0	0	0	0
21:00	0	0	1	0	1	0	0	2
22:00	0	0	0	0	0	0	0	0
23:00	0	0	0	0	0	0	0	0
Total	1	2	5	0	4	2	4	18

Count of collisions by junction detail

junctionDetail	collisions
not at junction	6
other junction	1
roundabout	11
Total	18

Count of collisions by junction control

junctionControl	collisions
auto traffic signal	10
give way or uncontrolled	2
not at junction	6
Total	18

Count of collisions by weather

weatherConditions	collisions
fine, without high winds	14
raining, with high winds	1
raining, without high winds	1
unknown	2
Total	18

Count of collisions by road surface

roadSurface	collisions
dry	16
wet or damp	2
Total	18

Count of collisions by light conditions

lightingConditions	collisions
daylight	11
dark, street lights lit	4
dark, street lights unlit	1
dark, no street lights	1
dark, street lighting unknown	1
Total	18

Collision Search

M4 J16 Spittelborough

Collisions between 01-01-2017 and 31-12-2021.

Collision descriptions and other vehicle and casualty attributes for individual collisions within search area.

Date of report: 13/06/2023

This data is not derived from National Highways validated dataset. It can contain sensitive data regulated by the Data Protection Act and is further subject to handling restrictions set out in legal agreements with the data providers.

This data must not be used other than for the specific purpose for which it has been provided to you. Under no circumstances should this data be shared with other parties.

For collision locations refer to plot number on collision plot.

plotNumber	refNumber	severity	day of week	date	time (24hr)
1	28864/17	slight	Saturday	01 Apr 2017	1113

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
70	not at junction	not at junction	dual carriageway	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	1	slight	driver/rider	male	29	not passenger	not ped.	not ped.	not ped.	other
2	2	slight	driver/rider	male	24	not passenger	not ped.	not ped.	not ped.	other
3	1	slight	passenger	male	31	front seat	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	SE	NW	on main c'way	skidded and over-turned	not at	none	offside + crossed central res.	central vrs	male	29	-ve
2	car	going ahead	none	SE	NW	on main c'way	none	not at	none		none	male	24	-ve

V1 (CAR) TRAV NW. DVR OF V1 HAS FALLEN ASLEEP AT THE WHEEL & COLLIDED WITH REAR OF V2 (CAR) TRAV NW. V1 THEN SKIDDED INTO CENTRAL CRASH BARRIER, CAUSING V1 TO OVERTURN OVER BARRIER & COME TO REST IN LANE 2 OF E/BOUND C/WAY. KB

plotNumber	refNumber	severity	day of week	date	time (24hr)
2	77367/19	slight	Tuesday	06 Aug 2019	1638

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
70	not at junction	not at junction	dual carriageway	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	1	slight	driver/rider	female	27	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	van/goods (under 3.5t)	going ahead	none	NW	SE	on main c'way	none	not at	none	offside onto central res. + re-bounded	central vrs	female	27	-ve

V1 (VAN) TRAV SE LOST CONTROL, COLLIDED WITH C/RESERVATION O/S, REBOUNDED AND COLLIDED WITH CRASH BARRIER N/S. TN

plotNumber	refNumber	severity	day of week	date	time (24hr)
3	A1376/21	slight	Sunday	17 Oct 2021	249

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
70	other junction	give way or uncontrolled	dual carriageway	dark, street lighting unknown	unknown	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	1	slight	driver/rider	female	31	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	W	E	on main c'way	none	leaving junction	none	nearside	near/offside vrs	female	31	+ve

V1(CAR) TRAV E. V1 HAS CHANGED DECISION TO LEAVE C/WAY AND HAS COLLIDED FRONT WITH SIDE CRASH BARRIER. V1 DRIVER INTOX. SMO

plotNumber	refNumber	severity	day of week	date	time (24hr)
4	36212/17	slight	Wednesday	26 Apr 2017	845

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
70	not at junction	not at junction	slip road	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	roadworks	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	male	55	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	van/goods (under 3.5t)	going ahead	none	NW	SE	on main c'way	none	not at	none	nearside	none	male	68	not provided (medical reasons)
2	van/goods (under 3.5t)	waiting to go	none	NW	SE	on main c'way	none	not at	none	nearside	none	male	55	-ve

V2 (VAN) TRAV SE STOPPED IN TRAFFIC. V1 (VAN) TRAV SE BEHIND V2. DVR OF V1 HAS SUFFERED A CARDIAC ARREST AT THE WHEEL & COLLIDED WITH REAR OF V2. V1 & V2 BOTH LEFT C/WAY N/SIDE. KB

plotNumber	refNumber	severity	day of week	date	time (24hr)
5	85925/19	slight	Friday	30 Aug 2019	1423

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
70	roundabout	auto traffic signal	slip road	daylight	unknown	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	male	20	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	van/goods (under 3.5t)	moving off	none	SE	NW	on main c'way	none	leaving rbt	none		none	not known	data missing	driver not contacted
2	car	moving off	none	SE	NW	on main c'way	none	leaving rbt	none		none	male	20	not requested

V1 (VAN) TRAV NW, V2 (CAR) TRAV NW. V1 & V2 MOVED OFF AT LIGHTS, V1 COLLIDED N/S V2 & THEN DROVE OFF. TN

plotNumber	refNumber	severity	day of week	date	time (24hr)
6	08728/20	slight	Saturday	25 Jan 2020	1733

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
40	roundabout	auto traffic signal	roundabout	dark, street lights lit	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	1	slight	passenger	female	84	front seat	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	SW	NE	on main c'way	none	approach junction	none		none	male	80	-ve
2	car	waiting to go	none	SW	NE	on main c'way	none	approaching junction	none		none	male	57	-ve
2	car	waiting to go	none	SW	NE	on main c'way	none	approach junction	none		none	male	57	-ve
1	car	going ahead	none	SW	NE	on main c'way	none	approaching junction	none		none	male	80	-ve

V1 (CAR) TRAV NE BEHIND V2 (CAR) TRAV NE. V2 SLOWED FOR TRAFFIC LIGHTS, V1 COLLIDED REAR V2. TN

plotNumber	refNumber	severity	day of week	date	time (24hr)
7	39979/19	serious	Friday	26 Apr 2019	1312

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
40	roundabout	auto traffic signal	roundabout	daylight	raining, with high winds	wet or damp	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	serious	driver/rider	female	45	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	turning right	none	S	NE	on main c'way	none	leaving rbt	none		none	male	76	-ve
2	car	turning left	none	S	NW	on main c'way	none	leaving rbt	none		none	female	45	-ve

V1 (CAR) TRAV NE, V2 (CAR) TRAV NW. V1 & V2 MOVED OFF AT LIGHTS IN WRONG LANES, V1 COLLIDED N/S V2. TN

plotNumber	refNumber	severity	day of week	date	time (24hr)
8	92456/21	slight	Wednesday	22 Sep 2021	1030

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
40	roundabout	auto traffic signal	roundabout	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	female	24	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	goods (3.5t to 7.5t)	moving off	none	SW	N	on main c'way	none	approaching junction	none		none	male	52	not requested
2	car	waiting to go	none	SW	N	on main c'way	none	approaching junction	none		none	female	24	not requested

V1(LORRY) TRAV N. V2(CAR) TRAV N. V2 HAS STOPPED AT TRAFFIC LIGHTS. V1 HAS FAILED TO NOTICE AND COLLIDED FRONT WITH V2 REAR. SMO

plotNumber	refNumber	severity	day of week	date	time (24hr)
9	30405/20	slight	Friday	27 Mar 2020	718

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
40	roundabout	auto traffic signal	roundabout	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	male	31	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	reversing	none	N	W	on main c'way	none	leaving rbt	none		central vrs	male	27	-ve
2	car	reversing	none	SW	E	on main c'way	none	mid junction	none		central vrs	male	31	-ve
2	car	reversing	none	SW	E	on main c'way	none	mid junction	none		central vrs	male	31	-ve
1	car	reversing	none	N	W	on main c'way	none	leaving rbt	none		central vrs	male	27	-ve

V1 (CAR) TRAV N. V2 (CAR) TRAV E. V1 TAKES R/BOUT TO GET ONTO M4. V1 RUNS RED LIGHT & COLLIDES O/S OF V2. JT.

plotNumber	refNumber	severity	day of week	date	time (24hr)
10	90080/21	slight	Wednesday	15 Sep 2021	1506

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
40	roundabout	auto traffic signal	roundabout	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	male	56	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	E	W	on main c'way	none	mid junction	none		none	male	67	driver not contacted
2	car	moving off	none	SW	N	on main c'way	none	mid junction	none		none	male	56	not requested

V1(CAR) TRAV W. V2(CAR) TRAV N. V1 HAS DISOBEYED RED TRAFFIC LIGHT CAUSING V2 TO COLLIDE FRONT WITH V1 N/S. V1 FTS. SMO

plotNumber	refNumber	severity	day of week	date	time (24hr)
11	90667/21	slight	Wednesday	15 Sep 2021	2125

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
30	roundabout	auto traffic signal	roundabout	dark, street lights lit	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	female	58	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	E	N	on main c'way	none	mid junction	none		none	male	30	not requested
2	car	moving off	none	SW	N	on main c'way	none	mid junction	central island of roundabout		none	female	58	not requested

V1(CAR) TRAV N. V2(CAR) TRAV N. V2 HAS ENTERED RBT ON GREEN LIGHT AND V1 HAS COLLIDED FRONT WITH V2 O/S CAUSING V2 TO SPIN AND IMPACT CRASH BARRIER. SMO

plotNumber	refNumber	severity	day of week	date	time (24hr)
12	39458/17	slight	Friday	05 May 2017	2113

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
60	roundabout	auto traffic signal	roundabout	dark, street lights lit	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	female	54	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	turning left	none	E	W	on main c'way	none	leaving rbt	none		none	male	31	-ve
2	car	going ahead	none	E	N	on main c'way	none	mid junction	none	nearside	none	female	54	-ve
3	car	waiting to go	none	SW	NE	on main c'way	none	approach junction	none		none	male	54	-ve
4	car	going ahead	none	E	N	on main c'way	none	mid junction	none		none	male	34	-ve

V2 & V4 (CARS) TRAV NW ON RBT IN LH LN. V4 BEHIND V2. V1 (CAR) TRAV NW IN MIDDLE LN. V1 CUT ACROSS FRONT OF V2 TO LEAVE RBT, HITTING FRONT OF V2. V2 WAS PUSHED BACK INTO FRONT OF V4. V2 THEN LEFT RD ACROSS ISLAND & BACK INTO C/WAY, HITTING V3 (CAR) TRAV NE. KB

plotNumber	refNumber	severity	day of week	date	time (24hr)
13	B6951/18	slight	Monday	10 Dec 2018	1742

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
60	roundabout	auto traffic signal	roundabout	dark, street lights lit	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	1	slight	driver/rider	female	20	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	motorcycle (over 500cc)	moving off	none	NE	NW	on main c'way	none	mid junction	none		none	female	20	-ve
2	car	going ahead	none	SE	N	on main c'way	none	mid junction	none		none	male	44	-ve

V1 (M/CYCLE) TRAV N, V2 (CAR) TRAV N. V1 HAS LOOKED AT WRONG TRAFF LIGHT AND THOUGHT SHE HAD THE GREEN LIGHT AND MOVED OFF. V2 HAS COLLIDED INTO V1. IW

plotNumber	refNumber	severity	day of week	date	time (24hr)
14	14871/21	slight	Sunday	14 Feb 2021	1657

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
40	roundabout	give way or uncontrolled	roundabout	dark, street lights unlit	raining, without high winds	wet or damp	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	female	53	not passenger	not ped.	not ped.	not ped.	other
2	1	slight	driver/rider	male	42	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	E	W	on main c'way	none	mid junction	none		none	male	42	-ve
2	car	turning right	none	S	N	on main c'way	none	leaving junction	none		none	female	53	not requested

V2(CAR) TRAV W. V1(CAR) TRAV N. V2 CROSSING JCT WHERE TRAFFIC LIGHTS AND STREET LIGHTS NOT FUNCTIONING. V1 COLLIDED FRONT WITH V2 N/S MID-JCT. SMO

plotNumber	refNumber	severity	day of week	date	time (24hr)
15	56512/20	slight	Sunday	14 Jun 2020	802

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
40	roundabout	auto traffic signal	roundabout	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	female	28	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	N	SW	on main c'way	none	mid junction	none		none	male	42	-ve
2	pedal cycle	going ahead	none	E	SW	on main c'way	none	mid junction	none		none	female	28	N/A
1	car	going ahead	none	N	SW	on main c'way	none	mid junction	none		none	male	42	-ve
2	pedal cycle	going ahead	none	E	SW	on main c'way	none	mid junction	none		none	female	28	N/A

V1 (CAR) TRAV SW. V2 (CYCLE) TRAV SW. V1 GOES THROUGH TRAFFIC LIGHTS TO BEAT THE GREEN LIGHT AND COLLIDES REAR V2. JT.

plotNumber	refNumber	severity	day of week	date	time (24hr)
16	30146/19	slight	Wednesday	27 Mar 2019	1645

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
70	not at junction	not at junction	dual carriageway	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	2	slight	driver/rider	female	22	not passenger	not ped.	not ped.	not ped.	other
2	1	slight	passenger	female	25	front seat	not ped.	not ped.	not ped.	other
3	1	slight	passenger	female	52	rear seat	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	SE	NW	on main c'way	skidded	not at	none		none	male	24	-ve
2	car	slowing/stopping	none	SE	NW	on main c'way	none	not at	none		none	female	22	-ve

V1 (CAR) TRAV NW, V2 (CAR) TRAV NW. V2 BRAKED DUE TO TRAFFICE, V1 COLLIDED REAR V2. TN

plotNumber	refNumber	severity	day of week	date	time (24hr)
17	14734/21	slight	Sunday	14 Feb 2021	437

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
70	not at junction	not at junction	dual carriageway	dark, no street lights	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	1	slight	driver/rider	male	44	not passenger	not ped.	not ped.	not ped.	other
2	2	slight	driver/rider	male	40	not passenger	not ped.	not ped.	not ped.	other
3	2	slight	passenger	male	40	front seat	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	car	going ahead	none	SE	NW	on main c'way	none	not at	none		none	male	44	not requested
2	car	going ahead	none	SE	NW	on main c'way	none	not at	none	nearside	none	male	40	not requested

V1 (CAR) TRAV NW. V2 (CAR) TRAV NW. V1 HAS COLLIDED W/ REAR V2. JT.

plotNumber	refNumber	severity	day of week	date	time (24hr)
18	60244/17	slight	Tuesday	04 Jul 2017	1430

speed limit	junction?	junction control?	road type	lighting	weather	road surface	ped. crossing facility?	special conditions	carriageway hazards
70	not at junction	not at junction	dual carriageway	daylight	fine, without high winds	dry	none within ped phase at traffic signal junction0m	none	none

casualty number	vehicle number	casualty severity	casualty class	sex	age	passenger	ped. direction	ped. movement	ped. location	school pupil?
1	4	slight	driver/rider	male	57	not passenger	not ped.	not ped.	not ped.	other
2	2	slight	driver/rider	male	50	not passenger	not ped.	not ped.	not ped.	other

vehicle number	vehicle type	manoeuvre	towing?	from	to	vehicle location	skid?	junction location	hit object in c'way	vehicle left c'way?	hit object off c'way	sex	age	breath test result
1	goods (over 7.5t)	going ahead	articulated	SE	NW	on main c'way	none	not at	none		none	male	43	-ve
2	car	waiting to go	none	SE	NW	on main c'way	none	not at	none		none	male	50	-ve
3	minibus	waiting to go	none	SE	NW	on main c'way	none	not at	none	nearside	none	male	51	-ve
4	car	waiting to go	none	SE	NW	on main c'way	none	not at	none	nearside	none	male	57	-ve
5	car	waiting to go	none	SE	NW	on main c'way	none	not at	none	nearside	none	male	34	-ve
6	car	waiting to go	none	SE	NW	on main c'way	none	not at	none		none	male	60	-ve

V2,V3,V4,V5 & V6 (CARS) TRAV NW IN STATIONARY TRAFFIC. V1 (LORRY) TRAV NW BEHIND V2 FAILED TO SLOW & HIT REAR OF V2, PUSHING V2 INTO V3 WHICH CAUSED V3 TO HIT REAR OF V6 & V5. V5 HIT REAR OF V4. V3, V4 & V5 ALL LEFT C/WAY N/SIDE ONTO HARD SHOULDER. KB

eddisons.com

Eddisons

Eddisons, 340 Deansgate,
Manchester, M3 4LY

T: +44 (0) 161 837 7350

www.eddisons.com