


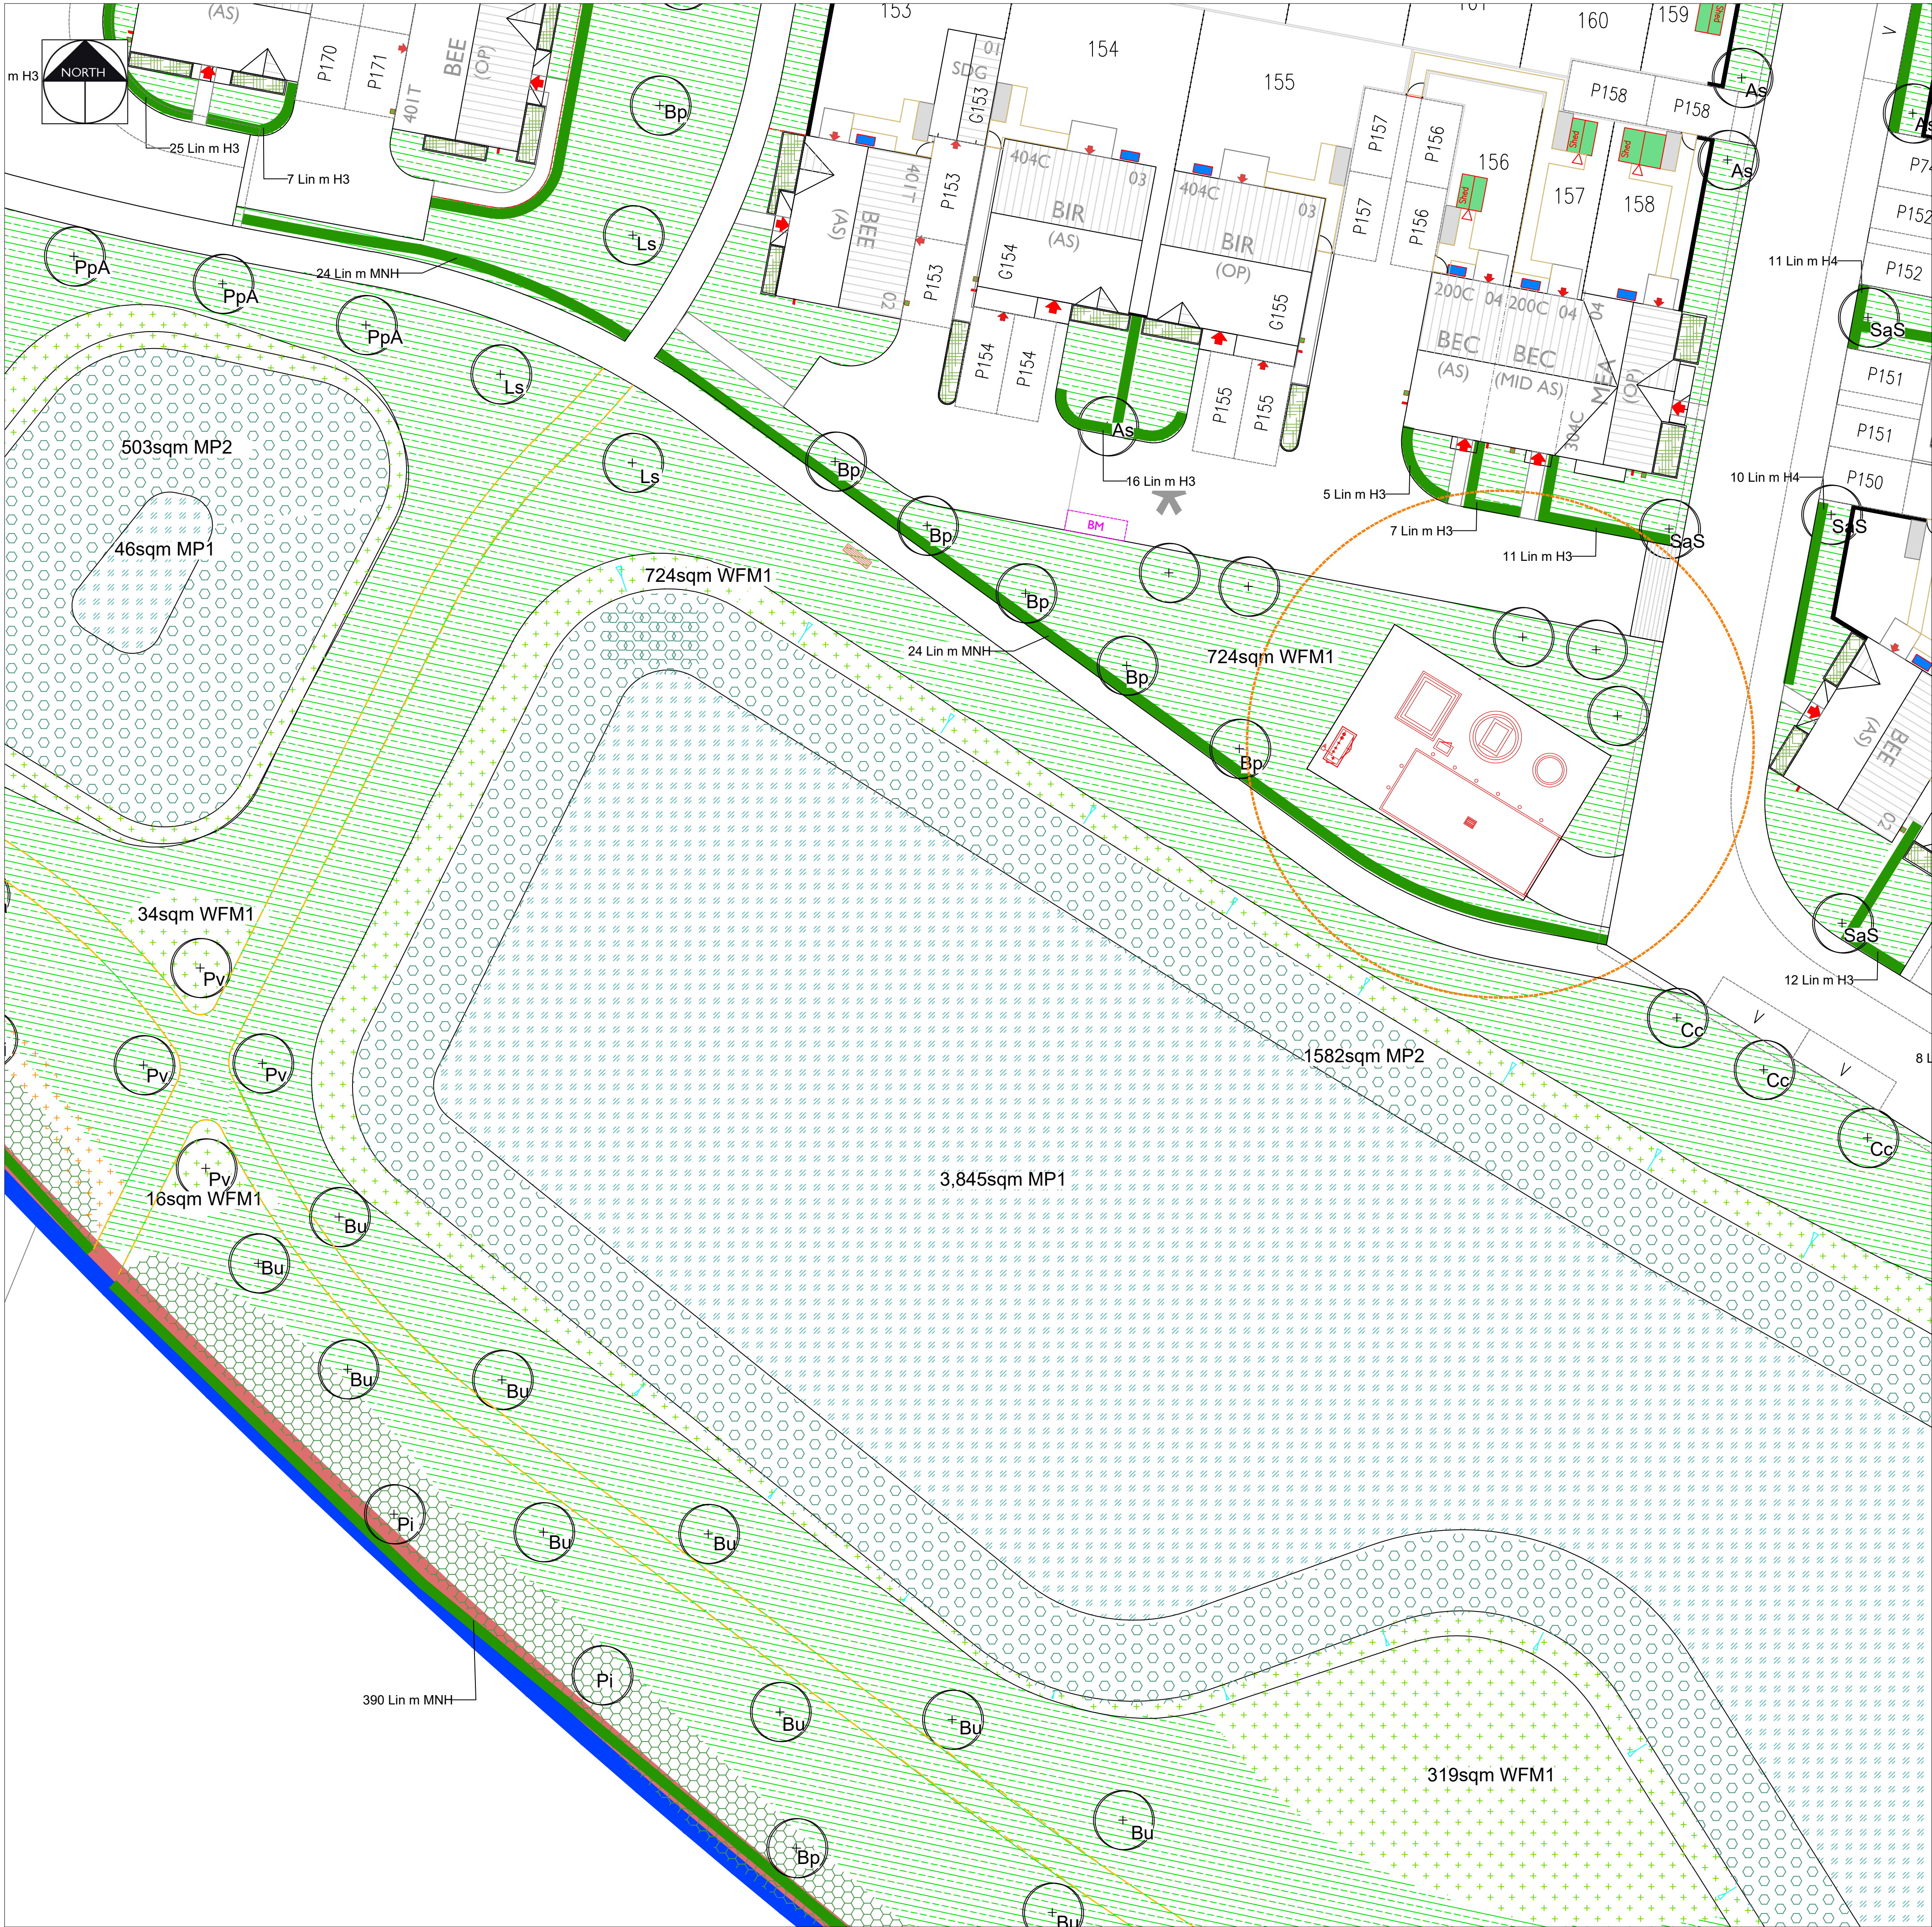

KEY

EXISTING VEGETATION

Please refer to the accompanying AIA and Ecology Report for further details on species, condition and maintenance requirements

ROOT PROTECTION AREA

Please refer to the accompanying tree survey for further details on species and condition

PROPOSED TREES

Refer to the planting schedule for details on species, quantities and specification

WILDFLOWER PLANTING

Refer to the planting schedule for details on species, quantities and specification. Where wildflower is proposed on existing grass and within RPA it will be overseeded

HEDGEROW / TRRE EDGE WILDFLOWER

Refer to the planting schedule for details on species, quantities and specification. Where wildflower is proposed on existing grass and within RPA it will be overseeded and no dig required

NATIVE WHIP PLANTING

Refer to the planting schedule for details on species, quantities and specification

MARGINAL PLANTING EDGE MIX

Refer to the planting schedule for details on species, quantities and specification

MARGINAL PLANTING WET MIX

Refer to the planting schedule for details on species, quantities and specification

AMENITY GRASS

To be seeded in the POS and turfed in the plot gardens

SHRUBS

Refer to the planting schedule for details on species, quantities and specification

SWALE WILDFLOWER MIX

Refer to the planting schedule or further details

TREES TO BE REMOVED

Please refer to the accompanying tree survey for further details on species and condition

WOODLAND WILDFLOWER PLANTING

Please refer to the accompanying tree survey for further details on species and condition

FLOWERING GRASS MIX

Overseeding in areas of existing grassland with flowering wildflower grass mix. Refer to schedule for further details

MARGINAL PLANTING BY STREAM

Overseeding along stream bank. Refer to schedule for further details and ecology plan.

HIBERNACULA PILES

Provide hibernacula/ resting places for fauna such as reptiles, mammals and invertebrates. Constructed from dead wood and rubble, topped with loose soil and turf. Dimensions to be a minimum of 2m length x 1m width x 1m height.

BENCH

Timber and steel bench - supplier tbc

LITTER BIN + PLAY AREA SIGN

Timber and steel bin - supplier tbc
Sign at entrance r- refer to LPA Lap requirements for details on text on sign

METAL FENCE AND GATES


1m high Black coated metal bow top fencing with contrasting coloured outward facing self closing gate

HEDGEROW

Refer to the planting schedule for details on species, quantities and specification

INFORMAL TRAIL / MOWN PATH

Informal trail through POS in the south east of the site

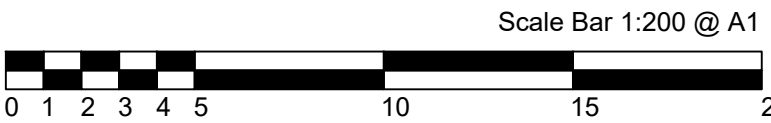

P4	26.11.25	Updated to show mown path and play area updated, trees moved out of archaeology sensitive areas	KLJ
P3	17.11.25	Schedule completed	KLJ
P2	12.11.25	Revised layout and updated to Client's comments	KLJ
P1	10.11.25	Initial Issue - for Comment	KLJ
Rev	Date	Description	Initials



PGLA Ltd
Landscape Architects
Station Hop Offices
815 Stockport Road
Manchester
M19 3BS

t: 0161 238 9138
e: info@pgla.co.uk
w: www.pgla.co.uk

Client
WAIN HOMES

Project
TROWBRIDGE

Description
PLANTING PLAN

SHEET 22

Status			
FOR PLANNING			
Scale	Drawn	Checked	Date
1:200@A1	KLJ	PGG	NOV 2025
Job number	Drawing number		Revision
TRO2507	PP01.22		P4