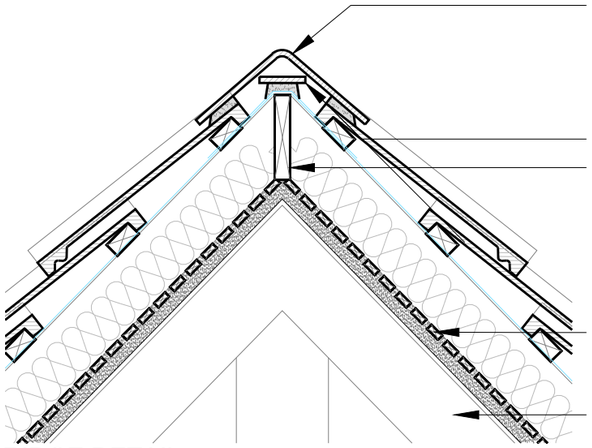


CLAY SEGMENTAL RIDGE TILE TO MATCH EXISTING, RE-USED WHERE PRACTICABLE. BEDDED ON CONTINUOUS MORTAR COURSE, WITH WEEP VENTS @ Max. 450c/c


TILE SLIP ON MORTAR BED

RIDGE BOARD TO BE REPAIRED / REPLACED AS NECESSARY

EXISTING CEILING TO BE RETAINED WHERE PRACTICABLE. REPLACEMENTS / REPAIRS TO BE BREATHABLE

EXISTING ROOF STRUCTURE TO BE RETAINED

RIDGE DETAIL

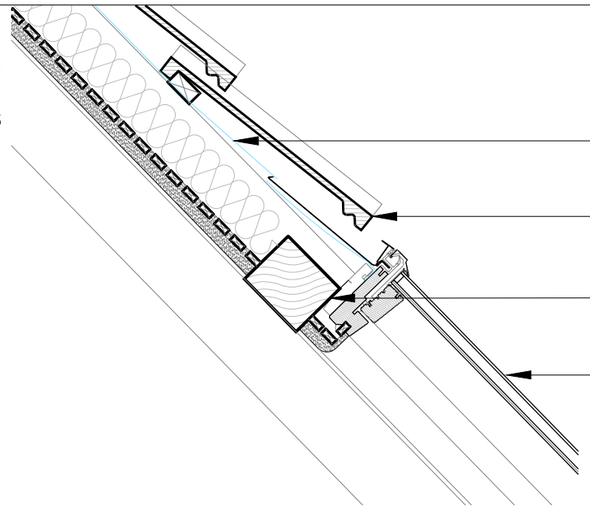


TYPE 1F BITUMINOUS MEMBRANE TO LAP ROOFLIGHT FLASHING TO MANUFACTURER'S RECOMMENDATIONS

ENSURE MANUFACTURER'S RECOMMENDED CLEARANCES, BETWEEN TILES & ROOFLIGHT MAINTAINED

EXISTING PURLIN TO BE RETAINED. TO FORM TRIMMED OPENING

CONSERVATION ROOFLIGHT. EXACT TYPE TBC (SHOWN, VELUX GCL) INSTALLED TO MANUFACTURER'S RECOMMENDATION

ROOFLIGHT HEADER

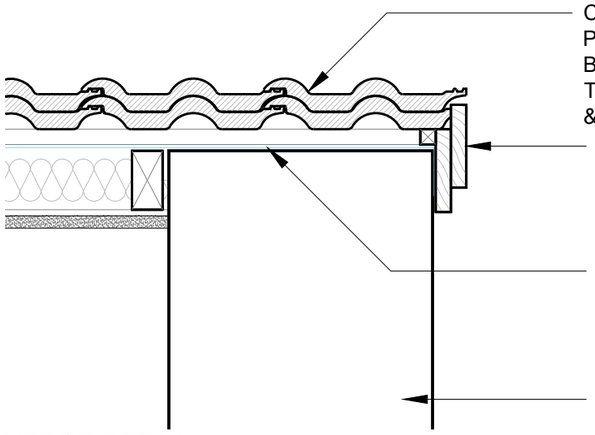

CLAY DOUBLE ROMAN TILES ON 50x25mm PRESSURE TREATED BATTENS. TILES TO BE RETAINED FROM ROOF STRIP, NEW TILES TO MATCH IN SIZE, STYLE, COLOUR, & QUALITY

2no. SW BARGEBOARDS, DIMENSIONS TO MATCH EXISTING. FIX BACK TO COUNTERBATTEN & WALL FACE. FINISHED AS EXISTING

TYPE 1F BITUMINOUS MEMBRANE LAID BETWEEN EXISTING RAFTERS. UNDERLAY TO CARRY ACROSS WALL HEAD & DRESS BEHIND BARGEBOARD


EXISTING WALL STRUCTURE

VERGE DETAIL

CONSERVATION ROOFLIGHT. EXACT TYPE TBC (SHOWN, VELUX GCL) INSTALLED TO MANUFACTURER'S RECOMMENDATION

PLASTER TO BE ROLLED AROUND REVEAL. SW PACKER TO FIX LATHS AS REQUIRED

ROOFLIGHT JAMB

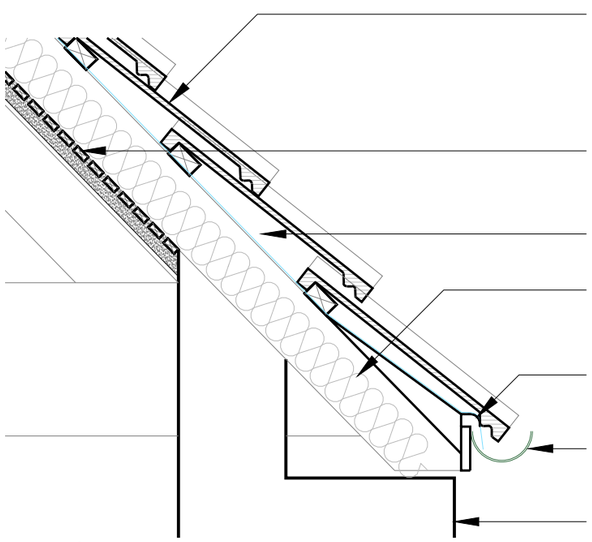

CLAY DOUBLE ROMAN TILES ON 50x25mm PRESSURE TREATED BATTENS. TILES TO BE RETAINED FROM ROOF STRIP, NEW TILES TO MATCH IN SIZE, STYLE, COLOUR, & QUALITY

EXISTING CEILING TO BE RETAINED WHERE PRACTICABLE. REPLACEMENTS / REPAIRS TO BE BREATHABLE

TYPE 1F BITUMINOUS MEMBRANE LAID BETWEEN EXISTING RAFTERS.


BREATHABLE THERMAL INSULATION TO SUIT RAFTER DEPTH. ENSURE 25mm CLEAR CAVITY FOR VENTILATION

OVER EAVES VENTILATOR W/ COMB & CARRIER TRAY TO BE INTRODUCED

FASCIAS & RAINWATER GOODS TO BE REINSTATED / REPLACED LIKE FOR LIKE

EXISTING WALL STRUCTURE

EAVES DETAIL

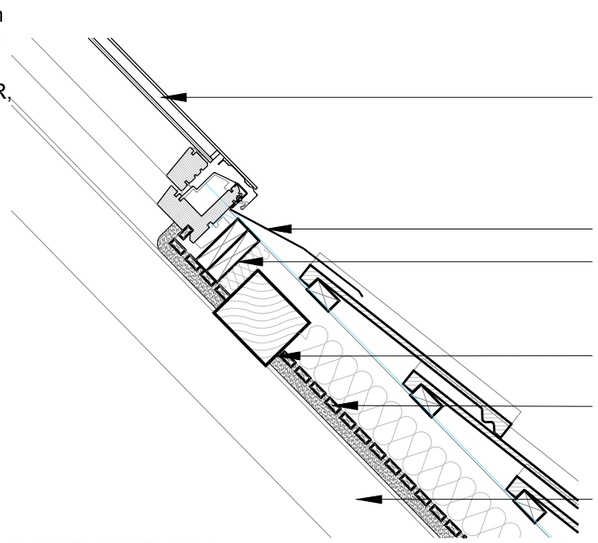

CONSERVATION ROOFLIGHT. EXACT TYPE TBC (SHOWN, VELUX GCL) INSTALLED TO MANUFACTURER'S RECOMMENDATION

PROPRIETARY FLASHING

NEW SW TRIMMERS TO SUIT PROPOSED ROOFLIGHT STRUCTURAL OPENING

EXISTING PURLIN TO BE RETAINED

EXISTING CEILING TO BE RETAINED WHERE PRACTICABLE. REPLACEMENTS / REPAIRS TO BE BREATHABLE

EXISTING ROOF STRUCTURE TO BE RETAINED

ROOFLIGHT CILL

NOTES:
1. Figured dimensions to be taken in preference to scaled dimensions.
2. Large scaled drawings to be taken in preference to small scale.
3. Critical dimensions to be taken from site.
4. If in doubt, the contractor must ask for clarification.
5. These drawings and designs are the copyright of James Slater & Co. and may not to be reproduced or used without permission.

Rev.ID	Rev.date	Rev.by	Comment

0 0.1 0.2 0.3 0.4 0.5m

1:10

CLIENT:
Mr James Hoffman

TITLE:
Proposed
Roof Details

STAGE:
Planning

SITE:
Nuthills Farm
Sandy Lane
SN15 2PY

JAMES SLATER & CO
SURVEYING & ARCHITECTURE

19 Dyer Street
Cirencester
Gloucestershire
GL7 2PP
Tel: 01285 650686
Fax: 01285 644212

RICS

www.jamesslater.co.uk

SCALES:
1:10 @ A3

DATE:	DRAWN:	CHECKED:
25/06/2024	AI	*

DRAWING NUMBER:
24-077-208

REV:
-