
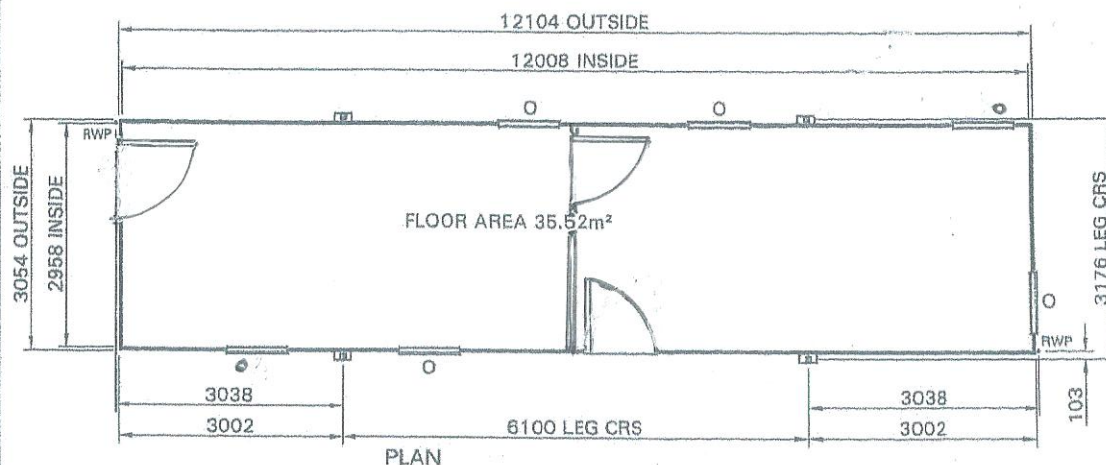

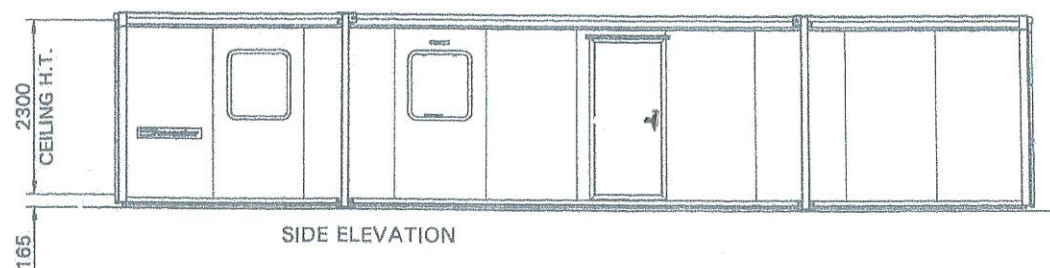



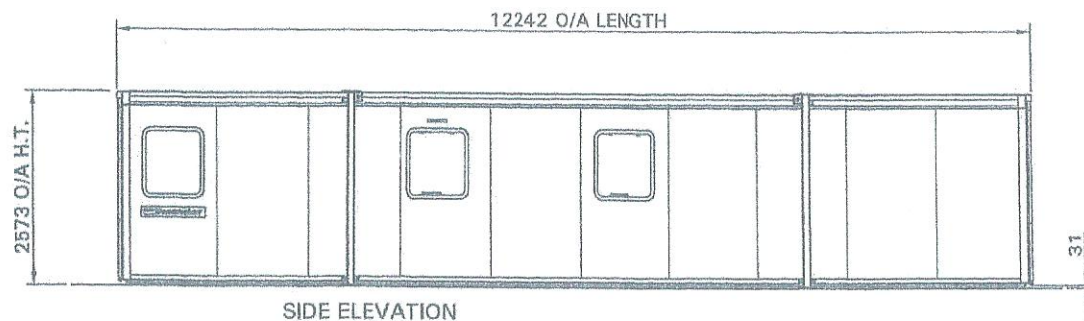

SCALE BAR 1:100 on A4

Portakabin

Portakabin Limited Huntington York YO32 9PT
Telephone 01904 611665 Fax 01904 611644

- KEY**
- O OPEN WINDOW
 - F FIXED WINDOW
 - RWP RAIN WATER PIPE

FOUNDATIONS

Simple foundations or level handstandings are required to be capable of taking the foundation design load at each Lodastrut leg position of 42 kN, which includes the dead weight of the unit, imposed floor load of 3kN/m², imposed roof load of 0.75 kN/m² and a basic wind load of 50 m/s. The foundations are to be designed in accordance with BS 8004 with level tops of a tolerance of ± 3 mm.

The top level of the foundations must ensure a clearance between the ground and the underside of the building.

It is recommended that professional advice is obtained for the design. All Lodastrut legs should be fully retracted onto the safety stops with the leg pins fitted through the outer legs and secured by the locking cotter.

STANDARD COLOURS

- | | |
|-------------------|--|
| External : Walls | - Silk Grey nearest BS ref. 10 A 05 |
| Doors | - Golden Amber nearest BS ref. 08 E 51 |
| Roof | - White nearest BS ref. 00 E 55 |
| Fascia & Corner | - Blue Grey nearest BS ref. 18 B 29 |
| Wall Trims | - Silk Grey nearest BS ref. 10 A 05 |
| Bottom Wall Trims | - Blue Grey BS 4800 18 B 29 |

Project	
PACEMAKER	
SERIES 8	
Client	
Emmanuel Church Chippenham	
Title	
PK402 SPECIFICATION DRAWING	
Date	21/7/26
Drawn	NEC
Scale	
1:100 on A4	
Drg. No.	BR0030
Rev.	D