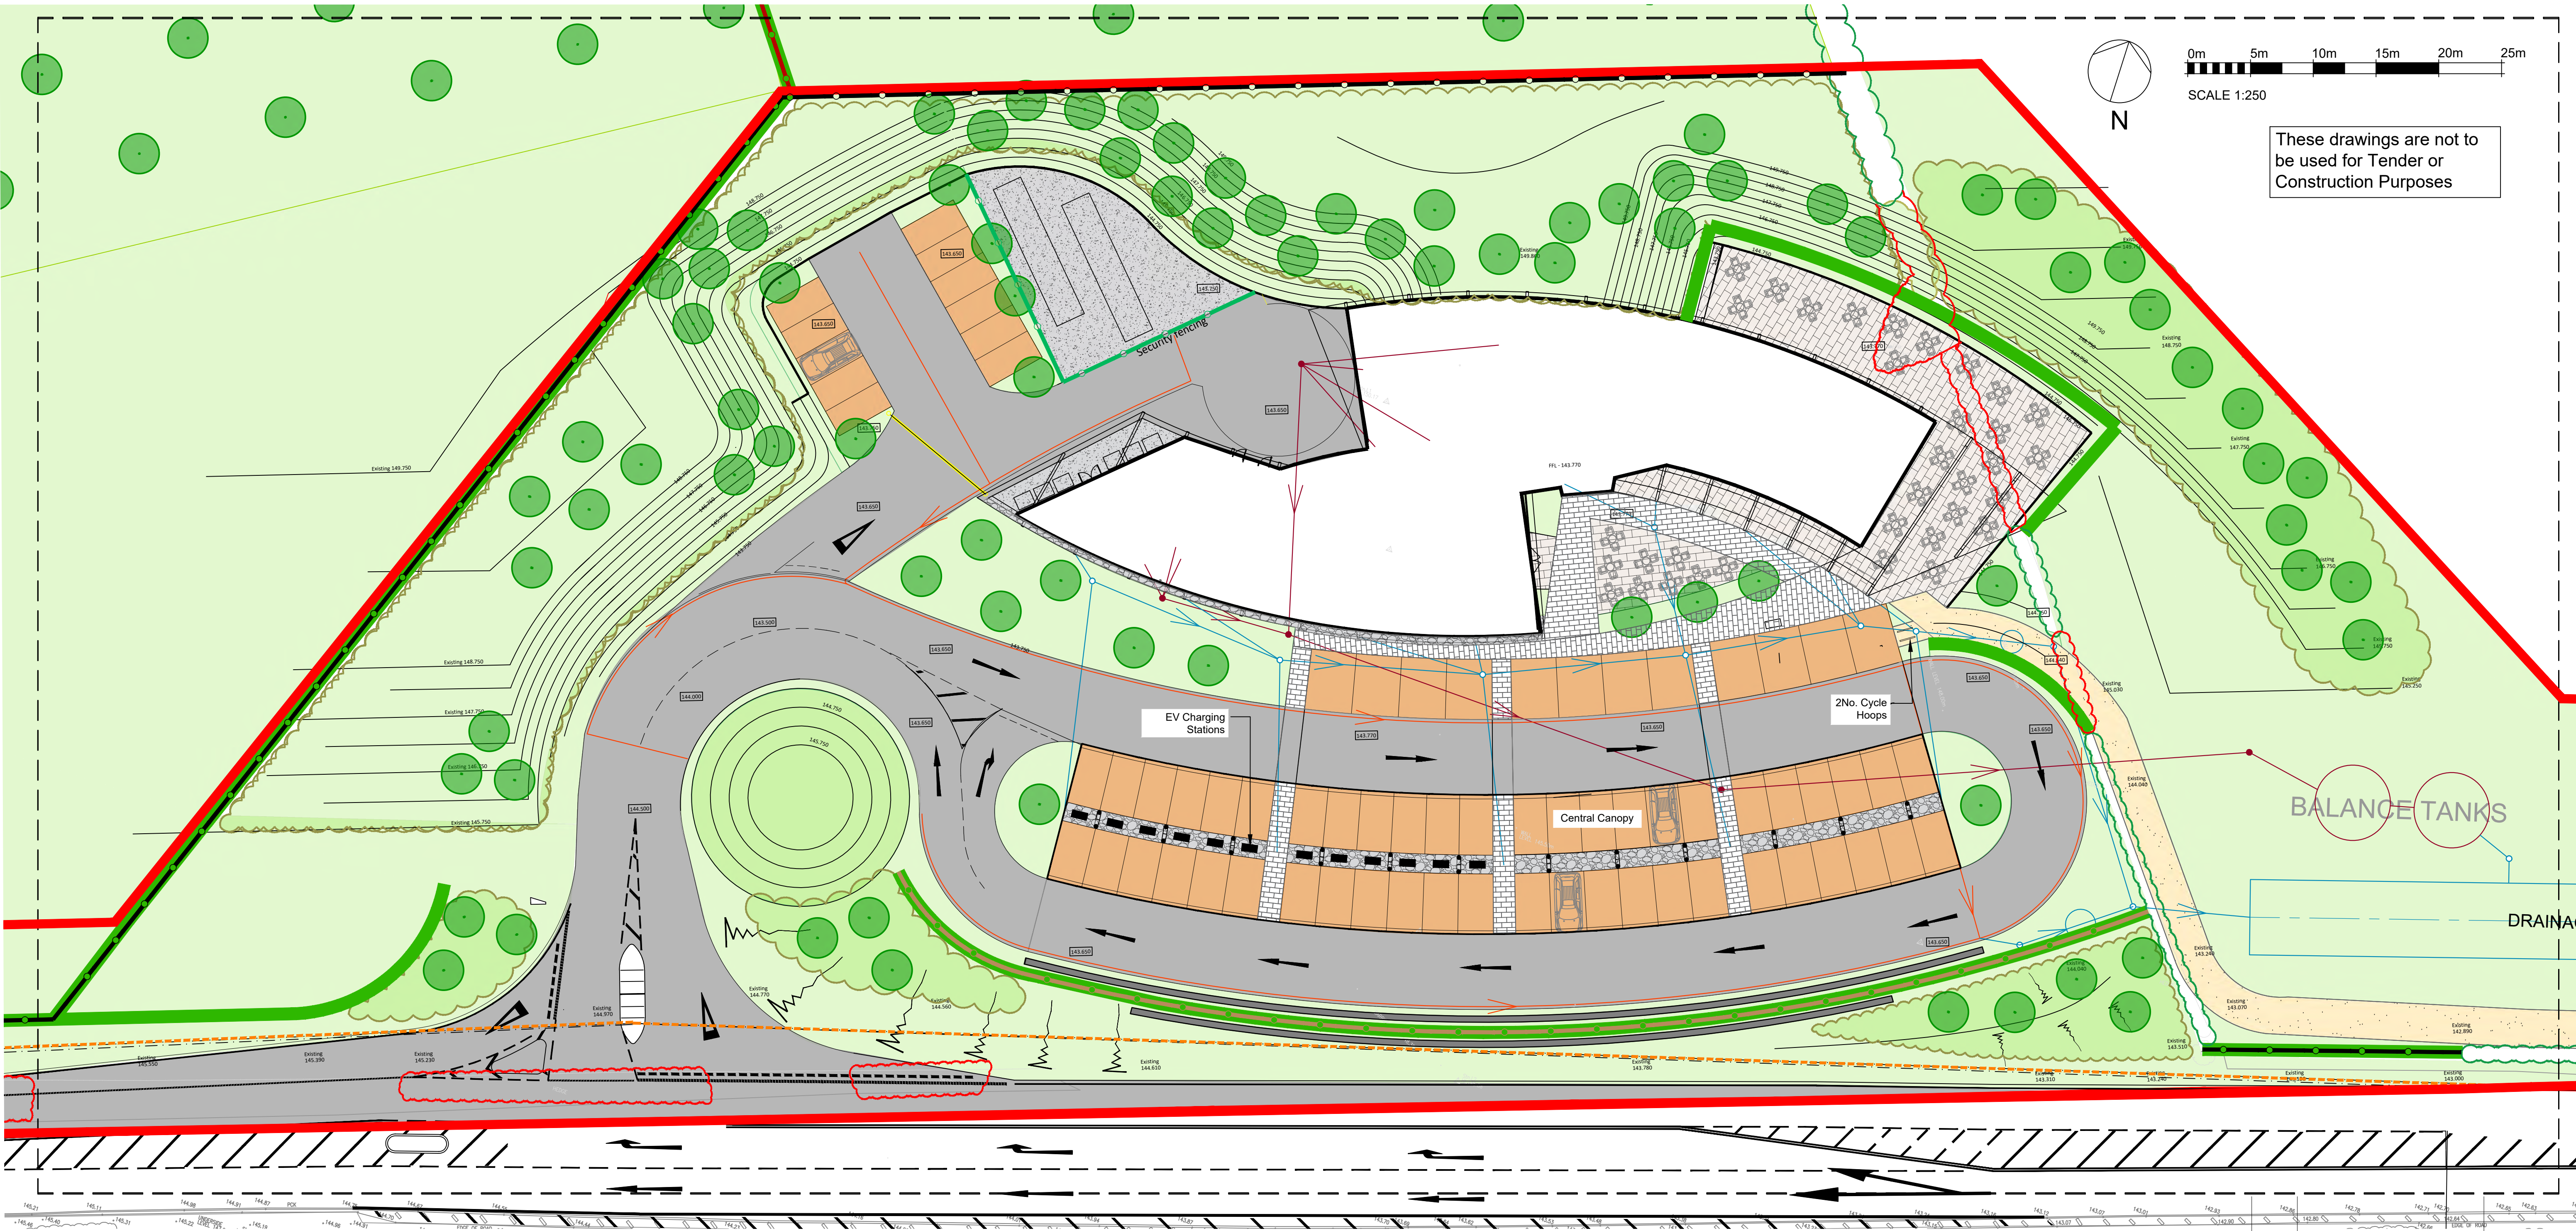


These drawings are not to be used for Tender or Construction Purposes

KEY

- Proposed Redline Boundary
- Existing Trees/ Hedge - Retained and Enhanced
- Existing Hedge - Removed
- Proposed Tree Native Planting
- Proposed Softworks (Refer to LHC Softworks Plan for details)
- Self-binding Gravel with Gravel board edge 10mmØ to dust in buff colour (or similar and approved)
- Gabion Wall Refer to LHC Landscape Details L9201-9202 Gabions to be designed to Engineer's specification
- Coloured Tarmac
- Brushed Concrete
- Decorative Smooth Cobbles 60-120mm Ø Grey Stone Pebble Edging To be sourced from UK (or similar and approved)
- Proposed 3.0m High Security Fencing To be pre-galvanised steel+ powder coated V Mesh security fencing (RAL 6005 Green)
- Proposed 1.2m High Cattle Stock Fencing
- Proposed 1.2m High Post & Wire Fencing
- Proposed 0.75m High Close Board Fencing To be FSC certified pressure treated wood (or similar and approved)
- Proposed Flag Paving 900x600x60mm To be Marshalls 'Conservation X' in 'Silver Grey' (Textured) (or similar and approved)

P1	05.08.25	FOR PLANNING	AFI/DE
REV	DATE	COMMENTS	AUTHOR / CHECKED

PROJECT TITLE			
Chicklade Services			
DETAIL			
Hardworks Plan (Sheet 2 of 2)			
DRAWING NUMBER PROJECT ORIGINATOR (ZONE-LEVEL-TYPE-ROLE-NUMBER)			
25098 - LHC - 00 - XX - DR - L - 9302			
STATUS	STATUS DESCRIPTION		
D0	FOR PLANNING		
REVISION	DATE	SCALE	
P1	AUGUST 2025	1:250 @ A1	
CONTRACTORS MUST CHECK ALL DIMENSIONS ON SITE - ONLY FIGURED DIMENSIONS ARE TO BE WORKED FROM - DISCREPANCIES MUST BE REPORTED TO THE ARCHITECT BEFORE PROCEEDING © THIS DRAWING IS COPYRIGHT			LHC PROJECT NUMBER
			22021CS



- EXETER 01392 444334
- PLYMOUTH 01752 669368
- ST AUSTELL 01726 213435
- lhc.net

