




Schedule drawing

Replacement window G-W-15

Section

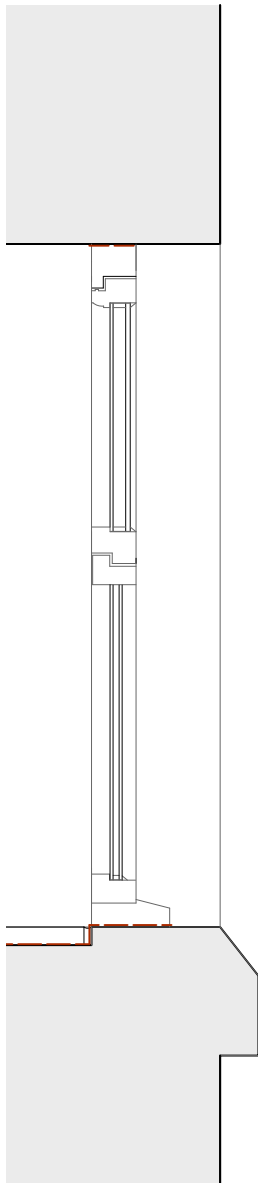

Plan

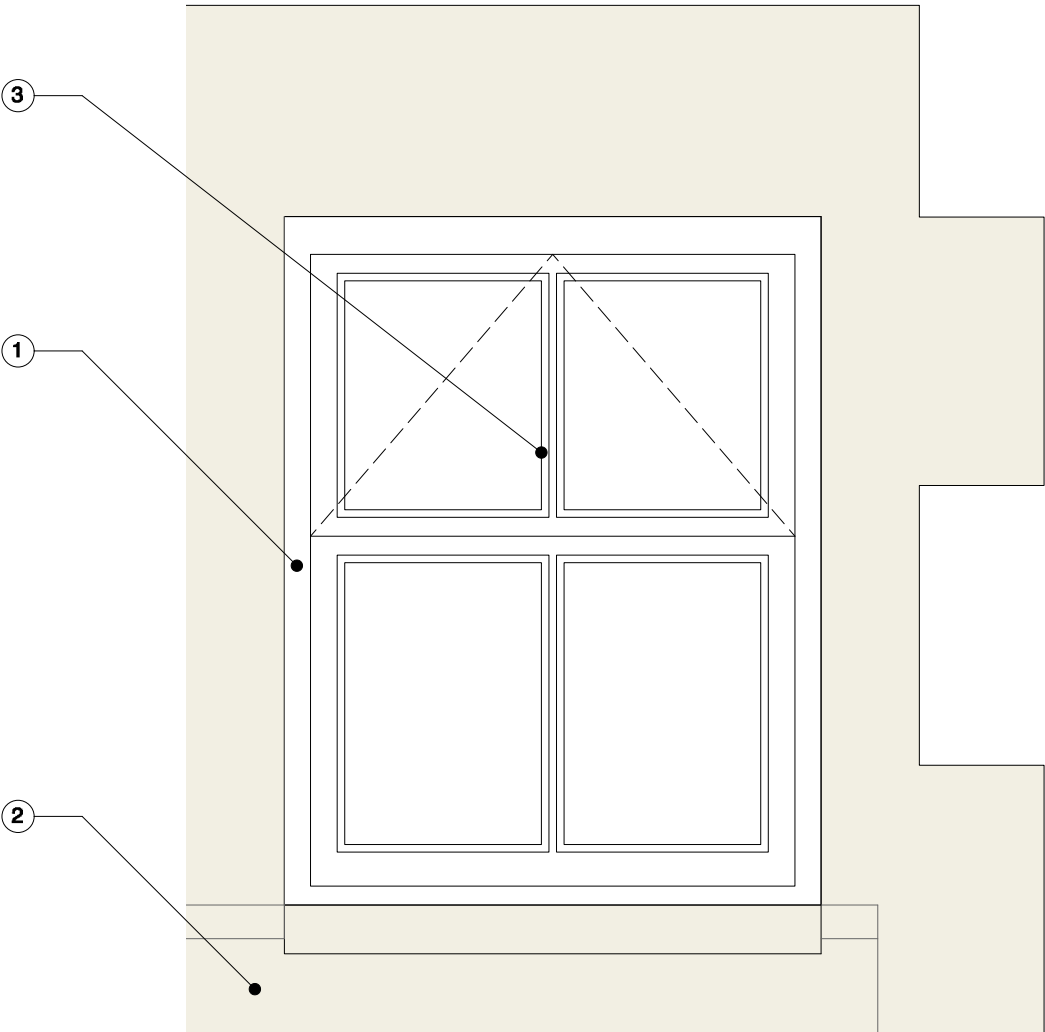

Elevation

photo showing G-W-15&16. Window to match as close as practical



General Notes


- A New windows to be timber
- B All dimensions of windows being replaced are indicative and may not be accurate. To be measured on site prior to manufacture.
- C All windows and doors to be fully draft proof
- D Colour and ironmongery to match existing monkey tail style for stays and fasteners
- E Hinge notation: pointing towards hinges and view from outside
- F All windows to meet the security requirements of PAS 24:2022, and ironmongery to be compliant with Approved Document Q.
- G U-value to acheive a minimum of 1.4 W/m2K
- H To the perimeter allow for a new DPC between masonry and new timber
- I To the perimeter allow for a new silicon bead inside and out

Notes

- 1. New clear slim-line double glazed timber window, frame and sub-cill painted to match adjacent window
- 2. Existing dressed stone cill and surround
- 3. Window mullions to be an 18mm ogee profile

External Opening Notation Key:

(D)oor, (W)indow
(G)round, (F)irst floor etc
Opening number



0 100 200 300 400 500 mm