

BS5837 Tree Survey and Arboricultural Impact Assessment at

Highwood, Lowden Hill Chippenham SN15 2BT

On behalf of International Design Group

18th September 2025



**wrc
trees**

**ARBORICULTURAL
CONSULTANTS**

Author: Rick Gunning (MSc, BSc (Hons)) PTI QTRA

WESSEX RURAL CRAFTS LTD

REGISTERED IN ENGLAND & WALES · COMPANY No. 600252 · VAT 159 0141 24 · REGISTERED OFFICE: 8A HOLLYBUSH · HORNINGSHAM · WILTSHIRE · BA12 7LE ·
T: 01985 220457/01985 844594



Contents

- 1: Instruction
- 2: Tree Survey
- 3: Site Details
- 4: Proposals
- 5: Drawings
- 6: Statutory Protection
- 7: Summary
- 8: Findings
- 9: Conclusion
- 10: Recommendations

Appendices

Appendix 1: Arboricultural Method Statement

Appendix 2: BS5837 Tree Survey

Appendix 3: Tree Survey Explanatory Notes

Appendix 4: Tree Location Plan

Appendix 5: Tree Root Protection Area Plan

Appendix 6: Tree Protection Plan

1: Introduction

- 1.1. WRC were instructed by Andrew Craven of International Design Group to inspect three trees at Highwood Lowden Hill Chippenham SN15 2BT that may be affected by a proposed development, in relation to British Standard 5837:2012 Trees in Relation to Design, Demolition and Construction– Recommendations (BS5837), and to provide recommendations to reduce the impact of development where feasible.

2: Tree Survey

- 2.1. The tree survey was carried out on 19th September 2025. The weather conditions were sunny.
- 2.2. The survey was of a preliminary nature undertaken from ground level. No invasive investigations or climbing inspections were undertaken to confirm visual or audible signs of defect or debility and no tissue or soil samples were taken.

3: Site Details

- 3.1. The site is within the curtilage of Highwood Lowden Hill Chippenham SN15 2BT. The site is bordered by closed board fencing on the East. The area immediately to the south of the planned structure is a retaining wall which then drops down to the public road and pavement. To the west is the driveway from the public road which leads up to the house which is N/NW of the planned development.
- 3.2 The tree locations are shown on the Tree Location Plan (Appendix 4)

4: Proposals

- 4.1. A single-story garage is proposed to the rear (south) of the property. The proposal is for the erection of an oak-framed, with cedar cladding infill, timber double garage with a tiled roof to match the existing dwelling. The structure will include a side storage area and provision for an electric vehicle charging point.

5: Drawings

5.1 Tree locations were plotted using Trimble Juno T41 “G” model with enhanced GPS which achieves 1-2 meter real-time accuracy.

Plans are separate documents entitled

Appendix 4: Tree Location Plan

Appendix 5: Tree Root Protection Area Plan

Appendix 6: Tree Protection Plan

6: Statutory Protection

6.1. Wiltshire Council Planning Explorer Map indicates that trees are in a conservation area and protected by the Wiltshire Council Tree Preservation Order N/TPO96

6.2. The principal effect of a Tree Preservation Order prohibits the cutting down, uprooting, topping, lopping, willful damage or willful destruction of any trees subject to their protection without the formal consent of the Local Planning Authority (Wiltshire Council) following a written application.

7: Summary

7.1. The arboricultural features are trees T1 Horse Chestnut (*Aesculus hippocastanum*), T2 Beech (*Fagus sylvatica*) and T3 Beech (*Fagus sylvatica*). These trees are to be retained and industry standard construction methods and tree protection methods (ground protection, piling) must be used to reduce the impact of the works upon them.

7.2. Provided the trees to be retained are protected throughout the development in accordance with this Arboricultural Impact Assessment and Appendix 1: Method Statement, the impact upon the retained trees is likely to be minimised. As the impact upon the trees is likely to be minimised there is unlikely to be any arboricultural impact upon the character of the local area.

8: Findings

Please see Appendix 2: BS5837 Tree Survey for specific details.

8.1. The proposed development encroaches into the RPA of T1, T2 and T3. Therefore, non-traditional foundations must be employed.

To minimise the impact upon T1, T2, T3 ground screws, piles or steel sleeved mini piles must be used to reduce the potential impact (excavation/root severance, compaction, removal of water source) upon the retained tree roots.

8.2. The current services must be utilised where possible. Any new services must avoid the RPAs of retained trees. If this is not possible then the services must be designed by an Engineer in consultation with an Arboricultural Consultant and submitted to the LPA for their written approval prior to implementation. Further advice is available in Appendix 1: Method Statement and NJUG Volume 4 "Guidance for the planning, installation and maintenance of utility services in proximity of trees". Alternatively, an above ground service could be employed if appropriate.

8.3. In the event of shrinkable soils being found on the site, it will be for an engineer to design the foundations in accordance with the current industry guidance to reduce any potential risk of tree related subsidence to an acceptable level.

8.4. Changes in grade are not specified

8.5. BS5837:2012 Trees in relation to design, demolition and construction - Recommendations states in paragraph 6.3:

Wherever trees on or adjacent to a site have been identified within the tree protection plan for protective measures, there should be an auditable system of arboricultural site monitoring. This should extend to arboricultural supervision whenever construction and development activity is to take place within or adjacent to any RPA.

- Therefore, it is necessary for site monitoring by an Arboricultural Consultant to occur for the proposed works.
- Tree protection measures are necessary to aid the retention of the trees. The details of these tree protection measures are specified in Appendix 1: Method Statement.

8.6. This report considers the trees that may significantly be affected by the proposed development. Any trees not mentioned or not surveyed are either sufficiently distant that the proposed works are unlikely to have an influence upon them or are adequately protected by tree protection measures.

9: Conclusion

9.1. The arboricultural features of the site are to be retained and tree protection measures must be utilised to minimise the impact of the proposals upon the trees. The principles and details of the Arboricultural Impact Assessment Appendix 1: Method Statement and Appendix 6: Tree Protection Plan must be followed to reduce the impact upon the retained trees.

10: Recommendations

10.1. Following any permission from the Local Planning Authority, the principles and details of the Arboricultural Impact Assessment Appendix 1: Method Statement and Appendix 6: Tree Protection Plan are followed to reduce the potential for harm to the retained trees during development.

Appendix 1: Method Statement and Tree Protection.



1. A pre-commencement meeting prior to the start of any works between the Local Planning Authority (LPA) Arboricultural Officer, appointed Arboricultural Consultant and Site Manager must take place to clarify any additional protection measures required.
2. To aid any site clearance, demolition or construction phase for the development of the site an Arboricultural Consultant must be appointed to inspect and monitor the site at the start of the works and on an as required basis throughout the construction works to ensure that the protection procedures are adhered to and to assist with addressing any further arboricultural issues that may arise.
3. All site personnel must be briefed by the Site Manager or an Arboriculturalist on the importance of the trees to be retained and the protective measures implemented to aid their retention into the future. The Site Manager is responsible for the implementation of all tree protection measures.
4. Ground protection must be used to access the site across the RPA of retained trees and installed prior to works commencing. Ground protection must be maintained for the duration of any demolition or construction works and considered sacrosanct and must not be removed or altered without prior recommendation by an Arboricultural Consultant and written approval by the LPA.
 - Ground protection for pedestrian movements within the RPA must be a single thickness of scaffold boards placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile membrane.
 - Ground protection for pedestrian-operated plant up to a gross weight of 2t within the RPA must be constructed of proprietary, inter-linked ground protection boards placed on top of a compression-resistant layer (e.g. 150 mm depth of woodchip), laid onto a geotextile membrane.
 - Ground protection for wheeled or tracked construction traffic exceeding 2t gross weight within the RPA must be constructed of an alternative system (e.g. proprietary systems or pre-cast reinforced concrete slabs) to an engineering specification designed in conjunction with arboricultural advice, to accommodate the likely loading to which it will be subjected and may involve the use of proprietary systems (for instance www.evetrakway.co.uk) or reinforced concrete slabs or a series of railway sleepers pinned together or other suitable system to ensure that the bulk density of the soil remains lower than 1.5g/cm³. If an alternative specification is preferred, then it must be agreed in writing with the Local Planning Authority prior to installation.
5. Any encroachment within the RPA or breaches of the tree protection measures must be reported to the appointed Arboricultural Consultant to enable them to provide recommendations to mitigate the encroachment / breach and to allow the issue and mitigation to be reported to the Local Planning Authority for their written approval.
6. All site personnel must be briefed by the Site Manager or an Arboriculturalist on the importance of the trees to be retained and the protective measures implemented to aid their retention into the future. The Site Manager is responsible for the implementation of all tree protection measures.

7. Care should be taken when planning site operations to ensure that wide or tall loads or plant with booms, jibs and counterweights can operate without coming into contact with retained trees. Such contact can result in serious damage to the equipment and retained trees and might make the safe retention of the retained trees impossible. Consequently, any transit or transverse of plant in close proximity to trees should be conducted under the supervision of a banksman to ensure that adequate clearance from trees is maintained at all times. In some circumstances it may be impossible to maintain adequate clearance thus requiring tree works to clear the necessary access.
8. Material which will contaminate the soil, e.g., concrete (dry or mixed), diesel, oil, vehicle washings, etc. must not be discharged within the root protection area. It is essential that an allowance should be made for any sloping ground so that damaging materials such as concrete washings, mortar, diesel or oil cannot run towards the trees.
9. There must be no fires on the site.
10. Notice boards, telephone cables or other services must not be attached to any part of the tree.
11. Storage of materials, concrete mixing, etc. must take place at roadside.
12. Any excavations in proximity of retained trees will require certain precautions to avoid unnecessary damage to trees to be retained, and should be undertaken as follows:
 - All excavations should be lined with an appropriate non-permeable membrane prior to pouring concrete to avoid leaching of chemicals into and contamination of the soil
 - All excavations should avoid damage to the protective bark covering larger roots. Roots, whilst exposed, should be wrapped in dry, clean hessian sacking to prevent desiccation (drying) and to protect from temperature changes.
 - Roots smaller than 25mm diameter may be pruned back, preferably to a side branch, using a proprietary clean cutting tool such as secateurs or handsaw.
 - Roots larger than 25mm diameter should only be severed following consultation with an Arboricultural Consultant, as the roots may be essential to the tree's health and stability.
 - Prior to backfilling, any hessian wrapping should be removed and retained roots should be surrounded by sharp sand (builder's sand should not be used because of its high salt content which is toxic to tree roots), or other loose granular fill, before soil or other material is replaced. This material, e.g., general purpose grade topsoil to BS3882, should be free of contaminants and other foreign objects potentially injurious to tree roots.
13. Following completion of the construction a site meeting between the Local Planning Authority Arboricultural Officer appointed Arboricultural Consultant and Site Manager must take place to assess whether the protective barriers can be removed.

Appendix 2: BS5837 Tree Survey

Tree No.	Species	BS5837 Cat.	Ht. (m)	Diam. (mm)	Crown Spread (m)	Crown Ht. (m)	Ht. of First Branch (m)	Age Class	Phys. Condition	Struc. Condition	Estimated Remaining Contribution (years)	Comments	Recommendations	RPA Area (m2)
T1	Horse Chestnut (<i>Aesculus hippocastanum</i>)	B1	21	1100	N:7 E:7 S:8 W:7	5	8	Mature	Fair	Fair	30+ Years	Tarmac to 1.5m of trunk on N/S/W. Fence 0.5m on E. Garden on E approx. 1m lower ground level. Membrane around base. Organic detritus piled on rootplate and Ivy obscuring visibility. Spiral fracture on main stem starting on SE limb above union spiralling down clockwise to the W - Occluded growth. Small decay pocket just below main union at 7.5m on NW. Occluded pruning scars 4-6m. Slight lean to NW. Horse Chestnut Leaf Blotch (<i>Guignardia aesculi</i>) Horse Chestnut Leaf Miner (<i>Cameraria ohridella</i>) on leaves. Previously reduced 2014 and 2021.	Protect with fencing.	547

Tree No.	Species	BS5837 Cat.	Ht. (m)	Diam. (mm)	Crown Spread (m)	Crown Ht. (m)	Ht. of First Branch (m)	Age Class	Phys. Condition	Struc. Condition	Estimated Remaining Contribution (years)	Comments	Recommendations	RPA Area (m2)
T2	Beech (<i>Fagus sylvatica</i>)	B1	16	520	N:3 E:4 S:7 W:4	-	-	Semi mature	Fair	Fair	40+ Years	Previously suppressed by large Beech to the E now removed. Slight lean to S.	Protect with fencing.	121
T3	Beech (<i>Fagus sylvatica</i>)	B1	17	860	N:3 E:6 S:7 W:3	-	-	Early mature	Fair	Fair	40+ Years	Previously reduced. Fungus: Young fruiting body <i>Ganoderma spp</i> on south base of main stem at ground level	Protect with fencing.	333

Appendix 3: Tree Survey Explanatory Notes

Tree Numbers

'T' prefixes have been used to identify individual trees and commence with 'T1'. 'G' prefixes have been used to identify groups of trees.

'H' prefixes have been used to identify hedges.

Species

Species are listed by their common name, both in the schedule and in the report text.

Height and Stem Diameter

The stem diameter of trees is measured at 1.5m above ground level and given in millimetres (mm).

Tree heights are measured or estimated in metres (m).

Crown Spread

Radial crown spread is measured in metres and is listed for each of the four cardinal points. The canopy shape for individually surveyed trees depicted on the accompanying plans accurately represents the canopy spread as measured on-site.

Age Class

The age of each tree is defined as follows:

Young - within the first third of life expectancy.

Semi-Mature - within the second third of life expectancy.

Mature - within the last third of life expectancy.

Over mature - Tree in decline; and

Veteran – tree that, by recognised criteria, shows features of biological, cultural or aesthetic value that are characteristic of, but not exclusive to, individuals surviving beyond the typical age range for the species concerned. For the purpose of this report the term 'ancient tree' and 'veteran tree' are interchangeable.

Physiological and Structural Condition

The physiological or structural condition of each tree is defined as either; good, fair, poor or dead.

For each tree, where appropriate, notes on the structural integrity are provided on form, taper, forking habit, storm damage, decay, fungi, pests, etc.

An assessment of a tree's physiological condition is defined as:

Good – fully functioning biological system showing expectant vitality for the species i.e., normal bud growth, leaf size, crown density and wound closure.

Fair – fully functioning biological system showing below average vitality i.e., reduced bud growth, smaller leaf size, lower crown density and reduced wound closure.

Poor – a biological system with limited functionality showing clear physiological decline, disease or significantly below average vitality i.e., limited bud growth, small and chlorotic leaves, low crown density and limited wound closure.

An assessment of a tree's structural condition is defined as:

Good – no significant structural defects.

Fair – structural defects which could be alleviated through remedial tree surgery or Arboricultural management practices.

Poor – structural defects which cannot be alleviated through tree surgery or Arboricultural management practices.

Estimated Remaining Contribution (ERC) in Years

The Estimated Remaining Contribution (ERC) for each tree is based on species and existing and apparent physiological and structural condition of the tree. The ERC may affect the proposed development layout, since the longer the tree is likely to live the greater the contribution it will make and the greater the need for retention.

<10 - Unsuitable for retention

10 - 20 - Can be retained in the short term

20 – 40 - Will continue to offer benefits for the foreseeable future

40+ - Good longevity potential

Tree Categorisation

Categories A, B and C deal with trees that should be a material consideration in the development process and are divided into subcategories that reflect arboricultural, landscape and cultural values.

- **Category Grading A:** Trees of high quality and value, which are in such a condition as to be able to make a substantial contribution from an arboricultural, landscape or cultural perspective.
- **Category Grading B:** Trees of moderate quality and value, which are in such a condition as to make a significant contribution from an arboricultural, landscape or cultural perspective.
- **Category Grading C:** Trees of low quality and value, which are currently in adequate condition to remain until new planting could be established or young trees with a stem diameter below 150mm at 1.5 metres above ground level.
- **Category Grading U:** Trees which are in such a condition that any existing value would be lost within 10 years and which should, in the current context, be removed for reasons of sound arboricultural management.

Root Protection Areas (RPA)

The RPAs are considered to contain sufficient rooting volume to ensure the survival of the tree and should be left undisturbed to avoid damage to the roots or rooting environment surrounding the tree unless special construction methods are employed. Any sudden and major alteration of the soil or surface conditions within RPAs will lead to progressive shoot and branch dieback until the roots have adapted to the altered conditions and have been able to source sufficient water and oxygen levels. If damage is progressive or so severe that the tree is unable to adapt, then it is likely that the tree will ultimately die. It should be noted that in general, with increased maturity of a specimen, the ability of that tree to adapt to dramatic alterations in relation to its root system is lessened.

The plan located to the rear of this report shows the approximate extent of Root Protection Areas (RPAs) marked in grey hatching. The RPAs have been calculated in accordance with the methodology set out within Appendices C and D of BS5837: 2012, using the stem diameter dimensions obtained during the site visit.

Limitations

The comments made are based on observable factors present at the time of inspection and are based on maximising the trees' safe life expectancy given their existing context. Although the health and stability of trees in their current context is an integral part of their suitability for retention, it must be stressed that this report is not a tree risk assessment and should not be construed as such. While every attempt has been made to provide a realistic and accurate assessment of the trees' condition at the time of inspection, it may have not been appropriate or possible to view all parts or all sides of every tree to fulfil the assessment criteria of a risk assessment.

No tree is entirely safe, given the possibility that exceptionally strong winds could damage or uproot even a mechanically 'perfect' specimen. It is therefore usually accepted that hazards are only recognisable from distinct defects or from other failure-prone characteristics of the tree or the site. Assessment of the potential influence of trees upon buildings or other structures resulting from the effects of trees upon shrinkable load-bearing soils or the effects of incremental root or branch growth, are specifically excluded from this report.

Un-assessable Risks

Any alteration to the site boundary could change the current circumstances and may invalidate this report and any recommendations made. A lack of recommended work does not imply that a tree does not pose an unacceptable level of risk and likewise, it should not be implied that a tree will present an acceptable level of risk following the completion of any recommended work.

The Wildlife and Countryside Act (WACA) 1981 (as amended) makes it an offence to disturb nesting birds or recklessly endanger a bat or its roost. Bats are also a European protected species and are additionally protected under the Conservation (Habitats & c) Regulations 1994 and 2010 (as amended).

WRC Trees

Unit 13 Deverill Rd Trading Estate BA12 7BZ
info@wrcTrees.co.uk

Highwood

SCALE :
1 : 500

@ A4

DATE :
09/01/2026

N



MAP FILENAME :

Highwood Tree Location Plan

Map data shown may contain Ordnance Survey © products supplied by
Pear Technology Services Ltd; Email: info@peartechology.co.uk
© Crown Copyright and database rights from date shown above
Ordnance Survey © licence number 100023148



© Crown copyright and database rights 2025. Ordnance Survey AC0000822731.

Legend

Tree Crown_Spread

WRC Trees

Unit 13 Deverill Rd Trading Estate BA12 7BZ
info@wrcTrees.co.uk

Highwood

SCALE :
1 : 500

@ A4

DATE :
09/01/2026


N



MAP FILENAME :

Highwood Tree Root Protection Areas

Map data shown may contain Ordnance Survey © products supplied by
Pear Technology Services Ltd; Email: info@peartechology.co.uk
© Crown Copyright and database rights from date shown above
Ordnance Survey © licence number 100023148

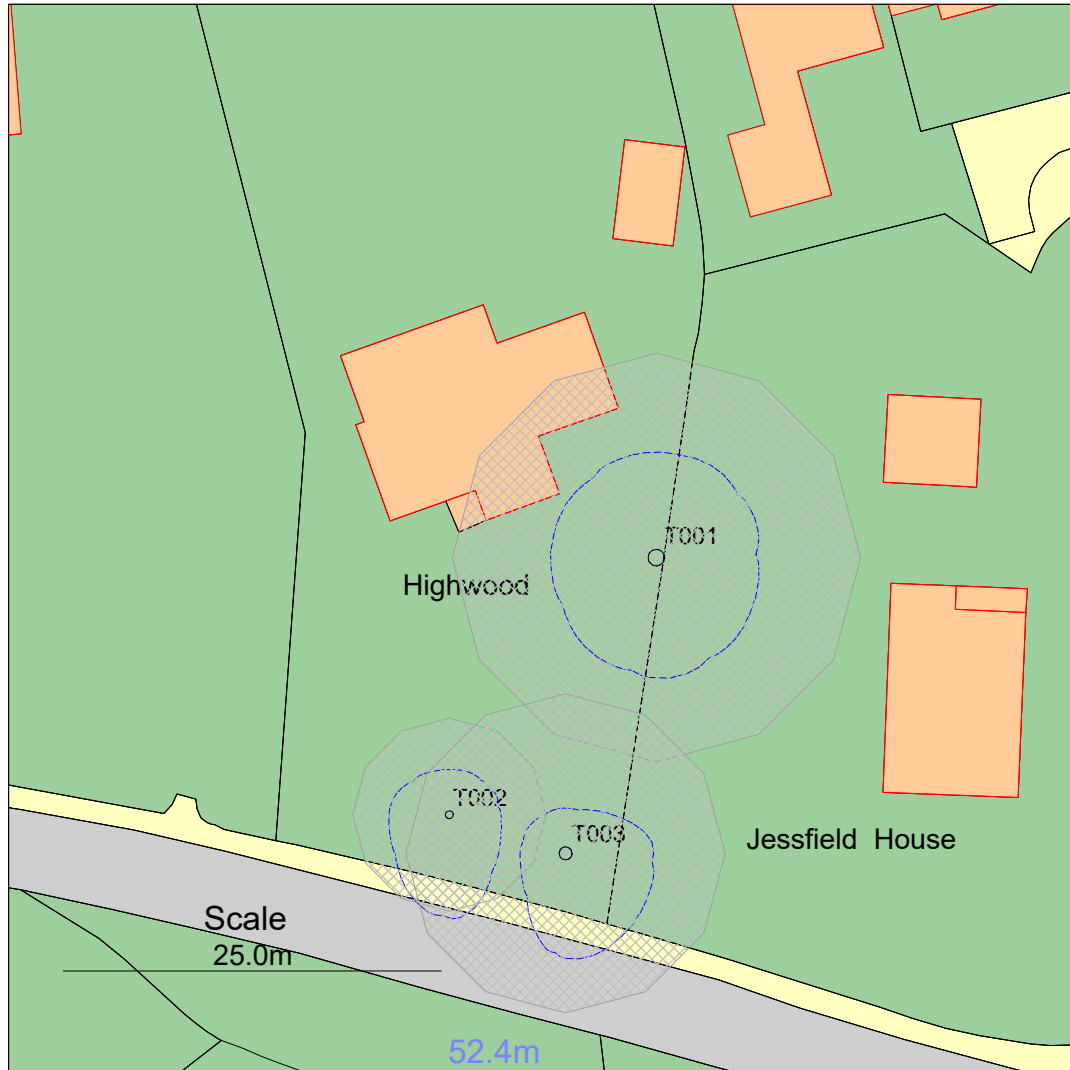

© Crown copyright and database rights 2025. Ordnance Survey AC0000822731.

Legend

Tree RPA_Outline

Tree Crown_Spread

WRC Trees

Unit 13 Deverill Rd Trading Estate BA12 7BZ
info@wrctrees.co.uk

Highwood

SCALE :
1 : 500

@ A4

DATE :
09/01/2026

N



MAP FILENAME :

Highwood Tree Protection Plan

Map data shown may contain Ordnance Survey © products supplied by
Pear Technology Services Ltd; Email: info@peartechology.co.uk
© Crown Copyright and database rights from date shown above
Ordnance Survey © licence number 100023148



© Crown copyright and database rights 2025. Ordnance Survey AC0000822731.

Legend

 Tree Protection Area

 Tree RPA_Outline

 Tree Crown_Spread