


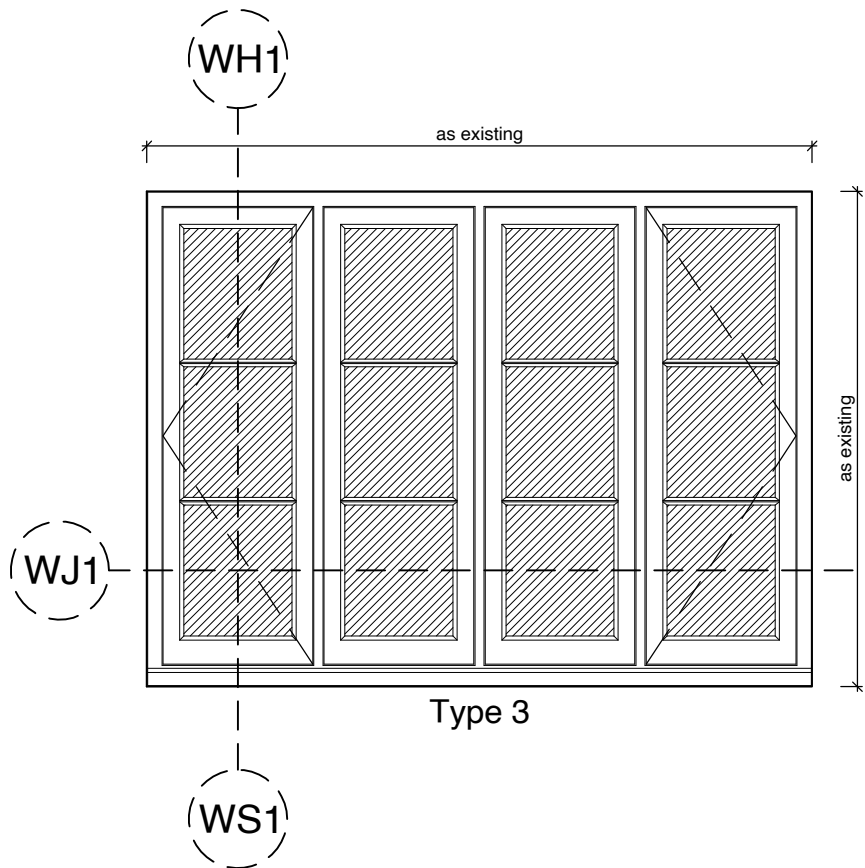

All window glazing in critical locations (up to 800mm above FFL, and 300mm or less from a door within 1500mm from FFL) should be of suitable safety glass in accordance with section K4 of Approved Document K.

Glazing, with which people are likely to come into contact whilst moving in or about the building shall:

- a) if broken on impact, break in a way which is unlikely to cause injury; or
- b) resist impact without breaking; or
- c) be shielded or protected from impact

Glazing to accord to BS EN 12600 section 4 & BS 6206 clause 5.3 for 'safe breakage'

Glazing supplier to provide glazing to accord with the above. Supplier to confirm compliance prior to installation.

All window glazing in critical locations (up to 800mm above FFL, and 300mm or less from a door within 1500mm from FFL) should be of suitable safety glass in accordance with section K4 of Approved Document K.

Glazing, with which people are likely to come into contact whilst moving in or about the building shall:

- a) if broken on impact, break in a way which is unlikely to cause injury; or
- b) resist impact without breaking; or
- c) be shielded or protected from impact

Glazing to accord to BS EN 12600 section 4 & BS 6206 clause 5.3 for 'safe breakage'

Glazing supplier to provide glazing to accord with the above. Supplier to confirm compliance prior to installation.