




Foundations to sections to be 500mm-300mm taken down to firm ground, a minimum 1000mm below Ground level the invert level of the sewer drain pipe.

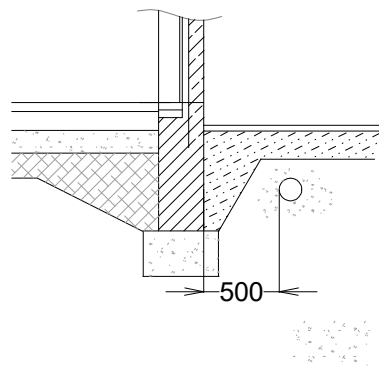

SECTION C-C

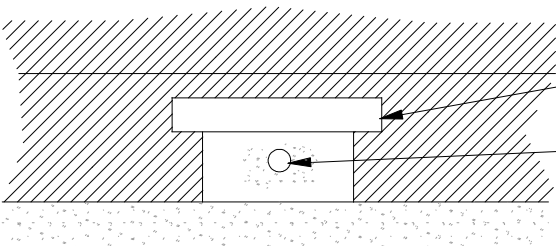

SECTION G-G

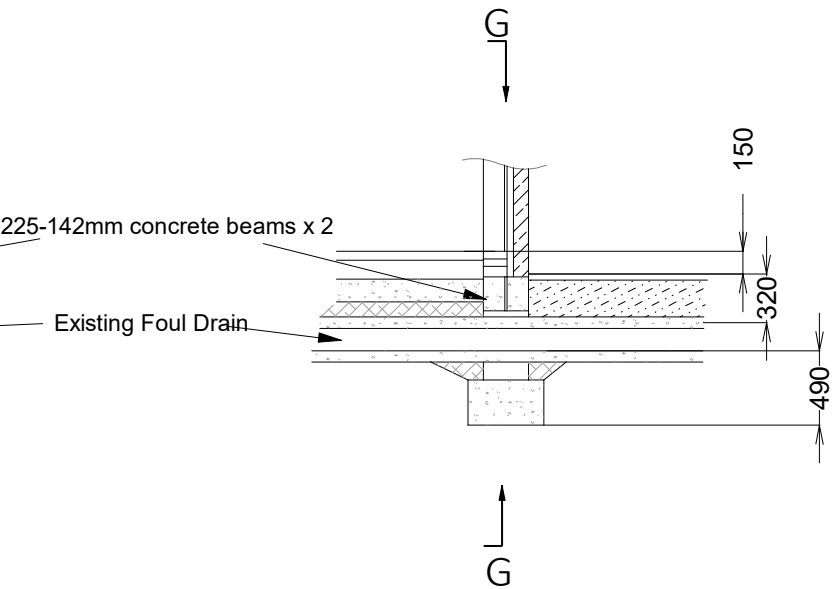

Typical drain section

Note:- the invert levels of the Culvert drain and foul drain are now confired

0	1	2	3	4
	JJ SIGA LTD			
	49 Westpark Road			
	Corsham			
	Wiltshire			
	SN13 9LW			
	Confired Drain Sections			
	Dr no. LB/26/010C			
	Scale 1/50 @ A3			