


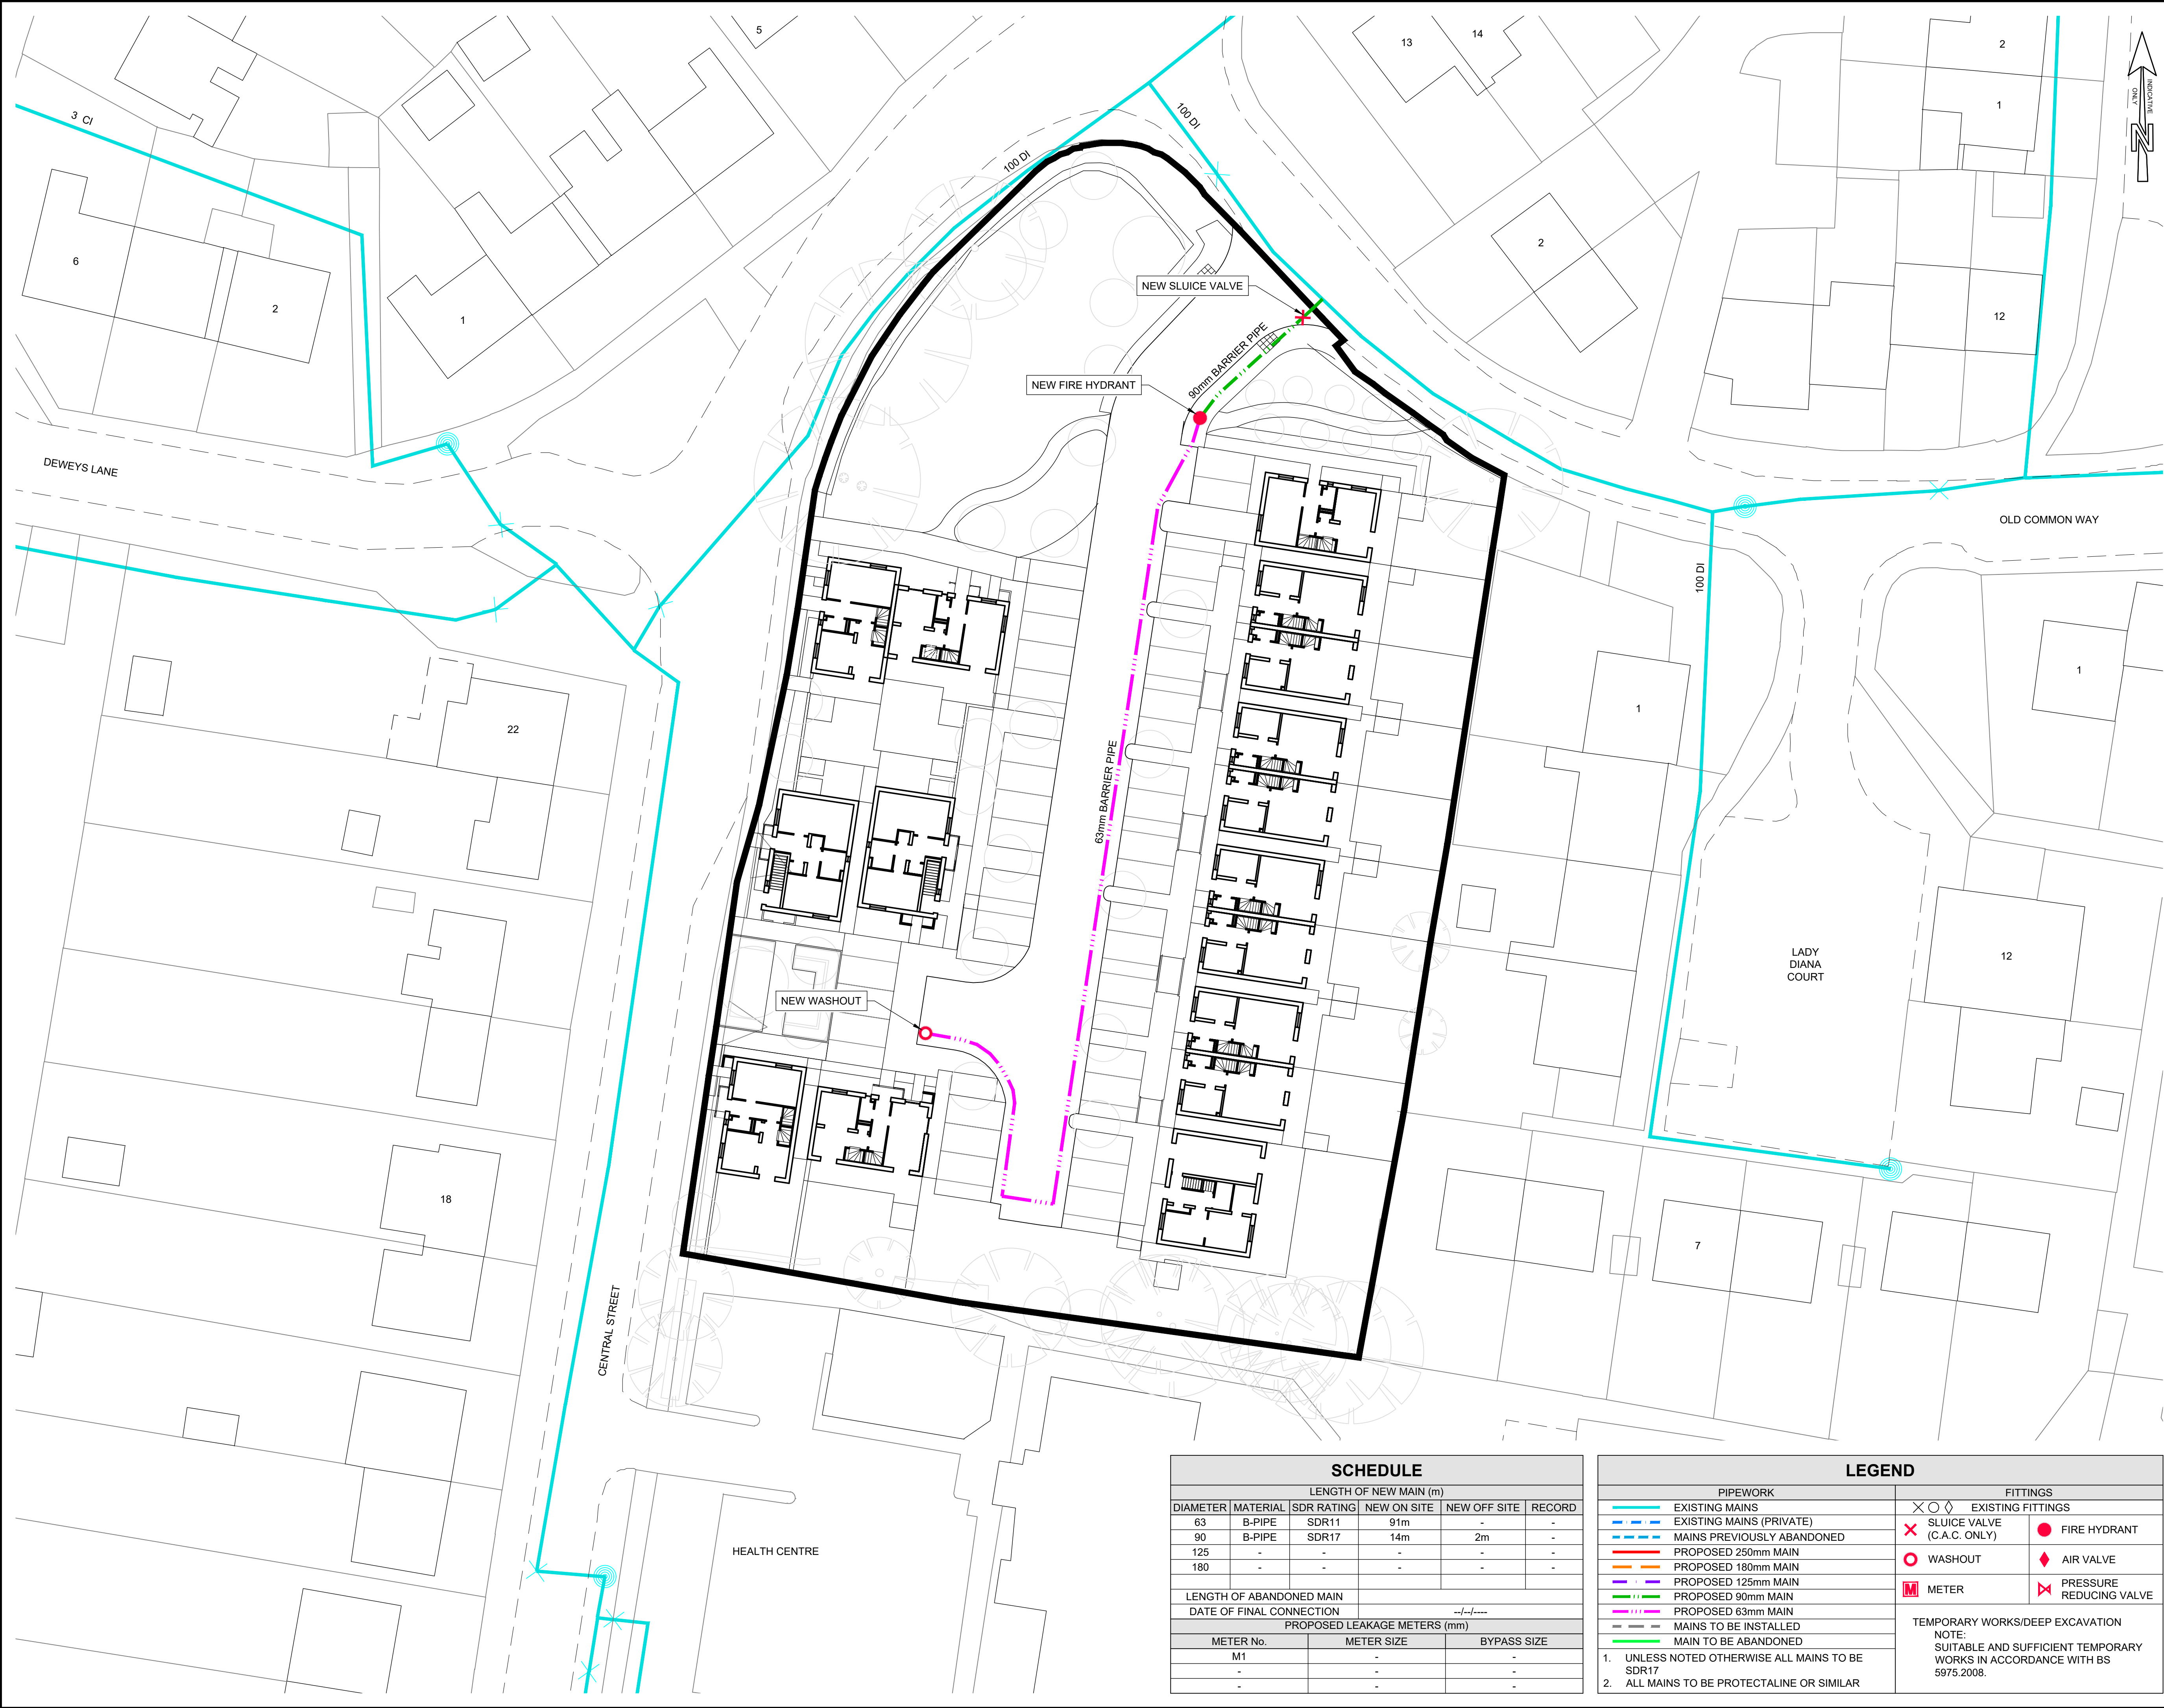

NGR426851, 150923

NOTES

1. ANY MAPS ON THIS DRAWING ARE REPRODUCED FROM THE ORDNANCE SURVEY MAP WITH THE PERMISSION OF HIS MAJESTY'S STATIONERY OFFICE © CROWN COPYRIGHT RESERVED, LICENCE No. 100019539.

2. UNLESS NOTED OTHERWISE, ALL DIMENSIONS ARE IN MILLIMETRES AND ALL LEVELS ARE IN METRES AOD.

SITE CLASSIFICATION:

CONTAMINATED

WESSEX WATER WILL:

A. SUPPLY, LAY AND INSTALL ALL MATERIALS AND FITTINGS IN A PRE-EXCAVATED FIT FOR PURPOSE TRENCH.

B. PRESSURE TEST AND CHLORINATE FOR SAMPLING.

C. ARRANGE FOR SAMPLING AND ORGANISE INITIAL CONNECTION ONCE PASS SAMPLE IS OBTAINED.

D. COMPLETE ANY EXCAVATIONS IN THE EXISTING CARRIAGEWAY (OUTSIDE OF THE SITE BOUNDARY) UNDER OWN TRAFFIC MANAGEMENT, UNLESS OTHER ARRANGEMENTS ARE AGREED PRIOR TO STARTING ON SITE.

THE DEVELOPER WILL:

1. COMPLETE ALL EXCAVATIONS ON SITE, TO AN ACCURATE LINE AND LEVEL. IF THE TRENCH IS NOT FIT FOR PURPOSE OR IN AN UNSAFE CONDITION LOCATION THEN WORKS WILL BE STOPPED AND CHARGES APPLIED* MAINS DEPTH SHOULD BE A MIN. OF 900mm AND MAX. OF 1200mm FROM THE CROWN OF PIPE, ANY DEVIATION FROM THIS FOUND WILL RESULT IN CORRECTIVE WORKS BEING COMPLETED WITH THE DEVELOPER BEING LIABLE FOR ALL COSTS INCURRED.

2. COMPLETE ALL BACKFILL USING CLEAN MATERIALS AND REINSTATE WITHIN THE SITE BOUNDARY - PIPE BEDDING WILL BE SUPPLIED BY WESSEX WATER FOR A STANDARD 300mm TRENCH

3. PROVIDE WELFARE FACILITIES ACCESSIBLE TO WESSEX WATER EMPLOYEES

4. RESPONSIBLE FOR ALL MUCK AWAY FROM ANY SITE WORKS

5. SITE SAFETY INCLUDING TRAFFIC MANAGEMENT

6. ADVISE OF ANY EXISTING, LIVE OR ABANDONED SERVICES FOUND WITHIN SITE BOUNDARY

7. LATE CANCELLATION/SITE NOT READY - NOTIFICATION TO CANCEL MUST BE A MINIMUM OF TWO WORKING DAYS FROM THE AGREED START DATE TO AVOID ADDITIONAL CHARGES. SITE NOT READY WILL ALSO RESULT IN ADDITIONAL CHARGES

NOTE:

A MINIMUM OF EIGHT WEEKS NOTICE IS REQUIRED TO START ON SITE. EARLIER ENTRY MAY BE POSSIBLE. PLEASE CONTACT THE ENGINEER IN CHARGE TO CONFIRM DATES AS SOON AS PAYMENT IS MADE

*FOR OUR LATEST CHARGES PLEASE REFER TO THE CALCULATOR AVAILABLE ON THE WEB SITE.

POSTCODE: SP11 9SA

YOUR WESSEX WATER CONTACT IS AVAILABLE BY EMAILING: _____@wessexwater.co.uk

C02	PIPE SIZE UPDATED	JDP			
C01	FIRST ISSUE	JDP	MW	MW	02/01/2025
MK	REVISIONS	DRN	CHK	APP	DATE

OLD COMMON WAY

LUDGERSHALL

S41 NEW WATER MAIN

PROPOSED LAYOUT

NOT APPROVED

ORIGINAL DRAWING SIZE A1

INITIALSDATE

DESIGNED: MW02/01/2025

DRAWN BY: JDP02/01/2025

DRAWING NUMBER

S41-151977-0001

SCALES

1:250

REV.

C02

Wessex Water

YTL GROUP

YTL

SCHEDULE					
LENGTH OF NEW MAIN (m)					
DIAMETER	MATERIAL	SDR RATING	NEW ON SITE	NEW OFF SITE	RECORD
63	B-PIPE	SDR11	91m	-	-
90	B-PIPE	SDR17	14m	2m	-
125	-	-	-	-	-
180	-	-	-	-	-
LENGTH OF ABANDONED MAIN			DATE OF FINAL CONNECTION		
PROPOSED LEAKAGE METERS (mm)					
METER No.		METER SIZE		BYPASS SIZE	
M1		-		-	
-		-		-	
-		-		-	

LEGEND	
PIPEWORK	
	EXISTING MAINS
	EXISTING MAINS (PRIVATE)
	MAINS PREVIOUSLY ABANDONED
	PROPOSED 250mm MAIN
	PROPOSED 180mm MAIN
	PROPOSED 125mm MAIN
	PROPOSED 90mm MAIN
	PROPOSED 63mm MAIN
	MAINS TO BE INSTALLED
	MAIN TO BE ABANDONED
FITTINGS	
	SLUIICE VALVE (C.A.C. ONLY)
	FIRE HYDRANT
	WASHOUT
	AIR VALVE
	METER
	PRESSURE REDUCING VALVE
TEMPORARY WORKS/DEEP EXCAVATION	
NOTE: SUITABLE AND SUFFICIENT TEMPORARY WORKS IN ACCORDANCE WITH BS 5975:2008.	

- UNLESS NOTED OTHERWISE ALL MAINS TO BE SDR17
- ALL MAINS TO BE PROTECTALINE OR SIMILAR