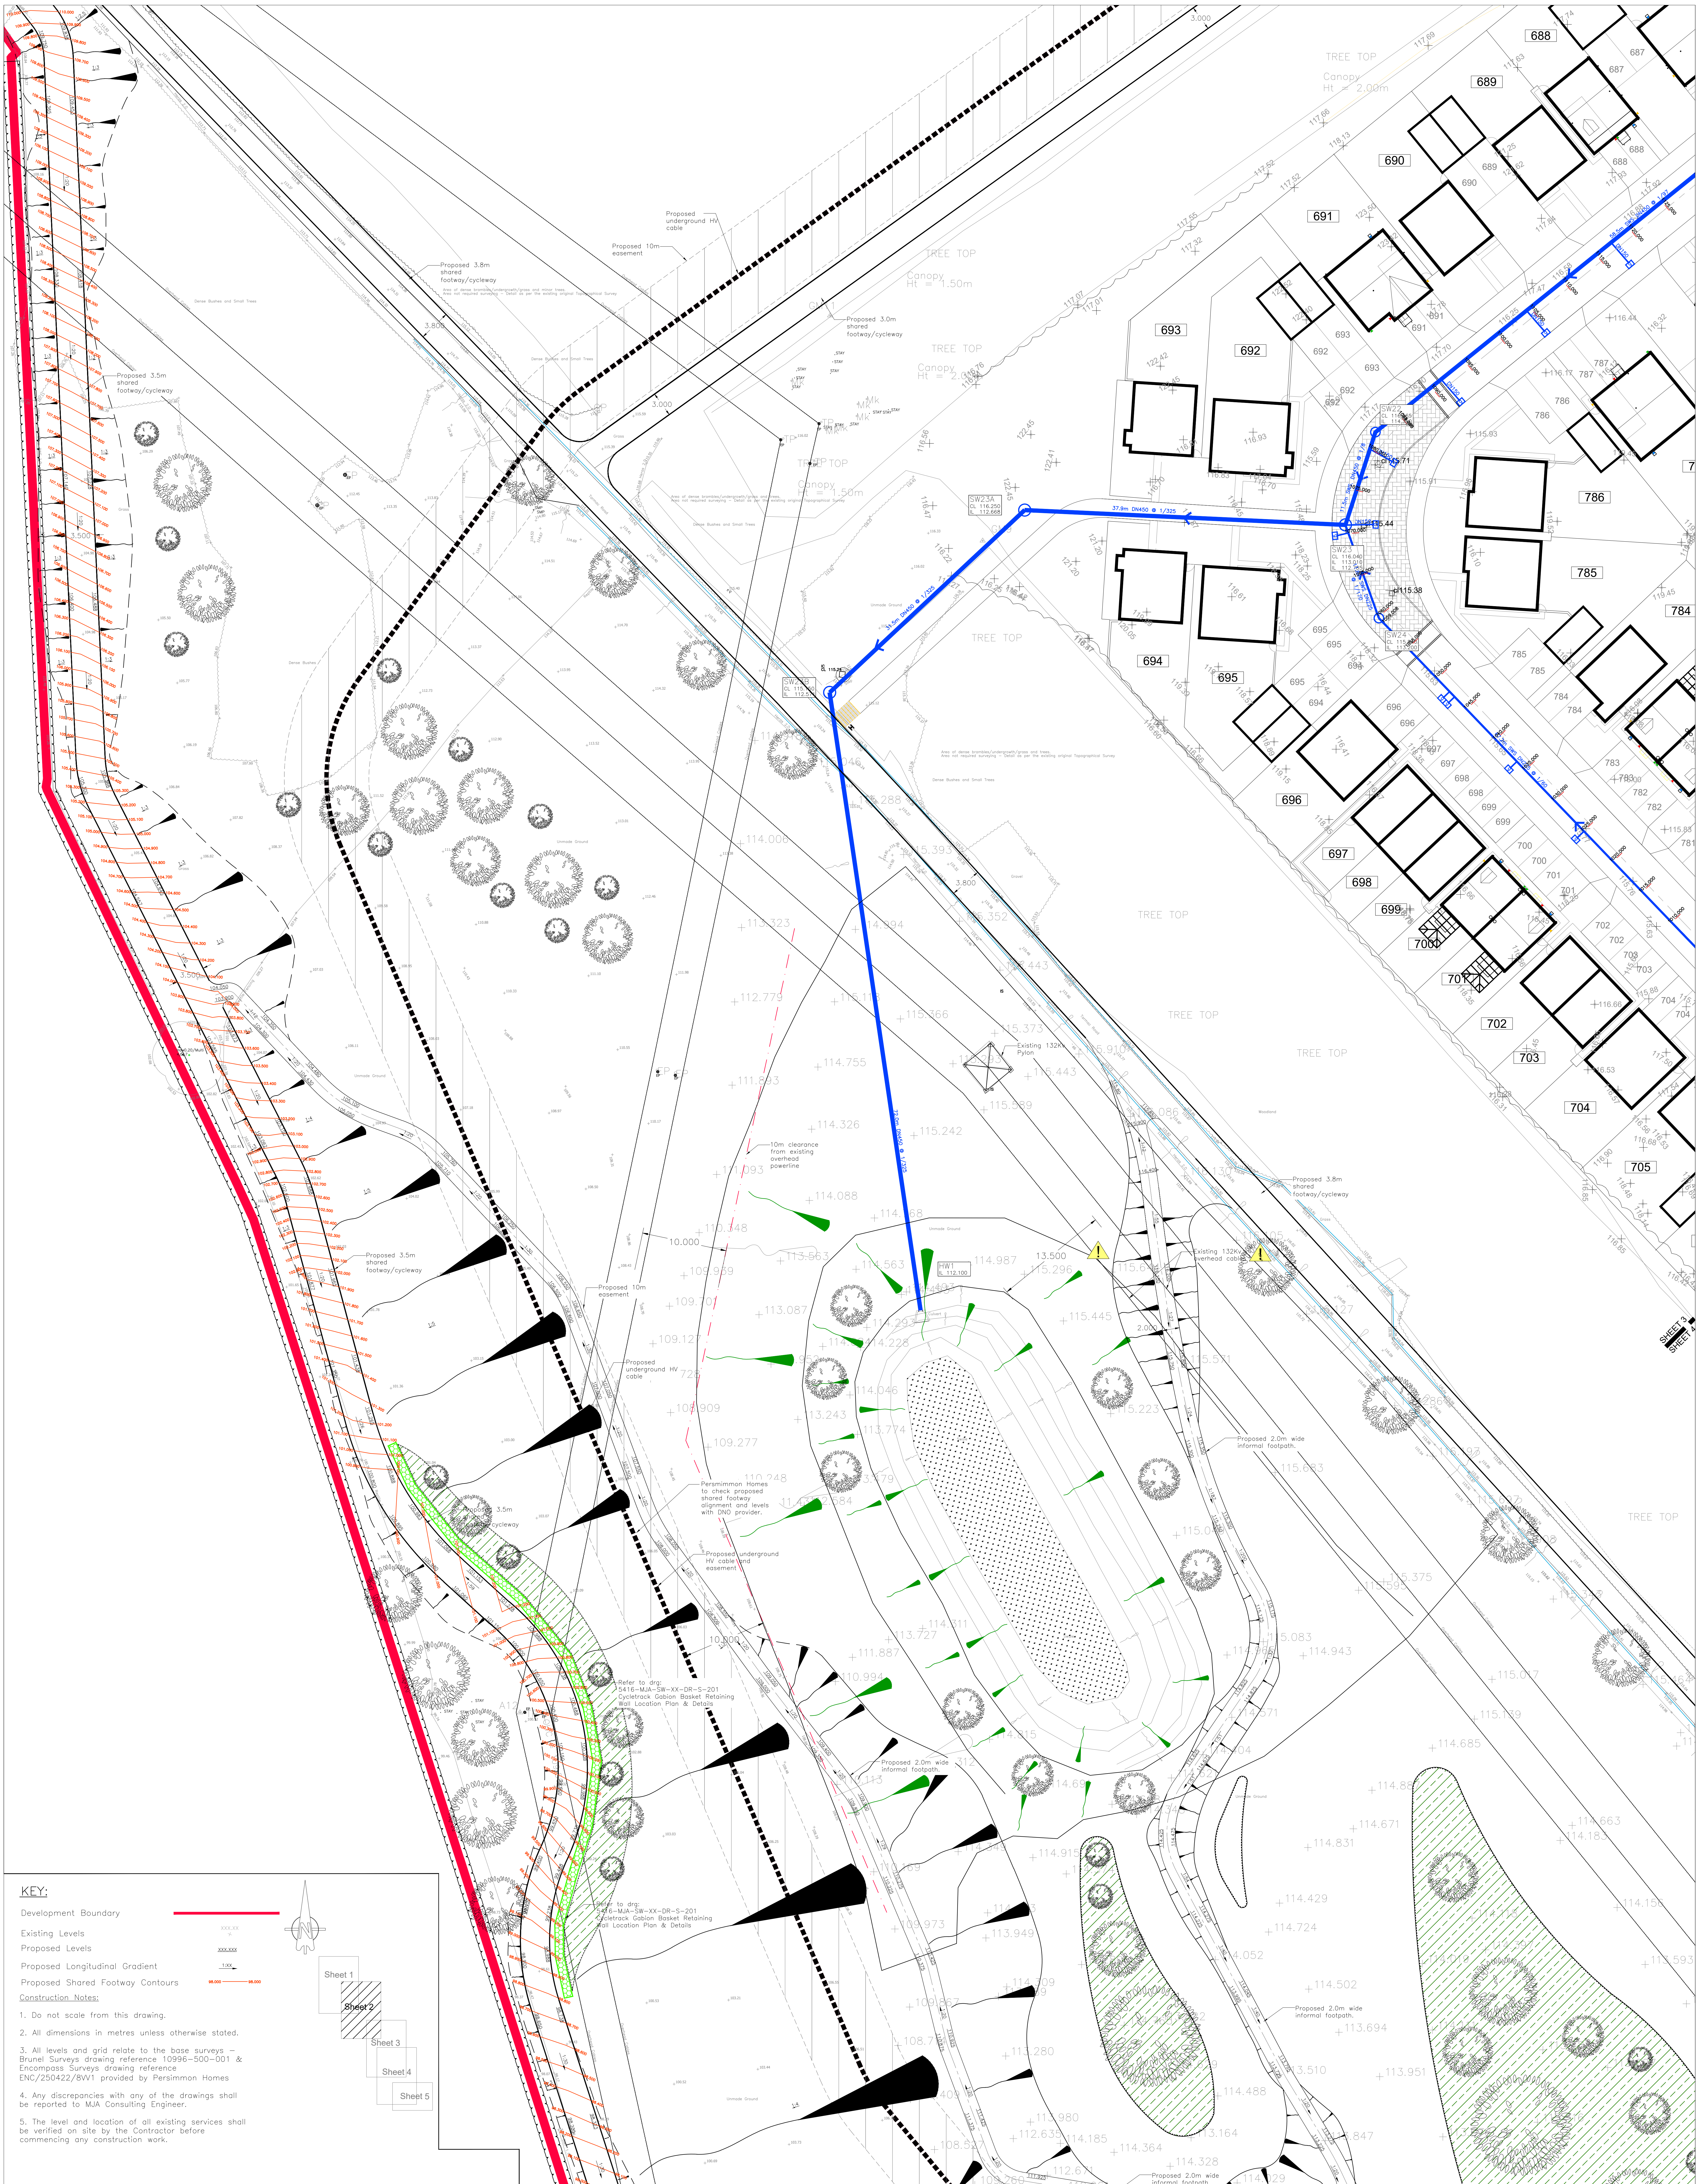
Proposed 10m easement
Proposed underground HV cable
Proposed 3.8m shared footway/cycleway
Proposed 3.0m shared footway/cycleway
Proposed 3.5m shared footway/cycleway
TREE TOP
Canopy Ht = 2.00m
Canopy Ht = 1.50m
37.9m DN450 @ 1/325
Existing 132KV Pylon
10m clearance from existing overhead powerline
Existing 132KV overhead cable
Persimmon Homes to check proposed shared footway alignment and levels with DNO provider.
Proposed underground HV cable and easement
Refer to drg: 5416-MJA-SW-XX-DR-S-201 Cycletrack Gabion Basket Retaining Wall Location Plan & Details
Proposed 2.0m wide informal footpath.
HW1
SHEET 3
SHEET 4
FOR APPROVAL

KEY:

Development Boundary

Existing Levels XXX.XX

Proposed Levels XXX.XXX

Proposed Longitudinal Gradient 1:XX

Proposed Shared Footway Contours 98.000 — 98.000

Sheet 1
Sheet 2
Sheet 3
Sheet 4
Sheet 5

Construction Notes:

1. Do not scale from this drawing.

2. All dimensions in metres unless otherwise stated.

3. All levels and grid relate to the base surveys – Brunel Surveys drawing reference 10996–500–001 & Encompass Surveys drawing reference ENC/250422/8VV1 provided by Persimmon Homes

4. Any discrepancies with any of the drawings shall be reported to MJA Consulting Engineer.

5. The level and location of all existing services shall be verified on site by the Contractor before commencing any construction work.


2.0m Footway/3.80m Wide Footway/Cycleway
20mm AC6 Dense Surf 100/150 or 160/220 if hand laying in winter.
60mm AC20 Dense Bin 40/60 or 160/220 if hand laying in winter.
225mm Type 1 granular sub–base material to clause 803 table 8/2 MCHW1 Series 800.
50x150 EF edging on ST1 concrete bed and haunch
50x150 EF edging on ST1 concrete bed and haunch
1/40
0.150
0.150
0.150

TYPICAL SECTION THROUGH PARCEL A3 POS
SHARED FOOTWAY/CYCLEWAY –
(WILTSHIRE COUNTY COUNCIL SPECIFICATION)
Scale 1:20

© This drawing is the copyright of Michael A Jennings Associates Limited and may not be copied, altered or reproduced in any way without their permission.

REV. No.	DATE	DESCRIPTION	INITIALS
P2	23.12.24	Latest landscape proposals added.	LJW
P1	20.11.24	Preliminary issue.	LJW

Client
PERSIMMON
HOMES
(South Coast) LTD

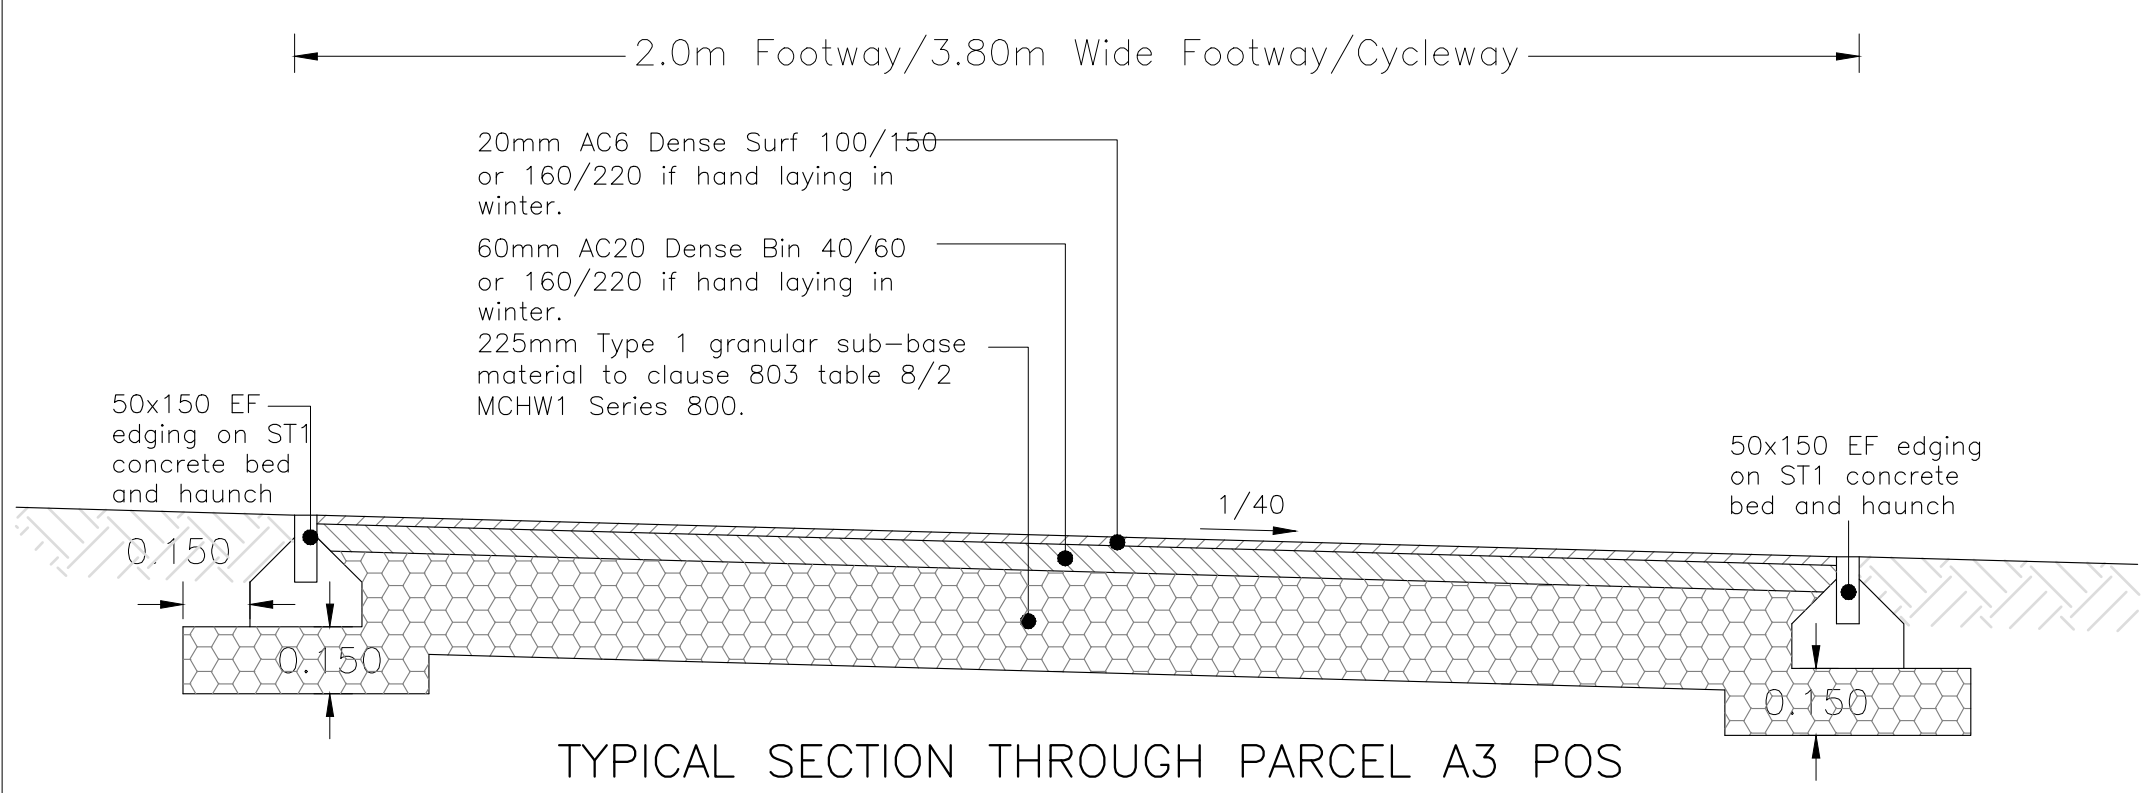Project Fugglestone Red
Salisbury, Wiltshire

MJA CONSULTING
CIVIL & STRUCTURAL ENGINEERS
Ipsum Court, The Quadrant,
Abingdon Science Park,
Oxon, OX14 3YS
Tel: 01235 555173
Fax: 01235 523226

Title Phase A3 – POS
Shared Footway Proposals
Sheet 2

Scale	Date	Drawing No.	Rev
1:250@A0	Nov '24	5416:621	P2
Checked KTG	Drawn LJW		