


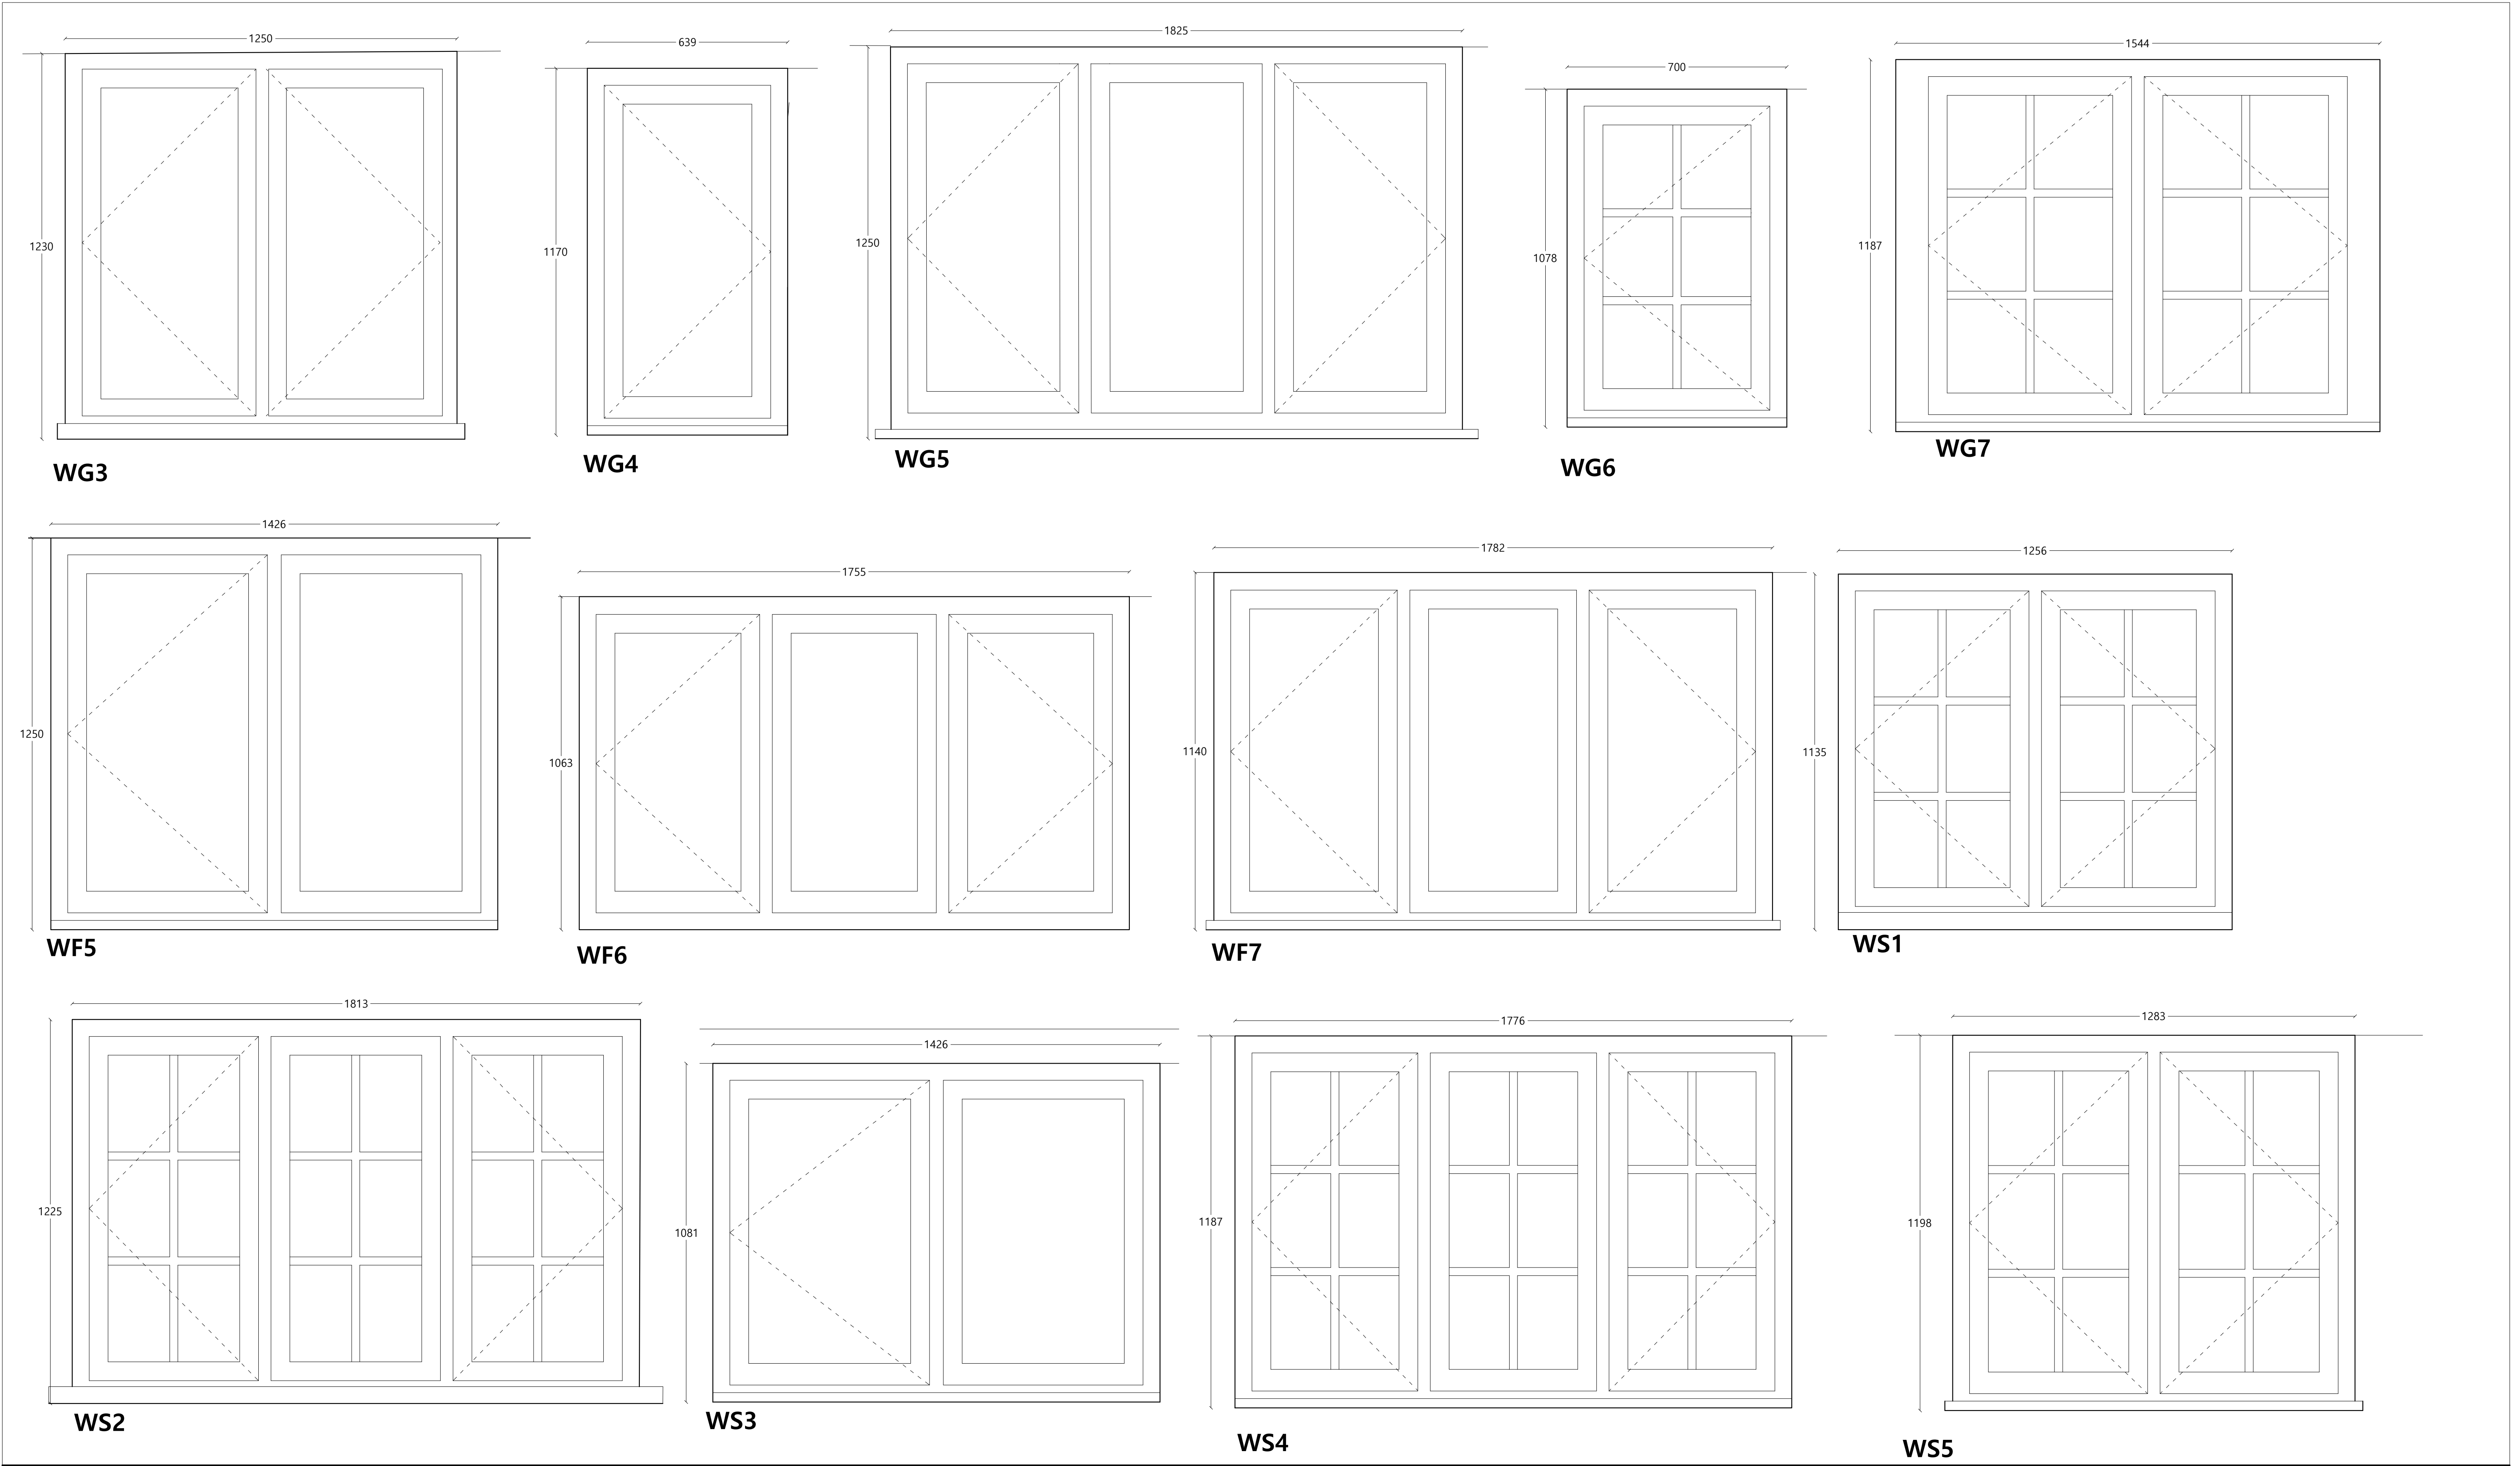

Notes SEE DRAWING 381/513 FOR SASH WINDOWS Approx Structural opening sizes shown, check on site for actual size		Read in conjunction with detail drawing 381/503. All casement windows to be provided with trickle vents. Weather proofing to be agreed with joiner.		All existing opening sizes to be confirmed by joiner on site prior to fabrication. Attic windows to be fitted with child restrictors		Allow a provisional sum of £250.00 per window for supply of ironmongery. All windows to be from hardwood.		Prepare all new joinery for decorating, fill any defects with wood filler and sand smooth, treat any knots with knotting solution prior to applying a full coat of Farrow & Ball primer and under coat and two top coats of Farrow & Ball External Eggshell - colour to be agreed			
NOTES Drawings are based on survey data and may not accurately represent what is physically present. Scale for planning purposes only. All dimensions are to be verified on site before proceeding with the work. All dimensions are in millimeters unless noted otherwise. James Mackintosh Architects shall be notified in writing of any discrepancies.		0mm100mm200mm500mm1m Scale 1:10 @A1/ 1:20@A3		- Mar26 RB First issue ISSUE DATE DRAWN CHECKEDDESCRIPTION		JAMES MACKINTOSH ARCHITECTS DESIGN / CONSERVATION / HISTORIC INTERIORS E. studio@jmackintosh.com T. 01608 692310 W. www.jamesmackintosharchitects.com		PROJECT Idover Demesne Farm CLIENT Vaughan Consultancy DRAWING STATUS LBC		DRG TITLE Casement Window Schedule JOB/DRG No. 381/514 SCALE 1:10@A1/1:20@A3 REVISION -	