

General: All soft landscape works are to be carried out in accordance with the latest editions of: BS 5837, BS 4428 and BS 7370-4
The existing soil and any imported soil required for the completion of the works is to be subject to a topsoil analysis and the report with any required amelioration to be carried out.

General: All plant stock to conform to the standards set out in the National Plant Specification, to be sturdy, healthy and vigorous. Of good shape and without elongated shoots, grown in a suitable environment and hardened off, free from pests, diseases, discoloration, weeds and physiological disorders. Have a balanced branch system and be true to name.


Preparation of Planting Beds: Prior to planting all topsoil to be dug over to a depth of 150mm within 2-3 days prior to planting when weather and ground is suitably dry. Leave to regular and even levels:
25mm above adjoining paving or kerbs. Remove all visible weeds and large stones exceeding 50mm.

Trees to be planted in prepared pits 1200 x 1200 x 900mm deep. The pit bottom is to be broken up to a depth of 150mm and trees to be planted at the same depth as grown on the nursery with approved tree backfilling material and well consolidated. Planting in grass areas are to be provided with a 1200mm diameter area clear of turf and weeds.



Mulching: All trees to be mulched after planting with Ornamental Bark Mulch (Melcourt or equal approved) to a depth of 75mm to form an area 1200 x 1200mm. Immediately after planting water all trees to soil field capacity.

To be planted in pits 150mm wider and deeper than container or roots when fully spread.
All pit bottoms to be broken up to a depth of 150mm, incorporating soil ameliorant at 50g/m² and well consolidated.

Turfing
Prior to laying turf or seeding all areas to be reduce to a fine, firm tilth with good crumb structure.
Raked to a true even surface, friable and lightly firmed but not compacted. All lawn areas to be laid with approved cultivated turf within 18 hours of delivery. Avoid laying in persistent cold, or drying winds, or when the soil is frost bound.

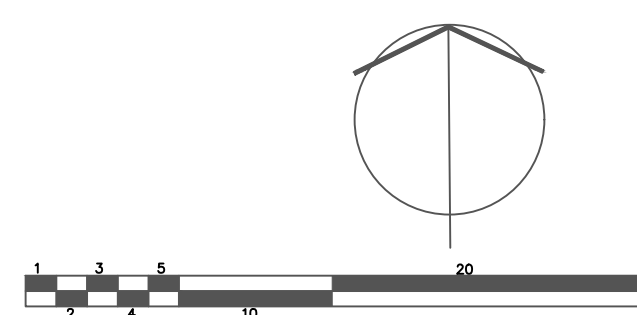

Existing Trees to be retained



Proposed Hedge Planting

Proposed Native Planting

Seating

Demographic Data

