
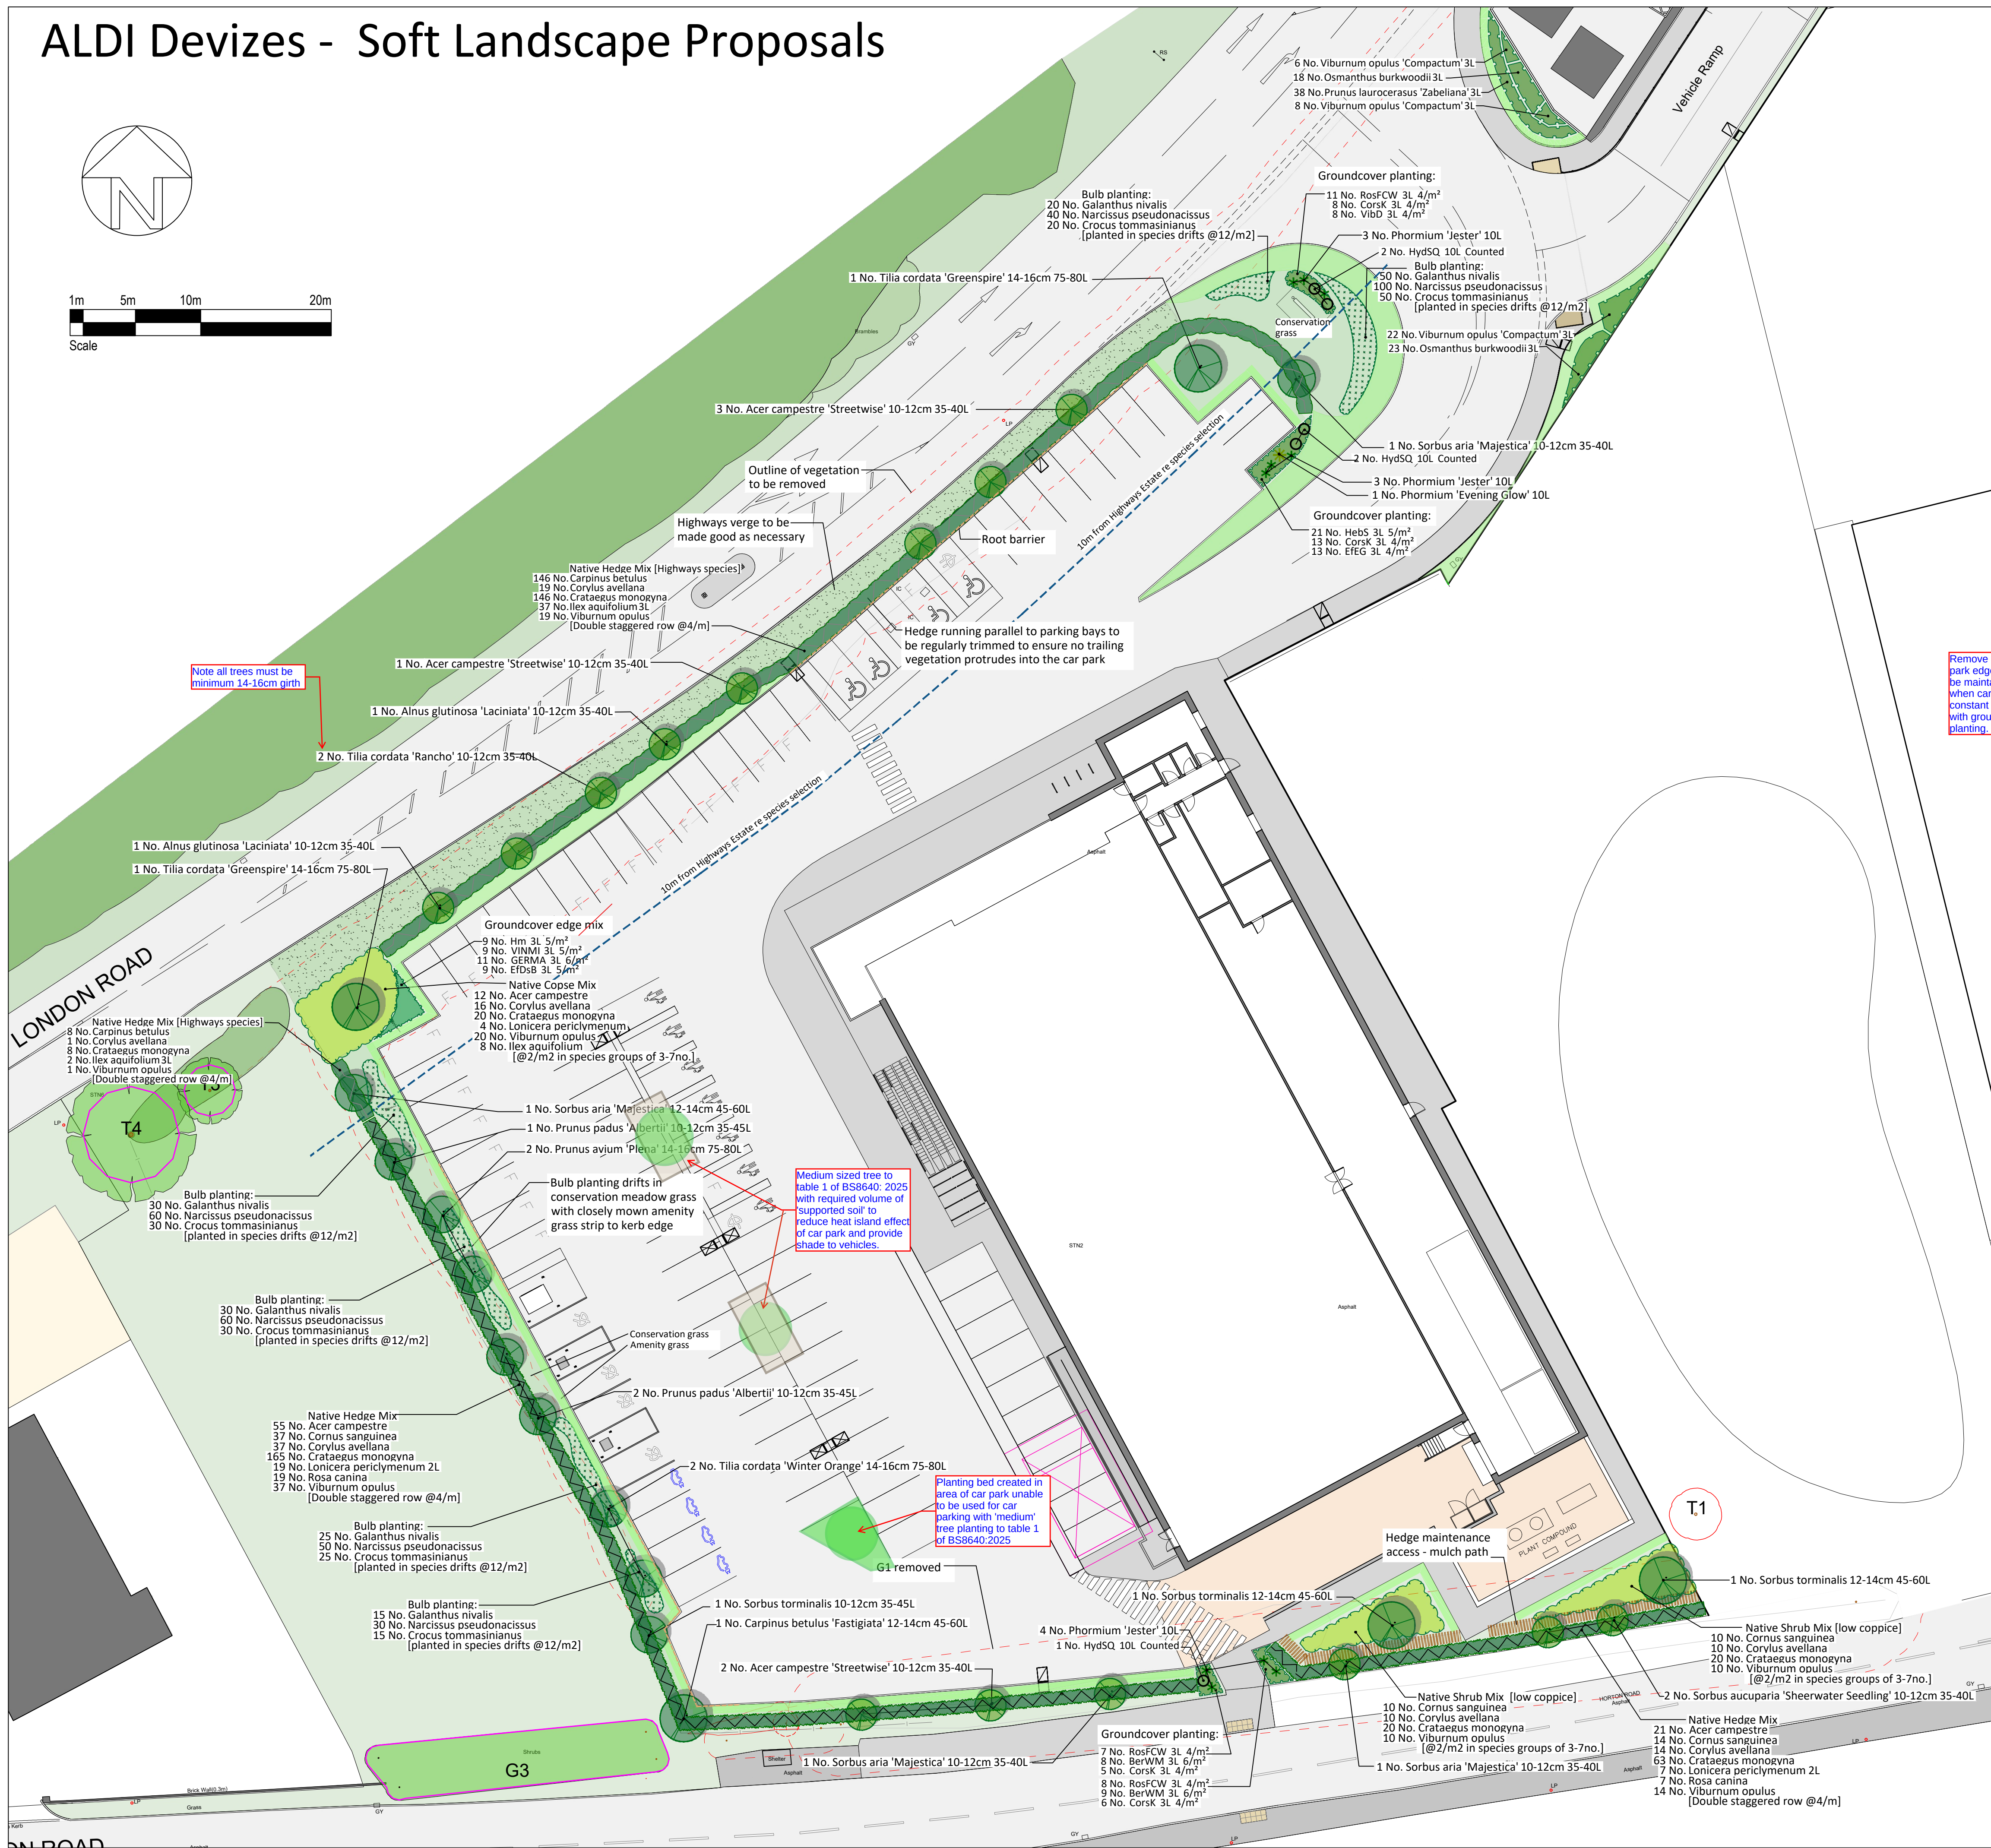


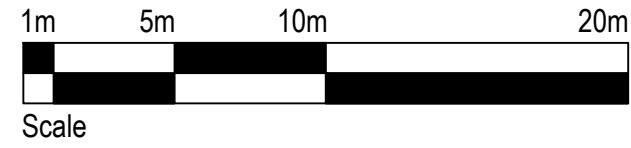

 Existing Trees
Refer to Arboicultural Assessments for further details

 Existing vegetation to be removed

 Proposed Tree Planting

 Proposed Native Cope Mix Planting
transplants planted @ 1-2/m² in species groups

 Proposed Native Mix Hedge Planting
planted @ 4/Lm in double staggered row

 Proposed Feature Specimen Shrub Planting
10/L pots

 Proposed Groundcover Planting
2/L pots planted @ 4-7/m²
species from RHS 'Plants for Pollinators'

 Proposed Groundcover Edge Mix Planting
2/L pots planted @ 3-5/m²
species from RHS 'Plants for Pollinators'

 Proposed Conservation Meadow Grass - hedgerow & shady margins and General Purpose Meadow Mix
Emorsgate Seeds EH1 Hedgerow Mixture sown / EM1 Meadow Mix, @ 4g/m² or equivalent turf

 Proposed Closely Mown Amenity Grass - kerb margins
Emorsgate Seeds EL1 Flowering Lawn Mixture sown, @ 4g/m² or equivalent turf - kerb margins 600mm wide edge alongside parking
kerbs Germinall A24 Wear & Tear mix

 Proposed Bulbs and / or Wildflower Plugs

 Root barrier - reroot 600 of similar approved

NOTES:
Refer to dwg 1636-03 for planting schedule and notes

CAMBIUM : Landscape architecture Arboricultural consultancy			
Project			
Aldi, Drive-thru and EV Hub - London Road, Devizes			
Title			
Soft Landscape Proposals			
Client			
PRZM Real Estate & Aldi Ltd			
Date		Drawn	Checked
February 2026		LR	MW
Scale		Status	
1:250 @A1		Planning	
Dwg No.		Revision	
DR-L-1636-02		P04	
Cambium, 4 Clyde terrace, Bedminster Bristol BS3 3BL			