


Scale - meters

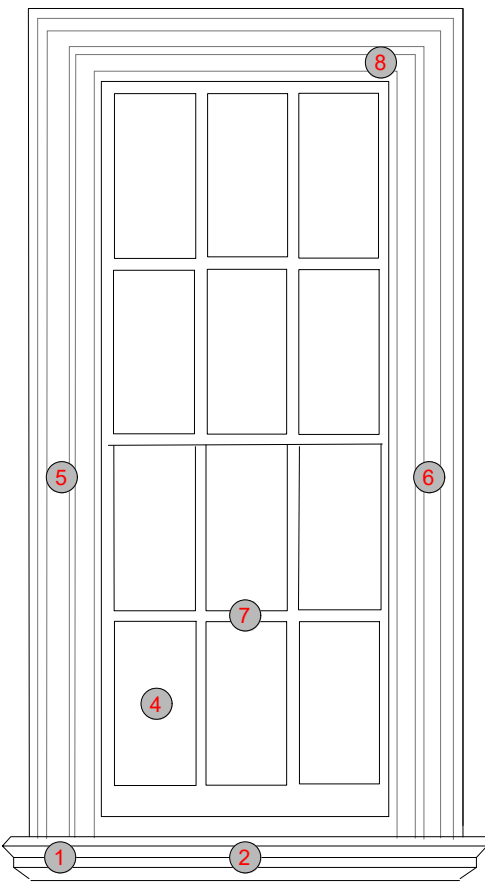

Generic list of window repair types

1. Window cill splice n.e 300mm
2. Window cill replacement - full length
3. Frame repairs (top and bottom rails, mullions, partin beads, staff bead, glazing bar etc)
4. Replacement glass (Where broken).
5. Outer box sash lining repairs
6. New sash chords and weights.
7. Upper or lower sliding sash replacement (if beyond repair for item 3).
8. Full scale replacement - new sashes, chords, weights glazing etc - like for like.

For window specific schedule of works - please refer to HSBC Trowbridge - Henley windows survey drawing window references marry up with Henley window survey; defects have been identified and linked with repair solution for each item.

RESTRICTED

Notes:				Rev	Date	Notes	Rev	Date	Notes
Copyright of this drawing is reserved by AXIS Architecture and issued on the condition that it is not copied, reproduced or disclosed to any third party either wholly or in part without the consent in writing of AXIS Architecture.									
RESIDUAL RISK Wherever possible unnecessary risk is designed out of these proposals. Where residual risk remains this is assessed and identified on the relevant drawings with this symbol. Refer to the note and the relevant measures in the Health + Safety documentation									
The contractor must verify all dimensions on site before making shop drawings or commencing work of any kind. No dimensions to be scaled from this drawing.									

Client Corporate Real Estate		Project Trowbridge Fore Street Facade Works			Title Proposed Elevation Front Elevation - Fore Street Window Repairs		
Status STAGE 0 - TEST TO FIT	Scale A1 1:50	A3 1:100	Date 17.03.26	Drawn DR	Checked RAS	Job No. 26700-7332-E1-W	Revision -
AXIS Architecture and Design Ltd, Talbot Chambers, 2-6 North Church Street, Sheffield, S1 2DH.		tel: +44(0)114 2490944 fax: +44(0)114 2490966 www.axis-architecture.com designed@axis-architecture.com		AXIS architecture			