



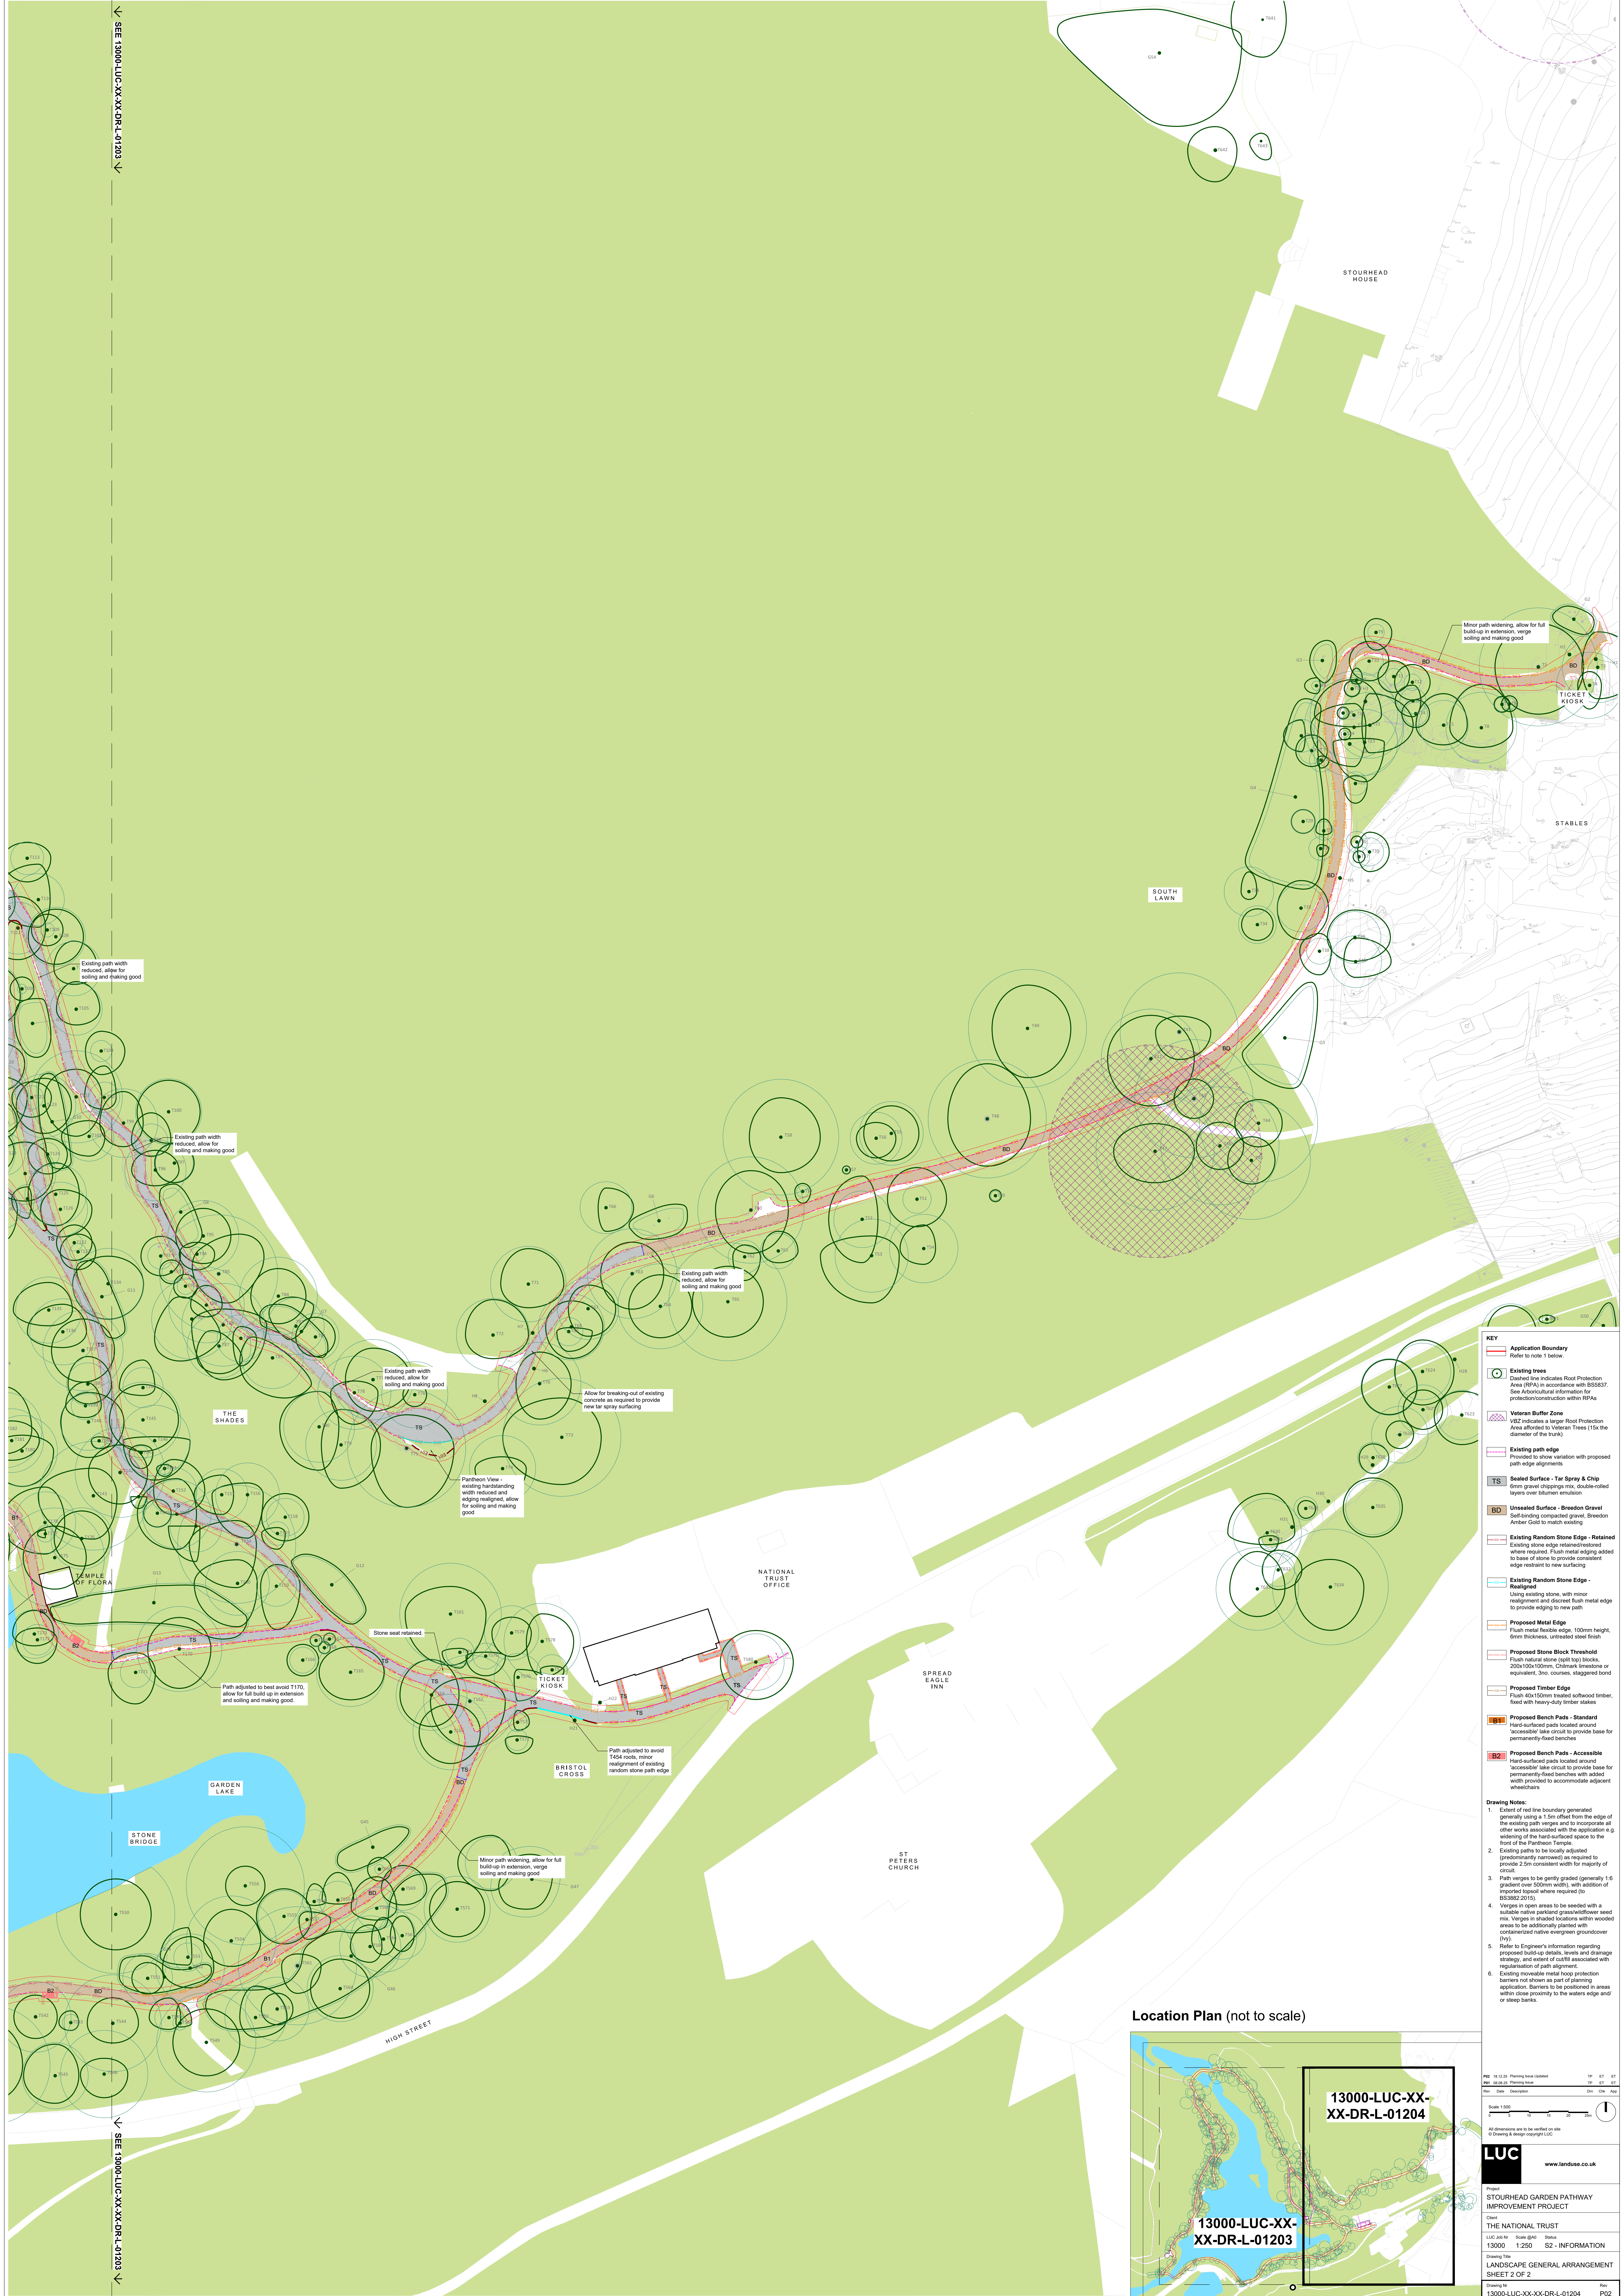

SEE 13000-LUC-XX-XX-DR-L-01203

Location Plan (not to scale)

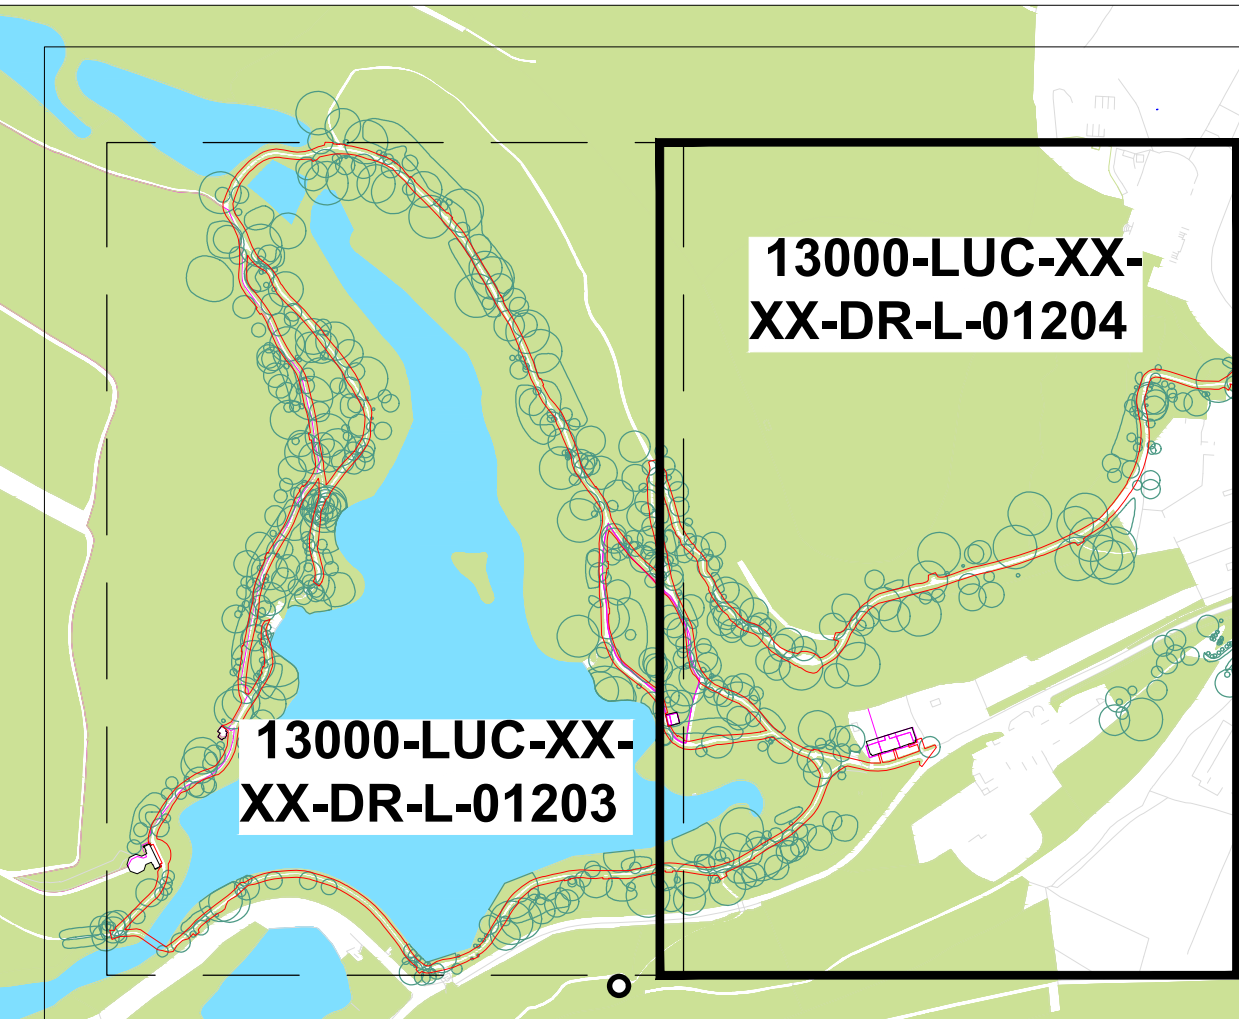

KEY

- Application Boundary
Refer to note 1 below.
- Existing trees
Dashed line indicates Root Protection Area (RPA) to accordance with BS5837. See Arboricultural Information for protection/construction within RPAs.
- Veteran Buffer Zone
VBZ indicates a larger Root Protection Area afforded to Veteran Trees (15x the diameter of the trunk).
- Existing path edge
Provided to show variation with proposed path edge alignments.
- Sealed Surface - Tar Spray & Chip
Form gravel chippings mix, double-related layers over bitumen emulsion.
- Unsealed Surface - Brendon Gravel
Self-binding compacted gravel. Brendon Amber Gold to match existing.
- Existing Random Stone Edge - Retained
Existing stone edge retained/restored where required. Flush metal edging added to base of stone to provide consistent edge resistant to new surfacing.
- Existing Random Stone Edge - Realigned
Using existing stone, with minor realignment and discreet flush metal edge to provide edging to new path.
- Proposed Metal Edge
Flush metal flexible edge, 100mm height, 6mm thickness, unsealed steel flush.
- Proposed Stone Block Threshold
Flush natural stone (split top) blocks, 200x100x50mm. Chalkmark limestone or equivalent, 3no. courses, staggered bond.
- Proposed Timber Edge
Flush 40x100mm treated softwood timber, fixed with heavy-duty timber stakes.
- Proposed Bench Pads - Standard
Hard-surfaced pads located around 'accessible' lake oval to provide base for permanently-fixed benches.
- Proposed Bench Pads - Accessible
Hard-surfaced pads located around 'accessible' lake oval to provide base for permanently-fixed benches with added width provided to accommodate adjacent wheelchairs.

Drawing Notes:

- Extent of red line boundary generated generally using a 1.5m offset from the edge of the existing path verges and to incorporate all other works associated with the application e.g. widening of the hard-surfaced spaces to the front of the Pantheon Temple.
- Existing paths to be locally adjusted (predominantly narrowed) as required to provide 2.0m consistent width for majority of oval.
- Path verges to be gently graded (generally 1:6 gradient over 500mm width), with addition of imported topsoil where required (to BS3882:2015).
- Verges in open areas to be seeded with a suitable native parkland grass/low-growing seed mix. Verges in shaded locations within wooded areas to be additionally planted with containerised native evergreen groundcover (WY).
- Refer to Engineer's information regarding proposed build-up details, levels and drainage strategy, and extent of cut/fill associated with realignment of path alignment.
- Existing moveable metal hoop protection barriers not shown as part of planning application. Barriers to be positioned in areas within close proximity to the waters edge and/or steep banks.

Rev: 10-12-25 Planning Issue Updated
Rev: 01-01-26 Planning Issue

Plan	Site	Topography	TP	ET	ET
01	01	01	01	01	01

Scale: 1:500

All dimensions are to be verified on site.
© Drawing & design copyright LUC

LUC
www.landuse.co.uk

Project: STOURHEAD GARDEN PATHWAY IMPROVEMENT PROJECT
Client: THE NATIONAL TRUST
LUC Job No: 13000 Scale: B4D Status: S2 - INFORMATION
Drawing Title: LANDSCAPE GENERAL ARRANGEMENT SHEET 2 OF 2
Drawing No: 13000-LUC-XX-XX-DR-L-01204 Rev: P02