


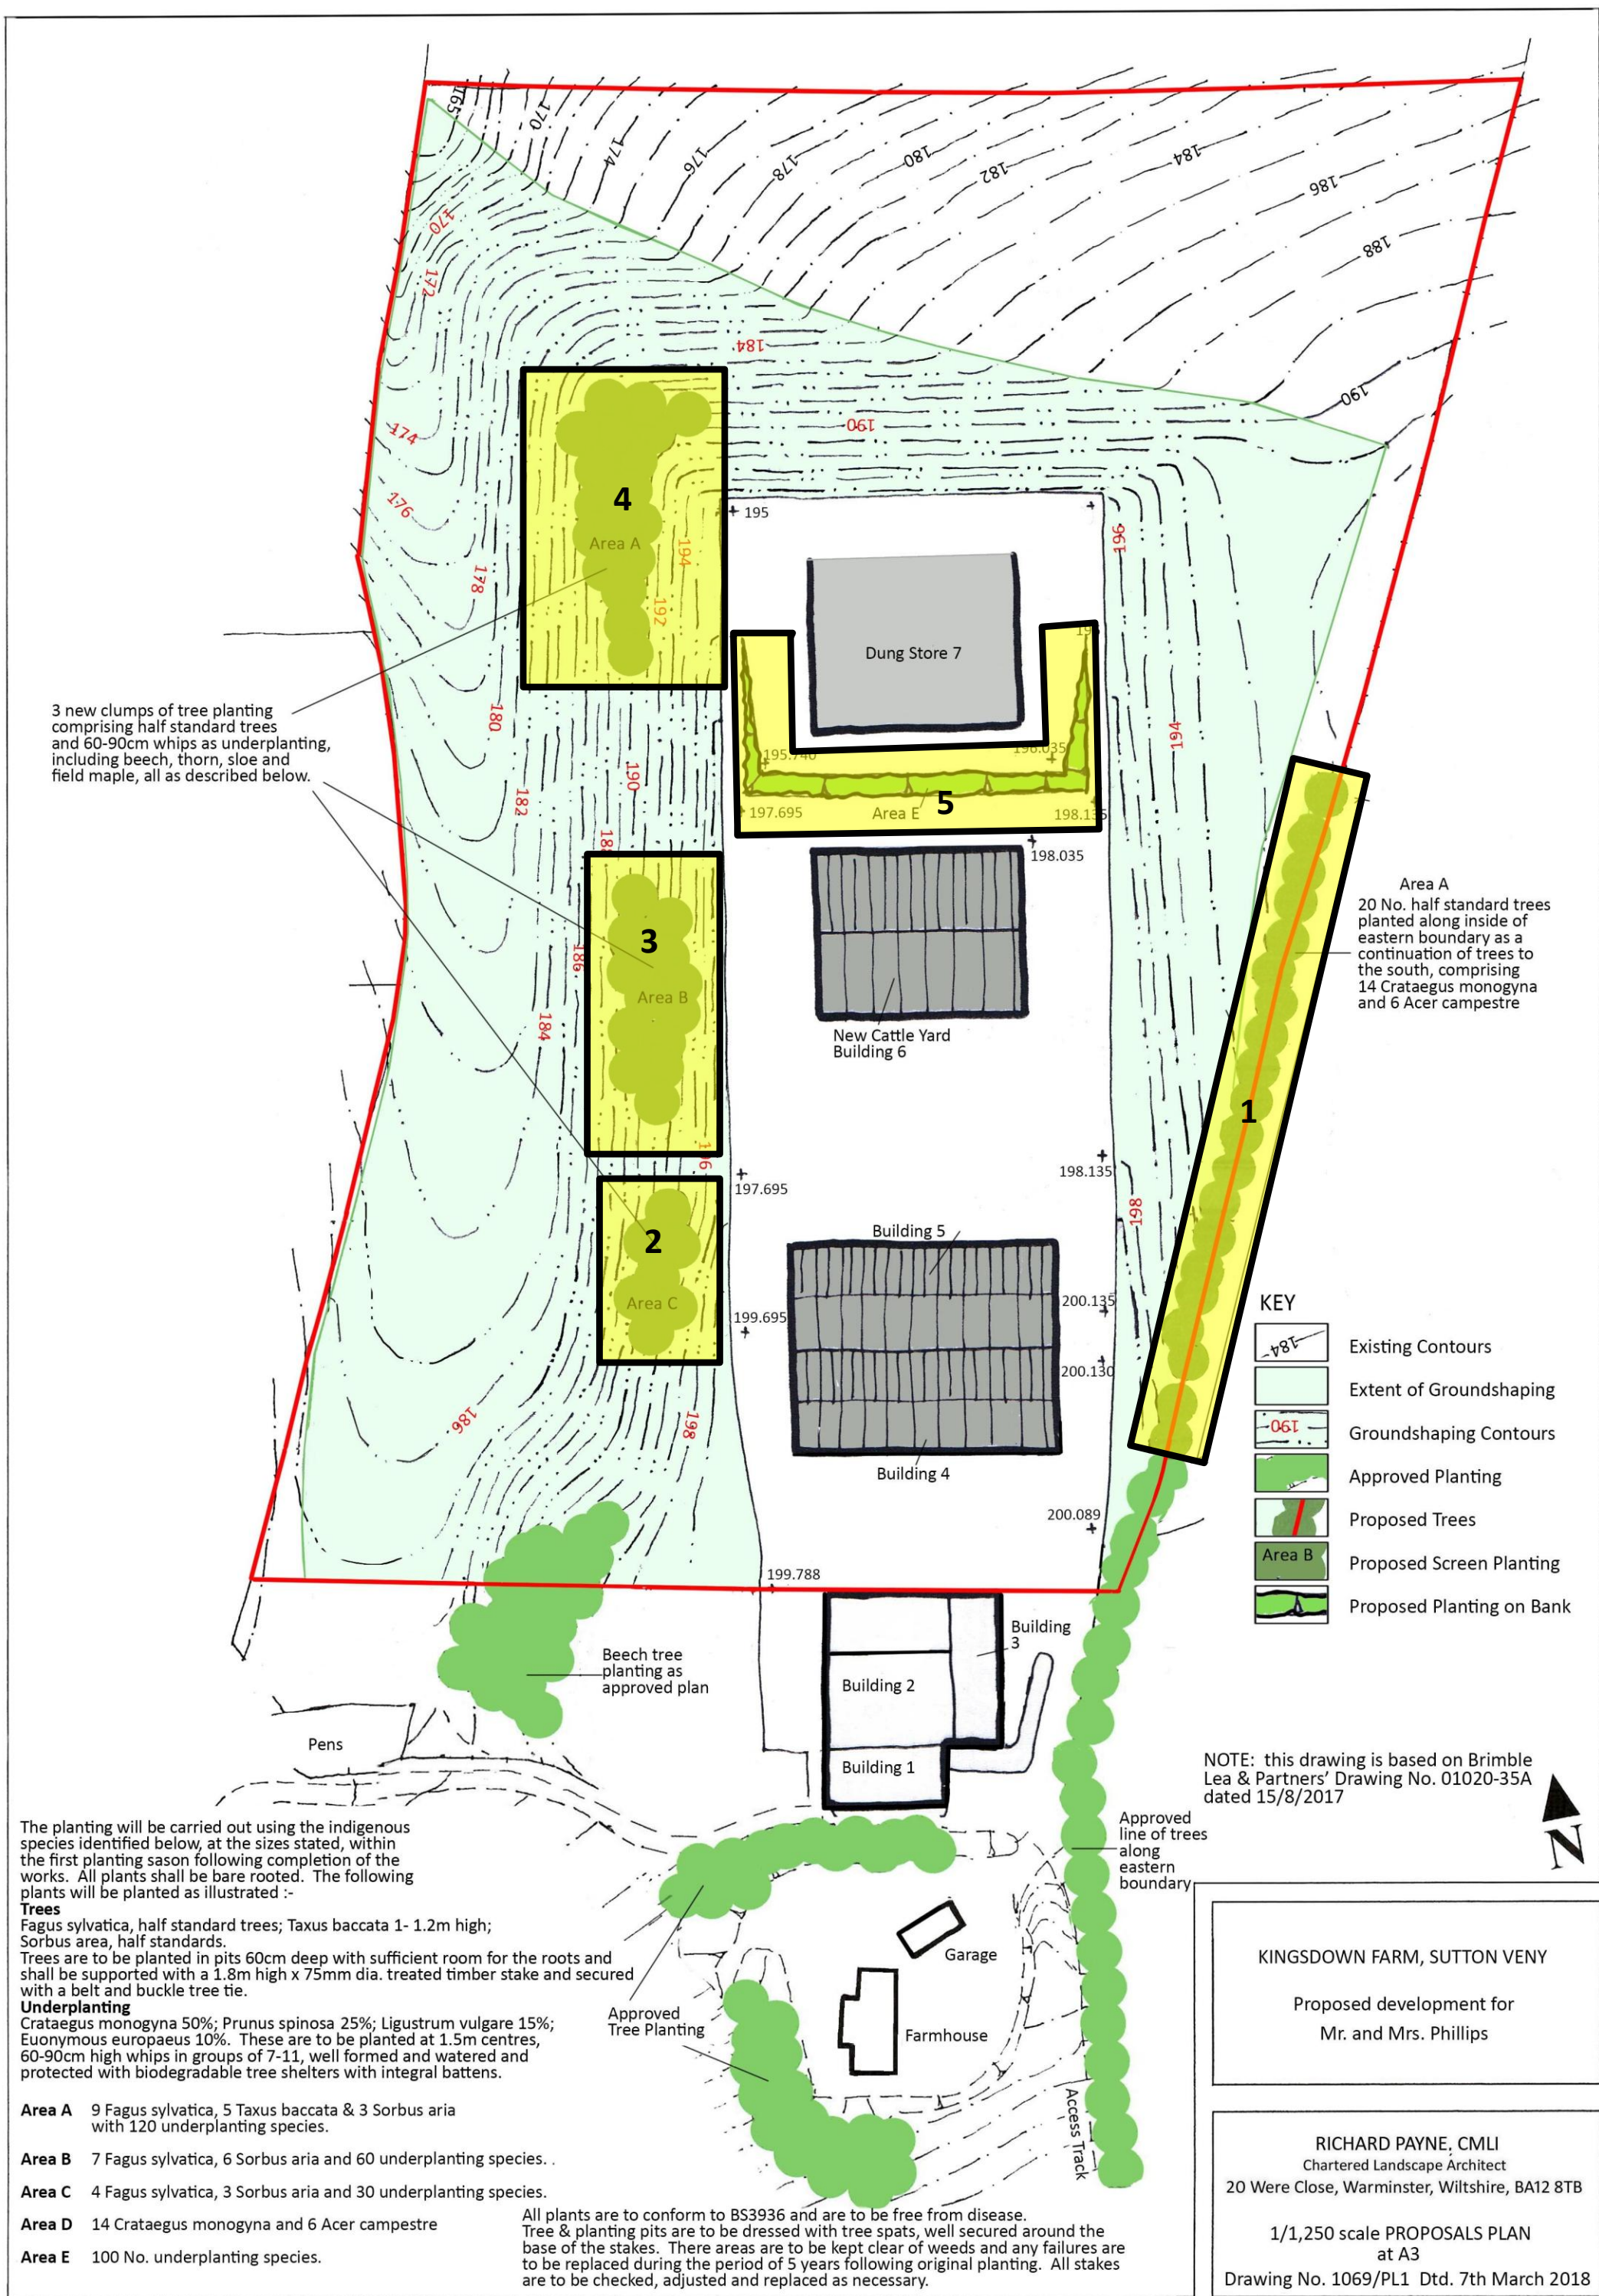

3 new clumps of tree planting comprising half standard trees and 60-90cm whips as underplanting, including beech, thorn, sloe and field maple, all as described below.

Area A
20 No. half standard trees planted along inside of eastern boundary as a continuation of trees to the south, comprising 14 *Crataegus monogyna* and 6 *Acer campestre*

- KEY**
- Existing Contours
 - Extent of Groundshaping
 - Groundshaping Contours
 - Approved Planting
 - Proposed Trees
 - Proposed Screen Planting
 - Proposed Planting on Bank

NOTE: this drawing is based on Brimble Lea & Partners' Drawing No. 01020-35A dated 15/8/2017

The planting will be carried out using the indigenous species identified below, at the sizes stated, within the first planting season following completion of the works. All plants shall be bare rooted. The following plants will be planted as illustrated :-

Trees
Fagus sylvatica, half standard trees; *Taxus baccata* 1- 1.2m high; *Sorbus aria*, half standards.
Trees are to be planted in pits 60cm deep with sufficient room for the roots and shall be supported with a 1.8m high x 75mm dia. treated timber stake and secured with a belt and buckle tree tie.

Underplanting
Crataegus monogyna 50%; *Prunus spinosa* 25%; *Ligustrum vulgare* 15%; *Euonymus europaeus* 10%. These are to be planted at 1.5m centres, 60-90cm high whips in groups of 7-11, well formed and watered and protected with biodegradable tree shelters with integral battens.

- Area A** 9 *Fagus sylvatica*, 5 *Taxus baccata* & 3 *Sorbus aria* with 120 underplanting species.
- Area B** 7 *Fagus sylvatica*, 6 *Sorbus aria* and 60 underplanting species.
- Area C** 4 *Fagus sylvatica*, 3 *Sorbus aria* and 30 underplanting species.
- Area D** 14 *Crataegus monogyna* and 6 *Acer campestre*
- Area E** 100 No. underplanting species.

All plants are to conform to BS3936 and are to be free from disease. Tree & planting pits are to be dressed with tree spats, well secured around the base of the stakes. There areas are to be kept clear of weeds and any failures are to be replaced during the period of 5 years following original planting. All stakes are to be checked, adjusted and replaced as necessary.

KINGSDOWN FARM, SUTTON VENY

Proposed development for
Mr. and Mrs. Phillips

RICHARD PAYNE, CMLI
Chartered Landscape Architect
20 Were Close, Warminster, Wiltshire, BA12 8TB

1/1,250 scale PROPOSALS PLAN
at A3
Drawing No. 1069/PL1 Dtd. 7th March 2018