



Phase 2a Preliminary Ground Investigation Report

Land South of Trowbridge

Report: GCE00644/R2v6

August 2020

GCE00644/ R2v6


Report prepared for: Waddeton Park Ltd
Greendale Court
Clyst St Mary
Exeter
Devon
EX5 1AW

Report Number: GCE00644/R2

Version: 6


Issue Date: January 2021

Report Prepared by: Rebecca Hitt BSc., FGS



.....

Report Revised and Reviewed by: David Jackson BSc., CEng., MICE., FGS



.....

This report is prepared on the instruction of, and for the benefit only of the party to whom it is addressed. The report has been prepared with all reasonable skill, care and due diligence. Geo Consulting Engineering Ltd owes no duty of care in relation to this report to any third party. Geo Consulting Engineering Ltd disclaims any responsibility to the client or others in respect of any matters outside of the agreed scope of works.

Table of Contents

1.0	INTRODUCTION.....	4
1.1	Instruction.....	4
1.2	Background.....	4
1.3	Objectives.....	4
1.4	Methodology.....	5
1.5	Limitations.....	5
2.0	SITE DATA.....	7
2.1	Site Location.....	7
2.2	Site Description.....	7
2.3	Geology.....	9
2.4	Hydrogeology.....	10
2.5	Hydrology.....	10
2.6	Site History.....	10
2.7	Radon.....	11
3.0	GROUND INVESTIGATION.....	12
4.0	INVESTIGATION FINDINGS.....	13
4.1	Ground Conditions.....	13
4.2	Groundwater.....	20
4.3	Ground Gas.....	22
4.4	Chemical Laboratory Analysis.....	31
4.5	Geotechnical Laboratory Analysis.....	31
4.6	Large Scale Infiltration Testing.....	34
4.7	DCP CBR Testing.....	35
4.8	Vacuum Excavation.....	35

5.0	POTENTIALLY CONTAMINATED LAND ASSESSMENT	36
5.1	Source Characterisation.....	36
5.2	Pathways.....	39
5.3	Receptors.....	39
5.4	Pollution Linkages	40
5.5	Waste Assessment	40
6.0	GEOTECHNICAL ASSESSMENT & RECOMMENDATIONS.....	41
6.1	Introduction	41
6.2	Excavation and Groundwater.....	41
6.3	Foundations	42
6.4	Floor Slabs	54
6.5	Buried Concrete	54
6.6	Road Pavement Design	55
7.0	CONCLUSIONS.....	56

FIGURES

APPENDICES

1.0 INTRODUCTION

1.1 Instruction

Geo Consulting Engineering Ltd (GCEL) was instructed by Waddeton Park Ltd to undertake a Phase 2a Preliminary Ground Investigation on the south of Trowbridge, adjacent the A361 (Frome Road).

1.2 Background

The site, currently utilised for agriculture, is being considered for residential development comprising approximately 180 dwellings with associated access, open space and landscaping.

A Phase 1 Desk Study was issued by GCEL in December 2016 (GCE00644/R1). The report covered a larger area than the Phase 2a investigation area, comprising the immediate fields surrounding Southwick Court Farm and split into Zones A to D. The Phase 2a Ground Investigation has targeted the proposed development area in the north only (part of former zones A and D).

1.3 Objectives

A preliminary intrusive investigation is required to provide information on ground and groundwater conditions. Additionally, design information is required to assist with the civil and structural design of the development.

1.4 Methodology

A phased investigation approach has been adopted; the first stage of which is the Phase 1 desk study and walkover survey (completed by GCEL in report GCE00664/R1) for development of site characterisation, conceptual model, and sampling and analysis plan. Subsequently, a Phase 2 preliminary ground investigation has been undertaken comprising trial pits, large-scale infiltration testing, dynamic sampling, groundwater and ground gas monitoring, geotechnical and chemical laboratory testing, largely as per the sampling and analysis plan outlined in the Phase 1 report, but tailored towards the revised site area.

1.5 Limitations

Subsoils are inherently variable and by their very nature are hidden from view such that no investigation can be exhaustive to the extent that all soil conditions are revealed. Conditions may therefore be present beneath the site that were not apparent from the data available for review. Similarly, this assessment has been based in part on third party data. This data has been taken at face value and has not been subjected to any external validation.

Groundwater levels are subject to seasonal variation and therefore may change from the levels recorded during this investigation.

Assessment of asbestos in the ground is outside the scope of our report and expertise. The potential for asbestos or other hazardous or deleterious substances in structures and substructures should be assessed by a competent person.

Unless specifically noted to the contrary, it should be assumed that this report has not been submitted to any regulatory authorities for approval.

GCE00644/ R2v6

Eurocode 7 EN 1997-1:2004 identifies the requirements of a ground investigation report, which shall form part of the Geotechnical Design Report. This document is not a Geotechnical Design Report.

2.0 SITE DATA

2.1 Site Location

The site is located immediately east of the A361 and comprises a band of land south of Trowbridge and north of Southwick Court Farm, BA14 0HD.

The National Grid Reference for the approximate centre of site is ST 84572 55978.

A site location plan is presented in Figure 1.

2.2 Site Description

The site is cut by the Lambrok Stream flowing from south to north, splitting the site into the east side, approximately 12.5ha in size, and the west side, approximately 6.3ha in size.

The land is currently in agricultural use and is traversed by several Public Right of Ways (PROW) and footpaths.

East Side

The east side is being considered for residential development. This area comprises one field and part of the field immediately south, a metal wire fence running north-east south-west containing some small trees separates the two fields. The area is irregular in shape, measuring approximately 585m from east to west and 200m north to south, across the centre lines of the site. Access to the east side was gained through a gate in the south west corner of the field east of Southwick Court Farm. A narrow footbridge is present south east of the property to cross the Lambrok Stream.

West Side

The west side of the site is irregular in shape, measuring approximately 375m from east to west and 180m north to south, across the centre lines of the site. It comprises two grass covered fields, separated by metal wire fencing running north north west to south south east. Access to this side is located along the western site boundary via the private road to the Southwick Court Farm property, a cattle grid is located at the entrance.

The site boundary conditions are as follows:

- North - Mature hedge with residential properties beyond on the east side and fields followed by residential properties on the west side.
- East – Grass covered fields, Axe and Cleaver Lane and Bramble Farm.
- South – Southwick Court Farm and grass covered fields.
- West – A361 road followed by Southwick Court Farm.

The site topography is generally level at roughly 42m AOD. The topography slopes gently down to the north from the access road in the west to the approximate centre of this field where the topography levels out. The west side also slopes very gently down to the west (1.5%).

An area of saturated ground was noted, in the north east of the east side of the stream, this is located approximately above the public water main running north west to south east cross this area. One water trough was present on site, along the fence separating the two fields on the west side of the stream.

Services

A public water main roughly follows the northern boundary of the site, generally between 20 and 25m south of the hedgerow. Another public water main cuts across the far east side of the site trending NNW-SSE.

GCE00644/ R2v6

A medium pressure gas main runs roughly central, west north west to east south east across the site.

Overhead cables are located along the boundary of the south-east corner of the site.

Publicly available utility service plans are attached as Appendix J.

2.3 Geology

Strata	Type	Source of data
Bedrock geology	Jurassic Oxford Clay Formation	British Geological Survey (BGS)
	Jurassic Kellaways Formation	
Superficial drift deposits	None mapped. Head and Alluvial deposits encountered during investigation.	British Geological Survey (BGS)

The geological mapping indicates the western half of site is predominantly underlain by the Jurassic Kellaways Formation, known to consist of sandy mudstones, and the eastern half of the site is mapped as the Oxford Clay Formation, generally mudstones and also of Jurassic age.

No Superficial deposits are mapped across or local to the site but were encountered during the investigation; generally alluvial adjacent the Lambrook Stream and Head deposits across the rest of the site.

2.4 Hydrogeology

The bedrock is classified as an aquitard, and superficial deposits are classed as unproductive strata according to the Envirocheck Database completed as part of the Phase 1 Desk Study.

2.5 Hydrology

The nearest surface water feature is the Lambrok Stream flowing from south to north through the site.

2.6 Site History

The site history derived from the available Ordnance Survey mapping as part of the Envirocheck Report indicates the site has been in agricultural use since at least 1887.

Anecdotal evidence provided to GCEL advised that the moated medieval manor house (now, Southwick Court Farmhouse) was present from 13th to the 14th Century, and rebuilt circa 18th - 17th Century. The southernmost field of the property was mapped as an orchard from 1887 to 1961.

The gatehouse and bridge over the moat at Southwick Court Farmhouse are listed under the Planning (Listed buildings and Conservation Areas) Act 1990 as amended due to special architectural or historic interest. The structures have been Grade 2 listed since 11th September 1968.

A (historic) water meadow is believed to have been present in the north west of the site, adjacent the Lambrok Stream.

GCE00644/ R2v6

Off site, Brick Works are mapped 26m north west of site from 1887. An associated quarry is mapped here from 1890, expansion is mapped in 1924 and 1938, and in 1974 a Haulage depot and Refuse Tip replace the Brick Works. The Tip is labelled disused from 1979. 1999 mapping shows the Tip to be covered and filled. 2006 mapping shows this area has been residentially developed (Spring Meadows), as part of the surrounding residential area of Upper Studley.

The Environment Agency do not have record of first and last waste received, however the types of waste buried are confirmed to be both “inert” and “household”.

An enquiry with the Environment Agency under the Request for information under the Freedom of Information Act 2000 (FOIA) / Environmental Information Regulations 2004 (EIR) detailed the following:

“Site used by the old R.D.C for disposal of household waste prior to 1974. The site was then used by a haulage company during which time rubble was tipped too for a hard standing.”

2.7 Radon

The Phase 1 Desk Study (GCE00644/R1) indicates that no radon protection measures are required in the construction of new dwellings or extensions.

GCE00644/ R2v6

3.0 GROUND INVESTIGATION

The following table summarises the ground investigation methods:

Method	Detail	Remarks
Trial Pitting	16 trial pits were excavated giving a general coverage across the whole site with particular focus on the east side (residential development area).	See Appendix A Investigation Methods, Appendix B Trial Pit Records and Appendix C Trial Pit Photographs. See Figure 2 and Figure 3 for exploratory hole location plans.
Large Scale Infiltration Testing	Four of the 16 trial pits were used for large scale infiltration testing.	See Appendix A Investigation Methods and Appendix E Large Scale Infiltration Results
Dynamic Sampling	Twelve dynamic sample boreholes were undertaken across the whole site. (Two additional boreholes were completed at WS05 and WS06 due to borehole collapse and shallow refusal.	See Appendix A Investigation Methods and Appendix D Borehole Records. See Figure 2 and Figure 3 for exploratory hole location plans.
Monitoring Wells	Ten combined ground gas and groundwater monitoring wells were installed in the dynamic sampling boreholes using 50mm diameter standpipes and completed with a flush cover. This enabled groundwater and ground gas monitoring to assess groundwater rest levels and to investigate the north west landfill as a potential source of ground gas.	See Appendix F Ground Gas and Groundwater Monitoring Results.
Chemical analysis	- 20No. soil samples were analysed for a generic suite comprising metals/ metalloids, pH soil, Soluble Sulphate, Poly Aromatic Hydrocarbons (PAH), Banded Petroleum Hydrocarbons (TPH), and Fraction of Organic Carbon and Asbestos ID. - 2No. samples were analysed for a combined pesticide suite comprising organophosphorus and organochlorine.	See Appendix G Chemical Laboratory Results.
Geotechnical testing	- 60No. Moisture Content - 5No. Plasticity Index tests - 6No. BRE SD1 suite	See Appendix H Geotechnical Laboratory Results
Dynamic Cone Penetrometer (DCP)	8No. DCP tests were undertaken along the road alignment across the site.	See Appendix I for DCP Test Results
Vacuum Excavation	Inspection Pits were excavated at six locations using a track mounted vacuum rig to locate the medium pressure gas main.	Results in Appendix K on drawing GCE00644-Fig A.

4.0 INVESTIGATION FINDINGS

4.1 Ground Conditions

The following table summarises the depths and thicknesses of the strata identified in the sixteen trial pits and ten dynamic sampling boreholes:

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)					
		TP01	TP02	TP03	TP04	TP05	TP06
Topsoil / Subsoil		GL – 0.25	GL – 0.30	GL – 0.36	GL – 0.25	GL – 0.30	GL – 0.35
Superficial deposits	Stiff to very stiff, grey brown, gravelly, sandy silty CLAY				0.25 – 0.50		
	Stiff to very stiff mottled yellow brown and light grey (slightly sandy) silty CLAY	0.25 – 1.60	0.30 – 0.92		0.50 – 1.00	0.30 – 0.60	0.35 – 0.45
	Firm to stiff mottled blue grey/purple and yellow brown (slightly gravelly, slightly sandy) silty CLAY			0.36 – 1.50		0.60 – 1.30	0.45 – 1.30
	Stiff, yellow brown and blue grey slightly gravelly, sandy silty CLAY				1.00 – 1.50		
	Grey mottled yellow silty SAND	1.60 – 2.00					
	Grey brown, sandy, silty GRAVEL	2.00 – 2.90					
	Soft, blue-grey, slightly sandy slightly gravelly clayey SILT		0.92 – 1.40				
Completely weathered Kellaways Formation	Firm to stiff light blue grey/purple grey mottled yellow brown, silty CLAY			1.50 – 1.60		1.30 – 1.50	
	Stiff, blue/purple grey/dark grey, slightly sandy, silty CLAY (loc. shelly debris and relic structure and lithorelics, gypsum crystal and sandy lenses and occ. decaying root)				1.50 – 2.00	1.50 – 3.50	1.30 – 1.60
	Extremely weak dark purple grey MUDSTONE/SILTSTONE/SHALE (with occ. shelly debris)						1.60 – 3.20
	Very stiff, dark blue grey CLAY	2.90 – 3.10					

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)					
		TP07	TP08	TP09	TP10	TP11	TP12
Topsoil / Subsoil		GL – 0.25	GL – 0.28	GL – 0.30	GL – 0.25	GL – 0.25	GL – 0.25
Superficial deposits	Stiff to very stiff mottled yellow brown with grey slightly sandy, (slightly gravelly) silty CLAY	0.25 – 0.50	0.28 – 0.56	0.30 – 0.55	0.25 – 0.80	0.25 – 0.60	0.25 – 0.50
	Firm to stiff mottled blue grey/purple and yellow brown (slightly gravelly, slightly sandy) silty CLAY					0.60 – 1.20	0.50 – 1.50
	Stiff, blue/purple grey mottled yellow brown, silty CLAY	0.50 – 1.60	0.56 – 1.50		0.80 – 1.40		
	Soft to firm blue-grey, locally sandy silty CLAY			0.55 – 1.50			
Completely weathered Kellaways Formation	Firm to stiff light blue grey/purple grey mottled yellow brown, (slightly sandy) silty CLAY (<i>loc. marine algae</i>)	1.60 – 2.80		1.50 – 2.10		1.20 – 1.80	
	Stiff, blue/purple grey/dark grey, slightly sandy, silty CLAY (<i>loc. shelly debris and relic structure and lithorelics, gypsum crystals, loc. marine algae and sandy lenses</i>)	2.80 – 3.80	1.50 – 2.80	2.10 – 3.50	1.40 – 2.80	1.80 – 2.00	1.50 – 3.30
	Extremely weak dark purple grey MUDSTONE/SILTSTONE/SHALE (<i>with occ. shelly debris</i>)		2.80 – 3.75	3.50 – 3.85	2.80 – 3.00	2.00 – 2.80	

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)			
		TP13	TP14	TP15	TP16
Topsoil / Subsoil		GL – 0.40	GL - 0.30	GL – 0.40	GL – 0.60
Superficial Deposits	Stiff, yellow brown with grey brown, gravelly, sandy silty CLAY		0.30 – 0.70	0.40 – 0.70	
	Stiff yellow brown gravelly, sandy, silty CLAY with cobbles	0.40 – 0.65			0.60 – 1.10 / 1.40
	Firm, locally soft mottled blue grey/purple and yellow brown (slightly gravelly, slightly sandy) silty CLAY	0.65 – 1.50	0.70 – 1.30		
	Stiff to very stiff, light blue grey mottled yellow brown, slightly gravelly, slightly sandy, silty CLAY			0.70 – 1.50	
Completely weathered Kellaways Formation	Firm purple grey mottled yellow brown, (slightly sandy) silty CLAY (loc. marine algae)	1.50 – 2.10			
	Stiff to very stiff, light blue/purple grey mottled yellow brown, sandy silty CLAY		1.30 – 1.70		1.10 / 1.40 – 2.80
	Stiff, blue/purple grey/dark grey, slightly sandy, silty CLAY (loc. shelly debris and relic structure and lithorelics, gypsum crystals, loc. marine algae and sandy lenses)	2.10 – 2.90	1.70 – 3.80	1.50 – 2.20	2.80 – 3.70
	Extremely weak dark purple grey MUDSTONE/SILTSTONE/SHALE (with occ. shelly debris)	2.90 – 3.50		2.90 – 3.00	

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)					
		WS01	WS02	WS03	WS04	WS05	WS05A
Topsoil / Subsoil		GL – 0.28	GL – 0.25	GL – 0.26	GL – 0.28	GL – 0.26	GL – 0.24
Superficial deposits	Firm, brown slightly sandy, slightly gravelly silty CLAY	0.28 – 0.56					
	Stiff to very stiff brown mottled light brown slightly sandy (slightly gravelly) silty CLAY	0.56 – 1.05	0.25 – 1.05	0.26 – 1.17	0.28 – 1.15	0.26 – 0.78	0.24 – 0.80
	Soft, orange brown and brown, slightly sandy, (slightly gravelly) silty CLAY		1.05 – 4.27		1.15 – 2.00		0.80 – 1.05
	Very soft, orange brown and grey, sandy silty CLAY				2.00 – 2.63		
	Firm brown and grey, slightly sandy silty CLAY		4.27 – 4.57			0.78 – 1.17	
	Stiff, grey and orange brown (slightly gravelly), sandy silty CLAY	1.05 – 2.70				1.17 – 1.81	
	Grey brown, sandy, silty GRAVEL				2.63 – 3.51		1.05 – 1.30
Completely weathered Kellaways Formation	Stiff to very stiff, brown becoming dark grey, slightly sandy, silty CLAY (loc. shelly debris and relic structure and lithorelics, gypsum crystal and sandy lenses)	2.70 – 5.45	4.57 – 5.45	1.17 – 5.40	3.51 – 5.00	1.81 – 4.45	
	Extremely weak dark purple grey MUDSTONE/SILTSTONE/SHALE (with occ. shelly debris)			5.40 – 5.45			

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)					
		WS06	WS06A	WS07	WS08	WS09	WS10
Topsoil / Subsoil		GL – 0.22	GL – 0.20	GL – 0.21	GL – 0.18	GL – 0.28	GL – 0.24
Superficial deposits	Stiff to very stiff brown mottled light brown (with grey) slightly sandy (slightly gravelly) silty CLAY	0.22 – 1.28	0.20 – 0.42	0.21 – 0.72	0.18 – 0.49	0.28 – 1.00	0.24 – 1.10
	Soft, orange brown and brown with grey, slightly sandy, (slightly gravelly) silty CLAY			0.72 – 1.33		1.00 – 1.34	
	Firm brown and grey, silty CLAY				0.49 – 1.34		
	Stiff, orange brown and grey (locally sandy) silty CLAY	1.28 – 1.95	0.42 – 1.00	1.33 – 1.90			
	Stiff, locally firm, orange brown and grey (locally sandy) silty CLAY		1.00 – 1.83				
	Grey brown, sandy, silty GRAVEL			1.90 – 2.50			
Completely weathered Kellaways Formation	Stiff to very stiff, brown becoming dark grey, slightly sandy, silty CLAY (loc. shelly debris and relic structure and lithorelics, gypsum crystals and sandy lenses)	1.95 – 5.45	1.83 – 2.10	2.50 – 3.00	1.34 – 4.70	1.34 – 5.45	1.10 – 3.40
	Extremely weak dark purple grey MUDSTONE/SILTSTONE/SHALE (with occ. shelly debris)						3.40 – 3.45
	COBBLE of sandstone		2.10 – 2.35				

Topsoil (to include Subsoil)

Topsoil and subsoil were encountered in all exploratory holes to depths ranging from 0.18m to 0.60m, typically comprising dark brown sandy silty clay with rootlets.

Superficial deposits

Varying strata were encountered overlying the weathered bedrock, predominantly Head deposits and Alluvium to a maximum depth of 4.57m bgl and 2.50m bgl respectively.

Alluvial deposits were generally situated on the west side of the site, near to the Lambrook Stream, however gravels of sub-rounded limestone and chert/flint were seen to extend across to WS07 to a depth of 2.50m bgl.

Head deposits were typically light brown mottled grey silty CLAYs, locally sandy and gravelly, with occasional rootlets. They lacked structure and were generally less competent.

Completely weathered Kellaways Clay Formation / Oxford Clay Formation

Underlying the Head was a weathered profile of Jurassic clays of the Kellaways and Oxford Clay formations. The sequence was relatively consistent across the site comprising grey silty CLAYs, weathered to become mottled yellow brown in places, grading into generally darker, purple grey/dark blue grey or dark grey silty CLAYs with relic structure and lithorelics.

Shelly debris was encountered in varying abundance, and shells were often less fragmented at depth, seen between layers in mudstone/siltstone. A white powdery silt dusting was noted in places, generally encountered as localised veins, interpreted to be calcite. Gypsum crystals were seen in varying sizes and abundance, ranging from localised medium sand sized crystals to up to 6cm long, prismatic crystals. These were encountered in eight trial pits in the east field. Fossil organic matter was locally abundant within the silty CLAYs across the site, seen as paleo-roots and marine algae, described

GCE00644/ R2v6

as red, fine and dendritic. Marine algae was recorded in four trial pits in the east field, and always partnered with gypsum crystals in the soils.

Silty clays became closely fractured MUDSTONE/SILTSTONE and CARBONACEOUS SHALE with depth. SANDSTONE was encountered in WS06A only, as a cobble at 2.10m, this is interpreted to be a part of the weathered bedrock due to the shelly debris in the strata above.

4.2 Groundwater

Groundwater was encountered in seven trial pits; TP01, TP02, TP04 - TP07 and TP11. Water ingress was seen in TP11 and TP06 only between 2.60m and 3.20m below ground level respectively. Strata were wet from as shallow as 0.92m bgl (TP02).

Groundwater was encountered in five of the dynamic sample boreholes when initially drilled between 1.05m bgl and 3.00m bgl, as well as in fissures between 3.26 and 3.78m bgl in WS02. Standpipes were installed in each borehole for long term groundwater monitoring. The following table shows the water depths below ground level (bgl) recorded:

GCE00644/ R2v6

Rest groundwater monitoring results

Hole ID	Water strike during drilling (27/07/2017 + 28/07/2017)	Base depth of well (m bgl)	Groundwater Level (m bgl)					
			08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
WS01	NE	4.97	0.90	0.77	0.75	0.67	0.70	0.59
WS02	3.26**	4.85	3.68	3.74	3.81	3.89	3.99	3.85
WS03	3.00	5.03	4.82	4.50	4.06	2.20	3.45	3.27
WS04	2.00	2.93	2.25	2.32	2.39	2.40	2.51	2.31
WS05	NE	3.69	Dry	3.32	2.60	1.72	1.45	1.10
WS06	NE	4.92	1.10	1.11	1.12	1.09	1.15	1.08
WS07	1.90	2.86	0.90	0.82	0.87	0.84	0.93	0.70
WS08	NE	4.60	-	1.10	1.02	0.94	0.92	0.76
WS09	NE	4.95	4.32	3.25	2.15	1.06	1.11	1.93
WS10	NE	3.02	2.56	2.10	1.67	1.56	1.57	1.60

* NE = Not encountered

** Groundwater encountered in fissures between 3.26m bgl and 3.68 m bgl.

4.3 Ground Gas

Six ground gas monitoring visits have been completed in order to measure the concentration of: methane, carbon dioxide, oxygen, carbon monoxide, hydrogen sulphide and flow rate.

The results of the methane, carbon dioxide, oxygen and gas flows are given in the following tables:

GCE00644/ R2v6

Parameter	WS01					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.10 / 0.00	0.00 / 0.00	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	2.50 / 2.50	0.90 / 0.40	0.50 / 0.50	2.20 / 2.20	3.40 / 3.20	3.60 / 3.60
Oxygen (%)	18.60 / 18.40	19.90 / 19.90	20.40 / 20.70	20.00 / 19.90	19.80 / 19.00	18.20 / 18.00
Gas Flow (l/h)	12.20 / 9.10 (60s)	0.00 / 0.00	-0.10 / -0.10	4.60 / 3.30 (60s)	-0.90 / -0.70 (60s)	9.40 / 5.80 (60s)
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

Parameter	WS02					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	2.50 / 2.50	2.60 / 2.60	2.60 / 2.60	2.80 / 2.80	3.00 / 3.00	3.20 / 3.20
Oxygen (%)	19.40 / 19.40	19.50 / 19.40	18.60 / 18.60	18.60 / 18.60	19.00 / 18.90	18.30 / 18.20
Gas Flow (l/h)	0.00 / 0.00	-0.10 / -0.10	0.00 / 0.00	-0.10 / -0.10	-0.10 / 0.00	0.00 / 0.00
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

GCE00644/ R2v6

Parameter	WS03					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	2.10 / 2.10	2.10 / 2.10	1.90 / 1.90	1.60 / 1.60	1.10 / 1.10	1.10 / 1.10
Oxygen (%)	18.90 / 18.90	18.70 / 18.70	19.10 / 19.10	19.50 / 19.50	20.60 / 20.60	20.30 / 20.30
Gas Flow (l/h)	0.00 / 0.00	-0.10 / -0.10	0.00 / 0.00	0.10 / 0.10	0.00 / 0.00	0.10 / 0.10
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

Parameter	WS04					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.20 / 0.20	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	1.10 / 0.60	0.80 / 0.40	0.80 / 0.20	1.80 / 1.70	1.40 / 1.10	1.00 / 0.30
Oxygen (%)	20.80 / 20.80	20.90 / 20.90	20.20 / 20.70	19.90 / 19.90	20.80 / 20.80	21.60 / 21.60
Gas Flow (l/h)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.10 / 0.10	0.10 / 0.10	0.20 / 0.20
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

Parameter	WS05					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.10 / 0.00	0.10 / 0.00
Carbon Dioxide (%)	3.00 / 3.00	1.80 / 1.80	2.30 / 2.30	1.60 / 1.60	1.20 / 1.20	1.00 / 1.00
Oxygen (%)	18.80 / 18.80	20.30 / 20.30	19.70 / 9.80	20.60 / 20.60	21.10 / 21.10	21.80 / 21.80
Gas Flow (l/h)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.20 / 0.20	0.10 / 0.10	-0.10 / -0.10
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

Parameter	WS06					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.20 / 0.20	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	2.50 / 2.50	2.00 / 2.00	1.70 / 1.70	2.00 / 2.00	2.10 / 2.10	2.20 / 2.20
Oxygen (%)	18.80 / 18.80	20.00 / 20.00	19.20 / 19.20	19.90 / 19.80	19.70 / 19.60	20.20 / 20.20
Gas Flow (l/h)	3.20 / 2.00 (60s)	0.00 / 0.00	-0.30 / -0.20	2.60 / 1.60 (60s)	-0.90 / -0.40 (60s)	3.40 / 2.40
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

Parameter	WS07					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	1.30 / 1.30	1.70 / 1.70	1.60 / 1.60	1.70 / 1.70	1.60 / 1.60	2.10 / 2.10
Oxygen (%)	20.30 / 20.20	19.90 / 19.80	19.70 / 19.50	19.70 / 19.60	20.50 / 20.10	20.50 / 20.40
Gas Flow (l/h)	5.60 / 4.1 (60s)	3.90 / 3.00 (60s)	-4.60 / -3.20	2.00 / 2.00	-6.20 / -4.20 (60s)	10.20 / 7.60 (60s)
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

Parameter	WS08					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)		0.00 / 0.00	0.00 / 0.00	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	-	2.70 / 2.70	2.60 / 2.60	4.10 / 4.10	3.60 / 3.50	4.70 / 4.70
Oxygen (%)	-	19.00 / 19.00	18.70 / 18.60	18.30 / 18.20	17.60 / 17.60	18.70 / 18.70
Gas Flow (l/h)	-	4.40 / 3.40 (60s)	4.80 / 3.00	9.70 / 4.70 (60s)	5.40 / 1.60 (60s)	11.20 / 6.00 (60s)
Atmospheric Pressure (mb) [Start / End of day]	-	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

GCE00644/ R2v6

Parameter	WS09					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.20 / 0.20	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	6.30 / 6.20	6.60 / 6.60	5.50 / 5.40	4.50 / 4.50	4.50 / 4.40	3.40 / 3.40
Oxygen (%)	15.10 / 15.10	15.40 / 15.40	16.50 / 16.40	17.90 / 17.80	18.60 / 18.60	20.00 / 20.00
Gas Flow (l/h)	0.00 / 0.00	0.00 / 0.00	-0.10 / 0.00	5.70 / 4.40 (60s)	-2.70 / 1.50 (60s)	5.00 / 3.50 (60s)
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

Parameter	WS10					
	[Peak / Steady State]					
	08/08/2017	18/08/2017	04/09/2017	27/09/2017	17/10/2017	10/11/2017
Methane (%)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.10 / 0.10	0.10 / 0.10	0.10 / 0.10
Carbon Dioxide (%)	3.40 / 3.40	2.60 / 2.60	1.90 / 1.90	1.60 / 1.60	1.60 / 1.60	1.90 / 1.90
Oxygen (%)	18.80 / 18.80	20.20 / 20.20	19.50 / 19.50	19.20 / 19.20	20.60 / 20.60	20.10 / 20.00
Gas Flow (l/h)	0.00 / 0.00	0.00 / 0.00	0.00 / 0.00	0.20 / 0.1	0.40 / 0.40	0.30 / 0.30
Atmospheric Pressure (mb) [Start / End of day]	1008 / 1009	1006 / 1009	1008 / 1010	1008 / 1010	1016/1017	1018/1019

GCE00644/ R2v6

Gas monitoring shows a relatively consistent trend across nine of the ten monitoring wells with little or no methane and carbon dioxide typically at 2% to 3%. The exception to this occurs in WS09 where, again, no significant methane was recorded but carbon dioxide was higher than the “norm” for the site at 4.5% to 6.6%. The NHBC traffic light system for assessing ground gas uses a trigger level of 5% Carbon Dioxide as the step between their “Green” and “Amber 1” categorisations. Taking the gas flow readings and measured levels a Gas Screening Value (GSV) can be calculated to better characterise the risk.

The table below shows the gas screening values for carbon dioxide in WS09 for the monitoring visits which have recorded elevated typical maximum concentration values (%). The final three monitoring visits have not recorded carbon dioxide exceeding 5%.

Date	08/08/2017	18/08/2017	04/09/2017
Gas screening value (l/hr)	0.63	0.66	0.06

These results confirm the GSVs allocated for a worst-case ground gas regime to sit within the Green NHBC traffic light classification noting that the total gas concentrations fall into Amber 1. A further six monitoring visits are recommended during the wet winter period in order to better characterise the trend of carbon dioxide concentrations in WS09 as well as WS08 which has encountered a maximum carbon dioxide concentration of 4.7%. If measurements continue to exceed 5%, consideration should be given to the installation of a further four wells around WS09 in an attempt to delineate the extent of the anomalous area. The further monitoring and any associated works should be addressed as a condition to any planning permission, being a matter that will influence design detail rather than any fundamental viability.

Borehole flow rate across the site is interpreted to be heavily affected by the shallow groundwater encountered in the wells. The groundwater fluctuation creates a “piston effect” within the standpipe, due to the metre of plain piping below the surface, which

GCE00644/ R2v6

traps air until released by the gas tap. Consequently, the initial flow reading and subsequent decline recorded during gas monitoring visits are not deemed to be representative of the actual borehole flow rate. Accordingly, a more representative peak flow value of 0.20l/hr is used to calculate site-wide GSVs, as this marks the highest non-groundwater affected flow rate recorded to date.

Carbon Dioxide and methane GSVs do not exceed the Green NHBC traffic light classification when using the representative site-flow rate of 0.20l/hr.

Carbon monoxide was recorded in minor concentrations and therefore not deemed to be of concern.

Volatile vapour levels within the boreholes were measured during one of the monitoring visits using a Photo Ionisation Detector (PID). A peak and steady reading were recorded for each borehole, steady readings were recorded after 1 minute of stabilization.

The following table summarises the peak and steady results recorded across six monitoring visits.

GCE00644/ R2v6

Location	08/08/2017		18/08/2017		04/09/2017		27/09/2017		17/10/2017		10/11/2017	
	Peak (ppm)	Steady (ppm)	Peak (ppm)	Steady (ppm)	Peak (ppm)	Steady (ppm)	Peak (ppm)	Steady (ppm)	Peak (ppm)	Steady (ppm)	Peak (ppm)	Steady (ppm)
WS01	1.50	1.40	0.00	0.00	0.00	0.00	0.40	0.10	0.00	0.00	0.00	0.00
WS02	0.20	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WS03	0.60	0.30	0.50	0.40	0.00	0.00	0.10	0.10	0.10	0.10	0.00	0.00
WS04	0.10	0.10	0.20	0.20	0.00	0.00	0.30	0.30	0.00	0.00	0.00	0.00
WS05	0.40	0.30	0.00	0.00	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WS06	0.40	0.30	1.60	1.60	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00
WS07	0.00	0.00	0.00	0.00	0.20	0.20	0.00	0.00	0.00	0.00	0.00	0.00
WS08	-	-	0.00	0.00	1.80	0.50	0.00	0.00	0.00	0.00	0.00	0.00
WS09	0.70	0.70	0.80	0.60	0.80	0.70	0.00	0.00	0.00	0.00	0.00	0.00
WS10	0.0	0.0	0.00	0.00	0.60	0.60	0.30	0.30	0.20	0.20	0.00	0.00

None of the measured levels are considered to be of significance.

4.4 Chemical Laboratory Analysis

The following provides a summary of the chemical laboratory analysis findings:


Preliminary soil testing:

- One sample (TP09 at 0.10m) exceeds both the NBC and residential S4UL for Mercury at 16mg/kg. Total Petroleum Hydrocarbons (TPHs) were below the laboratory Limit of Detection (LoD) in twenty samples.
- Minor detections of Polycyclic Aromatic Hydrocarbons (PAHs) were recorded in one sample (TP05 at 0.20m bgl). Total PAH for this sample was <2.0 mg/kg, and concentrations are below the S4UL.
- The pH from fifteen samples ranged from 4.0 to 7.5 indicating slightly acidic conditions. The two samples with the lowest pH (4.0 and 4.7) were both collected from 1.90m in the Kellaways Formation, but there is no clear correlation between depth and pH.
- All determinands within the pesticide suite were below the LoD.
- No asbestos in soils was detected in twenty samples tested.

4.5 Geotechnical Laboratory Analysis

The moisture content ranged from 0% to 50% with a mean value of 27%. The following chart presents moisture content values versus depth:

GCE00644/ R2v6

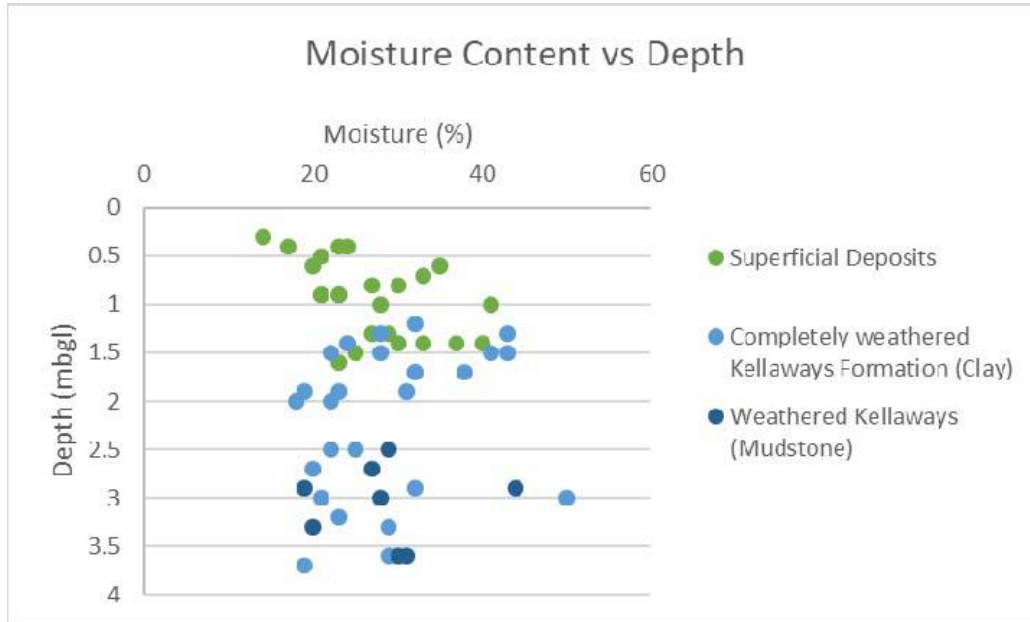

- The graphs show a trend of decreasing moisture content with depth in the completely weathered Kellaways Formation.
- An increase in moisture content with depth is generally noted in the Superficial Deposits.
- There is no clear trend between moisture content and depth in the weathered Kellaways Formation.

Five samples were tested for Plasticity Index (PI). Results from these analyses are presented in the following table. The table also provides natural moisture content (Wn%), Liquid Limit (LL), Plastic Limit (PL), modified Plasticity Index (PI mod), equivalent moisture content (We%), Liquidity Index (LI) and Consistency Index (CI):

GCE00644/ R2v6

TP	Depth	Wn%	LL%	PL%	PI	%pass 0.425	PI mod	We%	LI	CI
TP01	0.9	23	58	26	32	100	32	23	-0.09	1.09
TP02	1.3	29	53	24	29	100	29	29	0.17	0.83
TP03	1.5	41	66	34	32	100	32	41	0.22	0.78
TP05	2.5	25	61	27	34	100	34	25	-0.06	1.06
TP12	3	50	86	47	39	100	39	50	0.08	0.92

The modified Plasticity Index (PI_{mod}) indicates the fine-grained soils are clays of high to very high plasticity with a medium volume change potential as defined by NHBC.

The Consistency Index (CI) indicates a stiff to very stiff consistency fine grained soil.

The low to medium Liquid Index (LI) suggests the soils tested are within a semi plastic to plastic state.

Four samples were tested for pH, total sulphate, soluble sulphate and total sulphur (BRE SD1 Suite):

	TP05	TP05	TP08	TP09	TP09	TP13
Depth (m bgl)	0.40	3.40	2.90	0.80	1.70	1.90
pH	7.11	7.08	7.66	7.91	7.88	7.53
Total Sulphur (%S)	0.08	0.13	0.09	6.21	2.92	0.45
Total Potential Sulphate (%SO₄)	0.24	0.39	0.27	18.63	8.76	1.35
Oxidisable sulphides (OS as %SO₄)	0.01	-0.14	-0.02	0.3	0.02	0.03

By calculating an approximate concentration of oxidisable sulphides, pyrite is not likely to be present in the ground at this site.

4.6 Large Scale Infiltration Testing

Large scale infiltration tests were carried out in TP01-TP04. The tests were undertaken in general accordance with BRE 365. The BRE approach uses the time taken for the water levels to fall from 75% effective depth to 25% effective depth; effective depth being the depth between invert level or water level at the start of the test and the base of the soakaway or test pit.

Each infiltration test pit was left to run for almost 24 hours.

The tables below summarise the results recorded:

Trial Pit	Depth (m bgl)	No. of tests	Time	Start Depth of water (m bgl)	Final Depth of water (m bgl)
TP02	1.40	1	29hr 52min	0.26	1.11
TP03	1.6	1	28hr 32min	0.21	0.47
TP04	2.0	1	27hr 31min	0.7	0.72

Trial Pit	Depth (m bgl)	Number of Tests	Infiltration Rate (m/s)		
			Test 1	Test 2	Test 3
TP01	2.1	3	1.37×10^{-5}	8.01×10^{-6}	6.48×10^{-6}

Groundwater was encountered between 1.60 and 2.10m in TP01.

Based on the results from the four large scale infiltration tests, soakaway drainage is unlikely to be viable on a widespread basis at this site although localised areas could be found where infiltration drainage could be considered.

4.7 DCP CBR Testing

In-situ Dynamic Cone Penetrometer (DCP) CBR tests were undertaken at eight locations along the proposed road alignment. The results calculate a minimum CBR value of 2.60%. The lowest results were recorded in DCP 6 and DCP 7.

The table below summarises the results calculated below the topsoil at each location.

	CBR values (%)	
	Min	Max
DCP1	5.46	15.43
DCP2	4.37	8.15
DCP3	7.05	7.41
DCP4	5.03	48.18
DCP5	4.92	30.81
DCP6	2.60	5.88
DCP7	2.76	4.41
DCP8	4.69	5.40

Full DCP CBR test results are attached as Appendix I.

4.8 Vacuum Excavation

A medium pressure gas main traverses the site. Confirmation of the location and depth was requested by the utility owner, Wales & West, to back-up the earlier ground radar survey which identified an alignment but could not confirm the depth to the pipe. Following an unsuccessful attempt to hand dig onto the pipe on 27th June 2020, a track-mounted vacuum excavation rig was mobilised to site on 13th July 2020 and over two days exposed the gas main at seven locations, as shown on Figure GCE00644-Fig A in Appendix J.

5.0 POTENTIALLY CONTAMINATED LAND ASSESSMENT

5.1 Source Characterisation

The assessment of potentially contaminated land is based on source-pathway-receptor pollutant linkages. The following source characterisation, based on the chemical analysis, provides a basis for assessing the significance of potential pollutant linkages. The Normal Background Concentrations (NBC) based on the principal domain and the LQM/CIEH suitable for use levels (S4UL) values have been used to provide comparative screening values for residential development with home-grown produce. This provides a stringent first tier screening assessment. Results that exceed these levels require assessment in relation to the site-specific conditions prior to determining whether a potential pollutant linkage exists.

The LQM/CIEH S4ULs are subject to 'Copyright Land Quality Management Limited' reproduced with permission' Publication Number S4UL3432.

Soils - metals

Twenty soil samples were analysed for a generic suite of metals/metalloids:

Determinand	Number of samples >LOD	Minimum mg/kg	Maximum mg/kg	Max>NBC	Max>S4UL
Arsenic	20	3.8	21	No	No
Cadmium	16	0.1	0.89	No	No
Chromium	20	21	43	NA	No
Copper	20	7	23	No	No
Mercury	2	0.12	16	Yes	Yes
Nickel	20	10	130	Yes	No
Lead	20	11	56	No	NA
Selenium	1	0.3	0.3	NA	No
Zinc	19	4.7	440	NA	No

GCE00644/ R2v6

The above table shows all metal/metalloid concentrations fall below the residential S4UL, with the exception of Mercury. One sample (TP09 at 0.10m) exceeds both the NBC and residential S4UL, further statistical analysis gives the following results:

Determinand	US95 Value	Sample Mean	Suitable 4 Use Level (S4UL)	Statistical outliers?
	(mg/kg)			
Mercury	4.33	0.851	1.2	Yes

Further statistical analysis calculates a US95 value of 4.33mg/kg which still exceeds the S4UL, the sample mean of the 20 results is 0.85mg/kg which is below the S4UL.

The analysis identifies the elevated Mercury result as a statistical outlier; when removing the outlier from the dataset, the following results are calculated.

Determinand	US95 Value	Sample Mean	Suitable 4 Use Level (S4UL)	Statistical outliers?
	(mg/kg)			
Mercury	0.07	0.05	1.2	Yes

The elevated Mercury concentration of 16mg/kg is not deemed to be representative of the dataset as a whole, as demonstrated by the significant difference in the two US95 values calculated above. As such, further sampling of the topsoil in the eastern field, targeting the area around TP09, is recommended in order to confirm the result as anomalous. A sample tested from 0.3m below the anomalous sample did not exhibit any elevated Mercury. The further sampling and analysis and any associated works should be addressed as a condition to any planning permission, being a matter that will influence design detail rather than any fundamental viability.

GCE00644/ R2v6

Nickel exceeds the NBC in one sample collected from TP10 at 1.40m bgl. This result is below the S4UL for residential properties with home grown produce, and therefore of no further concern.

Soils - Total Petroleum Hydrocarbons (TPHs)

All twenty samples tested are below the LoD for TPH concentrations and are therefore of no further concern.

Soils - Polycyclic Aromatic Hydrocarbons (PAHs)

Twenty soil samples were analysed for total PAHs:

Determinand	Number of samples >LOD	Minimum (mg/kg)	Maximum (mg/kg)	Max>NBC	Max>SU4L
Total Organic Carbon	20	0.36	4.7	NA	NA
Naphthalene	0	0	0	NA	No
Acenaphthylene	0	0	0	NA	No
Acenaphthene	0	0	0	NA	No
Fluorene	0	0	0	NA	No
Phenanthrene	0	0	0	NA	No
Anthracene	0	0	0	NA	No
Fluoranthene	1	0.61	0.61	NA	No
Pyrene	1	0.62	0.62	NA	No
Benzo[a]anthracene	1	0.69	0.69	NA	No
Chrysene	0	0	0	NA	No
Benzo[b]fluoranthene	0	0	0	NA	No
Benzo[k]fluoranthene	0	0	0	NA	No
Benzo[a]pyrene	0	0	0	No	No
Indeno(1,2,3-c,d)Pyrene	0	0	0	NA	No
Dibenz(a,h)Anthracene	0	0	0	NA	No
Benzo[g,h,i]perylene	0	0	0	NA	No
Total Of 16 PAH's	0	0	0	NA	NA

GCE00644/ R2v6

PAHs were detected in one sample only; TP05 at 0.20m bgl with a Soil Organic Matter (SOM) of 7.9% and a Total PAH <2.0mg/kg. All PAH detections are below the residential S4UL and therefore are considered to be of no further concern.

5.2 Pathways

The proposed residential end use will provide the following exposure pathways that are considered in the CLEA model for residential development with home-grown vegetable consumption and used to calculate the S4UL values.

- Soil/ dust ingestion
- Home-grown vegetable consumption
- Soil attached to vegetables
- Dust inhalation indoors and outdoors
- Dermal contact indoors and outdoors
- Vapour inhalation indoors and outdoors

Additional pathways not included in the CLEA model include:

- Permeation through portable water supply pipes.
- Ingress of ground gas into confined spaces and dwellings.

5.3 Receptors

The following receptors require consideration:

- Construction workers/future residents
- Property
- Controlled Waters and associated eco-systems

5.4 Pollution Linkages

The site has been in agricultural use since the first available mapping of 1887. The southernmost field of the Southwick Court Farm Property was mapped as an orchard from 1887 to 1961. The site, which has a cover of Topsoil, is underlain by weathered sequence of the Kellaways Formation and Oxford Clay Formation predominantly comprising silty clay, becoming mudstone/siltstone/shale with depth.

Mercury was identified at levels that would be considered significant in one sample only, the source of which is unknown but is believed to be anthropogenic and recent. This sample was recovered from the topsoil in TP09 (at 0.10m bgl). Further statistical analysis has identified the result as an outlier, however, supplementary localised sampling of the topsoil in the eastern field, targeting the area around TP09, is recommended in order to better characterise the result as anomalous.

No other significant pollutant linkages have been identified.

The site is located within an area where no Radon protection measures are required.

5.5 Waste Assessment

Topsoil by definition is not inert and as such should be re-used and is not suitable for disposal at an inert landfill site.

If any anomalous Made Ground is encountered during the construction phase this should be assessed separately.

6.0 GEOTECHNICAL ASSESSMENT & RECOMMENDATIONS

6.1 Introduction

The British Geological Survey mapping indicates that the site is underlain by deposits of Kellaways Formation and Oxford Clay Formation.

The recent ground investigation identified a cover of Topsoil which is underlain by Head comprising predominantly firm to stiff silty clays, locally soft at depth, with localised areas where clayey sandy gravels are found overlying the bedrock. These more granular strata may represent alluvial deposits infilling channels from former courses of the Lambrook Stream; other such channels may traverse the site area. The Head overlies a weathered sequence of the Kellaways Clay Formation comprising silty clays typically becoming more competent with depth. Locally the strata contain; calcite veins; fossil organic matter (paleo-roots and marine algae); crystals (believed to be gypsum); and shells and fragments. The weathering sequence is reflected by an increase in mudstone lithorelics and relic structure with depth, becoming mudstone/siltstone/shale in the base of eight trial pits and one dynamic sampling borehole.

6.2 Excavation and Groundwater

The trial pits sides were generally stable during excavation however minor wall collapse occurred in places. Instability occurred in gravelly strata only, and in TP01 from 1.60m bgl.

Two dynamic sampling boreholes, WS05A and WS07, were abandoned due to collapse of gravels at 1.30m bgl and 3.00m bgl respectively. WS04 was drilled to 5.00m bgl but gravels collapsed to 3.00mbgl after drilling.

GCE00644/ R2v6

Wet strata were encountered as shallow as 0.92m from ground level in seven of the sixteen trial pits. Groundwater ingress occurred at 2.60m bgl and 3.20m bgl in TP11 and TP06 respectively.

Groundwater was encountered from below 1.05m bgl to 3.0m bgl in four of the twelve dynamic sampling boreholes at the time of drilling and WS02 encountered groundwater in fissures between 3.26 to 3.78m bgl (with a base depth of 5.45m bgl).

Groundwater monitoring (see section 4.2) identified groundwater depths at approximately 0.59m to 4.82m below ground level (bgl). Groundwater levels appear to be typically around 1m below ground level in the eastern part of the site with greater apparent variability in the western area, typically 1m to 4m.

The groundwater monitoring results of four of the ten wells showed a gradual rising of groundwater levels (WS01, WS03, WS09 and WS10). This may be related to a long lag time due to the strata's low permeability, which is reflected in the infiltration test results in TP02 – TP04.

Due to the above findings, provision for pumping and excavation support or benched excavations should be made.

6.3 Foundations

The application of an increased load through foundations of a structure results in deformation of the ground and settlement. Foundation design should ensure that foundation movements are within limits that can be tolerated by the structure without impairing its function. Foundation movements occur from the application and removal of load and ground movement independent of load. The following conditions may result in movements resulting from the application or removal of load:

GCE00644/ R2v6

- Shear deformation and failure (EC7 Ultimate Limit State condition)
- Settlement (EC7 Serviceability Limit State condition)

Shear deformation and failure may be guarded against using the traditional methods by determining the ultimate bearing capacity and application of a factor of safety of between 2 and 3 to limit deformation.

Settlement may result from immediate elastic settlement and primary consolidation settlement and in some cases secondary settlement of fine grained low permeability strata, subject to the stress history. Differential settlement may result from non-uniform soil conditions, made ground or fill, peaty and organic soils and non-level sites. The magnitude of tolerable settlement defines the allowable bearing pressure and is therefore the value provided within the report.

Eurocode 7: Geotechnical design Part 1: General Rules (BS EN 1997-1:2004) provides the following:

- Principle rules (P) are general statement and definitions for which there is no alternative; requirements and analytical models for which no alternative is permitted unless specifically stated.
- Application rules are examples of generally recognised rules, which follow the principles and satisfy their requirements.
- EC7 design requirements: P for each geotechnical design situation it shall be verified that no relevant limit state, as defined by EN 1990:2002, is exceeded.
- EC7 design situations: P Both short-term and long-term design situation shall be considered.
- EC7 Durability: P at the geotechnical design stage, the significance of environmental conditions shall be assessed in relation to durability and to enable provisions to be made for the protection or adequate resistance of materials.

- Geotechnical design by calculation: (1) P design by calculation shall be in accordance with the fundamental requirements of EN 1990:2002 and with the particular rules of the standard. (2) It should be considered that knowledge of the ground conditions depends on the extent and quality of the geotechnical investigations. Such knowledge and the control of workmanship are usually more significant to fulfilling the fundamental requirements than is precision in the calculation method.
- EC7 Actions: (1) P The definition of actions shall be taken from EN 1990:2002. The values of actions shall be taken from EN1991, where relevant. (2) P The values of geotechnical actions to be used shall be selected, since they are known before a calculation is performed; they may change during that calculation. (3) Any interaction between the structure and the ground shall be taken into account when determining the actions to be adopted in the design.
- EC7 Ground properties: (1) P Properties of soil and rock masses, as quantified for design calculation by geotechnical parameters, shall be obtained from test results, either directly or through correlation, theory or empiricism, and from other relevant data. (2) P Values obtained from test results and other data shall be interpreted appropriately for the limit state considered. (3) Account shall be taken of the possible differences between the ground properties and the geotechnical parameters obtained from the test results and those governing the behaviour of the geotechnical structure. (6) Calibration factors shall be applied where necessary to convert laboratory or field test results according to EN 1997-2 into values that represent the behaviour of the soil and rock in the ground, for the actual limit state, or to take account of correlations used to obtain derived values from test results.
- EC7 Geometrical data: P The level and slope of the ground surface, water levels, levels of interfaces between strata, excavation levels and the dimensions of the geotechnical structure shall be treated as geometrical data.

- EC7 Characteristic Values of actions: (1) P Characteristic and representative values of actions shall be derived in accordance with EN 1990:2002 and the various parts of EN 1991.
- EC7 Characteristic values of geotechnical parameters: (1) P The selection of characteristic values for geotechnical parameters shall be based on results and derived values from laboratory and field tests, complemented by well-established experience. (2) P The characteristic value of geotechnical parameter shall be selected as a cautious estimate of the value affecting the occurrence of the limit state. (12) When using standard tables of characteristic values related to soil investigation parameters, the characteristic value shall be selected as a very cautious estimate.

GCE00644/ R2v6

The following conditions influencing foundation design are independent of load:

Condition	Yes/No	Requirements
Seasonal volume change	Yes	Medium volume change potential within the cohesive superficial strata requiring a minimum foundation depth of 0.9m.
Building near trees	Yes	Follow NHBC Chapter 4.2 Building Near Trees.
Frost Heave	Possible	Minimum construction depth 0.45m
Application of artificial heat or cold to supporting ground	No	
Changes in groundwater level.	Yes	Seasonal fluctuations are likely. Make provision for groundwater pumping where necessary.
Loss of ground due to erosion (internal erosion) or solution by percolating water or pumping.	Possible	
Changes in state of stress due to adjacent structures, dredging, scour or erosion by streams or floods (loss of support) or due to erection of adjacent structures.	Yes	Foundations to be placed below adjacent service pipes, taking account of adjacent foundation stress zones. The Lambrook stream flows through the site and deposits in the surrounding area suggest it has been subjected to flooding, this will scour over time; structures should be placed well away from this zone.
Continuing settlement of natural deposits.	Yes	Do not place foundations on compressible superficial deposits if encountered. Soft strata encountered in 6 exploratory holes between 0.55 and 4.27m bgl.
Soil creep or landslides, ground sloping >1v:10h	No	
Vibration including seismic disturbances	Unlikely	
Alteration of the properties of the ground due to natural or artificial processes	No	

Foundation Options

Strip or trench fill foundations can be adopted within the firm silty clay Head or the Kellaways Clay Formation. Due to the medium volume change potential results of the four samples tested (see section 4.4) a minimum foundation depth of 0.9m must be adopted in accordance with Chapter 4.4 of the NHBC guidance.

An allowable bearing pressure of 75kPa can be adopted for foundations placed on the firm silty clays. If foundations are placed onto stiff silty clays an allowable bearing pressure of 100kPa can be adopted.

Granular deposits were not widely encountered on site and may be indicative of former channels of the Lambrook Stream. Based on Standard Penetration Testing in the two boreholes to encounter such material, an allowable bearing pressure of 100kPa can be adopted for sands and gravels.

Soft strata were encountered in eight exploratory holes as follows:

Location	Depth	Consistency	Description
TP02	0.92 – 1.40+	Soft	Blue grey mottled orange and yellow, slightly sandy, slightly fine gravelly, clayey SILT.
TP09	0.55 – 1.50	Soft to firm	Light blue grey mottled yellow brown, locally sandy silty CLAY.
TP14	0.70 – 1.30	Firm, locally soft	Yellow brown, mottled brown and grey, slightly gravelly, sandy, silty CLAY
WS02	1.05 – 4.27	Soft	Orange brown, mottled light brown, slightly fine sandy (slightly gravelly), silty CLAY
WS04	1.15 – 2.00	Soft	Brown and orange brown, slightly fine sandy, silty CLAY
WS04	2.00 – 2.63	Very soft	Orange brown mottled light grey, fine sandy, silty CLAY
WS05A	0.80 – 1.05	Soft	Orange brown sandy slightly gravelly silty CLAY.
WS07	0.72 – 1.33	Soft	Light brown, grey and orange brown, slightly sandy, silty CLAY
WS09	1.00 – 1.34	Soft to firm	Light brown and grey, slightly sandy, silty CLAY

GCE00644/ R2v6

Of the exploratory holes listed above, TP09, TP14, WS07 and WS09 are the only holes within the proposed residential development area. Accordingly, in these areas, and in any others which encounter strata of similar consistency, foundations should be extended to depths where more competent strata are reached.

The foundation for each building should be placed on a consistent bearing stratum.

Soft spots are possible and where encountered these should be assessed separately. If the soft spot is relatively small, it could be excavated and replaced with either engineering fill or lean mix concrete.

The depth of foundations near to existing or proposed trees will need to be increased in accordance with the recommendations of NHBC Chapter 4.2.

Foundations should be placed deeper than adjacent pipes and trenches.

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)					
		TP01	TP02	TP03	TP04	TP05	TP06
Topsoil / Subsoil		GL – 0.25	GL – 0.30	GL – 0.36	GL – 0.25	GL – 0.30	GL – 0.35
Superficial deposits	Stiff to very stiff, grey brown, gravelly, sandy silty CLAY				0.25 – 0.50		
	Stiff to very stiff mottled yellow brown and light grey (slightly sandy) silty CLAY	0.25 – 1.60	0.30 – 0.92		0.50 – 1.00	0.30 – 0.60	0.35 – 0.45
	Firm to stiff mottled blue grey/purple and yellow brown (slightly gravelly, slightly sandy) silty CLAY			0.36 – 1.50		0.60 – 1.30	0.45 – 1.30
	Stiff, yellow brown and blue grey slightly gravelly, sandy silty CLAY				1.00 – 1.50		
	Grey mottled yellow silty SAND	1.60 – 2.00					
	Grey brown, sandy, silty GRAVEL	2.00 – 2.90					
	Soft, blue-grey, slightly sandy slightly gravelly clayey SILT		0.92 – 1.40				
Completely weathered Kellaways Formation	Firm to stiff light blue grey/purple grey mottled yellow brown, silty CLAY			1.50 – 1.60		1.30 – 1.50	
	Stiff, blue/purple grey/dark grey, slightly sandy, silty CLAY				1.50 – 2.00	1.50 – 3.50	1.30 – 1.60
	Extremely weak dark purple grey MUDSTONE/SILTSTONE/SHALE						1.60 – 3.20
	Very stiff, dark blue grey CLAY	2.90 – 3.10					
Minimum founding depth (m)		0.9	*	0.9	0.9	0.9	0.9
Allowable bearing pressure (kPa)		100		75	100	75	75

* Further investigation required.

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)					
		TP07	TP08	TP09	TP10	TP11	TP12
Topsoil / Subsoil		GL – 0.25	GL – 0.28	GL – 0.30	GL – 0.25	GL – 0.25	GL – 0.25
Superficial deposits	Stiff to very stiff mottled yellow brown with grey slightly sandy, silty CLAY	0.25 – 0.50	0.28 – 0.56	0.30 – 0.55	0.25 – 0.80	0.25 – 0.60	0.25 – 0.50
	Firm to stiff mottled blue grey/purple and yellow brown (slightly gravelly, slightly sandy) silty CLAY					0.60 – 1.20	0.50 – 1.50
	Stiff, blue/purple grey mottled yellow brown, silty CLAY	0.50 – 1.60	0.56 – 1.50		0.80 – 1.40		
	Soft to firm blue-grey, locally sandy silty CLAY			0.55 – 1.50			
Completely weathered	Firm to stiff light blue grey/purple grey mottled yellow brown, (slightly sandy) silty CLAY	1.60 – 2.80		1.50 – 2.10		1.20 – 1.80	
Kellaways Formation	Stiff, blue/purple grey/dark grey, slightly sandy, silty CLAY	2.80 – 3.80	1.50 – 2.80	2.10 – 3.50	1.40 – 2.80	1.80 – 2.00	1.50 – 3.30
	Extremely weak dark purple grey MUDSTONE/SILTSTONE/SHALE		2.80 – 3.75	3.50 – 3.85	2.80 – 3.00	2.00 – 2.80	

Minimum founding depth (m)	0.9	0.9	1.5	0.9	0.9	0.9
Allowable bearing pressure (kPa)	100	100	75	100	75	75

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)			
		TP13	TP14	TP15	TP16
Topsoil / Subsoil		GL – 0.40	GL - 0.30	GL – 0.40	GL – 0.60
Superficial Deposits	Stiff, yellow brown with grey brown, gravelly, sandy silty CLAY		0.30 – 0.70	0.40 – 0.70	
	Stiff yellow brown gravelly, sandy, silty CLAY with cobbles	0.40 – 0.65			0.60 – 1.10 / 1.40
	Firm, locally soft mottled blue grey/purple and yellow brown (slightly gravelly, slightly sandy) silty CLAY	0.65 – 1.50	0.70 – 1.30		
	Stiff to very stiff, light blue grey mottled yellow brown, slightly gravelly, slightly sandy, silty CLAY			0.70 – 1.50	
Completely weathered Kellaways Formation	Firm purple grey mottled yellow brown, (slightly sandy) silty CLAY	1.50 – 2.10			
	Stiff to very stiff, light blue/purple grey mottled yellow brown, sandy silty CLAY		1.30 – 1.70		1.10 / 1.40 – 2.80
	Stiff, blue/purple grey/dark grey, slightly sandy, silty CLAY	2.10 – 2.90	1.70 – 3.80	1.50 – 2.20	2.80 – 3.70
	Extremely weak dark purple grey MUDSTONE/SILSTONE/SHALE	2.90 – 3.50		2.90 – 3.00	

Minimum founding depth (m)	0.9	0.9	0.9	0.9
Allowable bearing pressure (kPa)	75	75	100	100

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)					
		WS01	WS02	WS03	WS04	WS05	WS05A
Topsoil / Subsoil		GL – 0.28	GL – 0.25	GL – 0.26	GL – 0.28	GL – 0.26	GL – 0.24
Superficial deposits	Firm, brown slightly sandy, slightly gravelly silty CLAY	0.28 – 0.56					
	Stiff to very stiff brown mottled light brown slightly sandy silty CLAY	0.56 – 1.05	0.25 – 1.05	0.26 – 1.17	0.28 – 1.15	0.26 – 0.78	0.24 – 0.80
	Soft, orange brown and brown, slightly sandy, silty CLAY		1.05 – 4.27		1.15 – 2.00		0.80 – 1.05
	Very soft, orange brown and grey, sandy silty CLAY				2.00 – 2.63		
	Firm brown and grey, slightly sandy silty CLAY		4.27 – 4.57			0.78 – 1.17	
	Stiff, grey and orange brown (slightly gravelly), sandy silty CLAY	1.05 – 2.70				1.17 – 1.81	
Completely weathered Kellaways Formation	Grey brown, sandy, silty GRAVEL				2.63 – 3.51		1.05 – 1.30
	Stiff to very stiff, brown becoming dark grey, slightly sandy, silty CLAY	2.70 – 5.45	4.57 – 5.45	1.17 – 5.40	3.51 – 5.00	1.81 – 4.45	
	Extremely weak dark purple grey MUDSTONE/SILSTONE/SHALE			5.40 – 5.45			
Minimum founding depth (m)		0.9	*	0.9	2.6	1.1	
Allowable bearing pressure (kPa)		100		100	100	100	

* Piling likely to be required.

GCE00644/ R2v6

Strata		Depth of strata at each exploratory hole (m)					
		WS06	WS06A	WS07	WS08	WS09	WS10
Topsoil / Subsoil		GL – 0.22	GL – 0.20	GL – 0.21	GL – 0.18	GL – 0.28	GL – 0.24
Superficial deposits	Stiff to very stiff brown mottled light brown slightly sandysilty CLAY	0.22 – 1.28	0.20 – 0.42	0.21 – 0.72	0.18 – 0.49	0.28 – 1.00	0.24 – 1.10
	Soft, orange brown and brown with grey, slightly sandy, silty CLAY			0.72 – 1.33		1.00 – 1.34	
	Firm brown and grey, silty CLAY				0.49 – 1.34		
	Stiff, orange brown and grey silty CLAY	1.28 – 1.95	0.42 – 1.00	1.33 – 1.90			
	Stiff, locally firm, orange brown and grey silty CLAY		1.00 – 1.83				
Completely weathered Kellaways Formation	Grey brown, sandy, silty GRAVEL			1.90 – 2.50			
	Stiff to very stiff, brown becoming dark grey, slightly sandy, silty CLAY	1.95 – 5.45	1.83 – 2.10	2.50 – 3.00	1.34 – 4.70	1.34 – 5.45	1.10 – 3.40
	Extremely weak dark purple grey MUDSTONE/SILTSTONE/SHALE						3.40 – 3.45
	COBBLE of sandstone		2.10 – 2.35				

Minimum founding depth (m)	0.9	0.9	1.3	0.9	1.3	0.9
Allowable bearing pressure (kPa)	100	100	100	75	100	100

6.4 Floor Slabs

The previous Phase 1 report (ref: GCE00644/R1) indicates that no radon protection measures are required.

Suspended floor slabs will be required to take account of the potential for volume change where fine-grained soils are present within the building footprint. The following table provides the NHBC recommended void dimensions for potential ground movement based on volume change potential of the fine-grained soils:

Volume change potential	Against side of foundation/ ground beam	Underground beam and suspended in-situ concrete ground floor	Pre-cast concrete and suspended timber floors	Drainage construction minimum allowance for potential movement
	mm	mm	mm	mm
High	35	150	300	150
Medium	25	100	250	100
Low	0	50	200	50

6.5 Buried Concrete

Six samples were analysed for pH, total sulphate, soluble sulphate and total sulphur (BRE SD1 Suite) (see section 4.5). The calculated Total Potential Sulphate (%SO₄) calculated from these results were from 0.24 %SO₄ to 18.63 %SO₄.

Due to the high sulphate levels in the soils, buried concrete should be designed in accordance with design sulphate class DS-4 ACEC class AC-4s of BRE Special Digest 1 (2005), assuming mobile groundwater is present.

6.6 Road Pavement Design

Near surface sub-grade should be treated as frost susceptible therefore requiring a minimum 450mm layer of non-frost susceptible construction.

DCP testing has calculated a minimum CBR of 2.60% below the topsoil and a maximum CBR of 30.81%. Lowest results were recorded in DCP 6, which encountered soft ground to 777mm below ground level.

A preliminary design CBR of 2% is suggested, which should be subject to confirmation by further in-situ testing once the horizontal and vertical alignments of the roads are finalised.

7.0 CONCLUSIONS

The Phase 1 Desk Study completed by Geo Consulting Engineering Ltd (ref: GCE00644/R1) indicates that the site has been in agricultural use since the first available mapping of 1887. The north west of site was historically a water meadow.

An historic brickworks was mapped from 1887 north west of site. This area is subsequently mapped as a refuse tip and haulage depot from 1974 to 1999. Residential development covers the area from 2006.

The British Geological Survey's mapping indicates the site is underlain by the Kellaways Formation and Oxford Clay Formation.

The ground investigation comprised sixteen trial pits; four large scale infiltration tests; twelve dynamic sampling boreholes, ground gas and groundwater monitoring, and chemical and geotechnical laboratory testing.

The ground investigation found the site has a cover of top- and sub- soil over Head deposits of soft to firm (locally sandy) silty clays, occasional alluvial sands and predominantly limestone alluvial gravels. Superficial deposits are underlain by a weathered sequence of the Kellaways Formation, comprising silty clays typically becoming more competent with depth. Shell fragments, clear crystals (believed to be gypsum), organic matter (marine algae and paleo-roots) and sandy lenses were identified within the strata across the site.

Groundwater monitoring identified groundwater levels ranged from 0.59m to 4.82m below ground level (bgl). Water ingress was noted during the excavation of two trial pits from 2.60m bgl but wet strata, interpreted to be groundwater were observed from 0.92m bgl.

GCE00644/ R2v6

Large scale infiltration testing of four trial pits indicate that soakaway drainage is unlikely to be viable at this site due to the high rest groundwater levels and predominantly low permeability strata.

Mercury concentrations exceeded the residential S4UL values in one sample of topsoil only. Further statistical analysis identifies this concentration as an outlier. Further topsoil sampling around TP09 is recommended in order to delineate this result. The further sampling and any associated works should be addressed as a condition to any planning permission.

All other metal/metalloid concentrations fall below the residential S4UL values.

Total Petroleum Hydrocarbons (TPHs) were not detected in any of the twenty samples.

Polycyclic Aromatic Hydrocarbons (PAHs) were detected in one sample only. All PAH detections are below the residential S4UL.

Ground gas monitoring on four occasions to date has not identified any Gas Screening Values that would exceed the NHBC “Green” assessment criteria. Elevated typical maximum carbon dioxide concentrations have been recorded on three occasions in WS09, the three most recent monitoring visits have not recorded carbon dioxide exceeding 5%. A further six monitoring visits are recommended in order to better characterise carbon dioxide concentrations in WS09 as well as continue to assess WS08. The further monitoring should be addressed as a condition to any planning permission.

Strip or trench fill foundations can be adopted within firm to stiff clays. Due to the medium volume change potential, the foundation depth must be a minimum of 0.9m.

Suspended floor slabs are required.

GCE00644/ R2v6



Due to high sulphate levels in the soils, buried concrete should be designed in accordance with design sulphate class DS-4 ACEC class AC-4s of BRE Special Digest 1 (2005), assuming mobile groundwater is present.

A preliminary design CBR of 2% is suggested; in-situ testing is recommended during road construction.

GCE00644/ R2v6

FIGURES

- | | |
|----------|---|
| Figure 1 | Site Location Plan |
| Figure 2 | Exploratory Hole Location Plan (existing site layout) |
| Figure 3 | Exploratory Hole Location Plan (proposed site layout) |

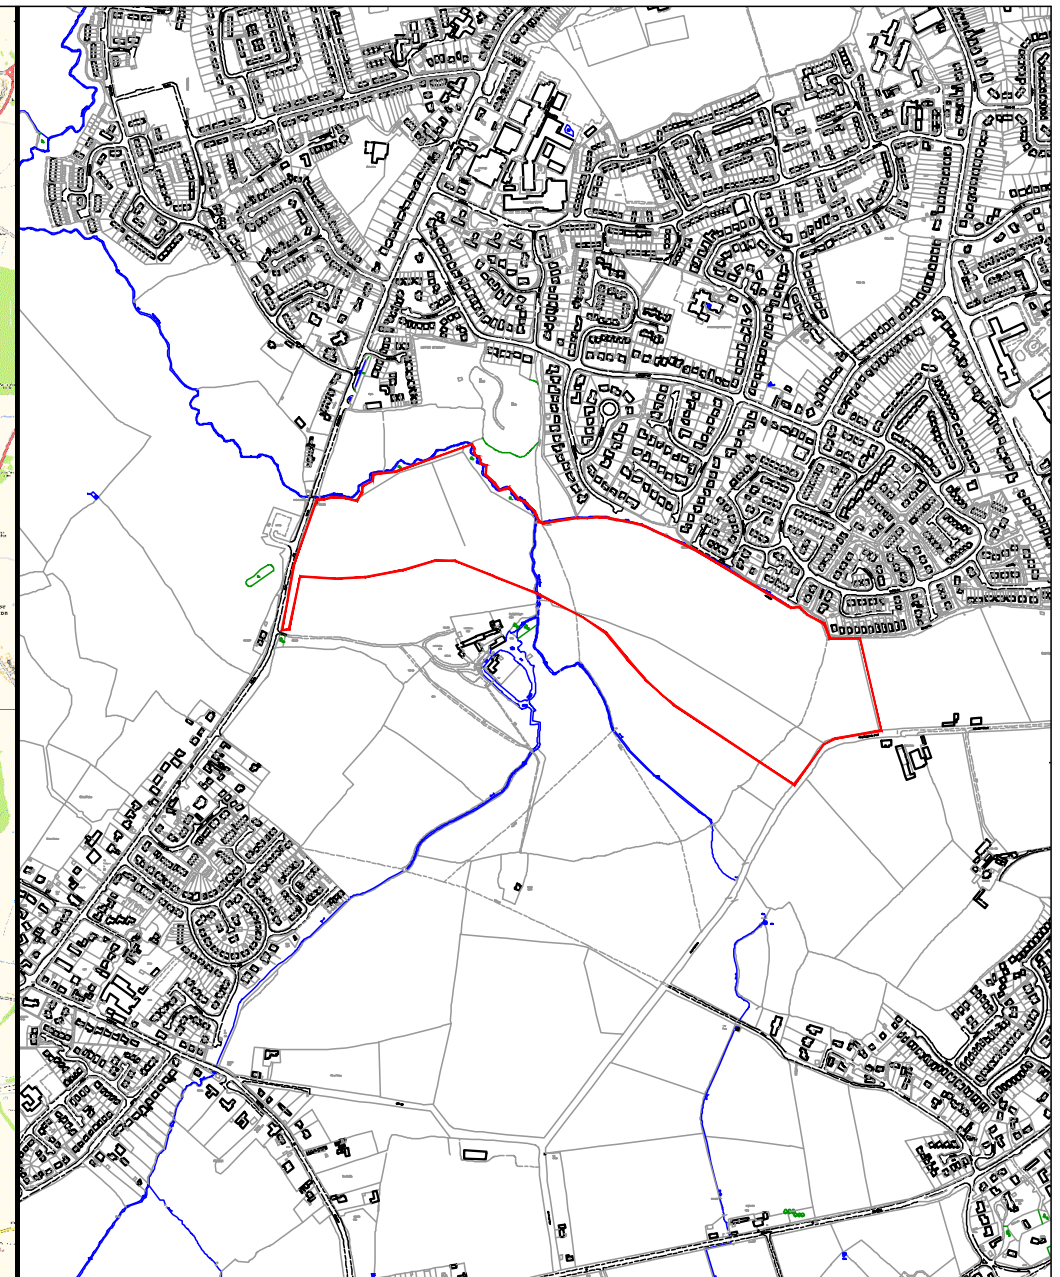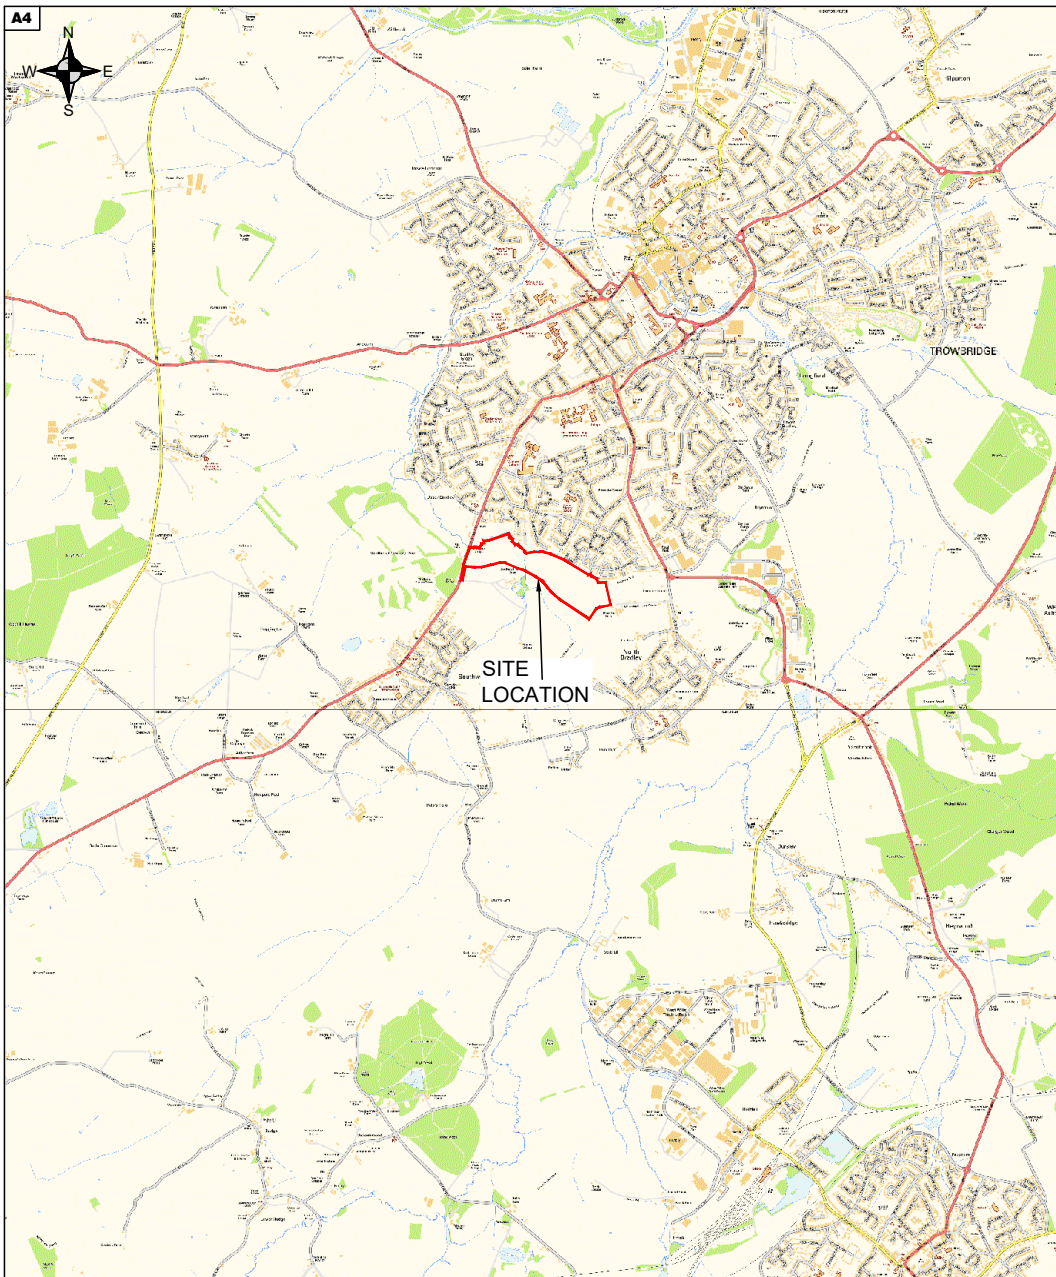

Geo Consulting Engineering Ltd
The Studio, Woodmanton Barns,
Woodbury, Exeter, EX5 1HQ

T: 01395 239977
E: mail@geoconsultingeng.co.uk
W: www.geoconsultingeng.co.uk

Job Title:

**Land South of Trowbridge
Trowbridge
Wiltshire**

Client:

Waddeton Park Ltd

Dwg Title:

Site Location Plan

Drawing Status


For Information

Scale 1:50000/1:12500 @ A4 Drawn RH

Date Sep 2017 Checked DLJ

Drawing no:
GCE00644/Fig1

Rev

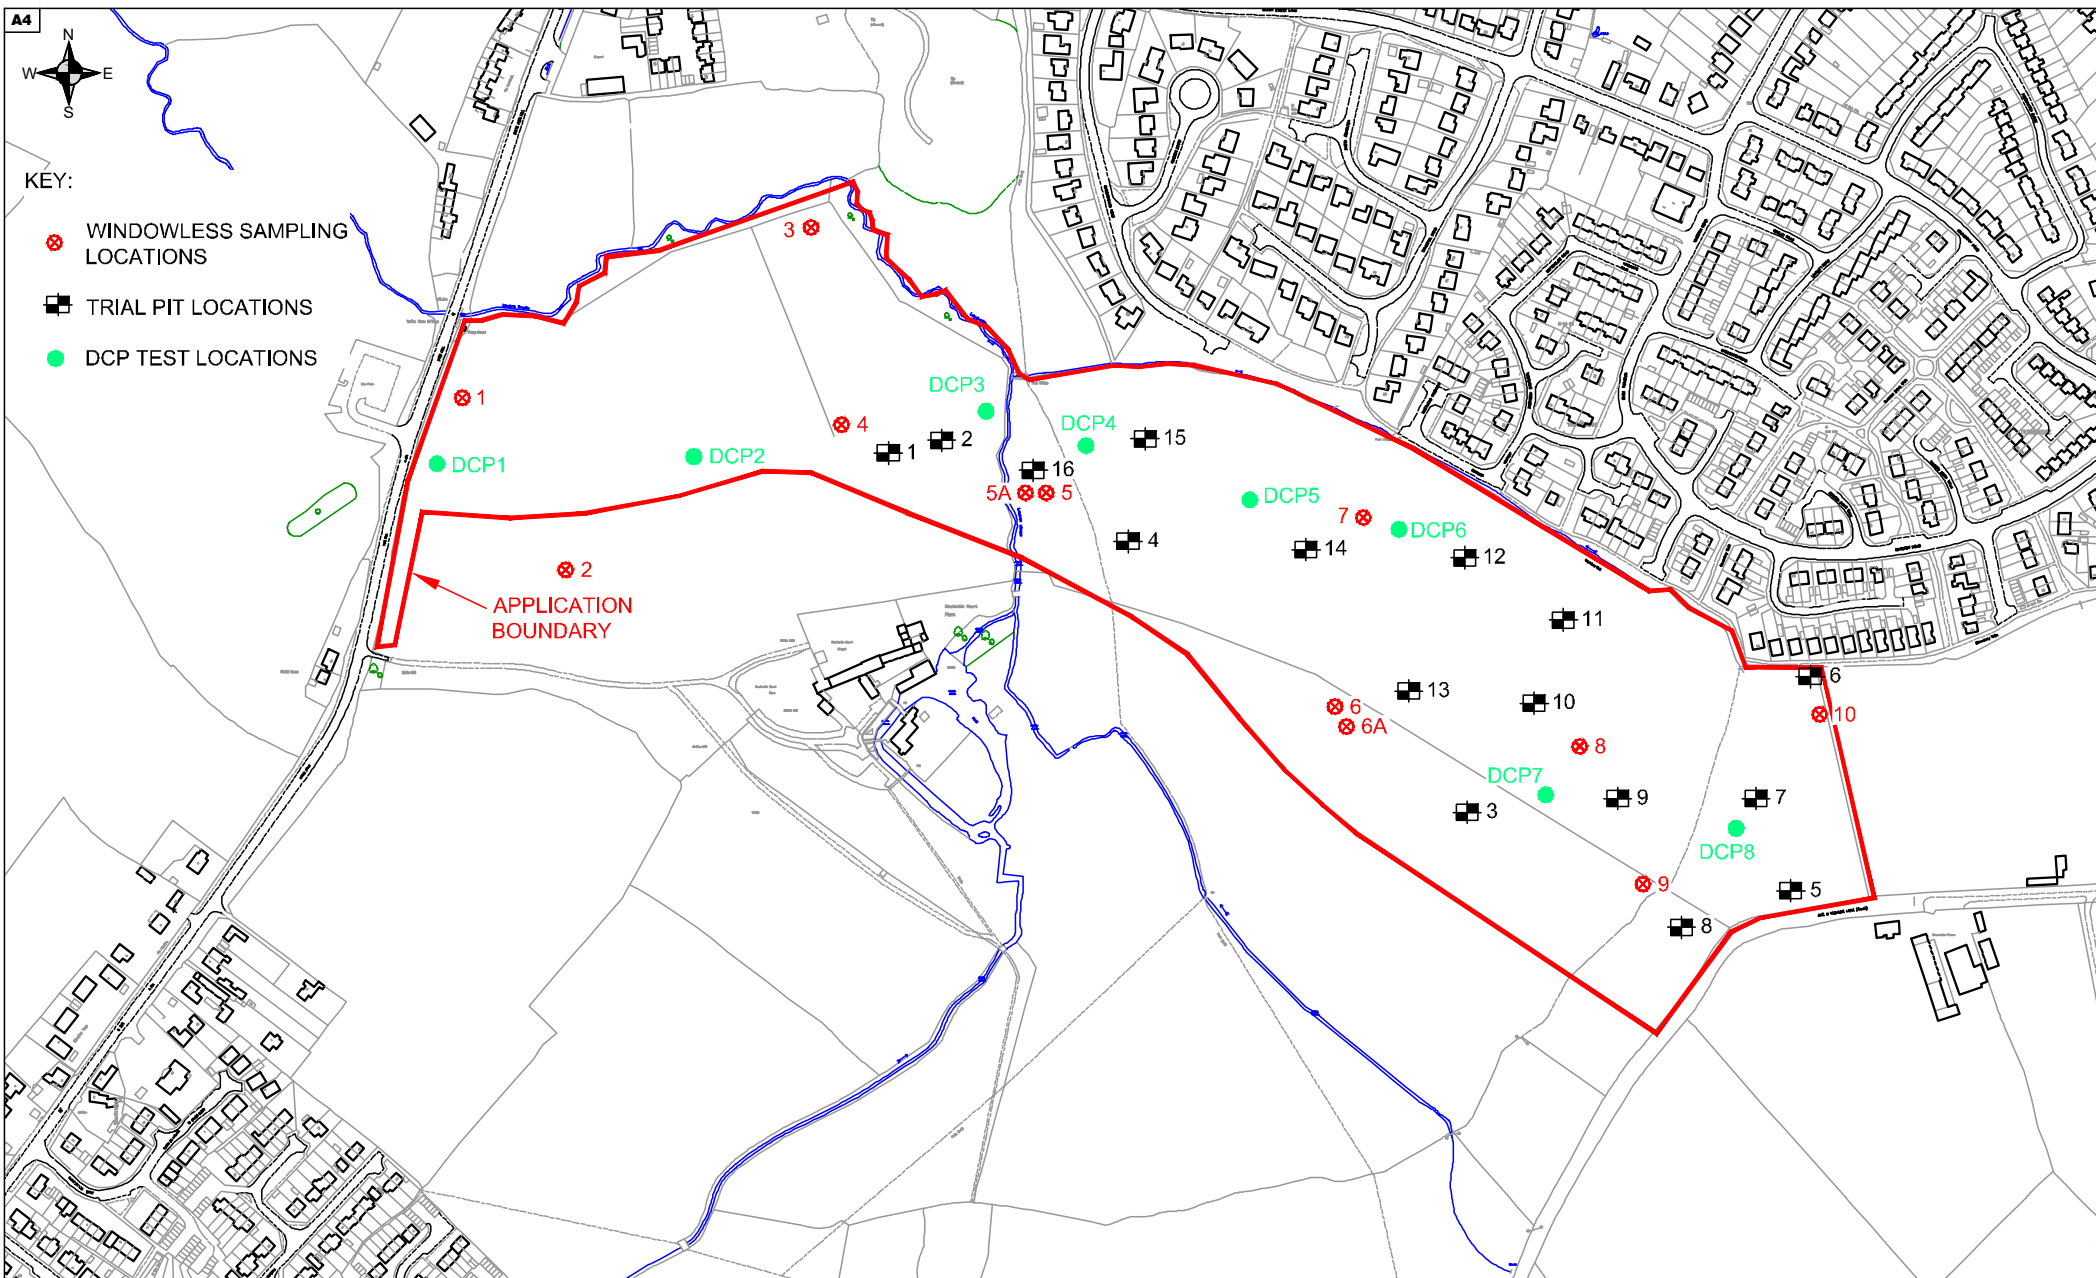

Geo Consulting Engineering Ltd
The Studio, Woodmanton Barns,
Woodbury, Exeter, EX5 1HQ

T: 01395 239977
E: mail@geoconsultingeng.co.uk
W: www.geoconsultingeng.co.uk

Job Title:

**Land South of Trowbridge
Trowbridge
Wiltshire**

Client:

Waddeton Park Ltd

Dwg Title:

**Exploratory Hole
Layout Plan
(Existing Layout)**

Drawing Status

For Information

Scale 1:5000 @ A4 Drawn RH

Date Sep 2017 Checked DLJ

Drawing no:
GCE00644/Fig2

Rev

APPENDICES

Appendix A	Investigation Methods
Appendix B	Trial Pit Records
Appendix C	Trial Pit Photographs
Appendix D	Dynamic Sampling Borehole Records
Appendix E	Large Scale Infiltration Records
Appendix F	Ground Gas and Groundwater Monitoring Results
Appendix G	Chemical Laboratory Test Results
Appendix H	Geotechnical Laboratory Test Results
Appendix I	DCP CBR Test Results
Appendix J	Utility Service Plans
Appendix K	Gas Main Location Plan

GCE00644/ R2



Appendix A – Investigation Methods

Investigation Methods

The following brief of Ground Investigation techniques summarises their methodology.

Soils and bedrock have been described in accordance with BS5930 2015. Prior to undertaking exploratory holes on site service plans are checked and locations are CAT scanned.

Ground conditions should be monitored during the construction of the works by groundworkers and the recommendations of the report re-evaluated as necessary.

Trial Pits

Trial pits provide an effective method of assessing ground conditions at shallow depth on site and advantages include a rapid check of ground conditions. Trial pits are normally excavated with a wheeled back acting excavator to up to 4m depth, to provide information on ground conditions. Where information is required for existing foundation details or services hand excavated trial pits are normally excavated to up to 1.20m depth. The strata within each trial pit are logged on site by an experienced Engineering Geologist and soil samples are collected for subsequent laboratory testing. The trial pits are entered at shallow depth where safe to do so to allow logging, in-situ testing and sampling. On completion the trial pits are backfilled with arisings.

The excavator will be operated by a trained driver with appropriate experience of the particular machine and suitable certification. A brief explanation of the works and site specific hazards will be provided at the beginning of the working day and reviewed as the work progresses. A bucket width of 0.6m will normally be selected, other widths may be used depending on particular conditions, and a trial pit length of 2m to 3m will be excavated in order to reach the maximum depth of the excavator boom. The arisings will be placed a safe distance from the pit sides in order to prevent overloading of the ground and collapse of the pit sides. Excavation in the upper layers will be undertaken

carefully in thin layers in order to reveal any warning tape indicating buried services. If the trial pit becomes unstable excavation will be stopped.

Large Scale Infiltration Testing

Infiltration testing is undertaken in general accordance with the BRE365 methodology.

Infiltration testing will involve the safe delivery of water into the trial pit via a pipe from a tractor towed bowser. Measurements of water depth will be recorded against time, together with pit dimensions, to allow calculation of an infiltration factor in accordance with BRE365.

Dynamic Drive (Window) Sampling

Dynamic Drive Sampling is used where access is restricted and/or where gas and groundwater installations are required or where hard surfacing is present. Depths of between 3-6m are normally achieved in suitable ground.

The Sampling rig is track mounted, with dimensions of 2.7m long, 0.75m wide and 2.4m high when in operation and 1.3m high when being tracked to position. A four stroke diesel engine is used to operate a chain lifted weight of 63.5kg, which is dropped a distance of 0.76m onto a hardened steel anvil, which in turn drives the steel sampling tubes vertically into the ground. The sample tubes are typically 1m long and 100mm to 75mm in diameter and contain a plastic liner. The sample tubes are retrieved using integral hydraulic rams. Additional driving rods are attached and tubes of gradually reducing diameter used to reach the required depth. Standard Penetration Testing and U100 sampling may be undertaken. Samples are collected from the soil samples recovered. The resulting hole may be completed as a monitoring well or backfilled with arisings. The rig will be operated by trained and experienced crew. Concrete coring is normally undertaken prior to window sampling where concrete surfacing is present, this is normally undertaken with the Archway rig with a coring attachment.

In areas where there is very limited access Dynamic Sampling is undertaken using a hand held jack hammer and separate power pack to drive the sample tubes into the ground. The diameter of the sample tubes are reduced as drilling proceeds. The sample tubes are jacked out of the ground using hydraulic jacks and the power pack. The soils are logged and samples are collected from the tubes.

Supervision of the works will be undertaken by competent Engineering Geologist/ Geotechnical Engineer.

Dynamic Probing

This technique measures the number of blows of a standard weight falling over a standard height. The weight is dropped onto an anvil delivering a set energy onto a hardened steel probe, which is driven into the ground. The number of blows per set 100mm increment is recorded. Dynamic Probing is normally undertaken with a track mounted Archway rig. Where access is limited a portable mechanically driven dynamic probe is used. Depths of up to 10m are typically achieved in suitable ground conditions. The normal weight used is 63.5kg (DPSH). Where access is very limited hand held dynamic probing can be undertaken, which uses a 10kg weight (DPL) with a separate power pack. The rods are jacked out of the ground using a hand held jack. No samples are collected with this method.

Dynamic Cone Penetrometer (DCP)

The hand driven DCP probing device has been calibrated by TRL to provide a profile of CBR values, normally to 0.85m depth.

Cable Percussion Boreholes

The technique can determine ground conditions to depths of in excess of 30m in suitable ground conditions. The method is used in ground conditions other than rock. Soil samples are recovered for logging purposes. Samples are normally collected at 1.00m

intervals or at a change of strata. Standard Penetration Testing and U100/UT100 sampling may be undertaken. Insitu testing is normally undertaken at 1m intervals to 5m depth and thereafter at 1.50m intervals. Steel casing is normally used to prevent hole collapse.

The following description is taken from British Standard BS5930 2015.

Cable percussion boring is an adaptation of standard well-boring methods, and normally uses a mobile rig specially designed for ground investigation work. For most investigations, the rig has a winch of 1 tonne to 2 tonne capacity, which is driven by a diesel engine and a derrick of about 6 m in height. With many types of rig, the legs of the derrick fold down to form a simple trailer that can be towed by a light vehicle. The drill tools, which are worked on a wire rope using the clutch of the winch for the percussive action, consist of the clay cutter for dry cohesive soils, the shell or bailer for granular soils and the chisel for breaking up rock and other hard layers.

The sizes of borehole casings and tools are usually 150 mm and 200 mm. For special projects 250 mm and 300 mm are available. This gives a maximum borehole depth of about 60m in suitable strata. The clay cutter should be used in cohesive soil in a damp or dry borehole. Where the borehole contains water, it might be necessary to use a combination of the clay cutter and the shell in cohesive soil. The shell should be used in granular soils and there should be sufficient water in the bottom of the borehole to cover the shell (about 2.5 m); it is, therefore, necessary to add water to a borehole in order to bore through dry granular strata that require the use of the shell. When the boring advances below the water table in granular strata, water should be added to the borehole to sufficient maintain water in the hole at a level above that of the surrounding groundwater. This reduces, but might not eliminate, the tendency for loosening the ground below the base of the hole by 'blowing'. The shell should be withdrawn slowly and, if necessary, an undersized shell should be used.

Cable percussion boring may be used for soil and weaker rocks. The clay cutter and shell bring up disturbed material which is usually sufficiently representative to permit identification of the strata.

Rotary Drilling

The technique can determine ground conditions to depths of in excess of 30m in suitable ground conditions. The method is used for drilling in soil and rock. The drilling is undertaken using a rotary drilling rig. The boreholes are initially drilled by dynamic sampling methods from ground level and stopped when effective refusal for this technique is reached as defined by a Standard Penetration Test (SPT) N value >50.

Soils samples are recovered for logging purposes. Samples are normally collected at 1.00m intervals or at a change of strata. Standard Penetration Testing and U100/UT100 sampling may be undertaken. Insitu testing is normally undertaken at 1m intervals to 5m depth and thereafter at 1.50m intervals. The boreholes are then ODEX cased and continued by rotary coring. The coring is normally undertaken using a 1.50m long T6-116 core barrel, giving a core diameter of 92mm. A combined air and water flush is used to assist coring and maximise the core recovery. The rotary coring technique includes a plastic core liner within the metal barrel; the liner is removed after sampling and placed into a wooden core box. The rock cores are logged, sampled and photographed by an Engineering Geologist. Examination of the cores allows detailed rock description and generally enables angled discontinuity surfaces to be observed.

The following description is taken from British Standard BS5930 2015.

Rotary drilling methods, in which the drill bit is rotated on the bottom of the borehole, are used to drill rocks and soils for investigation purposes. The drilling fluid, which is passed from the surface through hollow drill rods to the face of the bit, cools and lubricates the bit, transports drill cuttings to the ground surface and, when using particular types of drilling fluids, stabilizes the borehole. Common drilling fluids include clean water, air or a mixture of both. Mud, polymers or foam are also frequently used to maintain or assist

borehole stability, aid the transport of drill cuttings to the surface and maximize core recovery, particularly in soils and weaker rock formations.

There are two basic types of rotary drilling: open hole (or full hole) drilling, where the drill bit cuts all the material within the diameter of the borehole; and core drilling, where an annular bit, fixed to the bottom of the outer rotating tube of a core barrel, cuts a core, which is recovered within the innermost tube of the core barrel assembly and brought to the surface for examination and testing. Rotary drilling for ground investigation is usually core drilling.

When open hole drilling or coring, temporary casing is normally used to support unstable ground or to seal off fissures or voids, which cause excessive loss of drilling fluid. Drilling fluid additives or cement grouting can sometimes be satisfactory alternatives.

The rotary drilling rig should be well maintained and should be capable both of controlling rotational speed and providing axial load and torque to suit the nature and hardness of the material penetrated, the diameter of the core barrel and drill string, drilling fluid and flushing system, weight of drill string and installation of temporary casing(s). When recirculating, the drill fluid should be cleaned as an integral part of the process so that it is suitable for continuing reuse.

Open Hole Drilling

The technique is normally used for installing groundwater and gas monitoring wells or for determining the presence or otherwise of voids in bedrock to depths of in excess of 30m in suitable ground conditions. The drilling is undertaken using a rotary drilling rig. The boreholes are normally drilled by open hole methods with air flush. The boreholes are logged from risings and rates of penetration by an Engineering Geologist.

The following description is taken from British Standard BS5930 2015.

Open hole drilling is sometimes used in soils and weaker rocks as a rapid and economical means of making holes in the ground for the purpose of advancing the hole to a sampling depth, progressing a hole to a specified depth or material type, for carrying out in-situ tests, for installing instruments, etc. The technique can also be used to probe for voids such as mine workings, solution cavities, etc. Systems are available whereby casings are driven simultaneously with the open hole bit. While drilling, only drill cuttings are returned in the drill fluid.

The rate of progress of drilling and observations of the flushing medium and the cuttings should be recorded. These records may be made by the lead driller or a separate logger. The cuttings constitute very low quality samples and it is usually difficult to detect a change in strata, unless there is a good contrast in properties such as colour, mineral content or hardness. Where such contrast prevails, open hole drilling can be used as a probing technique.

NOTE The use of suitable instrumentation, termed “drilling parameter recording” (DPR) or “measurements while drilling” (MWD), in order to record the progress of the drilling rig can considerably enhance the results obtained (see BS EN ISO 22476-15).

Static Cone Penetration Test (SCPT)

Static cone penetration testing uses a hydraulic drive system to push a cone into the ground at a constant velocity from ground level on hollow extension rods each 1m long, which have a readout cable running through the hollow centre. Internal load sensing devices measure the axial thrust on the cone and the frictional force on the sleeve; an inclinometer checks vertical alignment and drift. The electrical signals are transmitted by the umbilical cable to the recorders at ground level as the tip is pushed into the ground at a constant rate of penetration of 20 mm/second.

The cone is 35.7mm in diameter, so that its projected area is 10cm², and the friction sleeve area is 150cm². The cone and sleeve resistances are automatically recorded in MPa.

A piezometric sensor and filter can be incorporated in the penetrometer to record equilibrium pore water pressures at intervals and excess pore water pressures during penetration.

GCE00644/ R2



Appendix B – Trial Pit Records



Trial Pit Log

TrialPit No
TP01
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384510.00 - 156008.00
Level:

Date
18/07/2017

Location: Trowbridge

Dimensions (m):

1.80

Depth
3.10

0.50

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
				0.25			Grass over, brown, sandy, silty CLAY with abundant roots and rootlets. (Topsoil/Subsoil)	
	0.30	ES					Stiff to very stiff, light yellow brown, sandy, silty CLAY with occasional rootlets.	
	0.40	D						
	0.40	PP	112.5	0.45			Stiff, yellow mottled light grey, slightly sandy, silty CLAY with occasional rootlets.	
	0.45	HVP	112					
	0.70	HVP	90					
	0.70	PP	100					
	0.90	D						
	0.90	PP	100					1
	1.30	HVP	72					
	1.50	D						
	1.60	D		1.60			Grey, mottled yellow, very silty/clayey fine SAND with black staining. Locally tending to very sandy SILT/CLAY.	
	2.00	D		2.00			Grey brown, sandy silty GRAVEL. Gravel is predominantly fine, sub-rounded limestone, siltstone, sandstone, chert and quartz.	2
				2.90			Very stiff, dark blue grey, silty CLAY.	3
				3.10			End of Pit at 3.10m	
								4
								5

Remarks: Strata are wet from 1.60mbgl.

Stability: Minor spalling from 1.60mbgl.





Trial Pit Log

Trial Pit No
TP02
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384534.00 - 156010.00
Level:

Date
18/07/2017

Location: Trowbridge

Dimensions (m): 2.05

Depth
1.40

0.50

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.20	ES					Grass over, brown, sandy, silty CLAY with abundant roots and rootlets. (Topsoil/Subsoil)	
	0.30	D		0.30			Stiff to very stiff, yellow brown, fine sandy, silty CLAY with occasional rootlets.	
	0.40	PP	200					
	0.55	PP	162.5	0.50 0.60			Very stiff, yellow brown, mottled light grey, slightly sandy, silty CLAY with occasional rootlets. Stiff to very stiff, yellow mottled light grey, slightly sandy, silty CLAY with occasional rootlets.	
	0.80	HVP	82					
	0.90	D		0.92				
	0.90	PP	125				Soft, blue grey mottled orange and yellow, slightly sandy (est.10%), slightly fine gravelly, clayey SILT. Gravel comprises fine, sub-angular limestone. Increase in sand and gravel content from 1.20m	1
	1.30	D		1.40			End of Pit at 1.40m	2 3 4 5

Remarks: Strata are wet from 0.92mbgl.

Stability: No side spalling below 0.3mbgl.





Trial Pit Log

Trial Pit No
TP03
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384835.00 - 155796.00
Level:

Date
18/07/2017

Location: Trowbridge

Dimensions (m): 2.10

Depth
1.60

0.50

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd








Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.20	ES		0.25			Grass over, dark brown, slightly sandy, silty CLAY with abundant roots and rootlets and orange staining. (Topsoil/Subsoil)	
	0.40	ES		0.36			Very stiff, dark grey, silty CLAY with mottled orange staining and rootlets.	
	0.40	PP	200				Firm to stiff, blue grey, mottled yellow, closely fissured, silty CLAY with rootlets.	
	0.65	HVP	80					
	0.80	D						
	1.00	PP	75	1.10				1
	1.20	HVP	68				Firm, blue grey, mottled yellow and orange, closely fissured, silty CLAY with rootlets.	
	1.50	D		1.50				
	1.55	PP	75	1.60			Firm to stiff, purple brown, mottled yellow, closely fissured, silty CLAY.	
							End of Pit at 1.60m	
								2
								3
								4
								5

Remarks: Damp from 0.36mbgl. Excavated as clumps.

Stability: Minor spalling from Ground level to 0.36mbgl. No spalling below.



				Trial Pit Log			TrialPit No TP04 Sheet 1 of 1	
Project Name: Southwick Court Farm				Project No. GCE00644		Co-ords: 384648.00 - 155940.00 Level:		Date 18/07/2017
Location: Trowbridge						Dimensions (m): 0.60		Scale 1:25
Client: Waddeton Park Ltd						Depth 2.00		Logged RH
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
▼	0.20	ES		0.25			Grass over, dark brown, slightly sandy, silty CLAY with abundant roots and rootlets and orange staining. (Topsoil/Subsoil)	
	0.35	PP	137.5				Stiff to very stiff, grey brown, mottled orange, fissured, slightly gravelly (est.10%), slightly sandy, silty CLAY with rootlets. Gravel comprises predominantly medium, sub-angular chert and occasional sandstone and occasional fine gravel of charcoal.	
	0.40	D					Stiff to very stiff, yellow brown, mottled blue grey and white, slightly sandy, fissured silty CLAY with occasional roots.	
	0.40	PP	137.5	0.50			Stiff, yellow brown, mottled blue grey and white, slightly gravelly, sandy fissured silty CLAY. Gravel comprises fine to medium, sub-rounded limestone.	
	0.90	D					Stiff, blue grey mottled yellow brown, sandy silty CLAY with occasional decaying root and shell fragment.	1
	0.90	PP	125				Stiff, blue grey, occasionally mottled dark grey, slightly sandy, silty CLAY with est. 20% shells and shell fragments and thickly laminated relic structure. Excavated as blocky crumble.	
	1.00	HVP	106	1.00			End of Pit at 2.00m	
	1.50	D		1.50			End of Pit at 2.00m	
	1.90	D		1.80			End of Pit at 2.00m	2
				2.00			End of Pit at 2.00m	
Remarks: Strata are wet from approximately 1.40mbgl.								
Stability: Very slight spalling.								

				Trial Pit Log			TrialPit No TP05 Sheet 1 of 1	
Project Name: Southwick Court Farm				Project No. GCE00644		Co-ords: 385092.00 - 155709.00 Level:		Date 18/07/2017
Location: Trowbridge						Dimensions (m):		Scale 1:25
Client: Waddeton Park Ltd						Depth 3.50		Logged RH
Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.20	ES		0.30			Grass over, dark brown, slightly gravelly, slightly sandy, silty CLAY with abundant roots and rootlets and mottled orange brown staining. (Topsoil/Subsoil)	1 2 3 4 5
	0.40	D						
	0.40	PP	200	0.60		Stiff to very stiff, yellow brown mottled light blue grey, very closely fissured, slightly sandy, silty CLAY. Gravel comprises occasional medium, sub-angular chert.		
	0.40	PP	225					
	0.60	PP	125					
	0.90	D		1.30		Firm to stiff, light blue grey, mottled, closely fissured, slightly gravelly, slightly sandy, silty CLAY. Gravel comprises occasional medium, sub-angular chert.		
	1.30	HVP	80					
	1.40	HVP	64					
	1.70	D		1.50		Firm to stiff, light blue grey mottled yellow brown, closely fissured silty CLAY with localised silt dusting (possible calcite).		
				1.90		Stiff, dark purple grey, mottled orange and yellow, slightly sandy, silty CLAY with thinly laminated relic structure. Sand is fine to coarse in localised lenses of orange and yellow mottling.		
			2.30		Stiff, dark purple grey, mottled orange and yellow, slightly sandy, silty CLAY with abundant coarse sand sized gypsum crystals and thinly laminated relic structure. Sand is fine to coarse in localised lenses of orange and yellow mottling.			
2.50	D		2.80		Stiff, dark purple grey, silty CLAY with thinly laminated relic structure, mottled pale yellow silt and occasional (<10%) dark brown, fine sand lenses.			
			3.30		Stiff, dark grey, silty CLAY with up to 10% extremely weak mudstone lithorelics, estimated 30 - 40% coarse sand sized gypsum crystals, estimated 20% shells and fragments, thinly laminated relic structure and localised lenses of dark brown fine sand.			
3.40	D		3.50		Very stiff, dark grey, silty CLAY tending to extremely weak mudstone with thinly to thickly laminated relic structure and occasional very weak, black, fine to medium mudstone gravel. Excavated as blocky cobble and coarse gravel of clay.			
End of Pit at 3.50m								
Remarks: Strata are wet from approximately 2.80mbgl.								
Stability: No spalling below 0.3mbgl.								





Trial Pit Log

Trial Pit No
TP06
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 385106.00 - 155849.00
Level:

Date
18/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.20

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.10	ES					Grass over, dark brown, slightly sandy, silty CLAY with abundant roots and rootlets and orange staining. (Topsoil)	
	0.30	PP	250	0.25			Very stiff, brown mottled dark grey and yellow brown, slightly sandy, silty CLAY with abundant rootlets and occasional pottery fragment. (Subsoil)	
	0.40	PP	200	0.35			Very stiff, yellow brown mottled light grey, closely fissured, silty CLAY with occasional rootlets and occasional fine coal.	
	0.60	PP	100	0.45			Firm to stiff, yellow brown mottled light grey, closely fissured, silty CLAY with occasional rootlets.	
	0.70	D						
	0.70	HVP	74					
	1.00	D						
	1.00	HVP	72	1.00			Firm to stiff, light blue grey mottled yellow brown, closely to very closely fissured silty CLAY with occasional rootlet.	1
	1.30	D		1.30			Stiff, dark purple grey, weathered brown and mottled pale yellow, silty CLAY with estimated 40% extremely weak, fine to coarse mudstone lithorelics and thinly to thickly laminated relic structure. Excavated as blocky gravel of clay.	
	1.50	D		1.50				
	1.70	D		1.60			Stiff, dark purple grey mottled rusty orange and pale yellow slightly sandy, silty CLAY.	
							Extremely weak, dark purple grey MUDSTONE excavated as blocky coarse gravel/cobbles in (est. 20%) slightly sandy clay matrix.	2
				2.40				
	2.50	D					Extremely weak to very weak, dark purple grey MUDSTONE.	
				2.90				
	3.00	D					Extremely weak, dark grey, thinly laminated MUDSTONE/ SHALE with up to 40% shell fragments between layers.	3
				3.20			End of Pit at 3.20m	
								4
								5

Remarks: Wet from 2.50mbgl, groundwater entered the trial pit from 3.20m.

Stability: Very slight spalling.





Trial Pit Log

Trial Pit No
TP07
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 385083.00 - 155770.00
Level:

Date
18/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.80

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.20	ES	225	0.15			Grass over, slightly gravelly, sandy silty CLAY with abundant roots and rootlets. Gravel comprises <10% sub-rounded sandstone and sub-angular chert. (Topsoil)	
	0.35	PP		0.25			Stiff, dark brown mottled yellow and orange, slightly gravelly, sandy, silty CLAY with occasional rootlets. Gravel comprises <10% medium limestone and sandstone. (Subsoil)	
	0.60	D		0.50			Very stiff, yellow brown, sandy, silty CLAY with occasional rootlets.	
			120				Stiff to very stiff, light blue grey mottled yellow brown, closely fissured silty CLAY with occasional rootlets. Lense of black decayed tree roots encountered at 1.40m.	1
	1.15	HVP						
	1.40	D						
				1.60				
	1.70	D		1.80			Stiff, locally firm, light blue grey mottled yellow brown and white, closely fissured silty CLAY with localised (up to 30%) fine, white medium sand.	
	1.90	D		2.00			Stiff, mottled light blue grey and yellow brown, sandy silty CLAY with occasional black staining. Sand is medium to coarse.	2
	2.50	D					Stiff, light blue grey, tending grey brown, closely fissured, slightly sandy silty CLAY with estimated 10% coarse sand sized gypsum crystals and relic structure of thin to thick laminations. Locally abundant seaweed-like palaeo-rootlets around 2.50m.	
				2.80				
	2.90	D		3.10			Stiff, grey, locally mottled brown, closely fissured, silty CLAY with up to 40% coarse sand and fine gravel sized gypsum crystals and relic thin and thick laminations.	3
	3.30	D						
				3.80			Stiff to very stiff, dark grey silty CLAY, with estimated 10% extremely weak mudstone lithorelics. Localised pale yellow silt veins in initial 0.30m.	
							End of Pit at 3.80m	4
								5

Remarks: Strata are wet around 2.80mbgl.

Stability: Very slight spalling.





Trial Pit Log

TrialPit No
TP08
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 385031.00 - 155677.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.75

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.05	ES		0.15			Grass over, brown, sandy, silty CLAY with abundant roots and rootlets. (Topsoil)	
	0.20	PP	250	0.28			Very stiff, brown, slightly gravelly, sandy silty CLAY with occasional rootlets and mottled orange staining. Gravel comprises fine, sub-rounded sandstone and limestone. (Subsoil)	
	0.35	PP	225				Stiff to very stiff, yellow brown, mottled light blue grey, closely fissured, slightly fine sandy silty CLAY with occasional rootlets and occasional fine coal.	
	0.40	D					Stiff, light blue grey mottled yellow brown, closely fissured silty CLAY with occasional rootlet.	
	0.55	PP	162.5	0.56				
	0.85	HVP	106					
	1.00	D						
	1.00	PP	130					
	1.20	HVP	116	1.30				
	1.40	D		1.50			Stiff, purple grey mottled pale yellow and rusty brown, closely to very closely fissured, silty CLAY with very occasional rootlets and occasional lenses of black organics.	
							Stiff, purple grey mottled pale yellow and rusty brown, closely to very closely fissured, silty CLAY with relic thin to thick laminations and locally medium sandy and very occasional rootlets.	
				2.00				
							Stiff, purple grey mottled yellow and rusty brown, silty CLAY tending to extremely weak MUDSTONE. Excavated as silty clay with up to 60% extremely weak, up to cobble sized mudstone lithorelics.	
	2.70	D		2.80				
	2.90	D					Extremely weak, blue grey, closely fractured MUDSTONE/SILTSTONE with localised yellow silt and <5% prismic gypsum crystals generally 3cm to 6cm long. Excavated as blocky gravelly cobbles in 20% silty clay matrix. Cobbles are smooth sided where broken along bedding fractures.	
	3.60	D		3.75				
							End of Pit at 3.75m	

Remarks: No groundwater encountered.

Stability: No spalling below 0.30mbgl.





Trial Pit Log

Trial Pit No
TP09
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384984.00 - 155759.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.85

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.10	ES		0.15			Grass over, brown, sandy, silty CLAY with abundant roots and rootlets (Topsoil)	
				0.30			Stiff, brown, slightly gravelly, sandy, silty CLAY with rootlets. Gravel comprises fine siltstone and sandstone. (Subsoil)	
	0.40	ES		0.40			Stiff to very stiff, brown, mottled orange, slightly gravelly, slightly sandy, silty CLAY with occasional rootlet. Gravel comprises fine, sub-angular sandstone and siltstone.	
	0.50	PP	100	0.55			Stiff, orange brown, slightly gravelly, slightly sandy, silty CLAY with occasional rootlet and occasional fine gravel of coal. Gravel comprises fine sub-angular sandstone and siltstone.	
	0.80	D					Soft to firm, light blue grey mottled yellow brown, closely fissured silty CLAY. Locally sandy from 1.30m.	1
	1.20	HVP	40				Firm to stiff, dark purple grey, locally rusty orange, yellow and white, closely fissured, slightly sandy silty CLAY.	
	1.20	HVP	64	1.50			Firm to stiff, dark purple grey, locally rusty orange, yellow and white, closely fissured, slightly sandy silty CLAY.	
	1.30	HVP	48				Firm to stiff, dark purple grey, locally rusty orange, yellow and white, closely fissured, slightly sandy silty CLAY.	
	1.40	D					Firm to stiff, dark purple grey, locally rusty orange, yellow and white, closely fissured, slightly sandy silty CLAY.	
	1.70	D					Firm to stiff, dark purple grey, locally rusty orange, yellow and white, closely fissured, slightly sandy silty CLAY.	
	1.80	HVP	50				Firm to stiff, dark purple grey, locally rusty orange, yellow and white, closely fissured, slightly sandy silty CLAY.	2
	2.00	D		2.10			Stiff, dark blue grey, locally pale yellow, closely to very closely fissured, silty CLAY with up to 30% extremely weak mudstone/siltstone lithorelics, relic thin laminations, shell fragments, localised lenses of coarse sand sized gypsum crystals and occasional lenses of seaweed-like palaeo-rootlets.	
							Stiff, dark blue grey, locally pale yellow, closely to very closely fissured, silty CLAY with up to 30% extremely weak mudstone/siltstone lithorelics, relic thin laminations, shell fragments, localised lenses of coarse sand sized gypsum crystals and occasional lenses of seaweed-like palaeo-rootlets.	3
				3.50			Extremely weak, blue grey, thinly laminated, close to medium fractured, MUDSTONE/SILTSTONE with <10% shells. Excavated as predominantly cobbles and boulders.	
	3.70	D		3.85			Extremely weak, blue grey, thinly laminated, close to medium fractured, MUDSTONE/SILTSTONE with <10% shells. Excavated as predominantly cobbles and boulders.	
							End of Pit at 3.85m	4
								5

Remarks: No groundwater encountered.

Stability: No spalling below 0.40mbgl.





Trial Pit Log

Trial Pit No
TP10
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384931.00 - 155852.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.00

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.10	ES		0.10			Grass over, brown, slightly gravelly, sandy, silty CLAY with abundant roots and rootlets. Gravel comprises fine, sub-angular siltstone and sandstone plus occasional glass shard. (Topsoil)	
				0.25			Stiff to very stiff, brown, slightly gravelly, slightly sandy silty CLAY with occasional rootlets. Gravel comprises fine, sub-angular to sub-rounded siltstone and sandstone with occasional coarse chert and land drain clay fragment. (Subsoil)	
	0.40	PP	237.5					
	0.60	PP	175					
	0.70	ES						
				0.80			Stiff to very stiff, light grey mottled yellow brown, closely fissured, very slightly sandy, silty CLAY with occasional rootlet and estimated 10% fine, ironstone nodules.	
	0.90	PP	100					
	0.90	PP	125				Stiff, light blue grey, mottled yellow brown, closely fissured silty CLAY with (est.5%) fine gravel sized hard coal.	1
	1.30	HVP	100					
	1.40	ES		1.40			Stiff, light blue grey mottled yellow brown, closely fissured, locally sandy, silty CLAY with abundant shells and fragments and localised decaying rootlets (est. <10%).	
	1.50	D		1.50				
				1.80			Stiff, light blue grey mottled yellow brown, fine to medium sandy silty CLAY with thinly laminated relic structure and est. 10% seaweed-like palaeo-rootlets.	
							Stiff, purple grey mottled grey brown, slightly fine to medium sandy, silty CLAY with up to 20% extremely weak mudstone/siltstone lithorelics and occasional seaweed-like palaeo-rootlets from 1.80 to 2.00mbgl.	2
				2.30				
	2.50	D					Stiff, dark grey mottled pale yellow, silty CLAY with up to 20% mudstone lithorelics tending to extremely weak mudstone/siltstone with localised lenses of coarse sand to fine gravel sized gypsum crystals.	
				2.80				
	2.90	D					Extremely weak, dark grey, occasionally stained rusty orange, closely to medium fractured, thinly laminated MUDSTONE/SILTSTONE. Excavated as blocky gravel and cobbles.	3
				3.00				
							End of Pit at 3.00m	

Remarks: No groundwater encountered.

Stability: No spalling below 0.3mbgl.





Trial Pit Log

Trial Pit No
TP11
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384943.00 - 155895.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
2.80

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.10	ES		0.25			Grass over, brown, slightly gravelly, sandy, silty CLAY with abundant roots and rootlets. Gravel comprises fine, sub-angular siltstone and sandstone and fine hard coal. (Topsoil)	
	0.45	PP	250				Stiff to very stiff, grey brown mottled yellow brown, very slightly fine sandy, silty CLAY with rootlets.	
	0.60	D		0.60			Firm to stiff, grey mottled yellow brown, fissured silty CLAY with occasional rootlet and occasional palaeo-root.	
	0.60	PP	100					
	0.60	PP	150					
	0.90	HVP	60					1
	1.20	HVP	62	1.20			Firm to stiff, purple grey mottled yellow brown, closely to very closely fissured silty CLAY with seaweed-like palaeo-rootlets.	
	1.20	HVP	78					
	1.30	D		1.40			Firm to stiff, purple grey, locally rusty orange and pale yellow, very closely fissured silty CLAY with occasional seaweed-like palaeo-rootlets.	
	1.30	HVP	56					
	1.50	HVP	70					
	1.90	D		1.80			Stiff to very stiff, purple grey, locally rusty orange and pale yellow, very closely fissured silty CLAY with occasional seaweed-like palaeo-rootlets.	2
	1.90	HVP	112	2.00			Extremely weak, dark purple grey, locally rusty orange and pale yellow, thinly laminated MUDSTONE/ SILTSTONE.	
				2.40			Extremely to very weak, dark blue grey, thinly laminated MUDSTONE/SHALE. Excavated as blocky, smooth-side cobbles, fractured along bedding planes.	
	2.70	D		2.80			End of Pit at 2.80m	3
								4
								5

Remarks: Groundwater encountered at 2.60mbgl.

Stability: No spalling below 0.40mbgl.





Trial Pit Log

Trial Pit No
TP12
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384876.00 - 155936.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.30

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.30 0.35	ES PP	150	0.25 0.50			Grass over, brown mottled orange, slightly sandy tending sandy, silty CLAY with abundant roots and rootlets. Gravel comprises fine siltstone and sandstone and occasional medium sub-angular chert. (Topsoil/Subsoil) Stiff to very stiff, grey brown, mottled yellow brown, fissured silty CLAY with occasional rootlets and fine gravel sized coal.	
	0.85	HVP	56				Firm, light grey mottled yellow brown, closely fissured silty CLAY with occasional rootlets and black staining.	1
	1.20 1.30 1.40	HVP D B	60	1.30 1.50			Firm, light grey mottled yellow brown, closely fissured, medium to coarse sandy, silty CLAY with occasional rootlets and black staining.	
							Stiff, dark purple grey locally rusty orange and pale yellow closely to very closely fissured silty CLAY with localised sandy lenses, localised areas of seaweed-like palaeo-rootlets and localised lenses of fine gravel sized angular gypsum crystals.	2
				2.10			Very stiff, dark purple grey locally rusty orange and pale yellow, closely to very closely fissured, slightly sandy silty CLAY with relic laminations and abundant shell fragments. Boulder and occasional cobble of medium strong dark grey calcareous mudstone with calcite veins.	
	2.70	B		2.70			Stiff to very stiff, dark blue grey, silty CLAY with relic thin laminations tending to extremely weak mudstone/ siltstone from 3.20m.	3
	3.00	D		3.30			End of Pit at 3.30m	4
								5

Remarks: No groundwater encountered.

Stability: No spalling below 0.40mbgl.





Trial Pit Log

TrialPit No
TP13
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384819.00 - 155855.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.50

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
				0.15			Grass over, brown, slightly sandy tending sandy, silty CLAY with abundant roots and rootlets. Gravel comprises fine siltstone and sandstone and occasional medium sub-angular chert. (Topsoil)	
	0.40	ES		0.40			Very stiff, brown, slightly gravelly, sandy silty CLAY with rootlets. Gravel comprises fine siltstone and sandstone and occasional medium sub-angular chert. (Subsoil)	
	0.60	PP	100	0.65			Stiff, grey brown mottled yellow brown, silty CLAY with occasional rootlets.	
	0.90	PP	50				Firm, light purple grey mottled yellow brown, silty CLAY with occasional decaying rootlets.	1
	1.10	HVP	60				Firm, purple grey mottled rusty orange and pale yellow, closely to very closely fissured, slightly sandy, silty CLAY with localised fine gravel sized angular gypsum crystals and relic thin laminations. Abundant gypsum crystals up to 4cm long around 1.60m.	2
	1.20	HVP	56				Stiff, dark blue grey, closely fissured silty CLAY with estimated 10% extremely weak mudstone lithorelics, thinly laminated relic structure, 5% prismic crystals up to 6cm long and locally sandy pockets.	
	1.40	D		1.50			Extremely weak, dark blue grey, slightly fine sandy MUDSTONE/SILTSTONE with abundant shells and fragments.	3
	1.90	D					Extremely weak, dark blue grey MUDSTONE/SILTSTONE with some shells and occasional gypsum crystal, tending to very stiff silty CLAY.	
	1.90	ES		2.10			End of Pit at 3.50m	4
	3.30	D		3.20				5
				3.50				

Remarks: No groundwater encountered.

Stability: No spalling below 0.40mbgl.





Trial Pit Log

TrialPit No
TP14
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384783.00 - 155941.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.80

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.10			0.10			Grass over, brown, slightly gravelly, sandy silty CLAY with abundant roots and rootlets. Gravel comprises fine, sub-angular siltstone and sandstone. (Topsoil)	
	0.30			0.30			Stiff, slightly gravelly, sandy silty CLAY with rootlets. Gravel comprises fine, sub-angular siltstone and sandstone. (Subsoil)	
	0.50	D					Stiff, yellow brown mottled brown and grey, slightly gravelly, sandy silty CLAY. Gravel comprises predominantly medium sub-angular to angular chert/flint.	
	0.80	ES		0.70			Firm locally soft, yellow brown mottled brown and grey, slightly gravelly, sandy silty CLAY. Gravel comprises predominantly medium sub-angular to angular chert/flint.	1
	1.00	HVP	40				Stiff to very stiff, closely to very closely fissured slightly fine sandy, silty CLAY.	
	1.20	HVP	70	1.30			Stiff, light blue grey mottled yellow brown, medium to coarse sandy, silty CLAY.	
	1.40	D					Stiff, purple grey mottled yellow and rusty orange, closely fissured silty CLAY with abundant fine angular gypsum crystals and occasional decaying root and occasional lense of weathered roots.	2
	1.40	HVP	70				Stiff to very stiff, blue grey, closely fissured, slightly fine sandy, silty CLAY with very occasional rounded cobble of limestone and occasional shell fragments. Tending to extremely weak, slightly sandy SILTSTONE/MUDSTONE from 3.60mbgl.	
				1.60				
				1.70				
				2.50				
	3.00	D						3
	3.70	D		3.80				
							End of Pit at 3.80m	4
								5

Remarks: No groundwater encountered.

Stability: Sides stable.





Trial Pit Log

Trial Pit No
TP15
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384671.00 - 156011.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Depth
3.00

Scale
1:25

Logged
RH

Client: Waddeton Park Ltd

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	1.20 1.20	D HVP	94	0.20 0.40 0.70		                       	Grass over, stiff, dark brown, slightly gravelly, sandy, silty CLAY with abundant roots and rootlets and low cobble content. Gravel comprises fine to medium, sub-angular limestone, sandstone and siltstone and coarse sub-angular chert. Cobbles are sub-angular sandstone. (Topsoil) Stiff, dark brown, slightly gravelly, slightly sandy, silty CLAY with occasional rootlets. Gravel comprises fine to medium, sub-angular limestone, sandstone and siltstone and coarse sub-angular chert. (Subsoil) Stiff, grey brown, mottled yellow brown, slightly sandy, slightly gravelly, silty CLAY. Gravel comprises predominantly medium sandstone and chert. Stiff to very stiff, light blue grey mottled yellow brown, slightly gravelly, slightly sandy, silty CLAY with occasional rootlets. Stiff, blue grey mottled yellow brown, sandy silty CLAY with thinly laminated relic structure. Sand is medium grained and white. Stiff, purple grey, silty CLAY with thinly laminated relic structure and abundant seaweed-like rootlets and shell fragments. Tending to extremely weak MUDSTONE from 2.0mbgl. Extremely weak, purple grey, slightly fine sandy, MUDSTONE/SILTSTONE with occasional very weak cobbles and coarse gravel. Extremely weak, blue grey MUDSTONE/SILTSTONE tending to very stiff, silty CLAY. End of Pit at 3.00m	1 2 3 4 5

Remarks: No groundwater encountered.

Stability: Sides stable.





Trial Pit Log

Trial Pit No
TP16
Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords: 384595.00 - 155997.00
Level:

Date
19/07/2017

Location: Trowbridge

Dimensions
(m):

Scale
1:25

Client: Waddeton Park Ltd

Depth
3.70

Logged
RH

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.40 0.40	ES PP	150	0.30 0.60		 	Grass over, stiff, dark brown, slightly gravelly (est. <10%), slightly sandy, silty CLAY. Gravel comprises fine to medium sub-rounded sandstone, siltstone and sub-angular chert with roots and rootlets. (Topsoil) Stiff, brown, silty CLAY with occasional rootlet. (Subsoil)	
				1.10			Stiff, yellow brown, gravelly, sandy, silty CLAY with low cobble content. Gravel comprises predominantly fine to coarse, sub-angular to sub-rounded chert. Cobbles are sub-rounded chert. Locally tending to gravelly SAND. This stratum extends to 1.40m in west of trial pit.	1
	1.90	D					Very stiff, purple grey mottled yellow brown, closely fissured silty CLAY with occasional root.	
	2.20	HVP	106				Very stiff, purple grey mottled yellow brown and pale yellow, closely fissured silty CLAY with abundant gypsum crystals from coarse sand sized to up to 6cm long. Tending to extremely weak mudstone from 3.0m.	2
				2.80			Very stiff, blue grey silty CLAY tending to extremely weak MUDSTONE.	
	3.20	D		3.30			End of Pit at 3.70m	3
	3.60	D		3.70				4
								5

Remarks: No groundwater encountered.

Stability: Minor spalling in gravelly layer.



GCE00644/ R2



Appendix C – Trial Pit Photographs

TP01



GCE00644 Land South of Trowbridge—Trial Pit photographs

TP02



TP03



GCE00644 Land South of Trowbridge—Trial Pit photographs

TP04



TP05



GCE00644 Land South of Trowbridge—Trial Pit photographs

TP06



TP07



TP08



GCE00644 Land South of Trowbridge—Trial Pit photographs

TP09



TP10



TP11



TP12



TP13



TP14



TP15



TP16



GCE00644/ R2



Appendix D – Dynamic Sampling Borehole Records



Borehole Log

Borehole No.

WS01

Sheet 1 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					0.12			Grass over brown, fine sandy, silty clay with rootlets.	1
					0.28			Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
		0.45	PP	62.50	0.56			Firm, brown with dark brown and orange brown speckles, slightly sandy, slightly gravelly, silty CLAY Gravel is of sandy limestone.	
		0.65	PP	75.00				Stiff, brown mottled light brown, dark brown and orange brown, slightly sandy, silty CLAY.	
		0.90 0.90 1.00	D PP SS	75.00 N=5 (1,1/1,2,1,1)	1.05			Stiff, grey and orange brwn, slightly fine sandy, slightly gravelly, silty CLAY. Gravel is of sub-rounded limestone. (Low SPT N value may be attributed to groundwater)	
		1.20	PP	100.00					2
		1.40	D						
		1.60	PP	100.00					
		2.00 2.00	PP SS	75.00 N=14 (1,2/3,3,3,5)	2.30			Stiff, grey brown mottled orange brown, slightly fine sandy, silty CLAY.	
		2.40 2.40	D PP	75.00					
		2.60	PP	100.00					3
		2.75	PP	100.00	2.70			Stiff, dark grey, slightly fine sandy, silty CLAY.	
					2.82			Hard, dark grey, silty CLAY with occasional shells.	
		3.00	SS	N=14 (1,2/3,3,4,4)	3.00			Stiff to very stiff, dark grey, silty CLAY with numerous shelly fragments. Locally tends to fine sandy gravel of mudstone.	
		3.40	PP	100.00					
		3.60	D						
		3.80	PP	125.00					4
		4.00	SS	N=30 (3,4/7,7,8,8)					
		4.20	PP	212.50					
		4.50 4.60	D PP	125.00					
		5.00 5.00	PP SS	137.50 N=15 (4,3/3,3,4,5)					
								Continued on Next Sheet	5

Remarks

No groundwater encountered.





Borehole Log

Borehole No.

WS01

Sheet 2 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					5.45			End of Borehole at 5.450m	
									6
									7
									8
									9
									10

Remarks

No groundwater encountered.





Borehole Log

Borehole No.

WS02

Sheet 1 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.10	ES		0.10			Grass over brown, fine sandy, silty clay with rootlets.	
					0.25			Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
								Stiff, brown, slightly fine sandy, silty CLAY.	
		0.50	PP	162.50					1
		0.70	D		0.60			Stiff, orange brown mottled light brown, slightly fine sandy, silty CLAY.	
		0.70	PP	125.00					
		0.90	PP	125.00					
		1.00	SS	N=3 (1,0/1,0,1,1)	1.05				
		1.20	PP	25.00				Very soft to soft, orange brown mottled light brown, slightly fine sandy, slightly fine gravelly, silty CLAY. Gravel is of sandy limestone.	
		1.50	D						2
		1.70	PP	25.00					
		2.00	SS	N=0 (0,0/0,0,0,0)					
		2.20	PP	12.50					
		2.50	D						
		2.70	PP	12.50					
		3.00	SS	N=6 (1,0/1,1,2,2)					3
		3.10	PP	12.50					
		3.30	PP	25.00	3.26			Soft, brown and orange brown, slightly fine sandy, fissured silty CLAY. Fissures concentrate wet, very soft, dark grey silty clay.	
		3.50	D						
		3.50	PP	25.00					
		3.70	PP	25.00	3.78			Soft to firm, light brown, slightly sandy, slightly gravelly, silty CLAY. Gravel is of sub-rounded limestone.	
		3.90	PP	37.50					4
		4.00	SS	N=11 (2,2/2,3,3,3)					
		4.35	PP	62.50	4.27			Firm, brown grey, slightly fine sandy, silty CLAY.	
		4.40	D		4.57				
		4.80	D					Stiff, dark grey, silty CLAY with occasional gypsum crystals up to 3mm.	
		5.00	SS	N=13 (1,2/2,3,3,5)					

Continued on Next Sheet

Remarks

Groundwater encountered in fissures between 3.26 - 3.78mbgl.





Borehole Log

Borehole No.

WS02

Sheet 2 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					5.45			End of Borehole at 5.450m	6 7 8 9 10

Remarks

Groundwater encountered in fissures between 3.26 - 3.78mbgl.





Borehole Log

Borehole No.

WS03

Sheet 1 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.05	ES		0.12			Grass over brown, slightly sandy, silty clay with roots and rootlets.	1
					0.26			Firm to stiff, brown, slightly sandy, silty CLAY with occasional rootlets.	
		0.40	PP	185.00				Very stiff, brown, slightly sandy, slightly fine gravelly, silty CLAY. Gravel is of iron-stained sandstone.	
		0.50	D						
		0.60	PP	212.50	0.65			Very stiff, light brown, slightly gravelly, silty CLAY. Gravel is of rounded chert and sandstone.	1
		0.80	PP	200.00					
		0.90	D						
		1.00	SS	N=16 (2,2/3,4,4,5)					
		1.10	PP	212.50	1.17			Very stiff, light brown mottled grey, silty CLAY with sand-sized gypsum crystals.	2
		1.30	PP	150.00					
					1.55			Very stiff, grey brown mottled light brown, orange brown and grey, silty CLAY with gypsum crystals up to 10-15mm.	
		1.70	PP	225.00					
		1.90	D						
		2.00	SS	N=23 (3,4/5,5,6,7)					2
		2.10	PP	200.00					
		2.60	PP	175.00					
					2.97			Very stiff, dark grey, fine sandy, silty CLAY with occasional shelly debris.	3
		3.00	D						
		3.00	SS	N=14 (2,3/3,3,4,4)					
		3.10	PP	137.50					
3.60	PP	112.50					4		
4.00	D								
4.00	SS	N=22 (3,4/5,5,5,7)							
4.10	PP	212.50					5		
4.60	PP	112.50							
5.00	D						5		
5.00	SS	33 (4,6/33 for 115mm)							
Continued on Next Sheet									

Remarks

Groundwater encountered below 3.0mbgl.





Borehole Log

Borehole No.

WS03

Sheet 2 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge


Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		5.10	PP	162.50				Extremely weak, dark grey, thinly laminated, fine sandy MUDSTONE. End of Borehole at 5.450m	
					5.40 5.45				
									6
									7
									8
									9
									10

Remarks

Groundwater encountered below 3.0mbgl.





Borehole Log

Borehole No.

WS04

Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.10	ES		0.13			Grass over brown, fine sandy, silty clay with rootlets.	1
					0.28			Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
		0.40	PP	187.50				Stiff, brown and orange brown with dark brown speckles, slightly fine sandy, silty CLAY.	
		0.80	D						1
		0.80	PP	175.00					
		1.00	PP	150.00					
		1.00	SS	N=6 (1,1/1,2,1,2)					
		1.10	PP	100.00	1.15				1
		1.20	PP	25.00					
		1.50	D						
		1.50	PP	25.00					2
		1.90	PP	25.00					
		2.00	SS	N=0 (0,0/0,0,0,0)	2.00			Very soft, orange brown mottled light grey, fine sandy, silty CLAY.	
									2
		2.20	PP	12.50					
		2.40	D						
		2.50	PP	12.50					3
					2.63				
		3.00	D						
		3.00	SS	N=10 (2,2/2,2,3,3)				Light brown, slightly silty, slightly clayey, sandy GRAVEL of fine to medium sandy limestone.	3
					3.51				
									4
		3.70	PP	100.00				Very stiff, dark grey, silty CLAY with occasional shell debris.	
		4.00	D						
		4.00	PP	125.00					4
		4.00	SS	N=15 (3,3/3,4,4,4)					
					5.00				5
								End of Borehole at 5.000m	5

Remarks

Groundwater encountered below 2.0mbgl. Gravels collapsed to 3mbgl after drilling.





Borehole Log

Borehole No.

WS05

Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
		Depth (m)	Type	Results						
		0.10	ES		0.16			Grass over brown, fine sandy, silty clay with rootlets.		
					0.26			Firm, brown, fine sandy, silty CLAY with occasional rootlets.		
		0.50	D			0.78			Stiff, brown mottled light brown and orange brown, slightly gravelly, silty CLAY. Gravel is of sub-angular chert.	1
		0.90	PP	50.00				Firm, orange brown and grey, slightly sandy, silty CLAY.		
		1.00	SS	N=9 (1,2/2,2,3,2)				Stiff, orange brown and grey, slightly sandy, silty CLAY.		
		1.10	PP	55.00	1.17					
		1.40	D					Stiff to very stiff, grey and grey brown, silty CLAY with gypsum crystals up to 8mm.	2	
		1.40	PP	160.00						
		1.70	PP	175.00						
		1.90	PP	100.00	1.81					
		2.00	SS	N=13 (1,2/2,3,4,4)				Very stiff, dark grey, silty CLAY.	3	
		2.30	D							
		2.30	PP	125.00						
		2.70	PP	112.50						
		3.00	SS	N=17 (3,3/4,4,4,5)				End of Borehole at 4.450m	4	
		3.10	PP	112.50						
		3.40	PP	105.00	3.30					
		3.70	D							
		3.70	PP	100.00					5	
		4.00	SS	N=19 (3,4/4,5,5,5)	4.45					

Remarks

No groundwater encountered.







Borehole Log

Borehole No.

WS06

Sheet 1 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 26/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.10	ES		0.10			Grass over brown, fine sandy, silty clay with rootlets.	
					0.22			Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
								Stiff, brown, slightly sandy, slightly gravelly, silty CLAY. Gravel is of sub-angular flint.	
					0.60			Stiff, orange brown and light brown, silty CLAY.	
		0.70	PP	125.00					1
		0.80	D						
		1.00	PP	100.00					
		1.00	SS	N=8 (1,2/1,2,3,2)					
		1.20	PP	100.00					
					1.28			Stiff, orange brown and grey, sandy, silty CLAY with localised horizons of silty sand.	
		1.40	PP	87.50					
		1.60	D						
		1.80	PP	87.50					
					1.95			Stiff, brown, sandy, slightly gravelly, silty CLAY with shells. Gravel is of sandstone with occasional iron staining.	
		2.00	SS	N=35 (2,3/3,12,10,10)					2
		2.10	PP	100.00					
		2.20	D						
					2.33			Stiff, brown, sandy, slightly gravelly, silty CLAY with low cobble content and shells. Gravel and cobbles are of sandstone with occasional iron staining.	
					2.50			Stiff, dark grey, fine sandy, silty CLAY with shells and shelly fragments.	
		2.60	PP	112.50					
		2.90	PP	150.00					3
		3.00	SS	N=13 (2,2/2,3,4,4)					
					3.14			Stiff, dark grey, slightly fine sandy, slightly gravelly, silty CLAY. Gravel is of ironstone nodules.	
		3.30	PP	125.00					
		3.60	D						
		3.60	PP	100.00					
		3.90	PP	125.00					
		4.00	SS	N=20 (2,2/4,4,6,6)	4.00			Stiff, dark grey, silty CLAY with very occasional shells.	
									4
		4.30	PP	137.50					
		4.50	D						
		4.60	PP	125.00					
		4.90	PP	137.50					
		5.00	SS	N=20 (2,3/4,4,5,7)					
								Continued on Next Sheet	5

Remarks

No groundwater encountered.





Borehole Log

Borehole No.

WS06

Sheet 2 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 26/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					5.45			End of Borehole at 5.450m	
									6
									7
									8
									9
									10

Remarks

No groundwater encountered.





Borehole Log

Borehole No.

WS06A

Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 26/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					0.10			Grass over brown, fine sandy, silty clay with rootlets.	
					0.20			Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
					0.42			Stiff, brown, slightly sandy, slightly gravelly, silty CLAY. Gravel is of sub-angular flint.	
		0.60	PP	150.00				Stiff, light brown and orange brown occasionally grey, silty CLAY.	
		0.80	PP	125.00					
		1.00	SS	N=7 (1,1/1,2,2,2)	1.00			Stiff, locally firm, brown orange brown and grey, slightly sandy to sandy, silty CLAY.	1
		1.20	PP	62.50					
		1.50	PP	75.00					
		1.70	PP	112.50					
					1.83			Stiff, brown and grey, slightly fine sandy, silty CLAY with shells and shelly fragments.	2
		2.00	SS	0 (60 for 135mm/0 for 0mm)	2.10			Cobble of sandstone.	
					2.35			End of Borehole at 2.350m	

Remarks

No groundwater encountered.





Borehole Log

Borehole No.

WS07

Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 25/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					0.15			Grass over brown, fine sandy, silty clay with rootlets.	
					0.21			Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
								Stiff, brown, slightly sandy, silty CLAY.	
		0.50	D						
		0.50	PP	100.00					
		0.70	PP	75.00	0.72				
		0.90	PP	25.00				Soft, light brown, grey and orange brown, slightly sandy, silty CLAY.	
		1.00	SS	N=7 (1,0/1,2,2,2)					1
		1.20	D						
		1.20	PP	25.00					
					1.33			Stiff, brown, orange brown and grey, slightly sandy, silty CLAY.	
		1.50	PP	75.00					
		1.70	D						
		1.70	PP	87.50					
					1.90			Grey, slightly silty, slightly clayey, sandy GRAVEL of flint and limestone. Locally tends to sandy, gravelly, silty clay.	2
		2.00	SS	N=14 (22,9/5,3,3,3)					
		2.20	D						
					2.50			Stiff, dark grey, fine sandy, silty CLAY.	
		2.70	PP	112.50					
		2.80	D						
		2.90	PP	112.50					
					3.00			End of Borehole at 3.000m	3
									4
									5

Remarks

Groundwater encountered at 1.9mbgl. Borehole abandoned due to collapse of gravels.





Borehole Log

Borehole No.

WS08

Sheet 1 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 26/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.10	ES		0.09 0.18			Grass over brown, fine sandy, silty clay with rootlets.	1 -
								Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
					0.49			Stiff, brown mottled orange brown, silty CLAY.	
		0.60	PP	62.50				Firm, light brown and grey, silty CLAY.	
		0.75	D					Clay land drain at 0.60mbgl.	
		0.90	PP	62.50					
		1.00	SS	N=7 (1,0/1,2,2,2)					
		1.10	PP	62.50					
		1.30	PP	62.50	1.34				
		1.40	PP	75.00				Stiff, brown, dark brown and orange brown, silty CLAY with gypsum crystals up to 5mm. Light brown bands tends to have dense clusters of fine gypsum crystals.	
		1.50	D						
		1.70	PP	112.50					
		2.00	PP	175.00					
		2.00	SS	N=13 (1,2/2,3,4,4)					
		2.30	PP	125.00					
		2.50	D						
		2.60	PP	212.50					
		2.90	PP	187.50					
		3.00	SS	N=17 (3,3/3,4,5,5)	3.09				
		3.30	PP	150.00				Very stiff, dark grey, silty CLAY with numerous gypsum crystals <1mm and occasional gypsum up to 3mm. Occasional shells and shelly fragments.	
		3.60	D						
		3.60	PP	225.00					
		3.90	PP	175.00					
		4.00	SS	N=26 (3,4/5,5,8,8)					
		4.30	PP	212.50					
		4.50	D						
		4.60	PP	150.00					
				5.00	SS		N=30 (4,4/5,7,9,9)		
Continued on Next Sheet									

Remarks

No groundwater encountered.





Borehole Log

Borehole No.

WS09

Sheet 1 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 26/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.10	ES		0.10			Grass over brown, fine sandy, silty clay with rootlets.	
					0.28			Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
					0.44			Stiff, brown, silty CLAY.	
								Stiff, brown speckled orange brown, silty CLAY.	
		0.60	PP	212.50					1
		0.70	D						
		0.90	PP	125.00					
		1.00	SS	N=3 (1,0/1,0,1,1)	1.00			Soft to firm, light brown and grey, slightly sandy, silty CLAY.	
		1.10	PP	37.50					
		1.20	D						
		1.25	PP	37.50	1.34			Stiff, brown occasionally light brown, silty CLAY with occasional gravel-sized mudstone lithorelics and sub-horizontal relic structure.	2
		1.50	PP	100.00					
		1.80	PP	125.00					
		1.90	D						
		2.00	SS	N=15 (1,2/3,3,4,5)	2.00			Stiff, brown occasionally light brown, silty CLAY with occasional gravel-sized mudstone lithorelics, sub-horizontal relic structure and gypsum crystals up to 20mm.	
		2.20	PP	137.50					
		2.25	D						
		2.40	PP	125.00					
		2.60	PP	100.00	2.55			Stiff, dark grey, silty CLAY with gypsum crystals up to 40mm.	3
		2.80	D						
		2.90	PP	137.50					
		3.00	SS	N=22 (2,3/4,5,6,7)					
		3.20	PP	112.50					
		3.50	D						
		3.60	PP	137.50					4
					3.80			Very stiff, dark grey, silty CLAY with shells.	
		3.90	PP	112.50					
		4.00	SS	N=17 (2,3/3,4,5,5)					
		4.40	PP	125.00					
		4.50	D						
		4.70	PP	162.50					5
		4.90	PP	225.00					
		5.00	SS	N=25 (2,3/5,6,7,7)					
Continued on Next Sheet									

Remarks

No groundwater encountered.





Borehole Log

Borehole No.

WS09

Sheet 2 of 2

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge

Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 26/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					5.45			End of Borehole at 5.450m	
									6
									7
									8
									9
									10

Remarks

No groundwater encountered.





Borehole Log

Borehole No.

WS10

Sheet 1 of 1

Project Name: Southwick Court Farm

Project No.
GCE00644

Co-ords:

Hole Type
WS

Location: Trowbridge


Level:

Scale
1:25

Client: Waddeton Park Ltd

Dates: 26/07/2017

Logged By
MH

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.10	ES		0.10			Grass over brown, fine sandy, silty clay with rootlets.	1
					0.24			Firm, brown, fine sandy, silty CLAY with occasional rootlets.	
								Stiff, brown and orange brown, slightly fine sandy, silty CLAY.	
		0.70	PP	200.00	0.58			Stiff, brown and grey, slightly gravelly, silty CLAY. Gravel is of sub-angular limestone.	1
		0.90	D						
		1.00	PP	200.00					
		1.00	SS	N=10 (1,2/2,2,3,3)	1.10			Stiff, brown, silty CLAY with laminations of silty, fine sand and fine gypsum crystals <1mm.	
		1.30	PP	100.00					
		1.50	D						
		1.50	PP	87.50					
		1.70	PP	125.00	1.66			Stiff, brown, silty CLAY with laminations of silty, fine sand and fine gypsum crystals <1mm. Sub-horizontal relic structure.	
		1.90	PP	112.50	1.80			Very stiff, dark brown, silty CLAY with sub-horizontal relic structure, numerous gypsum crystals <1mm and occasional gypsum crystals up to 2mm.	
		2.00	SS	N=22 (2,3/5,5,6,6)					
		2.30	PP	187.50					
		2.40	D						
		2.60	PP	150.00					
		3.00	PP	212.50					
		3.00	SS	N=54 (3,5/10,13,15,16)					
					3.40				
					3.45				
						Extremely weak, thinly laminated, dark brown MUDSTONE with occasional shelly fragments. End of Borehole at 3.450m			
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									
									

GCE00644/ R2



Appendix E – Large Scale Infiltration Test Results

Soakaway Test:


Trial Pit.	TP01
Test No.	1



Dimensions:

Length	1.8	m
Width	0.5	m
Depth	2.1	m
Start water depth	0.88	m
Effective Depth	1.22	m

[illegible]

	Depth	Time
Effective Depth %	m	Seconds
75	0.915	2600
25	0.305	13400
	Vp75-25	tp75-25
Sum	0.549	10800
Base	0.9	m2
Side long	1.098	m
Side short	0.305	m
ap50	3.706	m2
Soil Infiltration Rate	1.37E-05	m/s

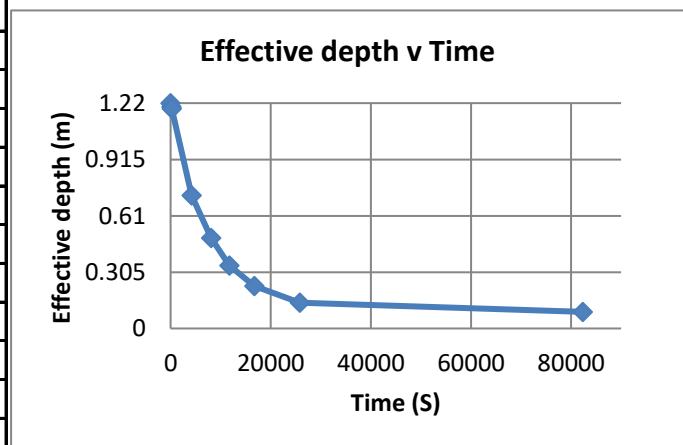

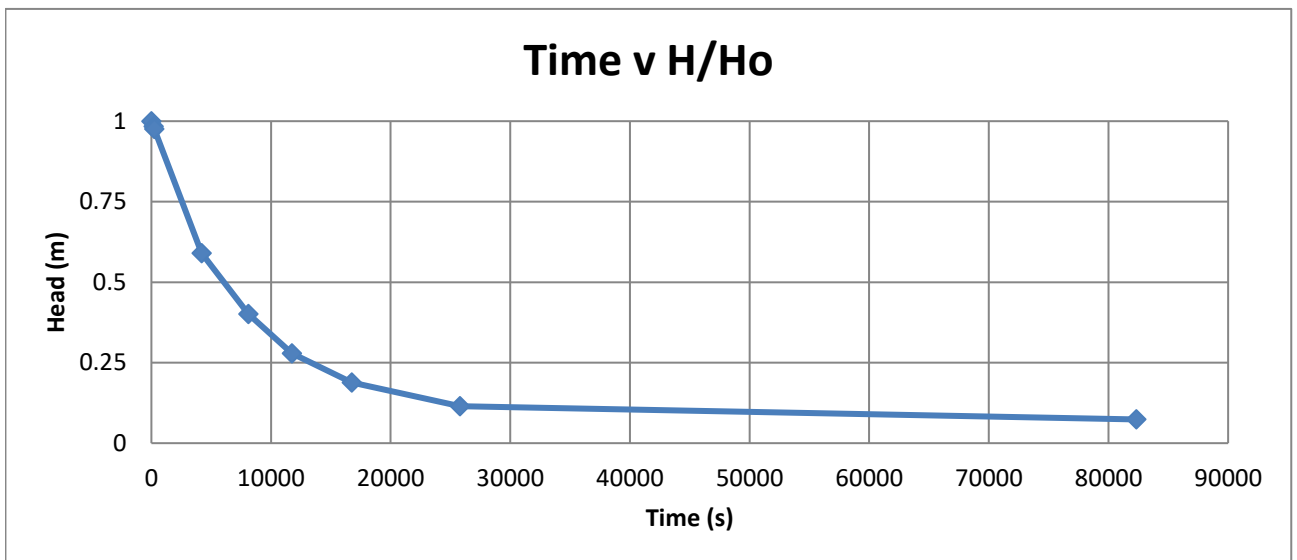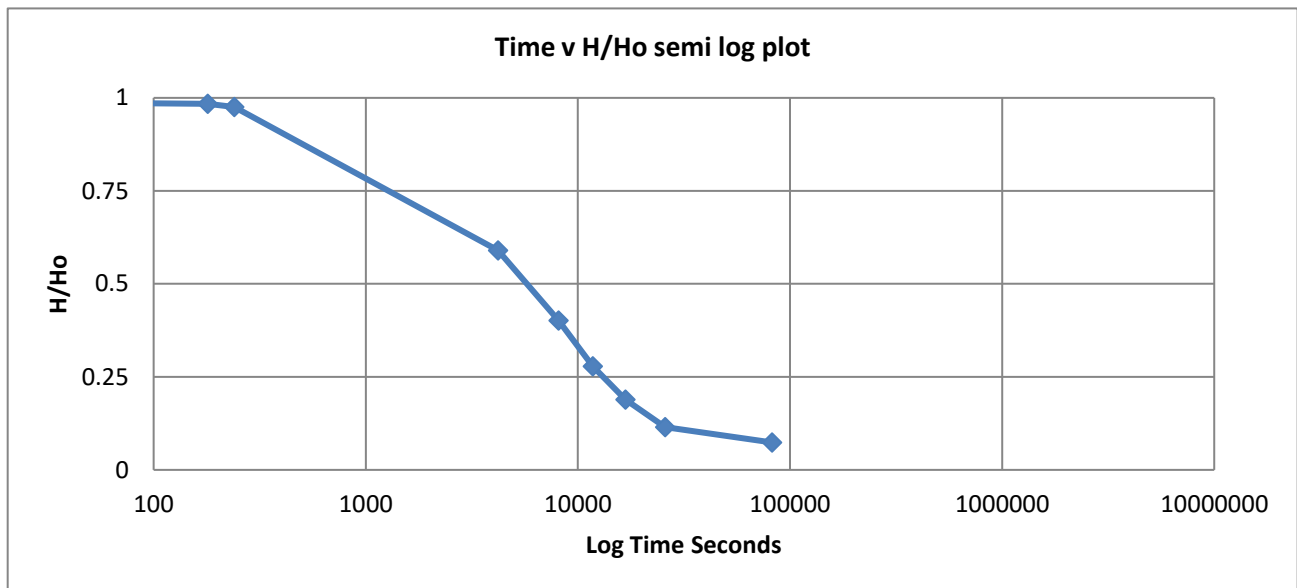

Soakaway Test:


Trial Pit.	TP01
Test No.	2



Dimensions:

Length	1.8	m
Width	0.5	m
Depth	2.1	m
Start water depth	0.88	m
Effective Depth	1.22	m

			Depth	Effect	Head		
Time	Time	Seconds	m	Depth		Seconds	H/Ho
19 July 2017	42935.401	0	0.88	1.22	1.22	0.1	1
19 July 2017	42935.423	1920	1.18	0.92	0.92	1920	0.754098
19 July 2017	42935.438	3180	1.19	0.91	0.91	3180	0.745902
19 July 2017	42935.479	6780	1.38	0.72	0.72	6780	0.590164
19 July 2017	42935.521	10380	1.54	0.56	0.56	10380	0.459016
19 July 2017	42935.576	15180	1.68	0.42	0.42	15180	0.344262
19 July 2017	42935.604	17580	1.74	0.36	0.36	17580	0.295082
19 July 2017	42935.653	21780	1.8	0.3	0.3	21780	0.245902
20 July 2017	42936.370	83760	2	0.1	0.1	83760	0.081967

	Depth	Time
Effective Depth %	m	Seconds
75	0.915	3000
25	0.305	21500
	Vp75-25	tp75-25
Sum	0.549	18500
Base	0.9	m2
Side long	1.098	m
Side short	0.305	m
ap50	3.706	m2
Soil Infiltration Rate	8.01E-06	m/s

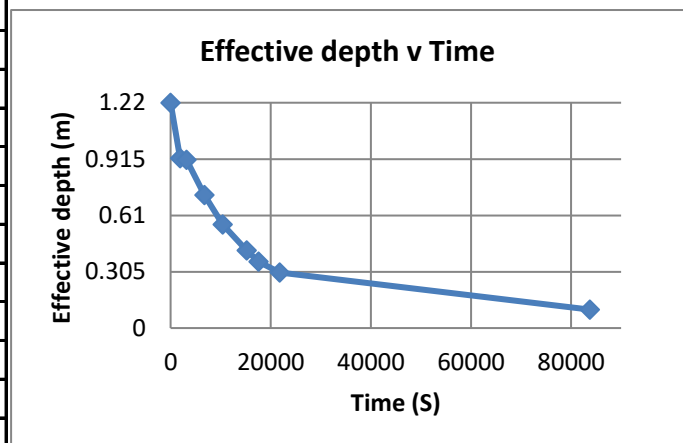

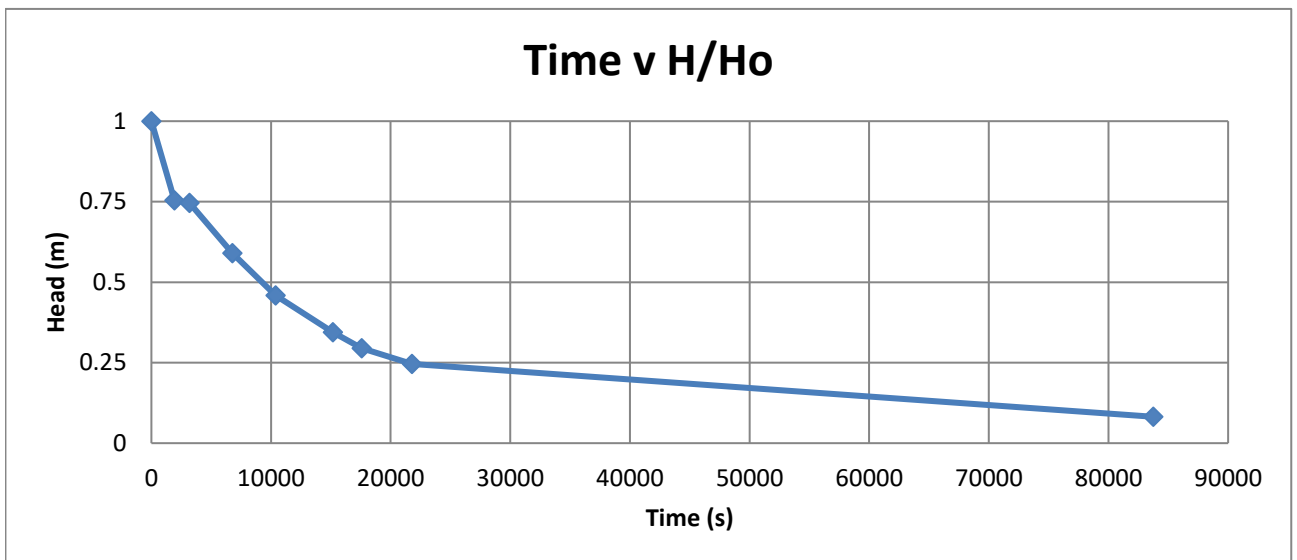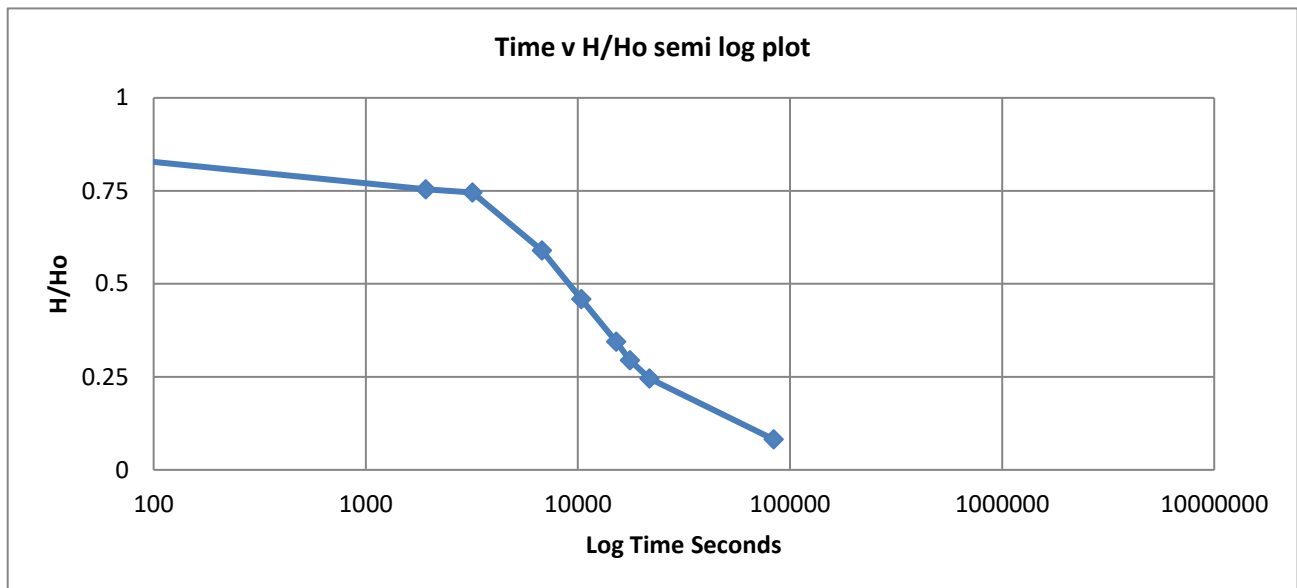

Soakaway Test:


Trial Pit.	TP01
Test No.	3



Dimensions:

Length	1.8	m
Width	0.5	m
Depth	2.1	m
Start water depth	0.85	m
Effective Depth	1.25	m

			Depth	Effect	Head		
Time	Time	Seconds	m	Depth		Seconds	H/Ho
20 July 2017	42936.372	0	0.85	1.25	1.25	0.1	1
20 July 2017	42936.385	1200	0.95	1.15	1.15	1200	0.92
20 July 2017	42936.399	2400	1.04	1.06	1.06	2400	0.848
20 July 2017	42936.417	3900	1.13	0.97	0.97	3900	0.776
20 July 2017	42936.458	7500	1.3	0.8	0.8	7500	0.64
20 July 2017	42936.500	11100	1.44	0.66	0.66	11100	0.528
20 July 2017	42936.542	14700	1.54	0.56	0.56	14700	0.448
20 July 2017	42936.583	18300	1.65	0.45	0.45	18300	0.36
20 July 2017	42936.625	21900	1.71	0.39	0.39	21900	0.312
20 July 2017	42936.667	25500	1.78	0.32	0.32	25500	0.256
21 July 2017	42937.344	84060	2.05	0.05	0.05	84060	0.04

	Depth	Time
Effective Depth %	m	Seconds
75	0.9375	4600
25	0.3125	27600
	Vp75-25	tp75-25
Sum	0.5625	23000
Base	0.9	m ²
Side long	1.125	m
Side short	0.3125	m
ap50	3.775	m ²
Soil Infiltration Rate	6.48E-06	m/s

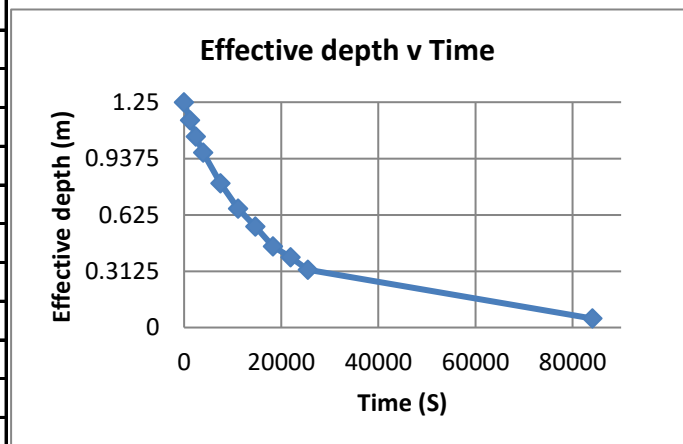

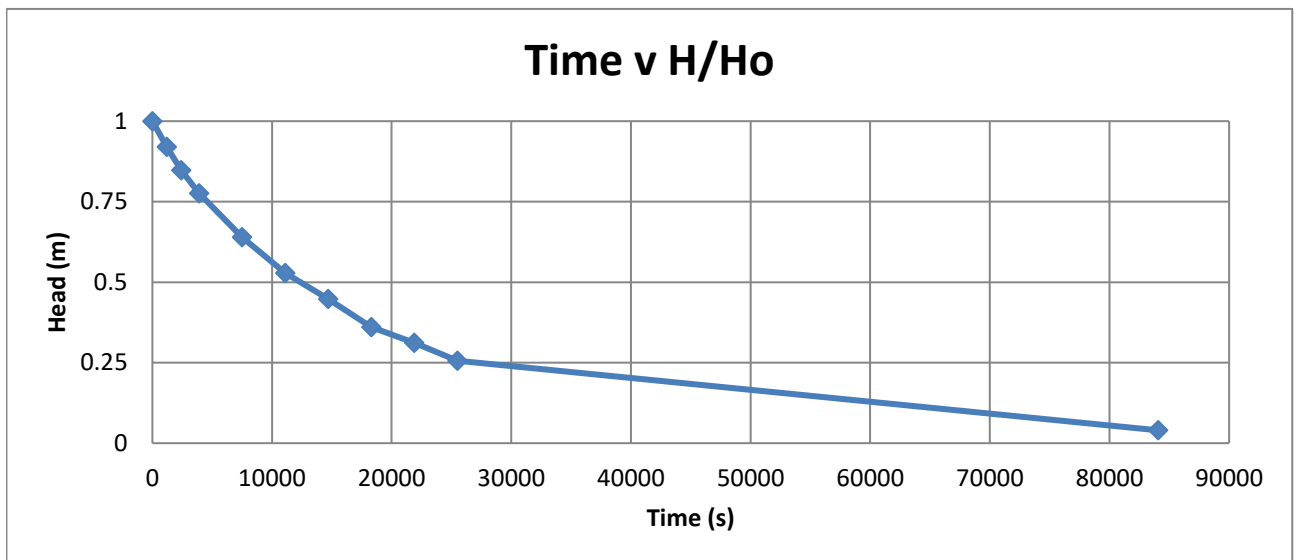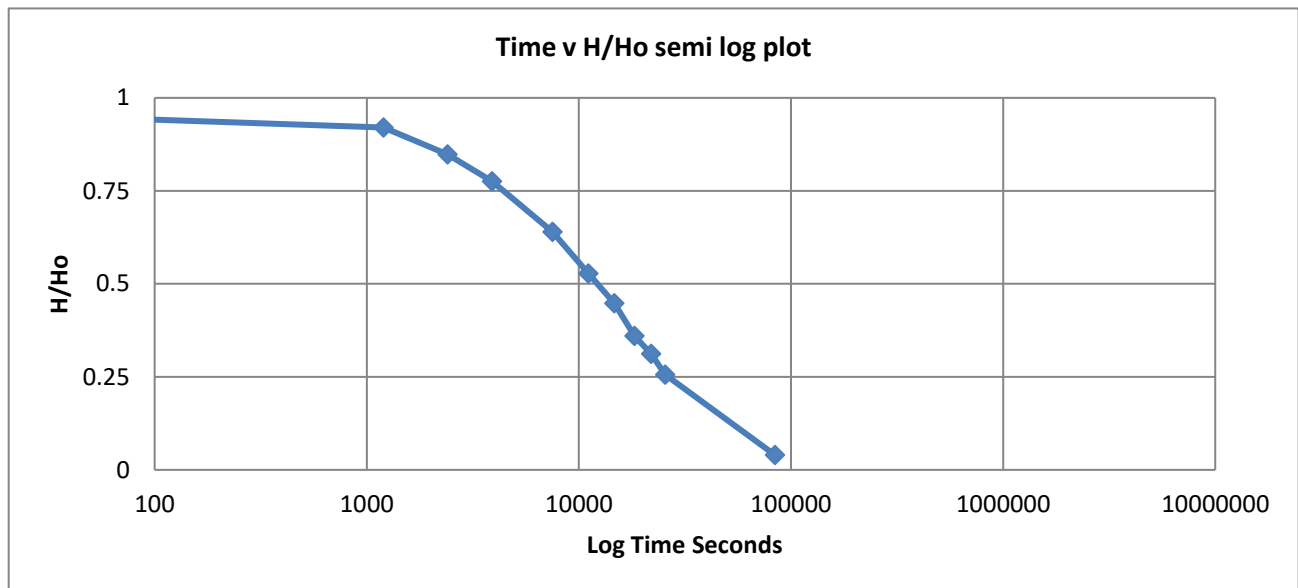

Soakaway Test:


Trial Pit.	TP02
Test No.	1

Dimensions:



Length	2.05	m
Width	0.5	m
Depth	1.4	m
Start water depth	0.26	m
Effective Depth	1.14	m

			Depth	Effect	Head		
Time	Time	Seconds	m	Depth		Seconds	H/Ho
18 July 2017	42934.408	0	0.26	1.14	1.14	0.1	1
18 July 2017	42934.409	60	0.26	1.14	1.14	60	1
18 July 2017	42934.413	420	0.26	1.14	1.14	420	1
18 July 2017	42934.461	4560	0.4	1	1	4560	0.877193
18 July 2017	42934.507	8520	0.48	0.92	0.92	8520	0.807018
18 July 2017	42934.549	12180	0.54	0.86	0.86	12180	0.754386
18 July 2017	42934.614	17760	0.59	0.81	0.81	17760	0.710526
18 July 2017	42934.712	26220	0.65	0.75	0.75	26220	0.657895
19 July 2017	42935.403	85920	1.01	0.39	0.39	85920	0.342105
19 July 2017	42935.486	93120	1.04	0.36	0.36	93120	0.315789
19 July 2017	42935.521	96120	1.06	0.34	0.34	96120	0.298246
19 July 2017	42935.576	100920	1.09	0.31	0.31	100920	0.27193
19 July 2017	42935.604	103320	1.1	0.3	0.3	103320	0.263158
19 July 2017	42935.653	107520	1.11	0.29	0.29	107520	0.254386

	Depth	Time
Effective Depth %	m	Seconds
75	0.855	
25	0.285	
	Vp75-25	tp75-25
Sum	0.58425	0
Base	1.025	m2
Side long	1.1685	m
Side short	0.285	m
ap50	3.932	m2
Soil Infiltration Rate	N/A	m/s

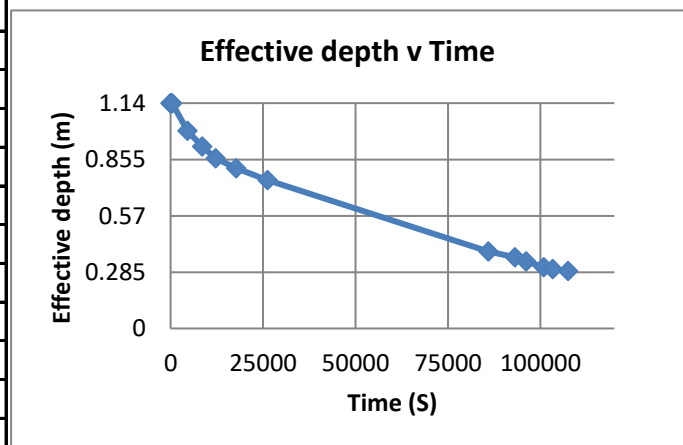

Soakaway test pit failed to reach 25% effective depth in 29 hours

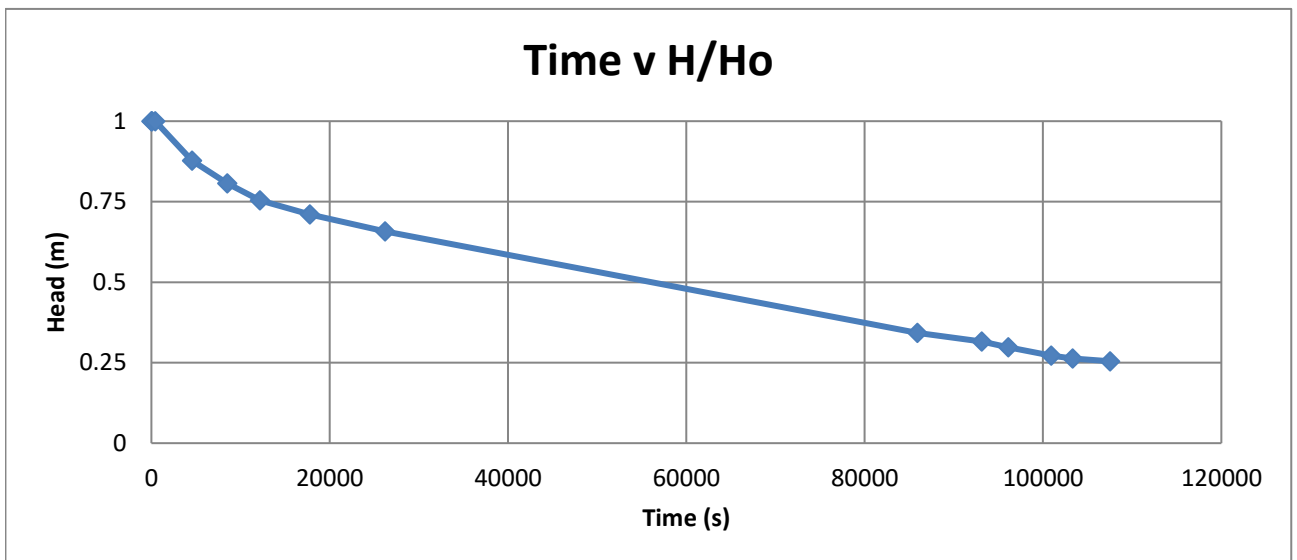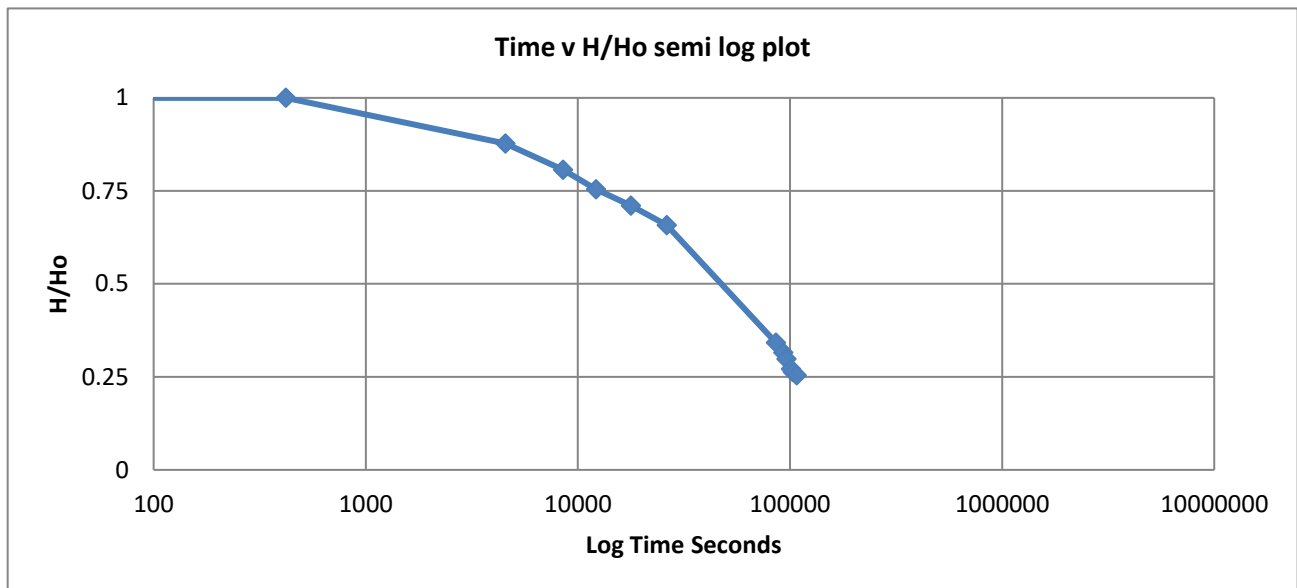

Soakaway Test:


Trial Pit.	TP03
Test No.	1

Dimensions:



Length	2.1	m
Width	0.5	m
Depth	1.6	m
Start water depth	0.21	m
Effective Depth	1.39	m

			Depth	Effect	Head		
Time	Time	Seconds	m	Depth		Seconds	H/Ho
18 July 2017	42934.499	0	0.21	1.39	1.39	0.1	1
18 July 2017	42934.499	60	0.24	1.36	1.36	60	0.978417
18 July 2017	42934.503	360	0.27	1.33	1.33	360	0.956835
18 July 2017	42934.510	1020	0.3	1.3	1.3	1020	0.935252
18 July 2017	42934.553	4740	0.33	1.27	1.27	4740	0.913669
18 July 2017	42934.617	10260	0.36	1.24	1.24	10260	0.892086
18 July 2017	42934.705	17820	0.38	1.22	1.22	17820	0.877698
19 July 2017	42935.413	78960	0.47	1.13	1.13	78960	0.81295
19 July 2017	42935.493	85920	0.47	1.13	1.13	85920	0.81295
19 July 2017	42935.573	92820	0.47	1.13	1.13	92820	0.81295
19 July 2017	42935.646	99120	0.47	1.13	1.13	99120	0.81295

	Depth	Time
Effective Depth %	m	Seconds
75	1.0425	
25	0.3475	
	Vp75-25	tp75-25
Sum	0.72975	0
Base	1.05	m2
Side long	1.4595	m
Side short	0.3475	m
ap50	4.664	m2
Soil Infiltration Rate	N/A	m/s

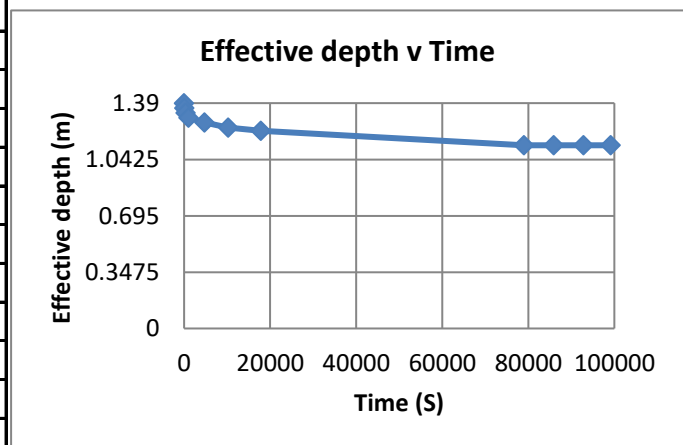

Soakaway test pit failed to reach 25% effective depth in 27.5 hours

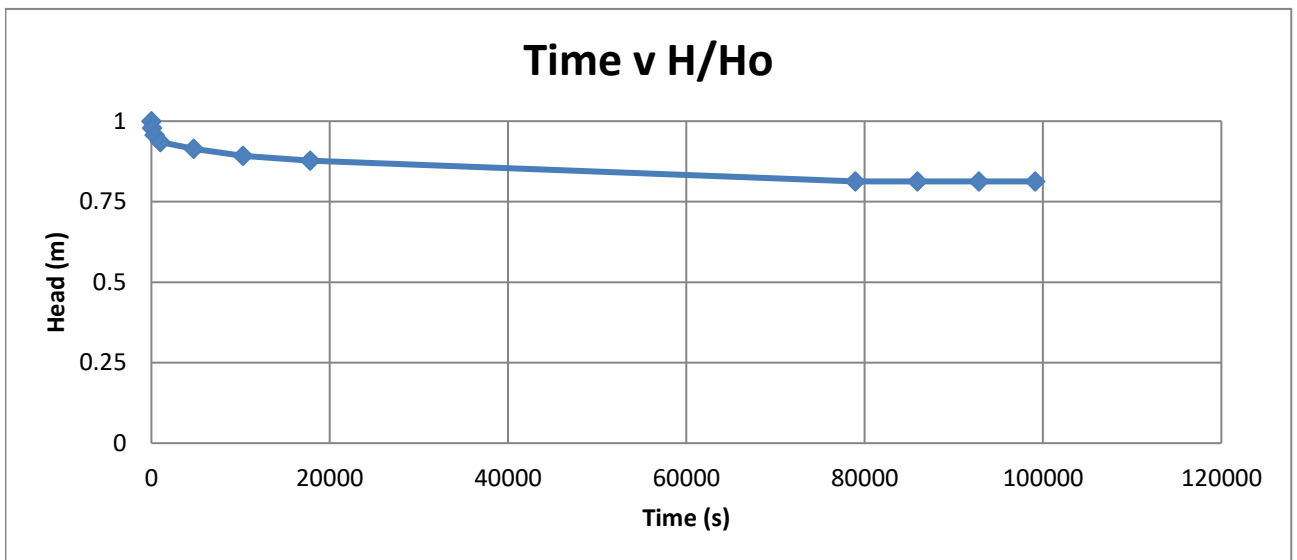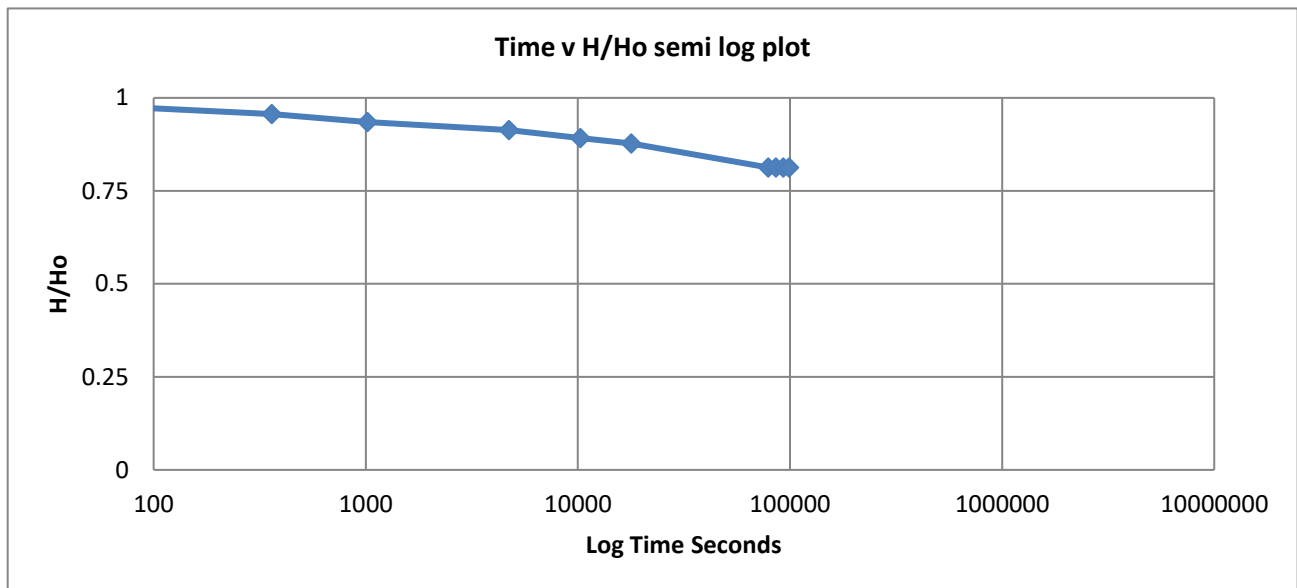

Soakaway Test:


Trial Pit.	TP04
Test No.	1

Dimensions:



Length	2 m
Width	0.6 m
Depth	2 m
Start water depth	0.7 m
Effective Depth	1.3 m

			Depth	Effect	Head		
Time	Time	Seconds	m	Depth		Seconds	H/Ho
18 July 2017	42934.534	0	0.7	1.3	1.3	0.1	1
18 July 2017	42934.535	120	0.7	1.3	1.3	120	1
18 July 2017	42934.539	420	0.7	1.3	1.3	420	1
18 July 2017	42934.564	2580	0.7	1.3	1.3	2580	1
18 July 2017	42934.619	7380	0.69	1.31	1.31	7380	1.007692
18 July 2017	42934.700	14340	0.69	1.31	1.31	14340	1.007692
19 July 2017	42935.409	75600	0.72	1.28	1.28	75600	0.984615
19 July 2017	42935.490	82560	0.72	1.28	1.28	82560	0.984615
19 July 2017	42935.563	88860	0.72	1.28	1.28	88860	0.984615
19 July 2017	42935.639	95460	0.72	1.28	1.28	95460	0.984615

	Depth	Time
Effective Depth %	m	Seconds
75	0.975	
25	0.325	
	Vp75-25	tp75-25
Sum	0.78	0
Base	1.2	m2
Side long	1.3	m
Side short	0.39	m
ap50	4.58	m2
Soil Infiltration Rate	N/A	m/s

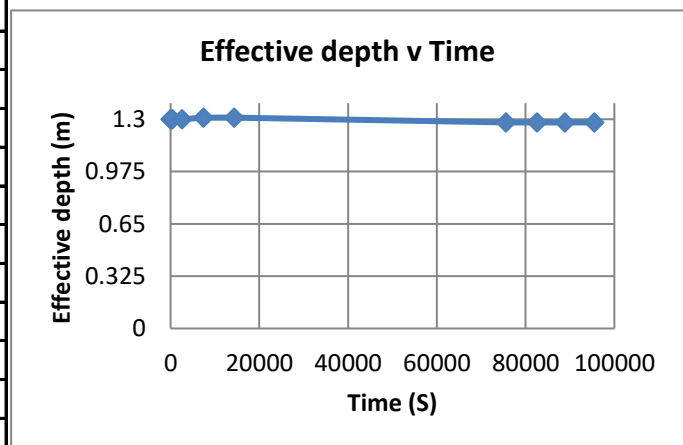

Soakaway test pit failed to reach 25% effective depth in 26.5 hours

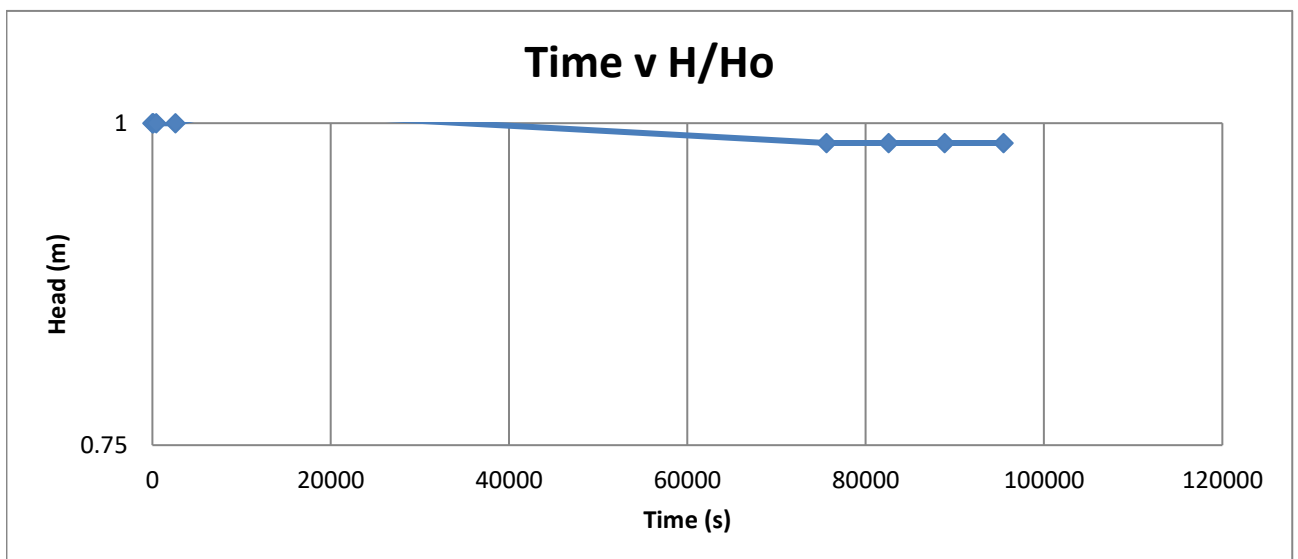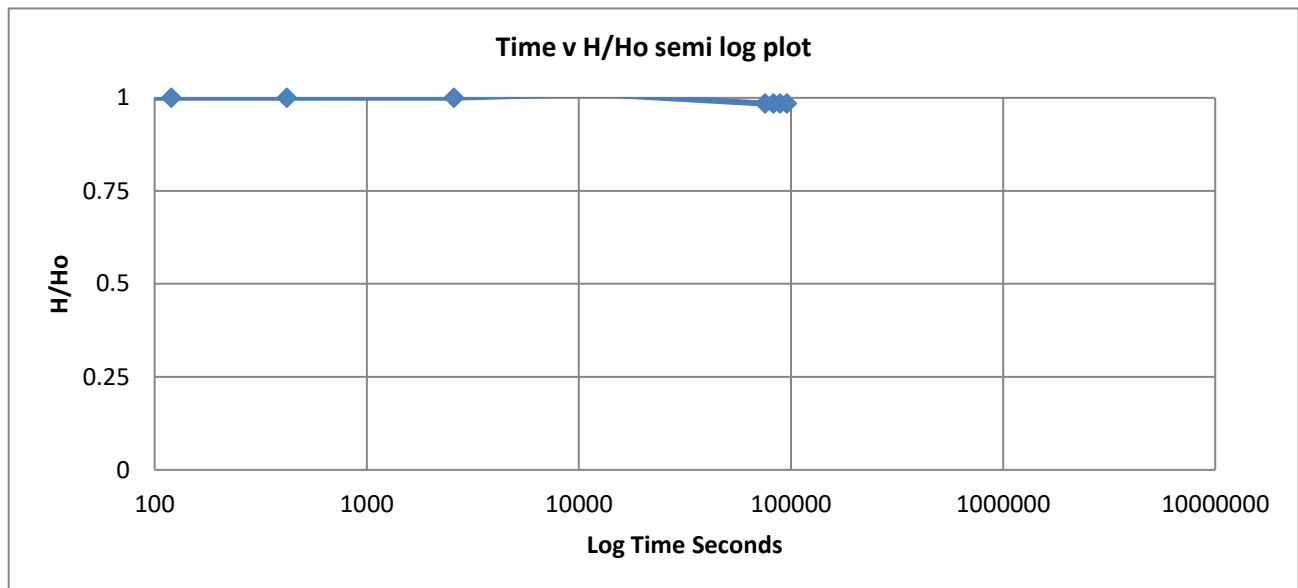

GCE00644/ R2



Appendix F – Ground Gas and Groundwater Monitoring Results

GAS MONITORING RECORD

Geo Consulting Engineering Ltd

Project:	Southwick Court Farm	Engineer:	RH
Job Number:	GCE00644	Date:	08/08/2017
Equipment:	Geotechnical Instruments Model GA2000 (Serial No G502010)	Calibration Certificate no:	G502010_2/18332
	PhoCheck TIGER (Serial No T-111659)	Calibration Date:	26/04/2017
		Calibration Certificate no:	236201 (Jan 2017)

Borehole No.	WS1	Parameter	Peak	Steady
Water Level (m/bgl):	0.90	CH ₄ %	0.10	0.00
Time:	10:12:00	CO ₂ %	2.50	2.50
		O ₂ %	18.60	18.40
		CO (ppm)	3.00	3.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	1.5	Gas Flow (l/hr)	12.20	9.10 (1min)

Borehole No.	WS2	Parameter	Peak	Steady
Water Level (m/bgl):	3.68	CH ₄ %	0.00	0.00
Time:	10:43:00	CO ₂ %	2.50	2.50
		O ₂ %	19.40	19.40
		CO (ppm)	1.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.2	Gas Flow (l/hr)	0.20	0.20

Borehole No.	WS3	Parameter	Peak	Steady
Water Level (m/bgl):	4.82	CH ₄ %	0.00	0.00
Time:	10:52:00	CO ₂ %	2.10	2.10
		O ₂ %	18.90	18.90
		CO (ppm)	1.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.6	Gas Flow (l/hr)	0.00	0.00

Borehole No.	WS4	Parameter	Peak	Steady
Water Level (m/bgl):	2.25	CH ₄ %	0.00	0.00
Time:	11:07:00	CO ₂ %	1.10	0.60
		O ₂ %	20.80	20.80
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.1	Gas Flow (l/hr)	0.00	0.00

Borehole No.	WS5	Parameter	Peak	Steady
Water Level (m/bgl):	Dry	CH ₄ %	0.00	0.00
Time:	12:17:00	CO ₂ %	3.00	3.00
		O ₂ %	18.80	18.80
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.4	Gas Flow (l/hr)	0.00	0.00

Borehole No.	WS6	Parameter	Peak	Steady
Water Level (m/bgl):	1.10	CH ₄ %	0.00	0.00
Time:	11:24:00	CO ₂ %	2.50	2.50
		O ₂ %	18.80	18.80
		CO (ppm)	3.00	2.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.4	Gas Flow (l/hr)	3.20	2.00 (1min)

Borehole No.	WS7	Parameter	Peak	Steady
Water Level (m/bgl):	0.90	CH ₄ %	0.00	0.00
Time:	12:06:00	CO ₂ %	1.30	1.30
		O ₂ %	20.30	20.20
		CO (ppm)	2.00	2.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.00	Gas Flow (l/hr)	5.60	4.10 (1min)

Borehole No.	WS9	Parameter	Peak	Steady
Water Level (m/bgl):	4.32	CH ₄ %	0.00	0.00
Time:	11:40:00	CO ₂ %	6.30	6.20
		O ₂ %	15.10	15.10
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.7	Gas Flow (l/hr)	0.10	0.10

Borehole No.	WS10	Parameter	Peak	Steady
Water Level (m/bgl):	2.56	CH ₄ %	0.00	0.00
Time:	11:55:00	CO ₂ %	3.40	3.40
		O ₂ %	18.80	18.80
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	0.00	0.00

Note: WSS was wet at the base of the well (<3cm of water).

Atmospheric pressure: 1008 / 1009

Ambient Concentrations: CH₄ (%): CO (ppm):
CO₂ (%): H₂S (ppm):
O₂ (%):

Tidal Conditions High Tide: n/a
Low Tide: n/a

Monitoring techniques and proforma based on guidance from CIRIA document C665
"stable" reading achieved after 60sec of stable values unless otherwise stated

GAS MONITORING RECORD

Geo Consulting Engineering Ltd

Project:	Southwick Court Farm	Engineer:	RH
Job Number:	GCE00644	Date:	18/08/2017
Equipment:	Geotechnical Instruments Model GA2000 (Serial No G502010) PhoCheck TIGER (Serial No T-111659)	Calibration Certificate no:	G502010_2/18332
		Calibration Date:	26/04/2017
		Calibration Certificate no:	236201 (Jan 2017)

Borehole No.	WS1	Parameter	Peak	Steady
Water Level (m/bgl):	0.77	CH ₄ %	0.00	0.00
Time:	10:33:00	CO ₂ %	0.90	0.40
		O ₂ %	19.90	19.90
		CO (ppm)	2.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.00	0.00
	0.00			

Borehole No.	WS2	Parameter	Peak	Steady
Water Level (m/bgl):	3.74	CH ₄ %	0.00	0.00
Time:	10:19:00	CO ₂ %	2.60	2.60
		O ₂ %	19.50	19.40
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	-0.10	-0.10
	0.00			

Borehole No.	WS3	Parameter	Peak	Steady
Water Level (m/bgl):	4.50	CH ₄ %	0.00	0.00
Time:	10:47:00	CO ₂ %	2.10	2.10
		O ₂ %	18.70	18.70
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.5	Steady	Gas Flow (l/hr)	-0.10	-0.10
	0.40			

Borehole No.	WS4	Parameter	Peak	Steady
Water Level (m/bgl):	2.32	CH ₄ %	0.00	0.00
Time:	10:59:00	CO ₂ %	0.80	0.40
		O ₂ %	20.90	20.90
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.2	Steady	Gas Flow (l/hr)	0.00	0.00
	0.20			

Borehole No.	WS5	Parameter	Peak	Steady
Water Level (m/bgl):	3.32	CH ₄ %	0.00	0.00
Time:	12:40:00	CO ₂ %	1.80	1.80
		O ₂ %	20.30	20.30
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.00	0.00
	0.00			

Borehole No.	WS6	Parameter	Peak	Steady
Water Level (m/bgl):	1.11	CH ₄ %	0.00	0.00
Time:	11:33:00	CO ₂ %	2.00	2.00
		O ₂ %	20.00	20.00
		CO (ppm)	3.00	3.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
1.6	Steady	Gas Flow (l/hr)	0.00	0.00
	1.60			

Borehole No.	WS7	Parameter	Peak	Steady
Water Level (m/bgl):	0.82	CH ₄ %	0.00	0.00
Time:	12:29:00	CO ₂ %	1.70	1.70
		O ₂ %	19.90	19.80
		CO (ppm)	2.00	2.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.00	Steady	Gas Flow (l/hr)	3.90	3.00 (1min)
	0.00			

Borehole No.	WS8	Parameter	Peak	Steady
Water Level (m/bgl):	1.10	CH ₄ %	0.00	0.00
Time:	12:18:00	CO ₂ %	2.70	2.70
		O ₂ %	19.00	19.00
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	4.40	3.40 (1min)
	0.00			

Borehole No.	WS9	Parameter	Peak	Steady
Water Level (m/bgl):	3.25	CH ₄ %	0.00	0.00
Time:	11:45:00	CO ₂ %	6.60	6.60
		O ₂ %	15.40	15.40
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.8	Steady	Gas Flow (l/hr)	0.00	0.00
	0.60			

Borehole No.	WS10	Parameter	Peak	Steady
Water Level (m/bgl):	2.10	CH ₄ %	0.00	0.00
Time:	11:56:00	CO ₂ %	2.60	2.60
		O ₂ %	20.20	20.20
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.00	0.00
	0.00			

Note:

Atmospheric pressure: 1006/1009

Ambient Concentrations:

CH₄ (%): 0.0% CO (ppm): 0.0%

CO₂ (%): 0.1% H₂S (ppm): 0.0%

O₂ (%): 21.4%

Tidal Conditions

High Tide: n/a

Low Tide: n/a

Monitoring techniques and proforma based on guidance from CIRIA document C665

"stable" reading achieved after 60sec of stable values unless otherwise stated

GAS MONITORING RECORD

Geo Consulting Engineering Ltd

Project:	Southwick Court Farm	Engineer:	RH
Job Number:	GCE00644	Date:	04/09/2017
Equipment:	Geotechnical Instruments Model GA2000 (Serial No G502010) PhoCheck TIGER (Serial No T-111659)	Calibration Certificate no:	G502010_2/18332
		Calibration Date:	26/04/2017
		Calibration Certificate no:	236201 (Jan 2017)

Borehole No.	WS1	Parameter	Peak	Steady
Water Level (m/bgl):	0.75	CH ₄ %	0.10	0.10
Time:	07:12:00	CO ₂ %	0.50	0.50
		O ₂ %	20.70	20.70
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	-0.10	-0.10
	0.00			

Borehole No.	WS2	Parameter	Peak	Steady
Water Level (m/bgl):	3.81	CH ₄ %	0.00	0.00
Time:	12:50:00	CO ₂ %	2.60	2.60
		O ₂ %	18.60	18.60
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.00	0.00
	0.00			

Borehole No.	WS3	Parameter	Peak	Steady
Water Level (m/bgl):	4.06	CH ₄ %	0.00	0.00
Time:	13:41:00	CO ₂ %	1.90	1.90
		O ₂ %	19.10	19.10
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.00	0.00
	0.00			

Borehole No.	WS4	Parameter	Peak	Steady
Water Level (m/bgl):	2.39	CH ₄ %	0.00	0.00
Time:	13:22:00	CO ₂ %	0.80	0.20
		O ₂ %	20.20	20.70
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.00	0.00
	0.00			

Borehole No.	WS5	Parameter	Peak	Steady
Water Level (m/bgl):	2.60	CH ₄ %	0.00	0.00
Time:	15:00:00	CO ₂ %	2.30	2.30
		O ₂ %	19.70	19.80
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.4	Steady	Gas Flow (l/hr)	0.00	0.00
	0.20			

Borehole No.	WS6	Parameter	Peak	Steady
Water Level (m/bgl):	1.12	CH ₄ %	0.00	0.00
Time:	13:55:00	CO ₂ %	1.70	1.70
		O ₂ %	19.20	19.20
		CO (ppm)	4.00	4.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.5	Steady	Gas Flow (l/hr)	-0.30	-0.20
	0.00			

Borehole No.	WS7	Parameter	Peak	Steady
Water Level (m/bgl):	0.87	CH ₄ %	0.00	0.00
Time:	14:50:00	CO ₂ %	1.60	1.60
		O ₂ %	19.70	19.50
		CO (ppm)	2.00	2.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.20	Steady	Gas Flow (l/hr)	-4.60	-3.20 (1min)
	0.20			

Borehole No.	WS8	Parameter	Peak	Steady
Water Level (m/bgl):	1.02	CH ₄ %	0.00	0.00
Time:	14:34:00	CO ₂ %	2.60	2.60
		O ₂ %	18.70	18.60
		CO (ppm)	4.00	4.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
1.8	Steady	Gas Flow (l/hr)	4.80	3.00 (1min)
	0.50			

Borehole No.	WS9	Parameter	Peak	Steady
Water Level (m/bgl):	2.15	CH ₄ %	0.00	0.00
Time:	14:05:00	CO ₂ %	5.50	5.40
		O ₂ %	16.50	16.40
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.8	Steady	Gas Flow (l/hr)	-0.10	0.00
	0.70			

Borehole No.	WS10	Parameter	Peak	Steady
Water Level (m/bgl):	1.67	CH ₄ %	0.00	0.00
Time:	14:19:00	CO ₂ %	1.90	1.90
		O ₂ %	19.50	19.50
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0.6	Steady	Gas Flow (l/hr)	0.00	0.00
	0.60			

Note:

Atmospheric pressure: 1008/1010

Ambient Concentrations:

CH₄ (%): 0.1% CO (ppm): 0/1%
CO₂ (%): 0.1% H₂S (ppm): 0.0%
O₂ (%): 21.3%

Tidal Conditions

High Tide: n/a
Low Tide: n/a

Monitoring techniques and proforma based on guidance from CIRIA document C665
"stable" reading achieved after 60sec of stable values unless otherwise stated

GAS MONITORING RECORD

Geo Consulting Engineering Ltd

Project:	Southwick Court Farm	Engineer:	RH
Job Number:	GCE00644	Date:	27/09/2017
Equipment:	Geotechnical Instruments	Calibration Certificate no:	G502010_2/18332
	Model GA2000 (Serial No G502010)	Calibration Date:	26/04/2017
	PhoCheck TIGER (Serial No T-111659)	Calibration Certificate no:	236201 (Jan 2017)

Borehole No.	WS1	Parameter	Peak	Steady
Water Level (m/bgl):	0.67	CH ₄ %	0.10	0.10
Time:	12:58:00	CO ₂ %	2.20	2.20
		O ₂ %	20.00	19.90
		CO (ppm)	3.00	3.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.4	Gas Flow (l/hr)	4.60	3.30 (1min)

Borehole No.	WS2	Parameter	Peak	Steady
Water Level (m/bgl):	3.89	CH ₄ %	0.10	0.10
Time:	13:16:00	CO ₂ %	2.80	2.80
		O ₂ %	18.60	18.60
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	-0.10	-0.10

Borehole No.	WS3	Parameter	Peak	Steady
Water Level (m/bgl):	2.20	CH ₄ %	0.10	0.10
Time:	10:46:00	CO ₂ %	1.60	1.60
		O ₂ %	19.50	19.50
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.1	Gas Flow (l/hr)	0.10	0.10

Borehole No.	WS4	Parameter	Peak	Steady
Water Level (m/bgl):	2.40	CH ₄ %	0.20	0.20
Time:	10:37:00	CO ₂ %	1.80	1.70
		O ₂ %	19.90	19.90
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.3	Gas Flow (l/hr)	0.10	0.10

Borehole No.	WS5	Parameter	Peak	Steady
Water Level (m/bgl):	1.72	CH ₄ %	0.00	0.00
Time:	12:21:00	CO ₂ %	1.60	1.60
		O ₂ %	20.60	20.60
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	0.20	0.20

Borehole No.	WS6	Parameter	Peak	Steady
Water Level (m/bgl):	1.09	CH ₄ %	0.20	0.20
Time:	11:06:00	CO ₂ %	2.00	2.00
		O ₂ %	19.90	19.80
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	2.60	1.60 (1min)

Borehole No.	WS7	Parameter	Peak	Steady
Water Level (m/bgl):	0.84	CH ₄ %	0.10	0.10
Time:	12:06:00	CO ₂ %	1.70	1.70
		O ₂ %	19.70	19.60
		CO (ppm)	2.00	2.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	1.10	0.20

Borehole No.	WS8	Parameter	Peak	Steady
Water Level (m/bgl):	0.94	CH ₄ %	0.10	0.10
Time:	11:52:00	CO ₂ %	4.10	4.10
		O ₂ %	18.30	18.20
		CO (ppm)	5.00	5.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	9.70	4.70 (1min)

Borehole No.	WS9	Parameter	Peak	Steady
Water Level (m/bgl):	1.06	CH ₄ %	0.20	0.20
Time:	11:22:00	CO ₂ %	4.50	4.50
		O ₂ %	17.90	17.80
		CO (ppm)	2.00	2.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	5.70	4.40 (1min)

Borehole No.	WS10	Parameter	Peak	Steady
Water Level (m/bgl):	1.56	CH ₄ %	0.10	0.10
Time:	11:34:00	CO ₂ %	1.60	1.60
		O ₂ %	19.20	19.20
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.3	Gas Flow (l/hr)	0.20	0.10

Note:
Atmospheric pressure: 1008/1010

Ambient Concentrations: CH₄ (%): 0.1% CO (ppm): 0/1%
CO₂ (%): 0.1% H₂S (ppm): 0.0%
O₂ (%): 21.3%

Tidal Conditions High Tide: n/a
Low Tide: n/a

Monitoring techniques and proforma based on guidance from CIRIA document C665
"stable" reading achieved after 60sec of stable values unless otherwise stated

GAS MONITORING RECORD

Geo Consulting Engineering Ltd

Project:	Southwick Court Farm	Engineer:	RH
Job Number:	GCE00644	Date:	17/10/2017
Equipment:	Geotechnical Instruments	Calibration Certificate no:	G502010_2/18332
	Model GA2000 (Serial No G502010)	Calibration Date:	26/04/2017
	PhoCheck TIGER (Serial No T-111659)	Calibration Certificate no:	236201 (Jan 2017)

Borehole No.	WS1	Parameter	Peak	Steady
Water Level (m/bgl):	0.70	CH ₄ %	0.10	0.10
Time:	11:19:00	CO ₂ %	3.40	3.20
		O ₂ %	19.80	19.00
		CO (ppm)	2.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	-0.90	-0.70 (1min)
		Steady		

Borehole No.	WS2	Parameter	Peak	Steady
Water Level (m/bgl):	3.99	CH ₄ %	0.10	0.10
Time:	11:37:00	CO ₂ %	3.00	3.00
		O ₂ %	19.00	18.90
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	-0.10	0.00
		Steady		

Borehole No.	WS3	Parameter	Peak	Steady
Water Level (m/bgl):	3.45	CH ₄ %	0.10	0.10
Time:	11:48:00	CO ₂ %	1.10	1.10
		O ₂ %	20.60	20.60
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.1	Gas Flow (l/hr)	0.00	0.00
		Steady		

Borehole No.	WS4	Parameter	Peak	Steady
Water Level (m/bgl):	2.51	CH ₄ %	0.10	0.10
Time:	12:03:00	CO ₂ %	1.40	1.10
		O ₂ %	20.80	20.80
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	0.10	0.10
		Steady		

Borehole No.	WS5	Parameter	Peak	Steady
Water Level (m/bgl):	1.45	CH ₄ %	0.10	0.00
Time:	13:40:00	CO ₂ %	1.20	1.20
		O ₂ %	21.10	21.10
		CO (ppm)	1.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	0.10	0.10
		Steady		

Borehole No.	WS6	Parameter	Peak	Steady
Water Level (m/bgl):	1.15	CH ₄ %	0.10	0.10
Time:	12:19:00	CO ₂ %	2.10	2.10
		O ₂ %	19.70	19.60
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	-0.90	-0.40 (1min)
		Steady		

Borehole No.	WS7	Parameter	Peak	Steady
Water Level (m/bgl):	0.93	CH ₄ %	0.10	0.10
Time:	13:26:00	CO ₂ %	1.60	1.60
		O ₂ %	20.50	20.10
		CO (ppm)	1.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	-6.20	-4.20 (1min)
		Steady		

Borehole No.	WS8	Parameter	Peak	Steady
Water Level (m/bgl):	0.92	CH ₄ %	0.10	0.10
Time:	13:10:00	CO ₂ %	3.60	3.50
		O ₂ %	17.60	17.60
		CO (ppm)	4.00	4.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	5.40	1.60 (1min)
		Steady		

Borehole No.	WS9	Parameter	Peak	Steady
Water Level (m/bgl):	1.11	CH ₄ %	0.10	0.10
Time:	12:35:00	CO ₂ %	4.50	4.40
		O ₂ %	18.60	18.60
		CO (ppm)	2.00	1.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0	Gas Flow (l/hr)	-2.70	-1.50 (1min)
		Steady		

Borehole No.	WS10	Parameter	Peak	Steady
Water Level (m/bgl):	1.57	CH ₄ %	0.10	0.10
Time:	12:51:00	CO ₂ %	1.60	1.60
		O ₂ %	20.60	20.60
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
	0.2	Gas Flow (l/hr)	0.40	0.40
		Steady		

Note:

Atmospheric pressure: 1016/1017

Ambient Concentrations:

CH₄ (%): 0.1% CO (ppm): 0.0%

CO₂ (%): 0.1% H₂S (ppm): 0.0%

O₂ (%): 21.6%

Tidal Conditions

High Tide: n/a

Low Tide: n/a

Monitoring techniques and proforma based on guidance from CIRIA document C665

"stable" reading achieved after 60sec of stable values unless otherwise stated

GAS MONITORING RECORD

Geo Consulting Engineering Ltd

Project:	Southwick Court Farm	Engineer:	RH
Job Number:	GCE00644	Date:	10/11/2017
Equipment:	Geotechnical Instruments Model GA2000 (Serial No G502010) PhoCheck TIGER (Serial No T-111659)	Calibration Certificate no:	G502010_2/18332
		Calibration Date:	26/04/2017
		Calibration Certificate no:	236201 (Jan 2017)

Borehole No.	WS1	Parameter	Peak	Steady
Water Level (m/bgl):	0.59	CH ₄ %	0.10	0.10
Time:	11:14:00	CO ₂ %	3.60	3.60
		O ₂ %	18.20	18.00
		CO (ppm)	2.00	2.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	9.40	5.80 (1min)
	0.00			

Borehole No.	WS2	Parameter	Peak	Steady
Water Level (m/bgl):	3.85	CH ₄ %	0.10	0.10
Time:	11:04:00	CO ₂ %	3.20	3.20
		O ₂ %	18.30	18.20
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.00	0.00
	0.00			

Borehole No.	WS3	Parameter	Peak	Steady
Water Level (m/bgl):	3.27	CH ₄ %	0.10	0.10
Time:	11:26:00	CO ₂ %	1.10	1.10
		O ₂ %	20.30	20.30
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.10	0.10
	0.00			

Borehole No.	WS4	Parameter	Peak	Steady
Water Level (m/bgl):	2.31	CH ₄ %	0.10	0.10
Time:	11:35:00	CO ₂ %	1.00	0.30
		O ₂ %	21.60	21.60
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.20	0.20
	0.00			

Borehole No.	WS5	Parameter	Peak	Steady
Water Level (m/bgl):	1.10	CH ₄ %	0.10	0.00
Time:	12:53:00	CO ₂ %	1.00	1.00
		O ₂ %	21.80	21.80
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	-0.10	-0.10
	0.00			

Borehole No.	WS6	Parameter	Peak	Steady
Water Level (m/bgl):	1.08	CH ₄ %	0.10	0.10
Time:	11:56:00	CO ₂ %	2.20	2.20
		O ₂ %	20.20	20.20
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	3.40	2.40
	0.00			

Borehole No.	WS7	Parameter	Peak	Steady
Water Level (m/bgl):	0.70	CH ₄ %	0.10	0.10
Time:	12:41:00	CO ₂ %	2.10	2.10
		O ₂ %	20.50	20.40
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	10.20	7.60 (1min)
	0.00			

Borehole No.	WS8	Parameter	Peak	Steady
Water Level (m/bgl):	0.76	CH ₄ %	0.10	0.10
Time:	12:29:00	CO ₂ %	4.70	4.70
		O ₂ %	18.70	18.70
		CO (ppm)	4.00	3.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	11.20	6.00 (1min)
	0.00			

Borehole No.	WS9	Parameter	Peak	Steady
Water Level (m/bgl):	1.93	CH ₄ %	0.10	0.10
Time:	12:08:00	CO ₂ %	3.40	3.40
		O ₂ %	20.00	20.00
		CO (ppm)	2.00	2.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	5.00	3.50 (1min)
	0.00			

Borehole No.	WS10	Parameter	Peak	Steady
Water Level (m/bgl):	1.60	CH ₄ %	0.10	0.10
Time:	12:18:00	CO ₂ %	1.90	1.90
		O ₂ %	20.10	20.00
		CO (ppm)	0.00	0.00
PID	Peak	H ₂ S (ppm)	0.00	0.00
0	Steady	Gas Flow (l/hr)	0.30	0.30
	0.00			

Note:

Atmospheric pressure: 1018/1019

Ambient Concentrations:

CH₄ (%): 0.1% CO (ppm): 0.0%

CO₂ (%): 0.1% H₂S (ppm): 0.0%

O₂ (%): 21.6%

Tidal Conditions

High Tide: n/a


Low Tide: n/a

Monitoring techniques and proforma based on guidance from CIRIA document C665
 "stable" reading achieved after 60sec of stable values unless otherwise stated

GCE00644/ R2



Appendix G Chemical Laboratory Test Results



2183

Final Report

Report No.: 17-19343-1

Initial Date of Issue: 31-Jul-2017

Client Geo Consulting Engineering Ltd

Client Address: The Studio, Woodmanton Barns
Woodbury
Exeter
Devon
EX5 1HQ

Contact(s): General
Rebecca Hitt

Project GCE00644 Southwick Court Farm

Quotation No.: Q17-08367

Date Received: 26-Jul-2017

Order No.:

Date Instructed: 26-Jul-2017


No. of Samples: 22

Turnaround (Wkdays): 3

Results Due: 28-Jul-2017

Date Approved: 31-Jul-2017

Approved By:



Details: Martin Dyer, Laboratory Manager

Results - Soil

Client: Geo Consulting Engineering Ltd	Chemtest Job No.:				17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343
Quotation No.: Q17-08367	Chemtest Sample ID.:				488470	488471	488472	488473	488474	488475	488476	488477	488478
Order No.:	Client Sample Ref.:				TP01	TP02	TP03	TP03	TP04	TP05	TP06	TP07	TP08
	Sample Type:				SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
	Top Depth (m):				0.30	0.20	0.20	0.40	0.20	0.20	0.10	0.20	0.05
	Date Sampled:				18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	21-Jul-2017
	Asbestos Lab:				COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	
Determinand	Accred.	SOP	Units	LOD									
ACM Type	U	2192		N/A	-	-	-	-	-	-		-	
Asbestos Identification	U	2192	%	0.001	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected		No Asbestos Detected	
Moisture	N	2030	%	0.020	15	17	20	18	21	20	18	20	18
pH	U	2010		N/A	6.3	5.7	6.1	6.4	5.8	6.0		7.4	
Sulphate (2:1 Water Soluble) as SO4	U	2120	g/l	0.010	< 0.010	< 0.010	< 0.010	< 0.010	< 0.010	< 0.010		< 0.010	
Sulphate (Total)	U	2430	%	0.010	0.023	0.079	0.10	0.026	0.046	0.17		0.081	
Arsenic	U	2450	mg/kg	1.0	11	13	11	8.3	13	11		12	
Cadmium	U	2450	mg/kg	0.10	0.14	0.27	0.33	0.10	0.29	0.35		0.30	
Chromium	U	2450	mg/kg	1.0	21	25	39	38	33	33		31	
Copper	U	2450	mg/kg	0.50	9.8	18	15	14	17	19		11	
Mercury	U	2450	mg/kg	0.10	< 0.10	< 0.10	0.12	< 0.10	< 0.10	< 0.10		< 0.10	
Nickel	U	2450	mg/kg	0.50	13	14	22	21	20	16		16	
Lead	U	2450	mg/kg	0.50	29	52	41	25	43	56		32	
Selenium	U	2450	mg/kg	0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20		< 0.20	
Zinc	U	2450	mg/kg	0.50	44	88	130	84	110	150		80	
Chromium (Hexavalent)	N	2490	mg/kg	0.50	< 0.50	< 0.50	< 0.50	< 0.50	< 0.50	< 0.50		< 0.50	
Total Organic Carbon	U	2625	%	0.20	1.3	3.6	4.7	1.2	4.1	4.6		2.2	
TPH >C5-C6	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		< 1.0	
TPH >C6-C7	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		< 1.0	
TPH >C7-C8	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		< 1.0	
TPH >C8-C10	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		< 1.0	
TPH >C10-C12	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		< 1.0	
TPH >C12-C16	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		< 1.0	
TPH >C16-C21	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		< 1.0	
TPH >C21-C35	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0		< 1.0	
Total TPH >C5-C35	N	2670	mg/kg	10	< 10	< 10	< 10	< 10	< 10	< 10		< 10	
Naphthalene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Acenaphthylene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Acenaphthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Fluorene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Phenanthrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	0.61		< 0.10	
Pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	0.62		< 0.10	
Benzo[a]anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	0.69		< 0.10	
Chrysene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Benzo[b]fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	

Results - Soil

Client: Geo Consulting Engineering Ltd	Chemtest Job No.:				17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343
Quotation No.: Q17-08367	Chemtest Sample ID.:				488470	488471	488472	488473	488474	488475	488476	488477	488478
Order No.:	Client Sample Ref.:				TP01	TP02	TP03	TP03	TP04	TP05	TP06	TP07	TP08
	Sample Type:				SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
	Top Depth (m):				0.30	0.20	0.20	0.40	0.20	0.20	0.10	0.20	0.05
	Date Sampled:				18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	18-Jul-2017	21-Jul-2017
	Asbestos Lab:				COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	
Determinand	Accred.	SOP	Units	LOD									
Benzo[k]fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Benzo[a]pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Indeno(1,2,3-c,d)Pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Dibenz(a,h)Anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Benzo[g,h,i]perylene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10		< 0.10	
Total Of 16 PAH's	U	2700	mg/kg	2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0		< 2.0	
Demeton-O	N	2820	mg/kg	0.20							< 0.20		< 0.20
Demeton-S	N	2820	mg/kg	0.20							< 0.20		< 0.20
Azinphos-Methyl	N	2820	mg/kg	0.20							< 0.20		< 0.20
Dimethoate	N	2820	mg/kg	0.20							< 0.20		< 0.20
Parathion	N	2820	mg/kg	0.20							< 0.20		< 0.20
Chlorfenvinphos	N	2820	mg/kg	0.20							< 0.20		< 0.20
Diazinon	N	2820	mg/kg	0.20							< 0.20		< 0.20
Azinphos-Ethyl	N	2820	mg/kg	0.20							< 0.20		< 0.20
Fenitrothion	N	2820	mg/kg	0.20							< 0.20		< 0.20
Malathion	N	2820	mg/kg	0.20							< 0.20		< 0.20
Mevinphos	N	2820	mg/kg	0.20							< 0.20		< 0.20
Parathion Methyl	N	2820	mg/kg	0.20							< 0.20		< 0.20
Alpha-HCH	N	2840	mg/kg	0.20							< 0.20		< 0.20
Gamma-HCH (Lindane)	N	2840	mg/kg	0.20							< 0.20		< 0.20
Beta-HCH	N	2840	mg/kg	0.20							< 0.20		< 0.20
Delta-HCH	N	2840	mg/kg	0.20							< 0.20		< 0.20
Heptachlor	N	2840	mg/kg	0.20							< 0.20		< 0.20
Aldrin	N	2840	mg/kg	0.20							< 0.20		< 0.20
Heptachlor Epoxide	N	2840	mg/kg	0.20							< 0.20		< 0.20
Gamma-Chlordane	N	2840	mg/kg	0.20							< 0.20		< 0.20
Alpha-Chlordane	N	2840	mg/kg	0.20							< 0.20		< 0.20
Endosulfan I	N	2840	mg/kg	0.20							< 0.20		< 0.20
4,4-DDE	N	2840	mg/kg	0.20							< 0.20		< 0.20
Dieldrin	N	2840	mg/kg	0.20							< 0.20		< 0.20
Endrin	N	2840	mg/kg	0.20							< 0.20		< 0.20
4,4-DDD	N	2840	mg/kg	0.20							< 0.20		< 0.20
Endosulfan II	N	2840	mg/kg	0.20							< 0.20		< 0.20
Endrin Aldehyde	N	2840	mg/kg	0.20							< 0.20		< 0.20
4,4-DDT	N	2840	mg/kg	0.20							< 0.20		< 0.20
Endosulfan Sulphate	N	2840	mg/kg	0.20							< 0.20		< 0.20
Methoxychlor	N	2840	mg/kg	0.20							< 0.20		< 0.20
Endrin Ketone	N	2840	mg/kg	0.20							< 0.20		< 0.20

Results - Soil

Client: Geo Consulting Engineering Ltd	Chemtest Job No.:	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343
Quotation No.: Q17-08367	Chemtest Sample ID.:	488479	488480	488481	488482	488483	488484	488485	488486
Order No.:	Client Sample Ref.:	TP09	TP09	TP10	TP10	TP10	TP10	TP11	TP11
	Sample Type:	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
	Top Depth (m):	0.10	0.40	0.10	0.70	1.40	2.50	0.10	1.90
	Date Sampled:	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017
	Asbestos Lab:	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY
Determinand	Accred.	SOP	Units	LOD					
ACM Type	U	2192		N/A	-	-	-	-	-
Asbestos Identification	U	2192	%	0.001	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected
Moisture	N	2030	%	0.020	20	16	24	19	22
pH	U	2010		N/A	5.9	6.6	5.7	5.9	7.5
Sulphate (2:1 Water Soluble) as SO4	U	2120	g/l	0.010	< 0.010	< 0.010	< 0.010	0.037	0.30
Sulphate (Total)	U	2430	%	0.010	0.16	0.028	0.13	0.033	0.27
Arsenic	U	2450	mg/kg	1.0	11	12	11	8.7	21
Cadmium	U	2450	mg/kg	0.10	0.32	0.11	0.45	0.13	0.89
Chromium	U	2450	mg/kg	1.0	33	36	38	43	31
Copper	U	2450	mg/kg	0.50	15	11	19	20	23
Mercury	U	2450	mg/kg	0.10	16	< 0.10	< 0.10	< 0.10	< 0.10
Nickel	U	2450	mg/kg	0.50	16	17	23	29	130
Lead	U	2450	mg/kg	0.50	49	21	49	15	15
Selenium	U	2450	mg/kg	0.20	< 0.20	< 0.20	< 0.20	< 0.20	0.30
Zinc	U	2450	mg/kg	0.50	150	82	150	100	440
Chromium (Hexavalent)	N	2490	mg/kg	0.50	< 0.50	< 0.50	< 0.50	< 0.50	< 0.50
Total Organic Carbon	U	2625	%	0.20	3.8	0.67	4.7	0.50	1.6
TPH >C5-C6	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C6-C7	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C7-C8	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C8-C10	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C10-C12	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C12-C16	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C16-C21	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C21-C35	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Total TPH >C5-C35	N	2670	mg/kg	10	< 10	< 10	< 10	< 10	< 10
Naphthalene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthylene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluorene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Phenanthrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo[a]anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Chrysene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo[b]fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10

Results - Soil

Client: Geo Consulting Engineering Ltd	Chemtest Job No.:				17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343	17-19343
Quotation No.: Q17-08367	Chemtest Sample ID.:				488479	488480	488481	488482	488483	488484	488485	488486
Order No.:	Client Sample Ref.:				TP09	TP09	TP10	TP10	TP10	TP10	TP11	TP11
	Sample Type:				SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL	SOIL
	Top Depth (m):				0.10	0.40	0.10	0.70	1.40	2.50	0.10	1.90
	Date Sampled:				21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017
	Asbestos Lab:				COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY	COVENTRY
Determinand	Accred.	SOP	Units	LOD								
Benzo[k]fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo[a]pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Indeno(1,2,3-c,d)Pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Dibenz(a,h)Anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo[g,h,i]perylene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Total Of 16 PAH's	U	2700	mg/kg	2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
Demeton-O	N	2820	mg/kg	0.20								
Demeton-S	N	2820	mg/kg	0.20								
Azinphos-Methyl	N	2820	mg/kg	0.20								
Dimethoate	N	2820	mg/kg	0.20								
Parathion	N	2820	mg/kg	0.20								
Chlorfenvinphos	N	2820	mg/kg	0.20								
Diazinon	N	2820	mg/kg	0.20								
Azinphos-Ethyl	N	2820	mg/kg	0.20								
Fenitrothion	N	2820	mg/kg	0.20								
Malathion	N	2820	mg/kg	0.20								
Mevinphos	N	2820	mg/kg	0.20								
Parathion Methyl	N	2820	mg/kg	0.20								
Alpha-HCH	N	2840	mg/kg	0.20								
Gamma-HCH (Lindane)	N	2840	mg/kg	0.20								
Beta-HCH	N	2840	mg/kg	0.20								
Delta-HCH	N	2840	mg/kg	0.20								
Heptachlor	N	2840	mg/kg	0.20								
Aldrin	N	2840	mg/kg	0.20								
Heptachlor Epoxide	N	2840	mg/kg	0.20								
Gamma-Chlordane	N	2840	mg/kg	0.20								
Alpha-Chlordane	N	2840	mg/kg	0.20								
Endosulfan I	N	2840	mg/kg	0.20								
4,4-DDE	N	2840	mg/kg	0.20								
Dieldrin	N	2840	mg/kg	0.20								
Endrin	N	2840	mg/kg	0.20								
4,4-DDD	N	2840	mg/kg	0.20								
Endosulfan II	N	2840	mg/kg	0.20								
Endrin Aldehyde	N	2840	mg/kg	0.20								
4,4-DDT	N	2840	mg/kg	0.20								
Endosulfan Sulphate	N	2840	mg/kg	0.20								
Methoxychlor	N	2840	mg/kg	0.20								
Endrin Ketone	N	2840	mg/kg	0.20								

Results - Soil

Client: Geo Consulting Engineering Ltd	Chemtest Job No.:				17-19343	17-19343	17-19343	17-19343	17-19343
Quotation No.: Q17-08367	Chemtest Sample ID.:				488487	488488	488489	488490	488491
Order No.:	Client Sample Ref.:				TP12	TP13	TP13	TP14	TP16
	Sample Type:				SOIL	SOIL	SOIL	SOIL	SOIL
	Top Depth (m):				0.30	0.40	1.90	0.80	0.40
	Date Sampled:				21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017
	Asbestos Lab:				COVENTRY	COVENTRY	COVENTRY	IN-TRANSIT	COVENTRY
Determinand	Accred.	SOP	Units	LOD					
ACM Type	U	2192		N/A	-	-	-	-	-
Asbestos Identification	U	2192	%	0.001	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected	No Asbestos Detected
Moisture	N	2030	%	0.020	21	18	22	16	26
pH	U	2010		N/A	6.1	6.3	4.7	6.6	7.2
Sulphate (2:1 Water Soluble) as SO4	U	2120	g/l	0.010	< 0.010	< 0.010	1.5	0.023	< 0.010
Sulphate (Total)	U	2430	%	0.010	0.10	0.047	4.0	< 0.010	0.024
Arsenic	U	2450	mg/kg	1.0	8.8	7.5	3.8	11	17
Cadmium	U	2450	mg/kg	0.10	0.16	< 0.10	< 0.10	0.29	0.37
Chromium	U	2450	mg/kg	1.0	34	35	28	27	42
Copper	U	2450	mg/kg	0.50	11	7.0	19	10	16
Mercury	U	2450	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Nickel	U	2450	mg/kg	0.50	21	20	15	37	35
Lead	U	2450	mg/kg	0.50	22	15	16	11	30
Selenium	U	2450	mg/kg	0.20	< 0.20	< 0.20	< 0.20	< 0.20	< 0.20
Zinc	U	2450	mg/kg	0.50	65	58	4.7	68	150
Chromium (Hexavalent)	N	2490	mg/kg	0.50	< 0.50	< 0.50	< 0.50	< 0.50	< 0.50
Total Organic Carbon	U	2625	%	0.20	1.6	0.54	1.2	0.36	2.2
TPH >C5-C6	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C6-C7	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C7-C8	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C8-C10	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C10-C12	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C12-C16	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C16-C21	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH >C21-C35	N	2670	mg/kg	1.0	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Total TPH >C5-C35	N	2670	mg/kg	10	< 10	< 10	< 10	< 10	< 10
Naphthalene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthylene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Acenaphthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluorene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Phenanthrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo[a]anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Chrysene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo[b]fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10

Results - Soil

Client: Geo Consulting Engineering Ltd	Chemtest Job No.:				17-19343	17-19343	17-19343	17-19343	17-19343
Quotation No.: Q17-08367	Chemtest Sample ID.:				488487	488488	488489	488490	488491
Order No.:	Client Sample Ref.:				TP12	TP13	TP13	TP14	TP16
	Sample Type:				SOIL	SOIL	SOIL	SOIL	SOIL
	Top Depth (m):				0.30	0.40	1.90	0.80	0.40
	Date Sampled:				21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017	21-Jul-2017
	Asbestos Lab:				COVENTRY	COVENTRY	COVENTRY	IN-TRANSIT	COVENTRY
Determinand	Accred.	SOP	Units	LOD					
Benzo[k]fluoranthene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo[a]pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Indeno(1,2,3-c,d)Pyrene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Dibenz(a,h)Anthracene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Benzo[g,h,i]perylene	U	2700	mg/kg	0.10	< 0.10	< 0.10	< 0.10	< 0.10	< 0.10
Total Of 16 PAH's	U	2700	mg/kg	2.0	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
Demeton-O	N	2820	mg/kg	0.20					
Demeton-S	N	2820	mg/kg	0.20					
Azinphos-Methyl	N	2820	mg/kg	0.20					
Dimethoate	N	2820	mg/kg	0.20					
Parathion	N	2820	mg/kg	0.20					
Chlorfenvinphos	N	2820	mg/kg	0.20					
Diazinon	N	2820	mg/kg	0.20					
Azinphos-Ethyl	N	2820	mg/kg	0.20					
Fenitrothion	N	2820	mg/kg	0.20					
Malathion	N	2820	mg/kg	0.20					
Mevinphos	N	2820	mg/kg	0.20					
Parathion Methyl	N	2820	mg/kg	0.20					
Alpha-HCH	N	2840	mg/kg	0.20					
Gamma-HCH (Lindane)	N	2840	mg/kg	0.20					
Beta-HCH	N	2840	mg/kg	0.20					
Delta-HCH	N	2840	mg/kg	0.20					
Heptachlor	N	2840	mg/kg	0.20					
Aldrin	N	2840	mg/kg	0.20					
Heptachlor Epoxide	N	2840	mg/kg	0.20					
Gamma-Chlordane	N	2840	mg/kg	0.20					
Alpha-Chlordane	N	2840	mg/kg	0.20					
Endosulfan I	N	2840	mg/kg	0.20					
4,4-DDE	N	2840	mg/kg	0.20					
Dieldrin	N	2840	mg/kg	0.20					
Endrin	N	2840	mg/kg	0.20					
4,4-DDD	N	2840	mg/kg	0.20					
Endosulfan II	N	2840	mg/kg	0.20					
Endrin Aldehyde	N	2840	mg/kg	0.20					
4,4-DDT	N	2840	mg/kg	0.20					
Endosulfan Sulphate	N	2840	mg/kg	0.20					
Methoxychlor	N	2840	mg/kg	0.20					
Endrin Ketone	N	2840	mg/kg	0.20					

SOP	Title	Parameters included	Method summary
2010	pH Value of Soils	pH	pH Meter
2030	Moisture and Stone Content of Soils(Requirement of MCERTS)	Moisture content	Determination of moisture content of soil as a percentage of its as received mass obtained at <37°C.
2120	Water Soluble Boron, Sulphate, Magnesium & Chromium	Boron; Sulphate; Magnesium; Chromium	Aqueous extraction / ICP-OES
2192	Asbestos	Asbestos	Polarised light microscopy / Gravimetry
2430	Total Sulphate in soils	Total Sulphate	Acid digestion followed by determination of sulphate in extract by ICP-OES.
2450	Acid Soluble Metals in Soils	Metals, including: Arsenic; Barium; Beryllium; Cadmium; Chromium; Cobalt; Copper; Lead; Manganese; Mercury; Molybdenum; Nickel; Selenium; Vanadium; Zinc	Acid digestion followed by determination of metals in extract by ICP-MS.
2490	Hexavalent Chromium in Soils	Chromium [VI]	Soil extracts are prepared by extracting dried and ground soil samples into boiling water. Chromium [VI] is determined by 'Aquakem 600' Discrete Analyser using 1,5-diphenylcarbazide.
2625	Total Organic Carbon in Soils	Total organic Carbon (TOC)	Determined by high temperature combustion under oxygen, using an Eltra elemental analyser.
2670	Total Petroleum Hydrocarbons (TPH) in Soils by GC-FID	TPH (C6–C40); optional carbon banding, e.g. 3-band – GRO, DRO & LRO*TPH C8–C40	Dichloromethane extraction / GC-FID
2700	Speciated Polynuclear Aromatic Hydrocarbons (PAH) in Soil by GC-FID	Acenaphthene; Acenaphthylene; Anthracene; Benzo[a]Anthracene; Benzo[a]Pyrene; Benzo[b]Fluoranthene; Benzo[ghi]Perylene; Benzo[k]Fluoranthene; Chrysene; Dibenzo[ah]Anthracene; Fluoranthene; Fluorene; Indeno[123cd]Pyrene; Naphthalene; Phenanthrene; Pyrene	Dichloromethane extraction / GC-FID
2820	Organophosphorus (O-P) Pesticides in Soils by GC-MS	Organophosphorus pesticide representative suite including Parathion, Malathion etc, plus client specific determinands	Dichloromethane extraction / GC-MS
2840	Organochlorine (O-Cl) Pesticides in Soils by GC-MS	Organochlorine pesticide representative suite including DDT and its metabolites, 'drins' and HCH etc, plus client specific determinands	Dichloromethane extraction / GC-MS

Report Information

Key

- U UKAS accredited
- M MCERTS and UKAS accredited
- N Unaccredited
- S This analysis has been subcontracted to a UKAS accredited laboratory that is accredited for this analysis
- SN This analysis has been subcontracted to a UKAS accredited laboratory that is not accredited for this analysis
- T This analysis has been subcontracted to an unaccredited laboratory
- I/S Insufficient Sample
- U/S Unsuitable Sample
- N/E not evaluated
- < "less than"
- > "greater than"

Comments or interpretations are beyond the scope of UKAS accreditation

The results relate only to the items tested

Uncertainty of measurement for the determinands tested are available upon request

None of the results in this report have been recovery corrected

All results are expressed on a dry weight basis

The following tests were analysed on samples as received and the results subsequently corrected to a dry weight basis TPH, BTEX, VOCs, SVOCs, PCBs, Phenols

For all other tests the samples were dried at < 37°C prior to analysis

All Asbestos testing is performed at the indicated laboratory

Issue numbers are sequential starting with 1 all subsequent reports are incremented by 1

Sample Deviation Codes

- A - Date of sampling not supplied
- B - Sample age exceeds stability time (sampling to extraction)
- C - Sample not received in appropriate containers
- D - Broken Container
- E - Insufficient Sample

Sample Retention and Disposal

All soil samples will be retained for a period of 45 days from the date of receipt

All water samples will be retained for 14 days from the date of receipt

Charges may apply to extended sample storage

If you require extended retention of samples, please email your requirements to:

customerservices@chemtest.co.uk

GCE00644/ R2



Appendix H Geotechnical Laboratory Test Results



Laboratory Report



GEO Site & Testing Services Ltd

Contract Number: 36115

Client's Reference: **GCE00644**

Report Date: **10-08-2017**

Client **GEO Consulting Engineering Limited**
The Studio
Woodmanton Barns
Woodbury
Exeter
EX5 1HQ

Contract Title: **Southwick Court Farm**
For the attention of: **Rebecca Hitt**

Date Received: **28-07-2017**
Date Commenced: **28-07-2017**
Date Completed: **10-08-2017**

Test Description	Qty
Moisture Content 1377 : 1990 Part 2 : 3.2 - * UKAS	60
4 Point Liquid & Plastic Limit (LL/PL) 1377 : 1990 Part 2 : 4.3 & 5.3 - * UKAS	5
(GI) BRE SD1 Reduced Suite pH, Acid Soluble Sulphate, Water Soluble Sulphate and Total Sulphur 1377 : 1990 Part 3 & BRE CP2/79 - @ Non Accredited Test	6
Disposal of Samples on Project	1

Notes: **Observations and Interpretations are outside the UKAS Accreditation**
* - denotes test included in laboratory scope of accreditation
- denotes test carried out by approved contractor
@ - denotes non accredited tests

This certificate is issued in accordance with the accreditation requirements of the United Kingdom Accreditation Service. The results reported herein relate only to the material supplied to the laboratory. This certificate shall not be reproduced except in full, without the prior written approval of the laboratory.

Approved Signatories:

Alex Wynn (Associate Director) - Ben Sharp (Contracts Manager) - Emma Sharp (Office Manager)
Paul Evans (Quality/Technical Manager) - Richard John (Advanced Testing Manager) - Sean Penn (Administrative/Quality Assistant)
Vaughan Edwards (Managing Director) - Wayne Honey (Administrative/Quality Assistant)



LIQUID LIMIT, PLASTIC LIMIT AND PLASTICITY INDEX
(BS 1377 : Part 2 : 1990 Method 5)

DESCRIPTIONS

Contract Number

36115

Site Name

Southwick Court Farm

Hole Reference	Sample Number	Sample Type	Depth (m)			Descriptions
TP01			0.40	-		Brown fine sandy silty CLAY.
TP01			0.90	-		Brown fine sandy silty CLAY.
TP01			1.50	-		Brown fine sandy silty CLAY.
TP01			1.60	-		Brown fine sandy silty CLAY.
TP01			2.00	-		Brown fine to medium gravelly sandy silty CLAY.
TP02			0.30	-		Brown fine sandy silty CLAY.
TP02			0.90	-		Brown fine sandy silty CLAY.
TP02			1.30	-		Brown fine sandy silty CLAY.
TP03			0.80	-		Brown fine sandy silty CLAY.
TP03			1.50	-		Greyish brown sandy clayey SILT.
TP04			0.40	-		Brown fine sandy silty CLAY.
TP04			0.90	-		Greyish brown fine sandy silty CLAY.
TP04			1.50	-		Greyish brown fine sandy silty CLAY.
TP04			1.90	-		Greyish brown fine sandy silty CLAY.
TP05			0.90	-		Greyish brown fine sandy silty CLAY.
TP05			1.70	-		Greyish brown fine sandy silty CLAY.
TP05			2.50	-		Greyish brown fine sandy silty CLAY.
TP06			0.70	-		Brown fine sandy silty CLAY.
TP06			1.00	-		Greyish brown fine sandy silty CLAY.
TP06			1.30	-		Brown fine sandy silty CLAY.
TP06			1.50	-		Brown fine sandy silty CLAY.
TP06			1.70	-		Brown fine sandy silty CLAY.
TP06			2.50	-		Brown fine sandy silty CLAY.
TP06			3.00	-		Brown fine sandy silty CLAY.

Operators

Checked

09-08-17

Emma Sharp

RO/MH

Approved

10-08-17

Paul Evans





LIQUID LIMIT, PLASTIC LIMIT AND PLASTICITY INDEX
(BS 1377 : Part 2 : 1990 Method 5)

Contract Number

36115

Site Name


Southwick Court Farm

Hole Reference	Sample Number	Sample Type	Depth (m)			Moisture Content %	Liquid Limit %	Plastic Limit %	Plasticity index %	Passing .425mm %	Remarks
TP01			0.40	-		17					
TP01			0.90	-		23	58	26	32	100	CH High Plasticity
TP01			1.50	-		25					
TP01			1.60	-		23					
TP01			2.00	-		18					
TP02			0.30	-		14					
TP02			0.90	-		21					
TP02			1.30	-		29	53	24	29	100	CH High Plasticity
TP03			0.80	-		30					
TP03			1.50	-		41	66	34	32	100	MH High Plasticity
TP04			0.40	-		24					
TP04			0.90	-		21					
TP04			1.50	-		22					
TP04			1.90	-		19					
TP05			0.90	-		23					
TP05			1.70	-		38					
TP05			2.50	-		25	61	27	34	100	CH High Plasticity
TP06			0.70	-		33					
TP06			1.00	-		41					
TP06			1.30	-		43					
TP06			1.50	-		43					
TP06			1.70	-		0					
TP06			2.50	-		29					
TP06			3.00	-		28					

Symbols: NP : Non Plastic

: Liquid Limit and Plastic Limit Wet Sieved

PLASTICITY CHART FOR CASAGRANDE CLASSIFICATION
BS 5930:1999+A2:2010

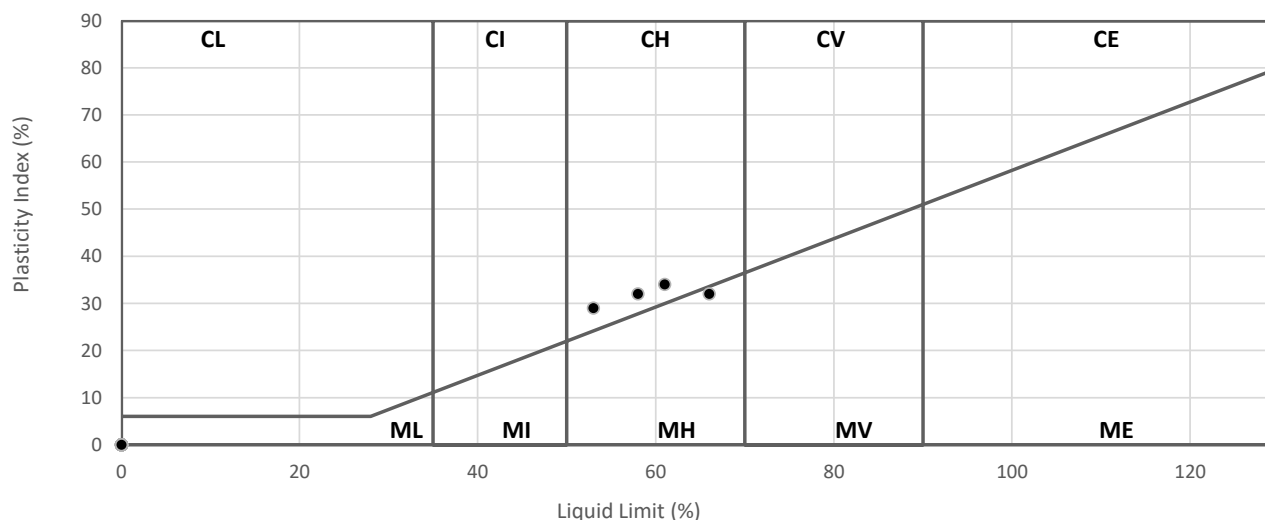

Operators

Checked

09-08-17

Emma Sharp

DB

Approved

10-08-17

Paul Evans





LIQUID LIMIT, PLASTIC LIMIT AND PLASTICITY INDEX
(BS 1377 : Part 2 : 1990 Method 5)

DESCRIPTIONS

Contract Number

36115

Site Name

Southwick Court Farm

Hole Reference	Sample Number	Sample Type	Depth (m)			Descriptions
TP07			0.60	-		Greyish brown fine sandy silty CLAY.
TP07			1.40	-		Greyish brown fine sandy silty CLAY.
TP07			1.70	-		Greyish brown fine sandy silty CLAY.
TP07			1.90	-		Greyish brown fine sandy silty CLAY.
TP07			2.50	-		Greyish brown fine sandy silty CLAY.
TP07			2.90	-		Greyish brown fine sandy silty CLAY.
TP07			3.30	-		Greyish brown fine sandy silty CLAY.
TP08			0.40	-		Greyish brown fine sandy silty CLAY.
TP08			1.00	-		Greyish brown fine sandy silty CLAY.
TP08			1.40	-		Greyish brown fine sandy silty CLAY.
TP08			3.60	-		Greyish brown fine sandy silty CLAY.
TP09			0.80	-		Greyish brown fine sandy silty CLAY.
TP09			1.40	-		Greyish brown fine sandy silty CLAY.
TP09			1.70	-		Greyish brown fine sandy silty CLAY.
TP09			2.00	-		Greyish brown fine sandy silty CLAY.
TP09			3.60	-		Greyish brown fine sandy silty CLAY.
TP10			1.50	-		Greyish brown fine sandy silty CLAY.
TP10			2.90	-		Greyish brown fine sandy silty CLAY.
TP11			0.60	-		Greyish brown fine sandy silty CLAY.
TP11			1.30	-		Greyish brown fine sandy silty CLAY.
TP11			2.70	-		Greyish brown fine sandy silty CLAY.
TP12			1.30	-		Greyish brown fine sandy silty CLAY.
TP12			3.00	-		Greyish brown clayey SILT.
				-		

Operators

Checked

09-08-17

Emma Sharp

RO/MH

Approved

10-08-17

Paul Evans





LIQUID LIMIT, PLASTIC LIMIT AND PLASTICITY INDEX (BS 1377 : Part 2 : 1990 Method 5)

Contract Number

36115

Site Name


Southwick Court Farm

Hole Reference	Sample Number	Sample Type	Depth (m)			Moisture Content %	Liquid Limit %	Plastic Limit %	Plasticity index %	Passing .425mm %	Remarks
TP07			0.60	-		20					
TP07			1.40	-		30					
TP07			1.70	-		32					
TP07			1.90	-		31					
TP07			2.50	-		22					
TP07			2.90	-		32					
TP07			3.30	-		29					
TP08			0.40	-		23					
TP08			1.00	-		28					
TP08			1.40	-		33					
TP08			3.60	-		30					
TP09			0.80	-		27					
TP09			1.40	-		40					
TP09			1.70	-		32					
TP09			2.00	-		22					
TP09			3.60	-		31					
TP10			1.50	-		28					
TP10			2.90	-		44					
TP11			0.60	-		35					
TP11			1.30	-		28					
TP11			2.70	-		27					
TP12			1.30	-		27					
TP12			3.00	-		50	86	47	39	100	MV Very High Plasticity
				-							

Symbols: NP : Non Plastic

: Liquid Limit and Plastic Limit Wet Sieved

PLASTICITY CHART FOR CASAGRANDE CLASSIFICATION BS 5930:1999+A2:2010

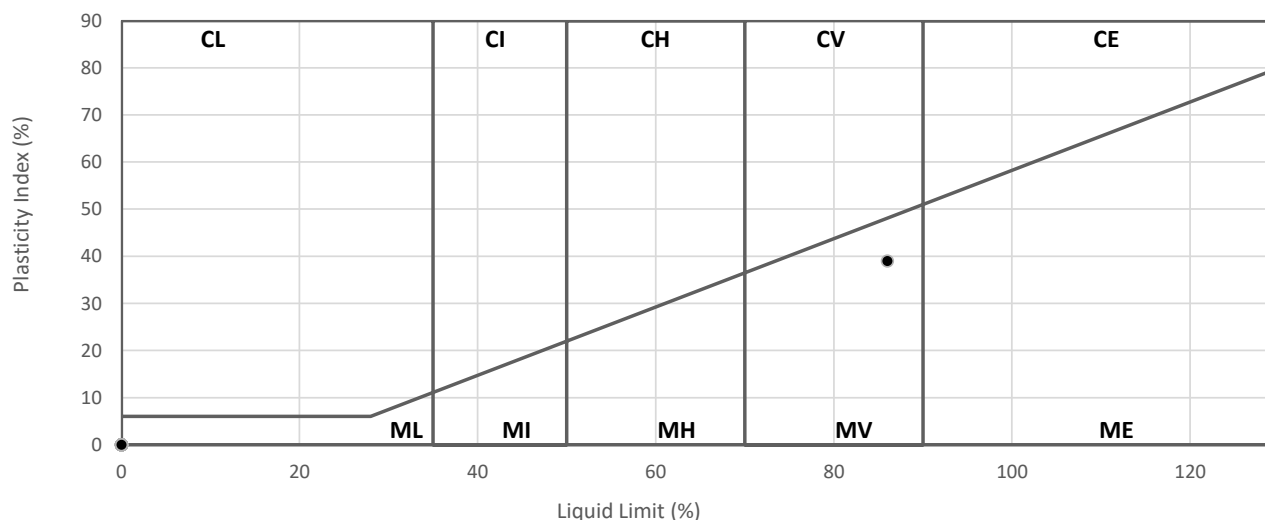

Operators

Checked

09-08-17

Emma Sharp

DB

Approved

10-08-17

Paul Evans



LIQUID LIMIT, PLASTIC LIMIT AND PLASTICITY INDEX
(BS 1377 : Part 2 : 1990 Method 5)

DESCRIPTIONS

Contract Number	36115	
Site Name	Southwick Court Farm	

[illegible]

Operators	Checked	09-08-17	Emma Sharp
RO/MH	Approved	10-08-17	Paul Evans

LIQUID LIMIT, PLASTIC LIMIT AND PLASTICITY INDEX (BS 1377 : Part 2 : 1990 Method 5)

Contract Number

36115

Site Name


Southwick Court Farm

[illegible]

Symbols: NP : Non Plastic

: Liquid Limit and Plastic Limit Wet Sieved

PLASTICITY CHART FOR CASAGRANDE CLASSIFICATION BS 5930:1999+A2:2010

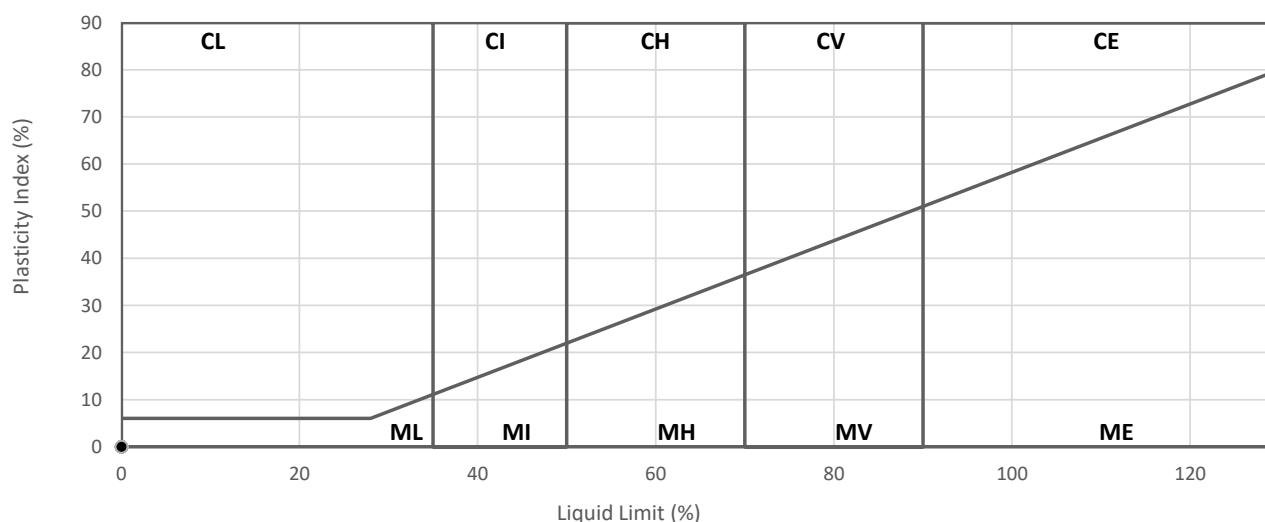


Operators	Checked	09-08-17	Emma Sharp	
DB	Approved	10-08-17	Paul Evans	

GCE00644/ R2



Appendix I DCP CBR Test Results


Project:	Southwick Court Farm DCP No.:	DCP1	Date:	04/09/2017	easting	northing
Project No.:	GCE00644	Start datum:	90 mm	Start depth	0 mm	

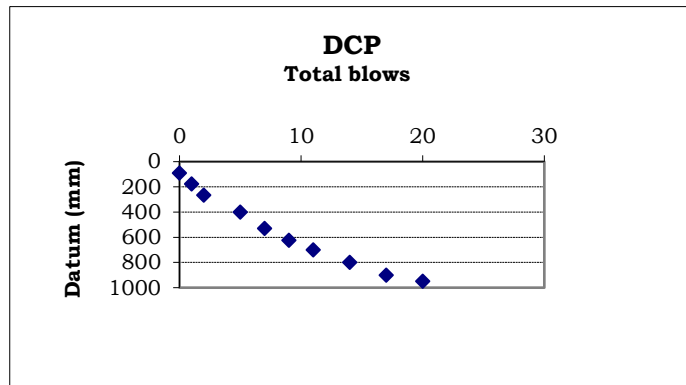[illegible]

	Datum(mm)	Blows	mm/blow	CBR%	Depth(mm)	Cu
From	90	0			0	
To	265	2	87.50	2.67	175	48.32
From	265	2			175	
To	800	14	44.58	5.46	710	73.38
From	800	14			710	
To	900	17	33.33	7.42	810	87.86
From	900	17			810	
To	950	20	16.67	15.43	860	134.97

TRRL, Road Transport Note 8.
 $\text{Log CBR} = -1.057 \log (\text{mm/blow}) + 2.48$


Project:	Southwick Court Farm DCP No.:	DCP2	Date:	04/09/2017	easting	northing
Project No.:	GCE00644	Start datum:	80 mm	Start depth	0 mm	

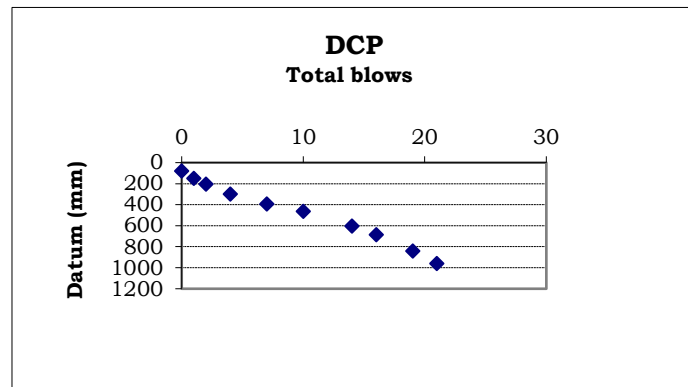[illegible]

	Datum(mm)	Blows	mm/blow	CBR%	Depth(mm)	Cu
From	80	0			0	
To	300	4	55.00	4.37	220	64.43
From	300	4			220	
To	605	14	30.50	8.15	525	92.83
From	605	14			525	
To	960	21	50.71	4.76	880	67.75

TRRL, Road Transport Note 8.
Log CBR = -1.057 log (mm/blow) + 2.48


Project:	Southwick Court Farm DCP No.:	DCP3	Date:	04/09/2017	easting	northing
Project No.:	GCE00644	Start datum:	78 mm	Start depth	0 mm	

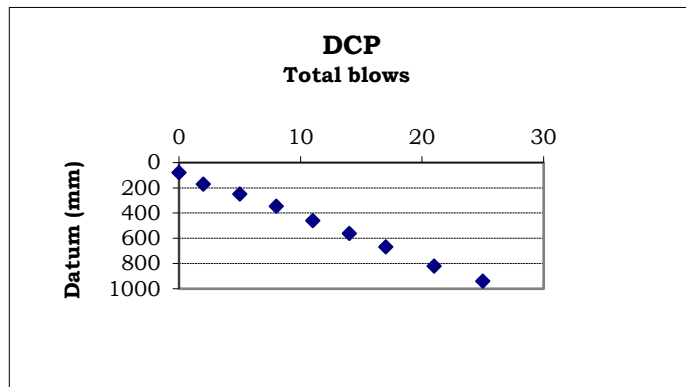[illegible]

	Datum(mm)	Blows	mm/blow	CBR%	Depth(mm)	Cu
From	78	0			0	
To	345	8	33.38	7.41	267	87.79
From	345	8			267	
To	940	25	35.00	7.05	862	85.24

TRRL, Road Transport Note 8.
 $\text{Log CBR} = -1.057 \log (\text{mm/blow}) + 2.48$


Project:	Southwick Court Farm DCP No.:	DCP4	Date:	04/09/2017	easting	northing
Project No.:	GCE00644	Start datum:	80 mm	Start depth	0 mm	

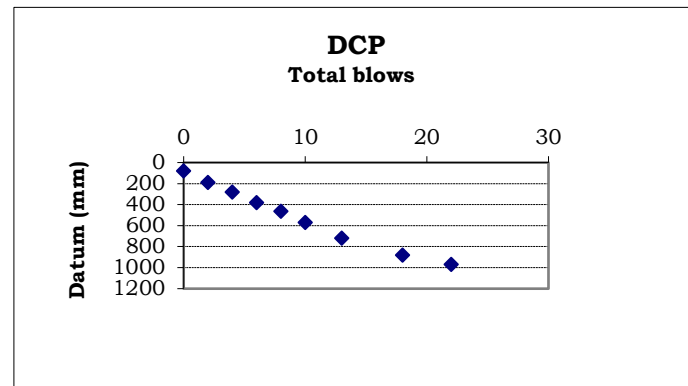[illegible]

	Datum(mm)	Blows	mm/blow	CBR%	Depth(mm)	Cu
From	80	0			0	
To	190	2	55.00	4.37	110	64.43
From	190	2			110	
To	720	13	48.18	5.03	640	69.93
From	720	13			640	
To	880	18	32.00	7.75	800	90.11
From	880	18			800	
To	970	22	22.50	11.24	890	112.07

TRRL, Road Transport Note 8.
 $\text{Log CBR} = -1.057 \log (\text{mm/blow}) + 2.48$


Project:	Southwick Court Farm DCP No.:	DCP5	Date:	04/09/2017	easting	northing
Project No.:	GCE00644	Start datum:	70 mm	Start depth	0 mm	

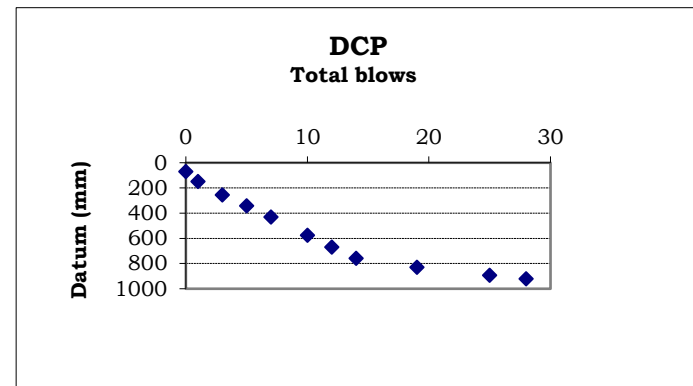[illegible]

	Datum(mm)	Blows	mm/blow	CBR%	Depth(mm)	Cu
From	70	0			0	
To	758	14	49.14	4.92	688	69.08
From	758	14			688	
To	894	25	12.36	21.16	824	162.39
From	894	25			824	
To	920	28	8.67	30.81	850	202.37

TRRL, Road Transport Note 8.
 $\text{Log CBR} = -1.057 \log (\text{mm/blow}) + 2.48$


Project:	Southwick Court Farm DCP No.:	DCP6	Date:	04/09/2017	easting	northing
Project No.:	GCE00644	Start datum:	80 mm	Start depth	0 mm	

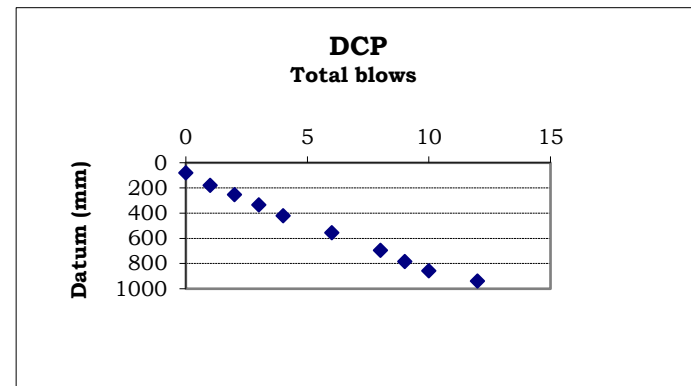[illegible]

	Datum(mm)	Blows	mm/blow	CBR%	Depth(mm)	Cu
From	80	0			0	
To	555	6	79.17	2.97	475	51.41
From	555	6			475	
To	695	8	70.00	3.39	615	55.49
From	695	8			615	
To	785	9	90.00	2.60	705	47.49
From	785	9			705	
To	857	10	72.00	3.29	777	54.53
From	857	10			777	
To	940	12	41.50	5.88	860	76.71

TRRL, Road Transport Note 8.
 $\text{Log CBR} = -1.057 \log (\text{mm/blow}) + 2.48$


Project:	Southwick Court Farm DCP No.:	DCP7	Date:	04/09/2017	easting	northing
Project No.:	GCE00644	Start datum:	80 mm	Start depth	0 mm	

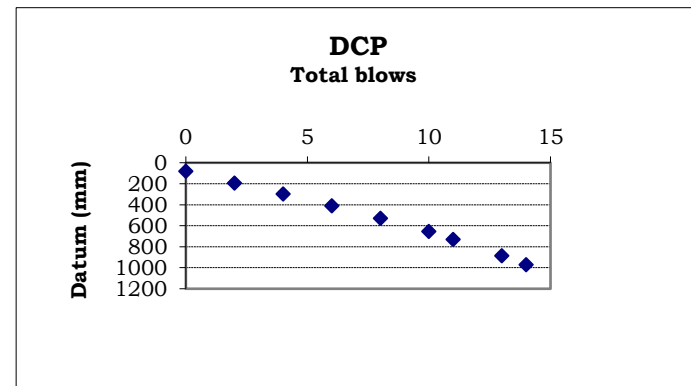[illegible]

	Datum(mm)	Blows	mm/blow	CBR%	Depth(mm)	Cu
From	80	0			0	
To	298	4	54.50	4.41	218	64.79
From	298	4			218	
To	655	10	59.50	4.02	575	61.36
From	655	10			575	
To	731	11	76.00	3.10	651	52.73
From	731	11			651	
To	885	13	77.00	3.06	805	52.31
From	885	13			805	
To	970	14	85.00	2.76	890	49.20

TRRL, Road Transport Note 8.
 $\text{Log CBR} = -1.057 \log (\text{mm/blow}) + 2.48$

Project:	Southwick Court Farm DCP No.:	DCP8	Date:	04/09/2017	easting	northing
Project No.:	GCE00644	Start datum:	80 mm	Start depth	0 mm	

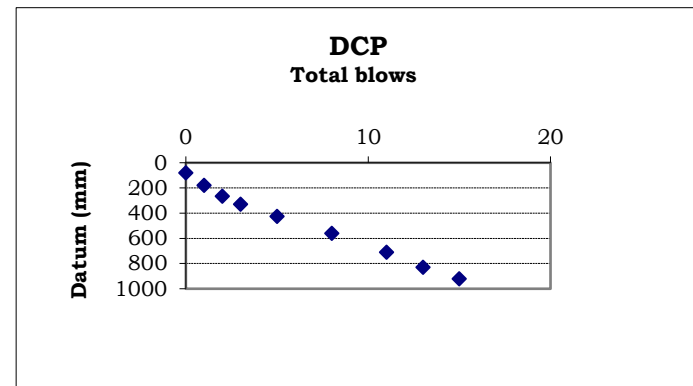[illegible]

	Datum(mm)	Blows	mm/blow	CBR%	Depth(mm)	Cu
From	80	0			0	
To	330	3	83.33	2.82	250	49.81
From	330	3			250	
To	425	5	47.50	5.10	345	70.55
From	425	5			345	
To	560	8	45.00	5.40	480	72.95
From	560	8			480	
To	920	15	51.43	4.69	840	67.16


TRRL, Road Transport Note 8.
 $\text{Log CBR} = -1.057 \log (\text{mm/blow}) + 2.48$

GCE00644/ R2




Appendix J Utility Service Plans

Extreme caution. Major Accident Hazard Pressurised Gas Plant in Vicinity.
Extreme caution. Major Accident Hazard Pipeline in Vicinity.
****RISK OF DEATH OR SERIOUS INJURY****
Prior to excavation starting you must contact the plant protection team on 02920 278912.

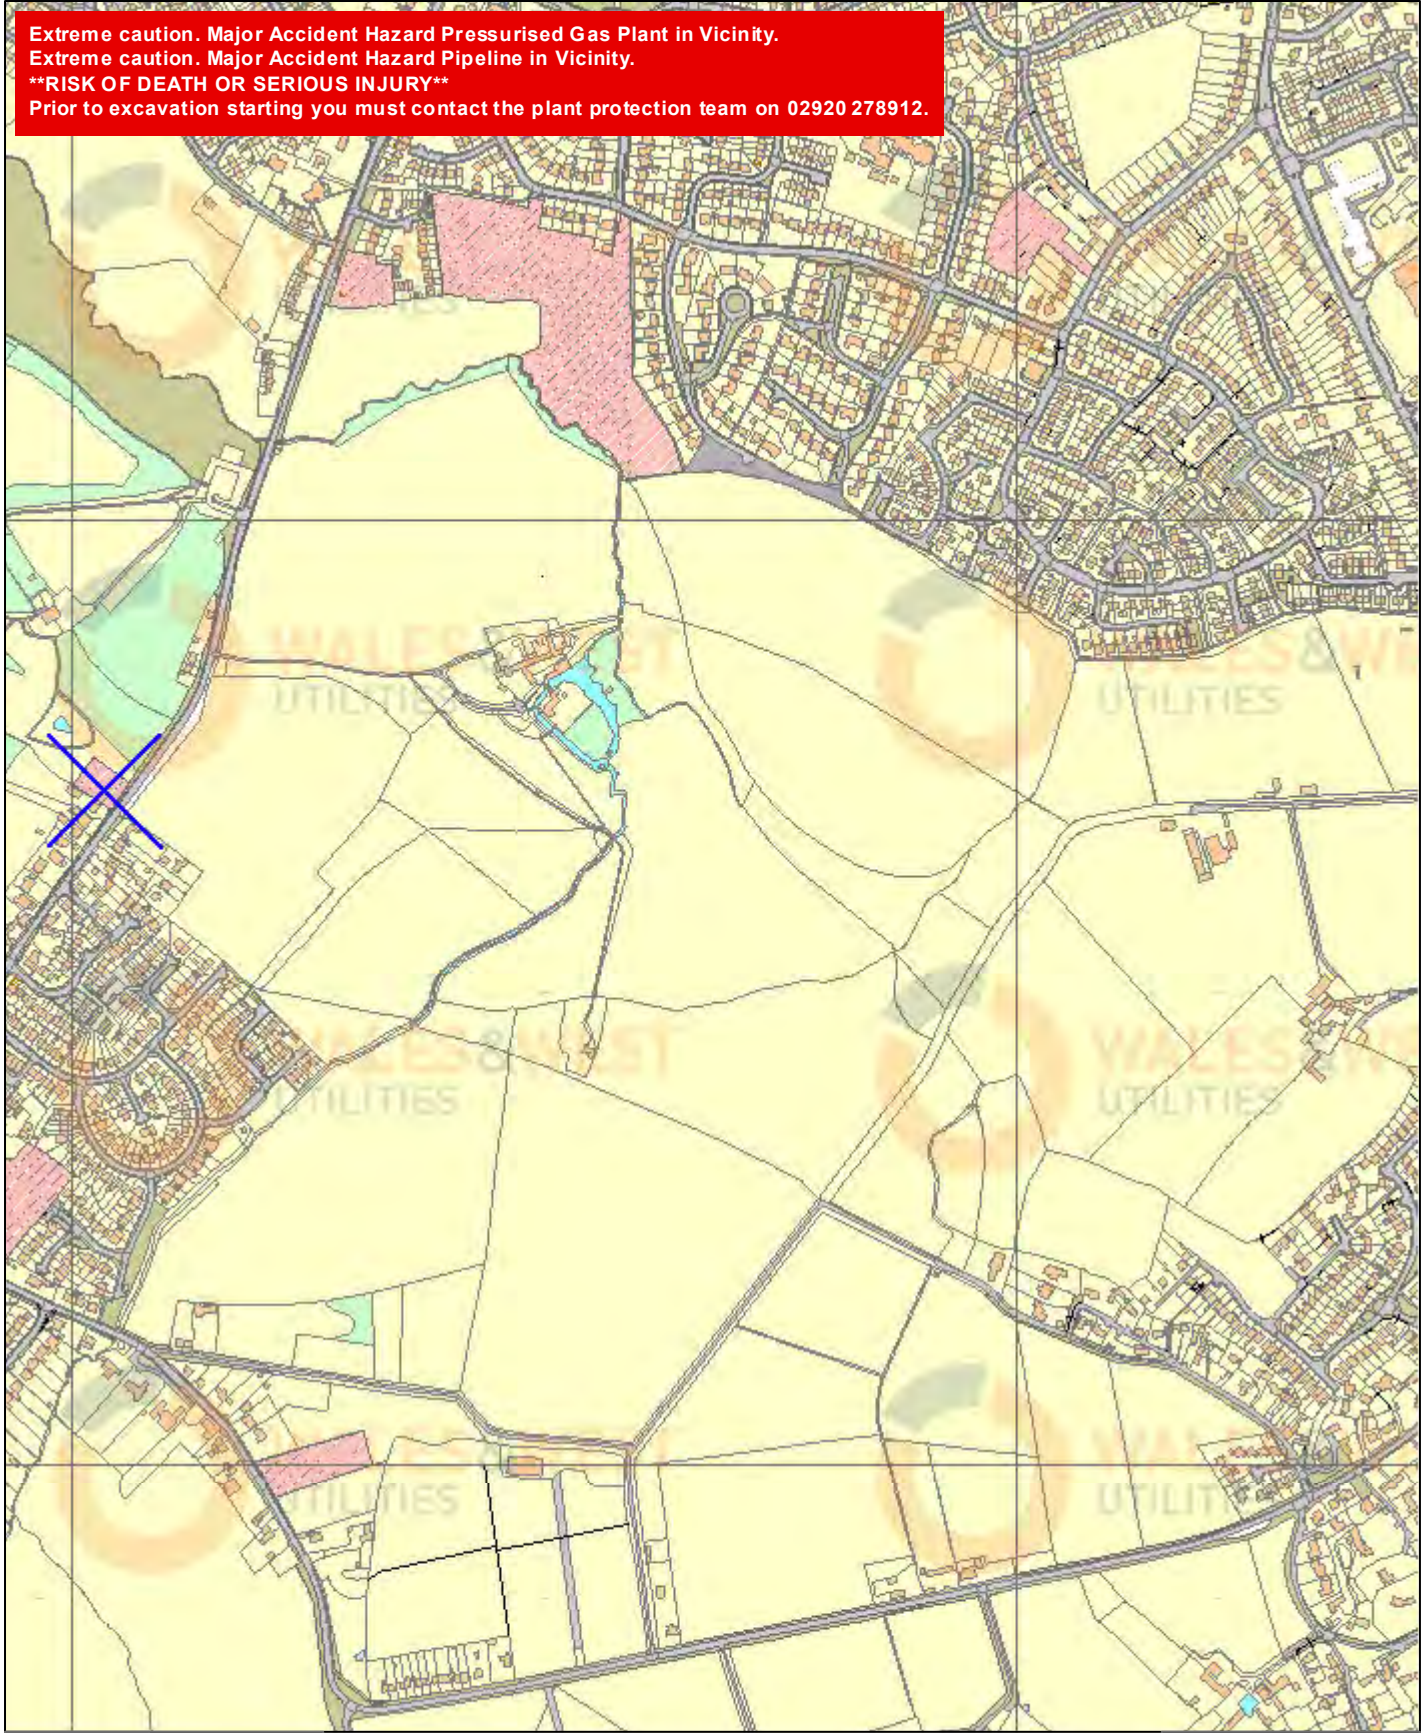

Scale	1 : 8000@A4	TITLE: southwicke	 Wales and West Utilities Ltd., Wales and West House, Spooner Close, Celtic Springs, Coedkernew, Newport, NP10 8FZ
User ID	ras@more@geoconsulti	The plan shows those pipes owned by Wales & West Utilities (WWU) in its role as a Licensed Gas Transporter (GT). The information shown on this plan is derived from historic information and may have involved re-scaling plans, and the accuracy of it cannot be guaranteed. Service pipes, valves, syphons, stub connections, etc. may not be shown but their presence should be anticipated. No warranties are therefore given in respect of it. WWU its employees and contractors do not accept any liability for any inaccuracy or incompleteness in it.	
Date	21/01/2016	You must use safe digging practices, in accordance with HSG47, to establish the actual position of mains, pipes, services and other apparatus on site before any mechanical plant is used. It is your responsibility to ensure that this information is provided to all persons (either direct labour or contractors) working for you or near gas apparatus. The information shown on this plan should not be used beyond 28 days from the date of issue of this plan as it is subject to updating.	
Grid Ref:	Easting: 384678 Northing: 155633	The plan also provides indications of gas pipes owned by other GTs, or otherwise privately owned, which may be present in this area. This information is not information of WWU and WWU is unable to verify this information or to confirm whether it is accurate or complete. It is supplied voluntarily to assist the user in determining whether to make contact with other GTs or others. The user must obtain such information from the other GT or person concerned. WWU, its employees and contractors do not accept any liability for this information or any inaccuracy or incompleteness in it.	
			© All MasterMap data is reproduced by permission of Ordnance Survey on behalf of HMSO. © Crown copyright and database right 2016. All rights reserved. Ordnance Survey Licence number 0100044308.


Extreme caution. Major Accident Hazard Pipeline in Vicinity.
RISK OF DEATH OR SERIOUS INJURY
Prior to excavation starting you must contact the plant protection team on 02920 278912.
Extreme caution. Major Accident Hazard Pressurised Gas Plant in Vicinity.

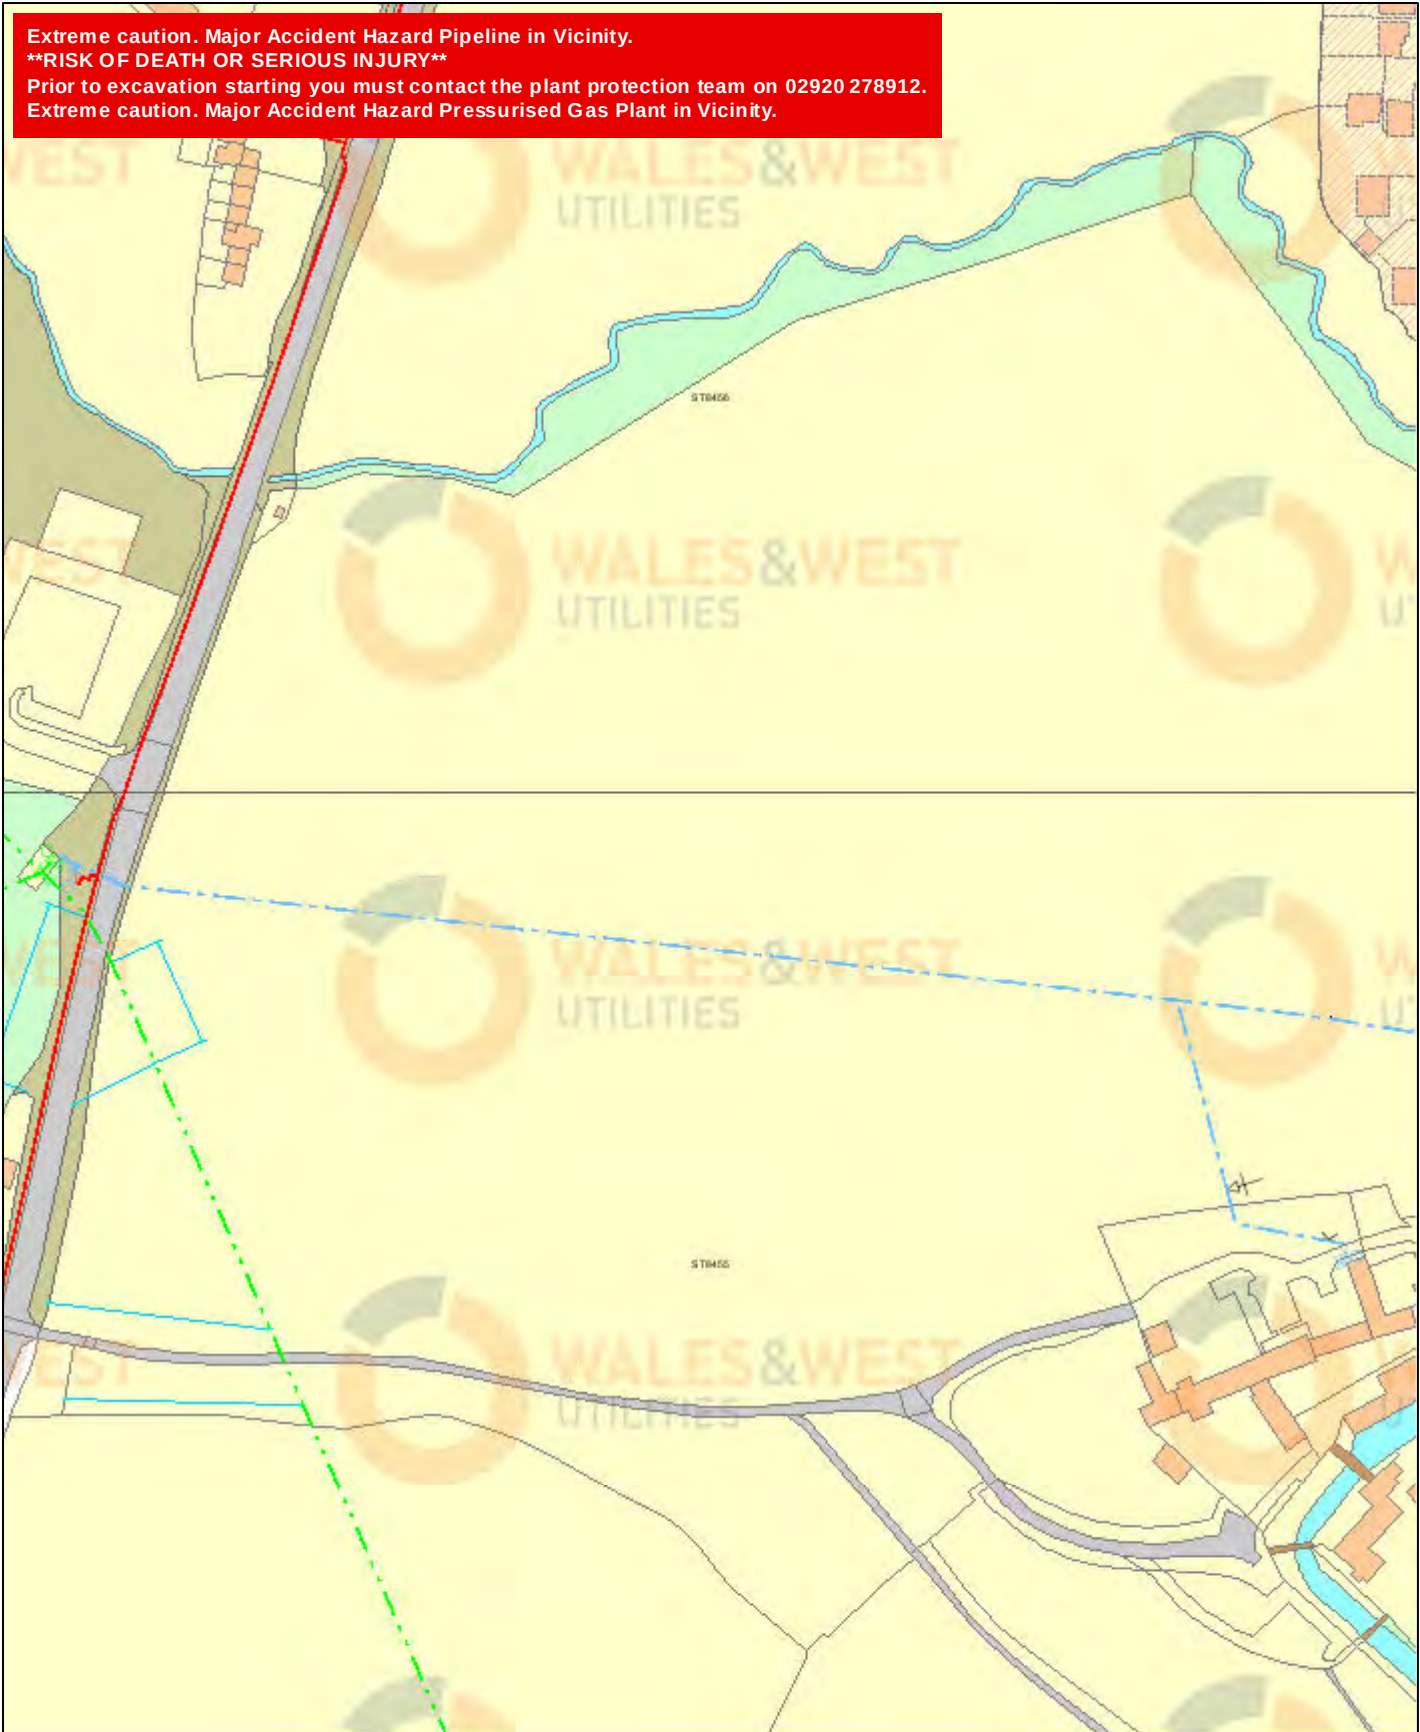

Scale	1 : 2000@A4	TITLE: GCE00644	 Wales and West Utilities Ltd., Wales and West House, Spooner Close, Celtic Springs, Coedkernew, Newport, NP10 8FZ
User ID	rhitt@geoconsulting	The plan shows those pipes owned by Wales & West Utilities (WU) in its role as a Licensed Gas Transporter (GT). The information shown on this plan is derived from historic information and may have involved re-scaling plans, and the accuracy of it cannot be guaranteed. Service pipes, valves, syphons, stub connections, etc. may not be shown but their presence should be anticipated. No warranties are therefore given in respect of it. WU, its employees and contractors do not accept any liability for any inaccuracy or incompleteness in it.	
Date	19/10/2017	You must use safe digging practices, in accordance with HSG47, to establish the actual position of mains, pipes, services and other apparatus on site before any mechanical plant is used. It is your responsibility to ensure that this information is provided to all persons (either direct labour or contractors) working for you or near gas apparatus. The information shown on this plan should not be used beyond 28 days from the date of issue of this plan as it is subject to updating.	
Grid Ref:	Easting: 384334 Northing: 155980	The plan also provides indications of gas pipes owned by other GTs, or otherwise privately owned, which may be present in this area. This information is not information of WU and WU is unable to verify this information or to confirm whether it is accurate or complete. It is supplied voluntarily to assist the user in determining whether to make contact with other GTs or others. The user must obtain such information from the other GT or person concerned. WU, its employees and contractors do not accept any liability for this information or any inaccuracy or incompleteness in it.	
Low Pressure Medium Pressure Intermediate Pressure High Pressure Design Pipes Abandoned		Valve Depth of Cover Syphon Obstacle Manhole Change Manhole Change	02550Meters © All Master Map data is reproduced by permission of Ordnance Survey on behalf of HMSO. © Crown copyright and database right 2017. All rights reserved. Ordnance Survey Licence number 0100044308.

****RISK OF DEATH OR SERIOUS INJURY****


Extreme caution. Major Accident Hazard Pressurised Gas Plant in Vicinity.

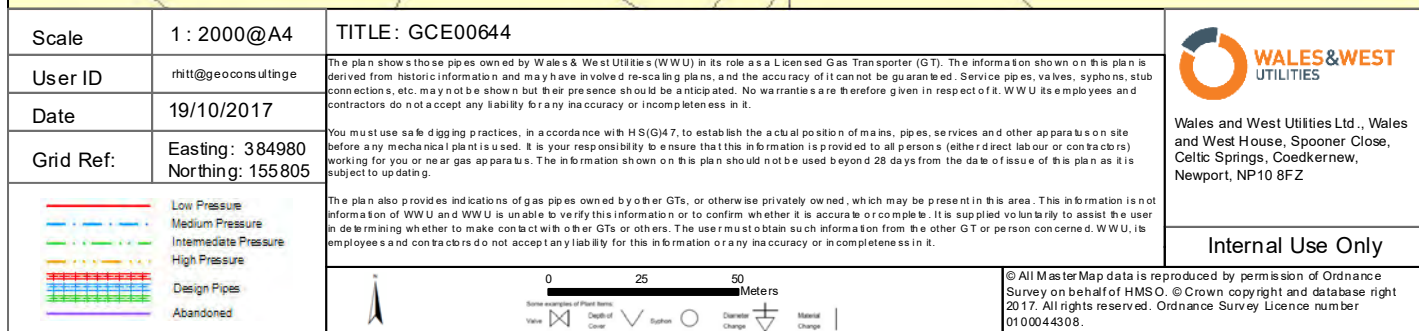


****RISK OF DEATH OR SERIOUS INJURY****

Prior to excavation starting you must contact the plant protection team on 02920 278912.

Extreme caution. Major Accident Hazard Pressurised Gas Plant in Vicinity.

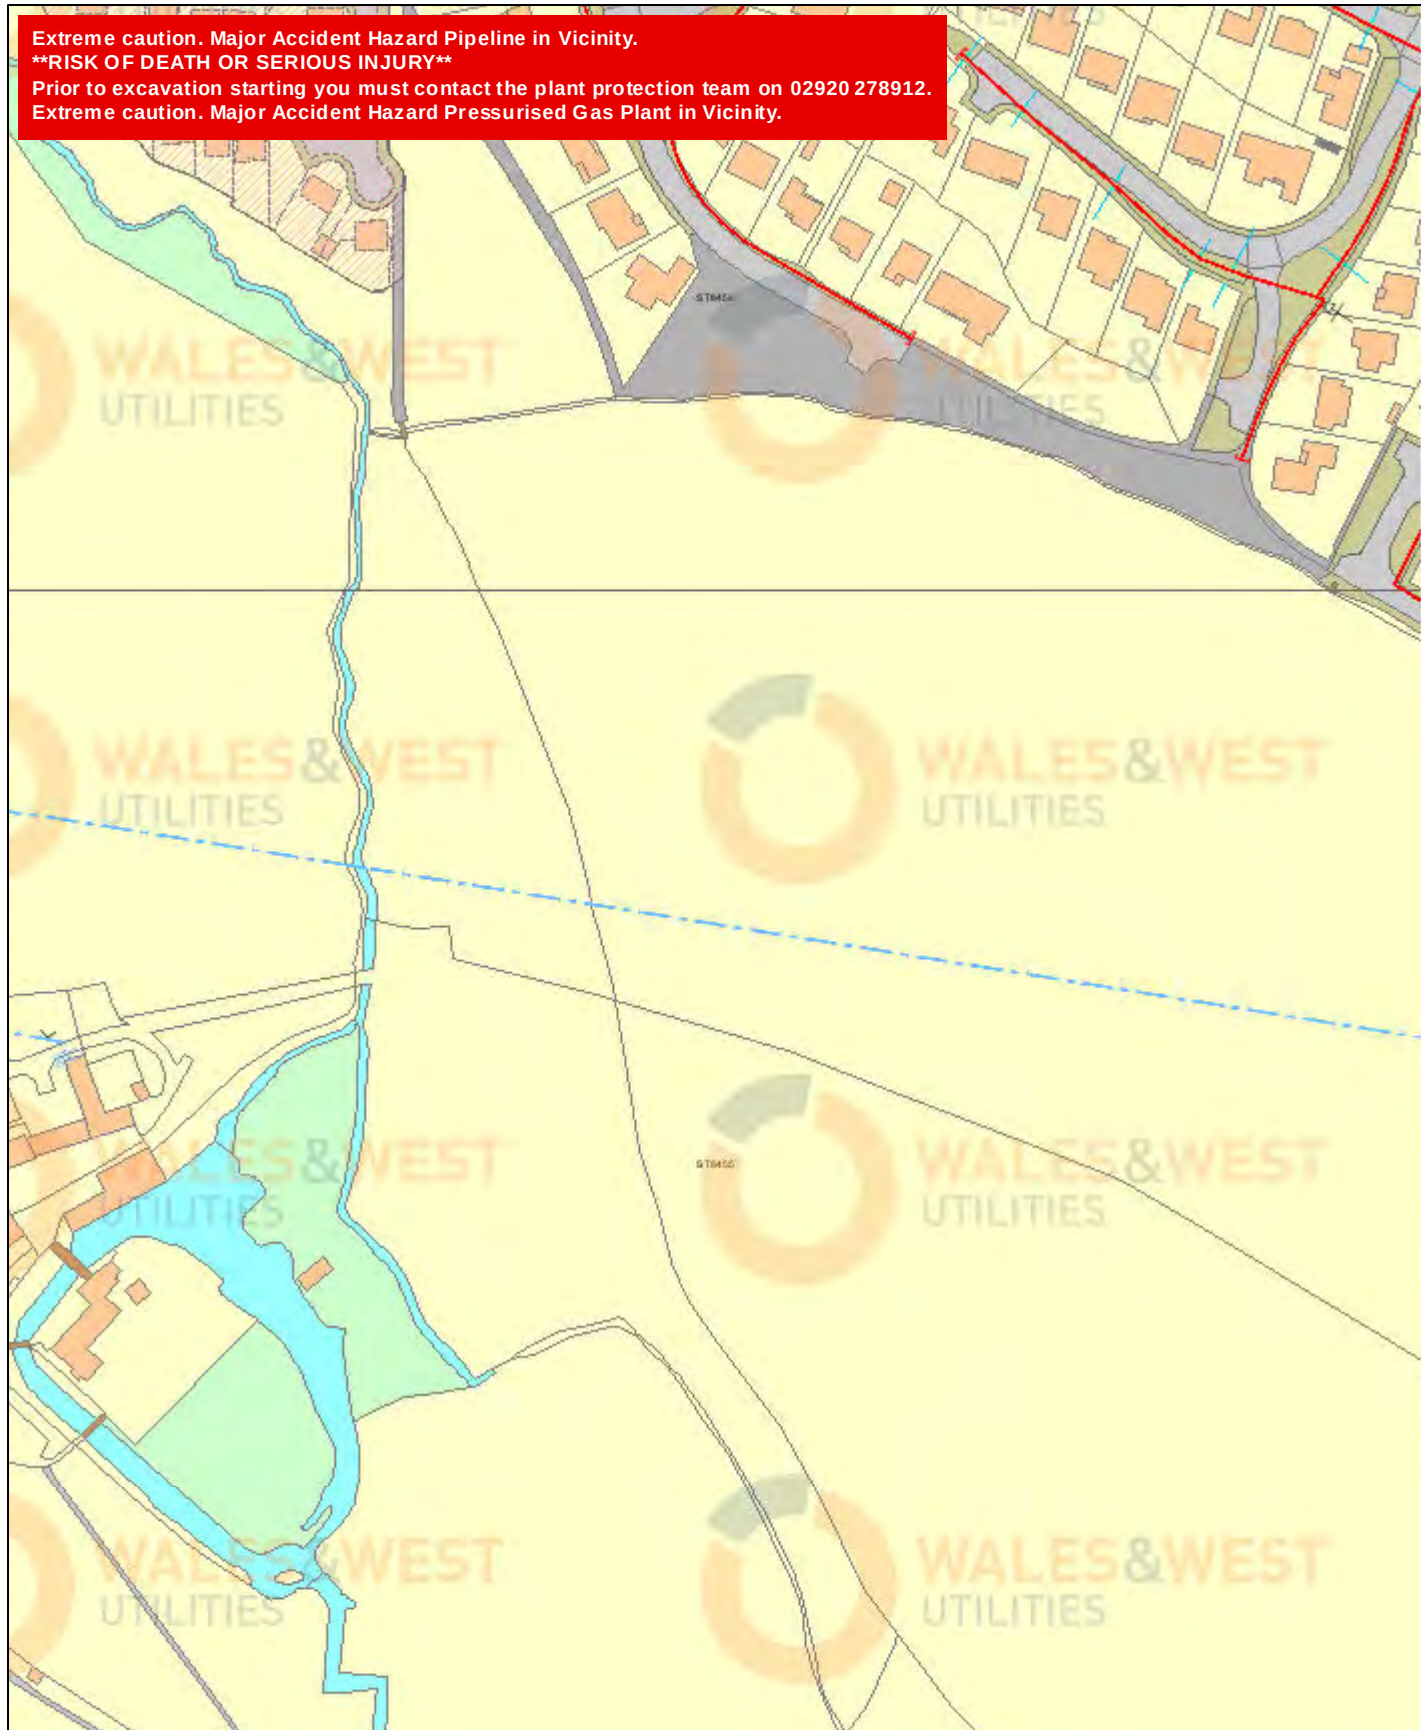

Scale	1 : 2000@A4	TITLE : GCE00644 The plan shows those pipes owned by Wales & West Utilities (WUU) in its role as a Licensed Gas Transporter (GT). The information shown on this plan is derived from historic information and may have involved re-scaling plans, and the accuracy of it can not be guaranteed. Service pipes, valves, syphons, stub connections, etc. may not be shown but their presence should be anticipated. No warranty is therefore given in respect of it. WUU its employees and contractors do not accept any liability for any inaccuracy or incompleteness in it. You must use safe digging practices, in accordance with HSG47, to establish the actual position of mains, pipes, services and other apparatus on site before any mechanical plant is used. It is your responsibility to ensure that this information is provided to all persons (either direct labour or contractors) working for you or near gas apparatus. The information shown on this plan should not be used beyond 28 days from the date of issue of this plan as it is subject to updating. The plan also provides indications of gas pipes owned by other GTs, or otherwise privately owned, which may be present in this area. This information is not information of WUU and WUU is unable to verify this information or to confirm whether it is accurate or complete. It is supplied voluntarily to assist the user in determining whether to make contact with other GTs or others. The user must obtain such information from the other GT or person concerned. WUU, its employees and contractors do not accept any liability for this information or any inaccuracy or incompleteness in it.	 WALES&WEST UTILITIES Wales and West Utilities Ltd., Wales and West House, Spooner Close, Celtic Springs, Coedkernew, Newport, NP10 8FZ
User ID	rhlit@geoconsulting		
Date	19/10/2017		
Grid Ref:	Easting: 384674 Northing: 155926		
 Low Pressure Medium Pressure Intermediate Pressure High Pressure Design Pipes Abandoned		 02550Meters Some examples of Plant Items ValveDepth of CoverSyphonClarifier ChangeMaterial Change	© All MasterMap data is reproduced by permission of Ordnance Survey on behalf of HMSO. © Crown copyright and database right 2017. All rights reserved. Ordnance Survey Licence number 0100044308.



Southwick Court Fm 4

Southwick, Trowbridge

Printed on : 22/01/2016 14:59

WATER MAINS

Public

Private

Public

Raw Water

Abandoned

Valve

Hydrant

PRV

Meter

M

SEWERS

Public - Section 104 - Private

Foul

Combined

Surface

Abandoned sewers

OTHER WESSEX PIPES

Rising Mains

Effluent Disposal Main

Overflow

NON-WESSEX PIPES

Private Rising Mains

Culverted Water Course

Highway Drain

Information in this plan is provided for identification purposes only. No warranty as to accuracy is given or implied. The precise route of pipe work may not exactly match that shown. Wessex Water does not accept liability for inaccuracies.

Sewers and lateral drains adopted by Wessex Water under the Water Industry (Schemes for Adoption of Private Sewers) Regulations 2011 are to be plotted over time and may not yet be shown.

In carrying out any works, you accept liability for the cost of any repairs to Wessex Water apparatus damaged as a result of your works. You are advised to commence excavations using hand tools only. Mechanical digging equipment should not be used until pipe work has been precisely located.

If you are considering any form of building works and pipe work is shown within the boundary of your property or a property to be purchased (or very close by) a surveyor should plot its exact position prior to commencing works or purchase. Building over or near Wessex Water's apparatus is not normally permitted.

Centre:384322.12 , 155923.64

Scale = 1:1500


Metres

20

40

60

80

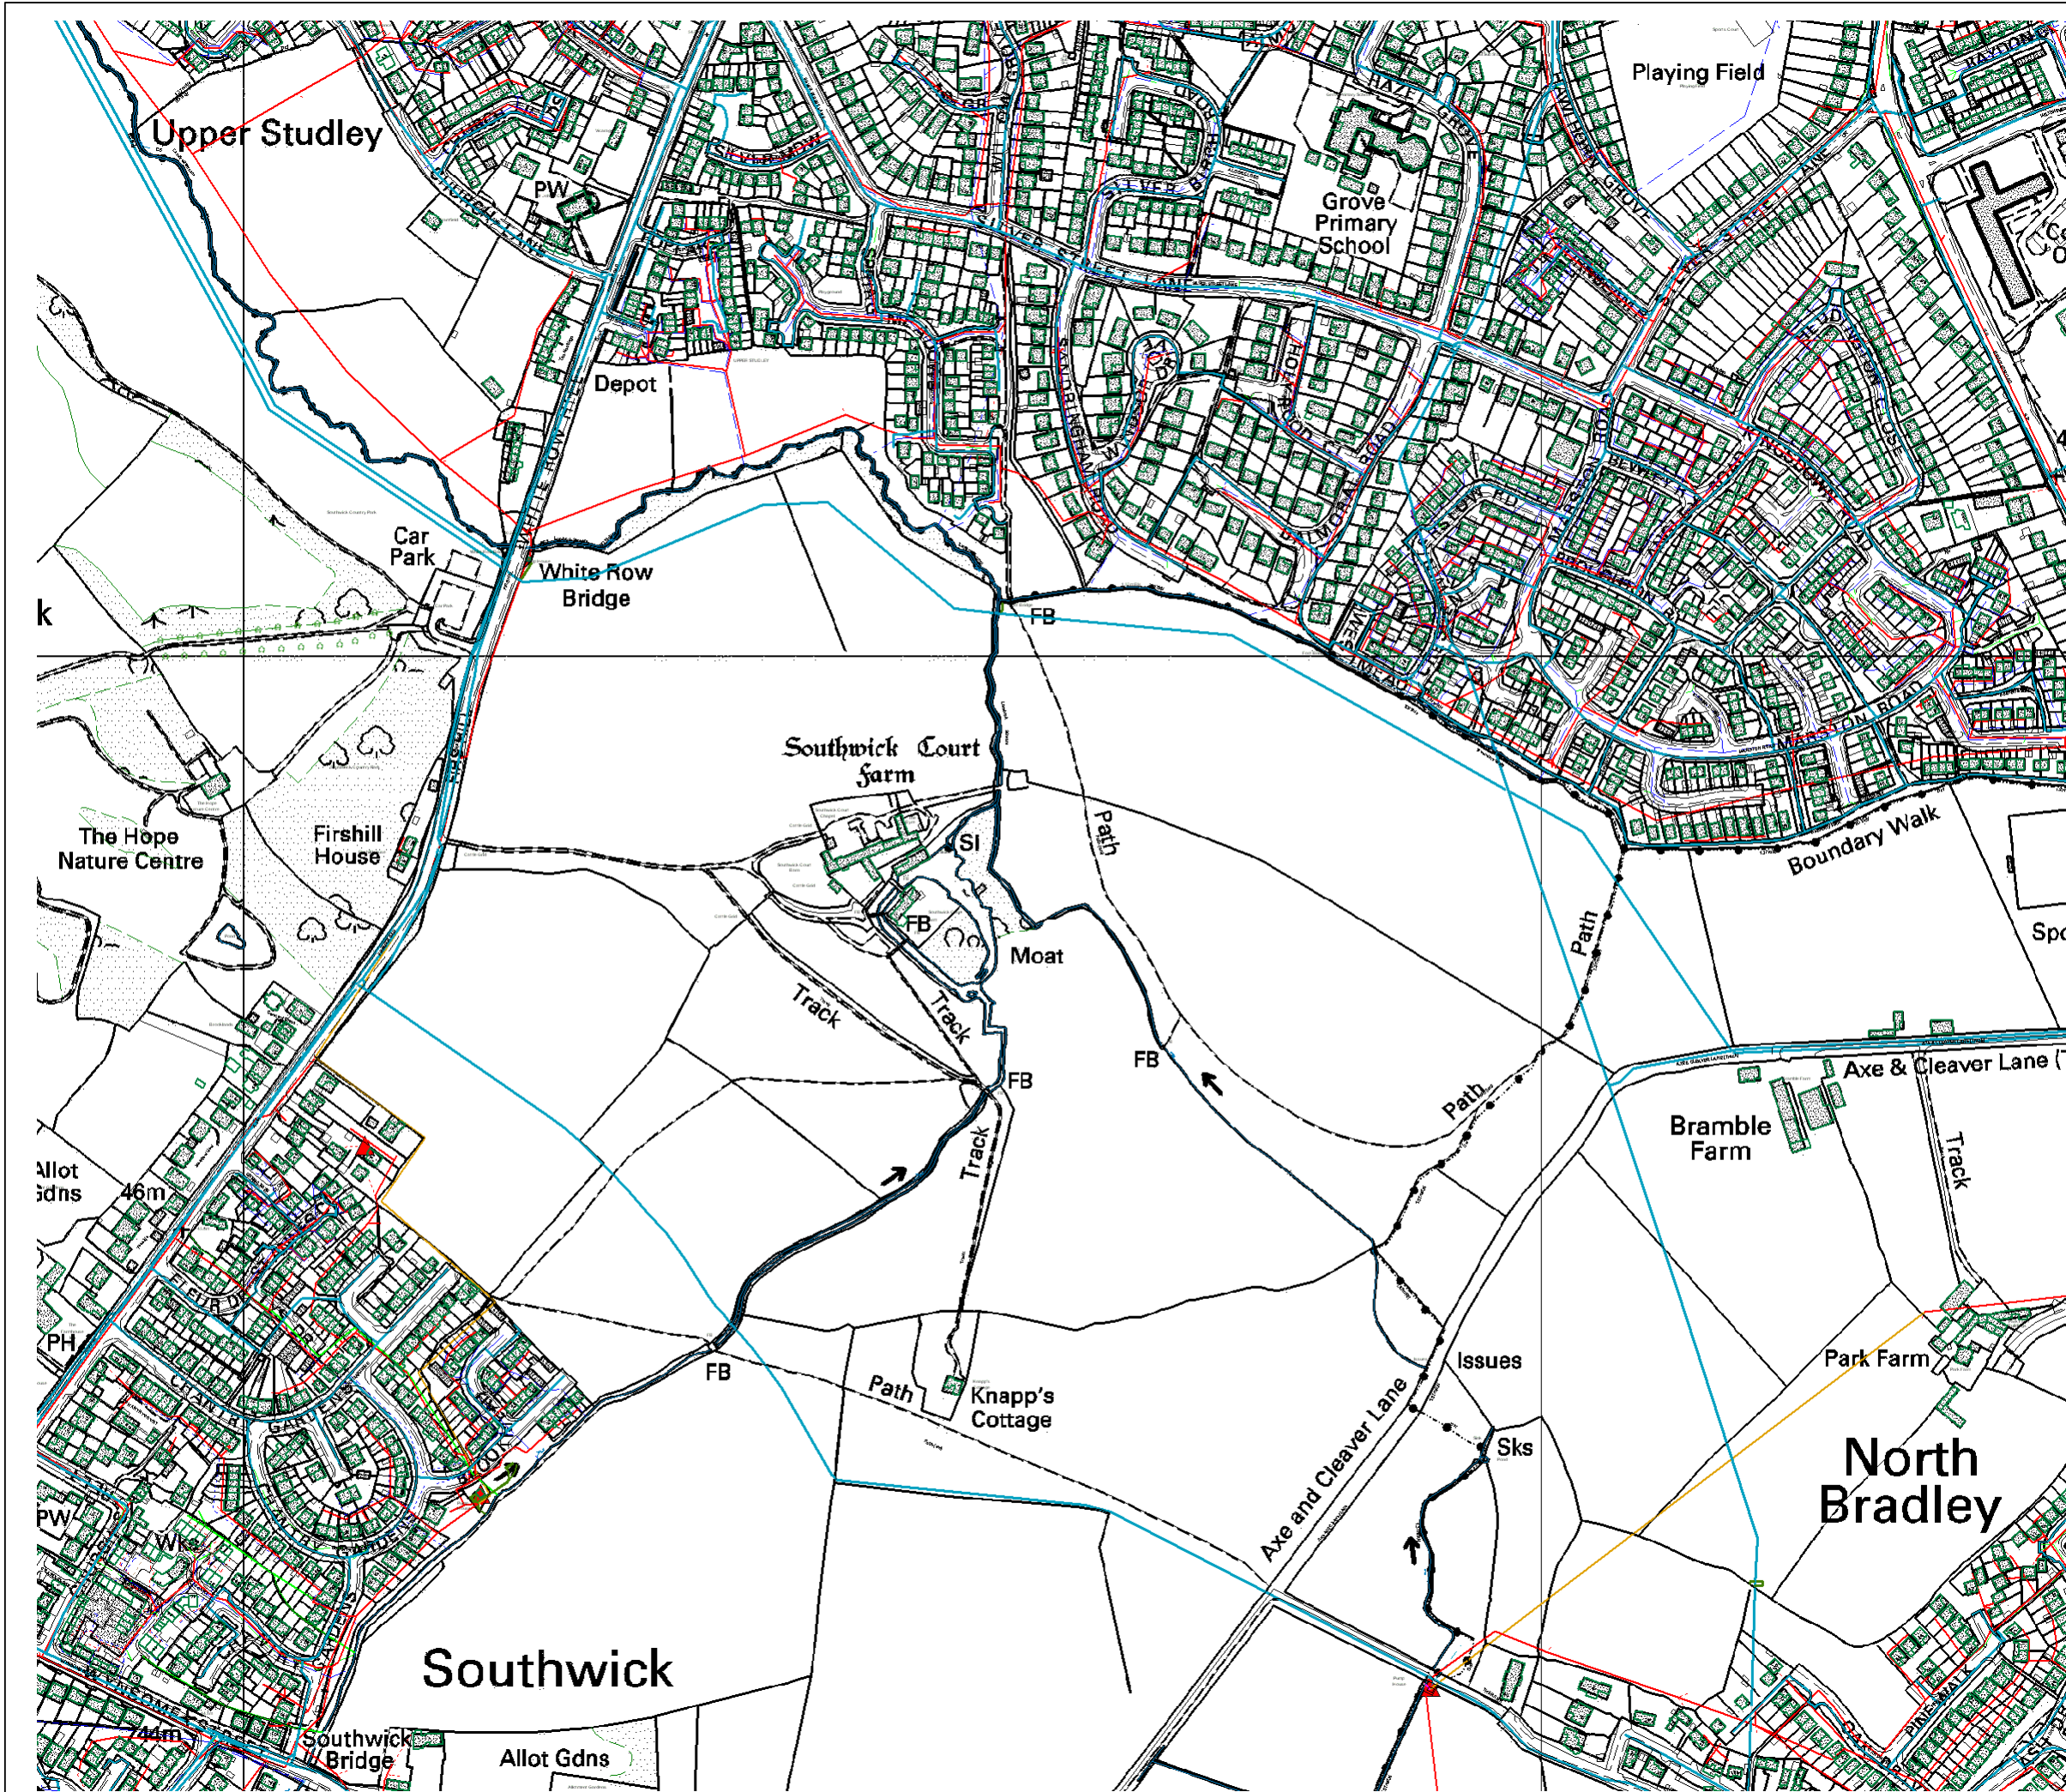

Southwick Court Farm

Southwick, Trowbridge

Printed on : 22/01/2016 14:55

WATER MAINS

Public

Private

Public Raw Water

Abandoned

Valve

Hydrant

PRV

Meter

SEWERS

Public - Section 104 - Private

Foul

Combined

Surface

Abandoned sewers

OTHER WESSEX PIPES

Rising Mains

Effluent Disposal Main

Overflow

NON-WESSEX PIPES

Private Rising Mains

Culverted Water Course

Highway Drain

Information in this plan is provided for identification purposes only. No warranty as to accuracy is given or implied. The precise route of pipe work may not exactly match that shown. Wessex Water does not accept liability for inaccuracies.

Sewers and lateral drains adopted by Wessex Water under the Water Industry (Schemes for Adoption of Private Sewers) Regulations 2011 are to be plotted over time and may not yet be shown.


In carrying out any works, you accept liability for the cost of any repairs to Wessex Water apparatus damaged as a result of your works. You are advised to commence excavations using hand tools only. Mechanical digging equipment should not be used until pipe work has been precisely located.

If you are considering any form of building works and pipe work is shown within the boundary of your property or a property to be purchased (or very close by) a surveyor should plot its exact position prior to commencing works or purchase. Building over or near Wessex Water's apparatus is not normally permitted.

Centre:384622.55 , 155806.82

Scale = 1:5000

Metres 100 200 300

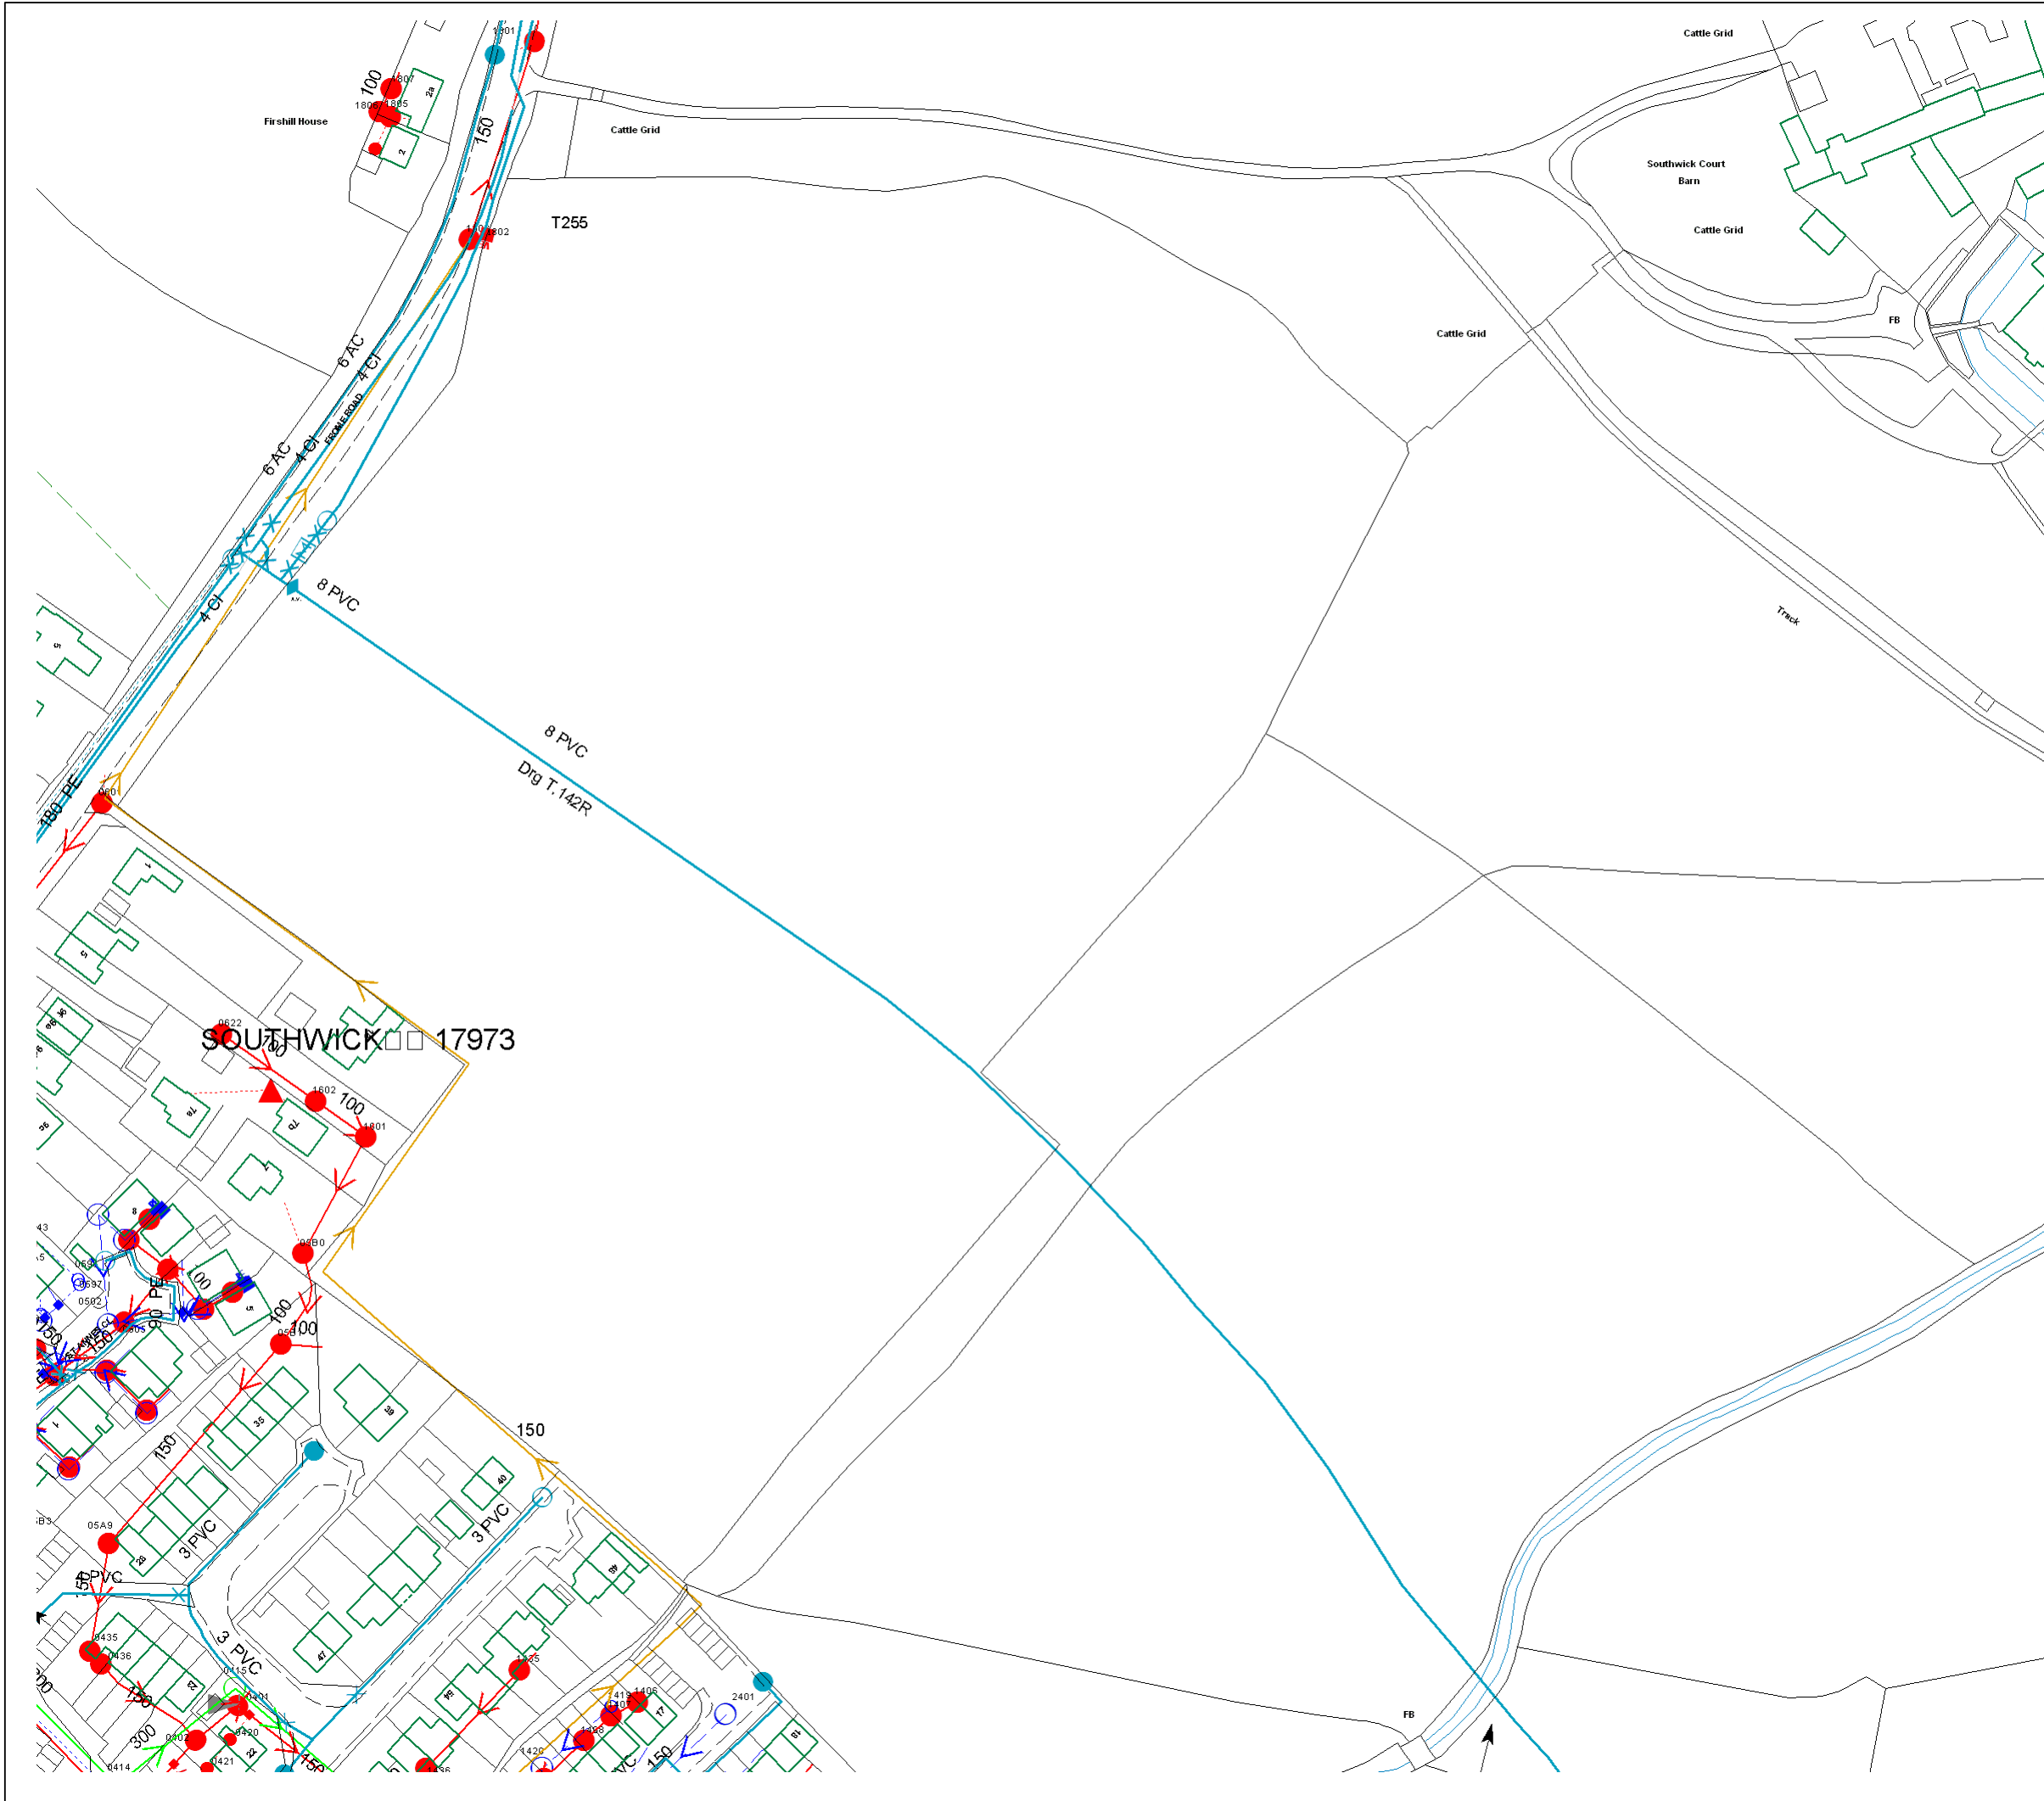

Southwick Court Fm 5

Southwick, Trowbridge

Printed on : 22/01/2016 15:00

WATER MAINS		Public	Private
Public			
Raw Water			
Abandoned			
Valve	X	Hydrant	PRV
			Meter

SEWERS		Public - Section 104 - Private
Foul		
Combined		
Surface		
Abandoned sewers		

OTHER WESSEX PIPES	
Rising Mains	
Effluent Disposal Main	
Overflow	

NON-WESSEX PIPES	
Private Rising Mains	
Culverted Water Course	
Highway Drain	

Information in this plan is provided for identification purposes only. No warranty as to accuracy is given or implied. The precise route of pipe work may not exactly match that shown. Wessex Water does not accept liability for inaccuracies.

Sewers and lateral drains adopted by Wessex Water under the Water Industry (Schemes for Adoption of Private Sewers) Regulations 2011 are to be plotted over time and may not yet be shown.


In carrying out any works, you accept liability for the cost of any repairs to Wessex Water apparatus damaged as a result of your works. You are advised to commence excavations using hand tools only. Mechanical digging equipment should not be used until pipe work has been precisely located.

If you are considering any form of building works and pipe work is shown within the boundary of your property or a property to be purchased (or very close by) a surveyor should plot its exact position prior to commencing works or purchase. Building over or near Wessex Water's apparatus is not normally permitted.

Centre:384272.91 , 155667.26

Scale = 1:1500

Metres 20 40 60 80

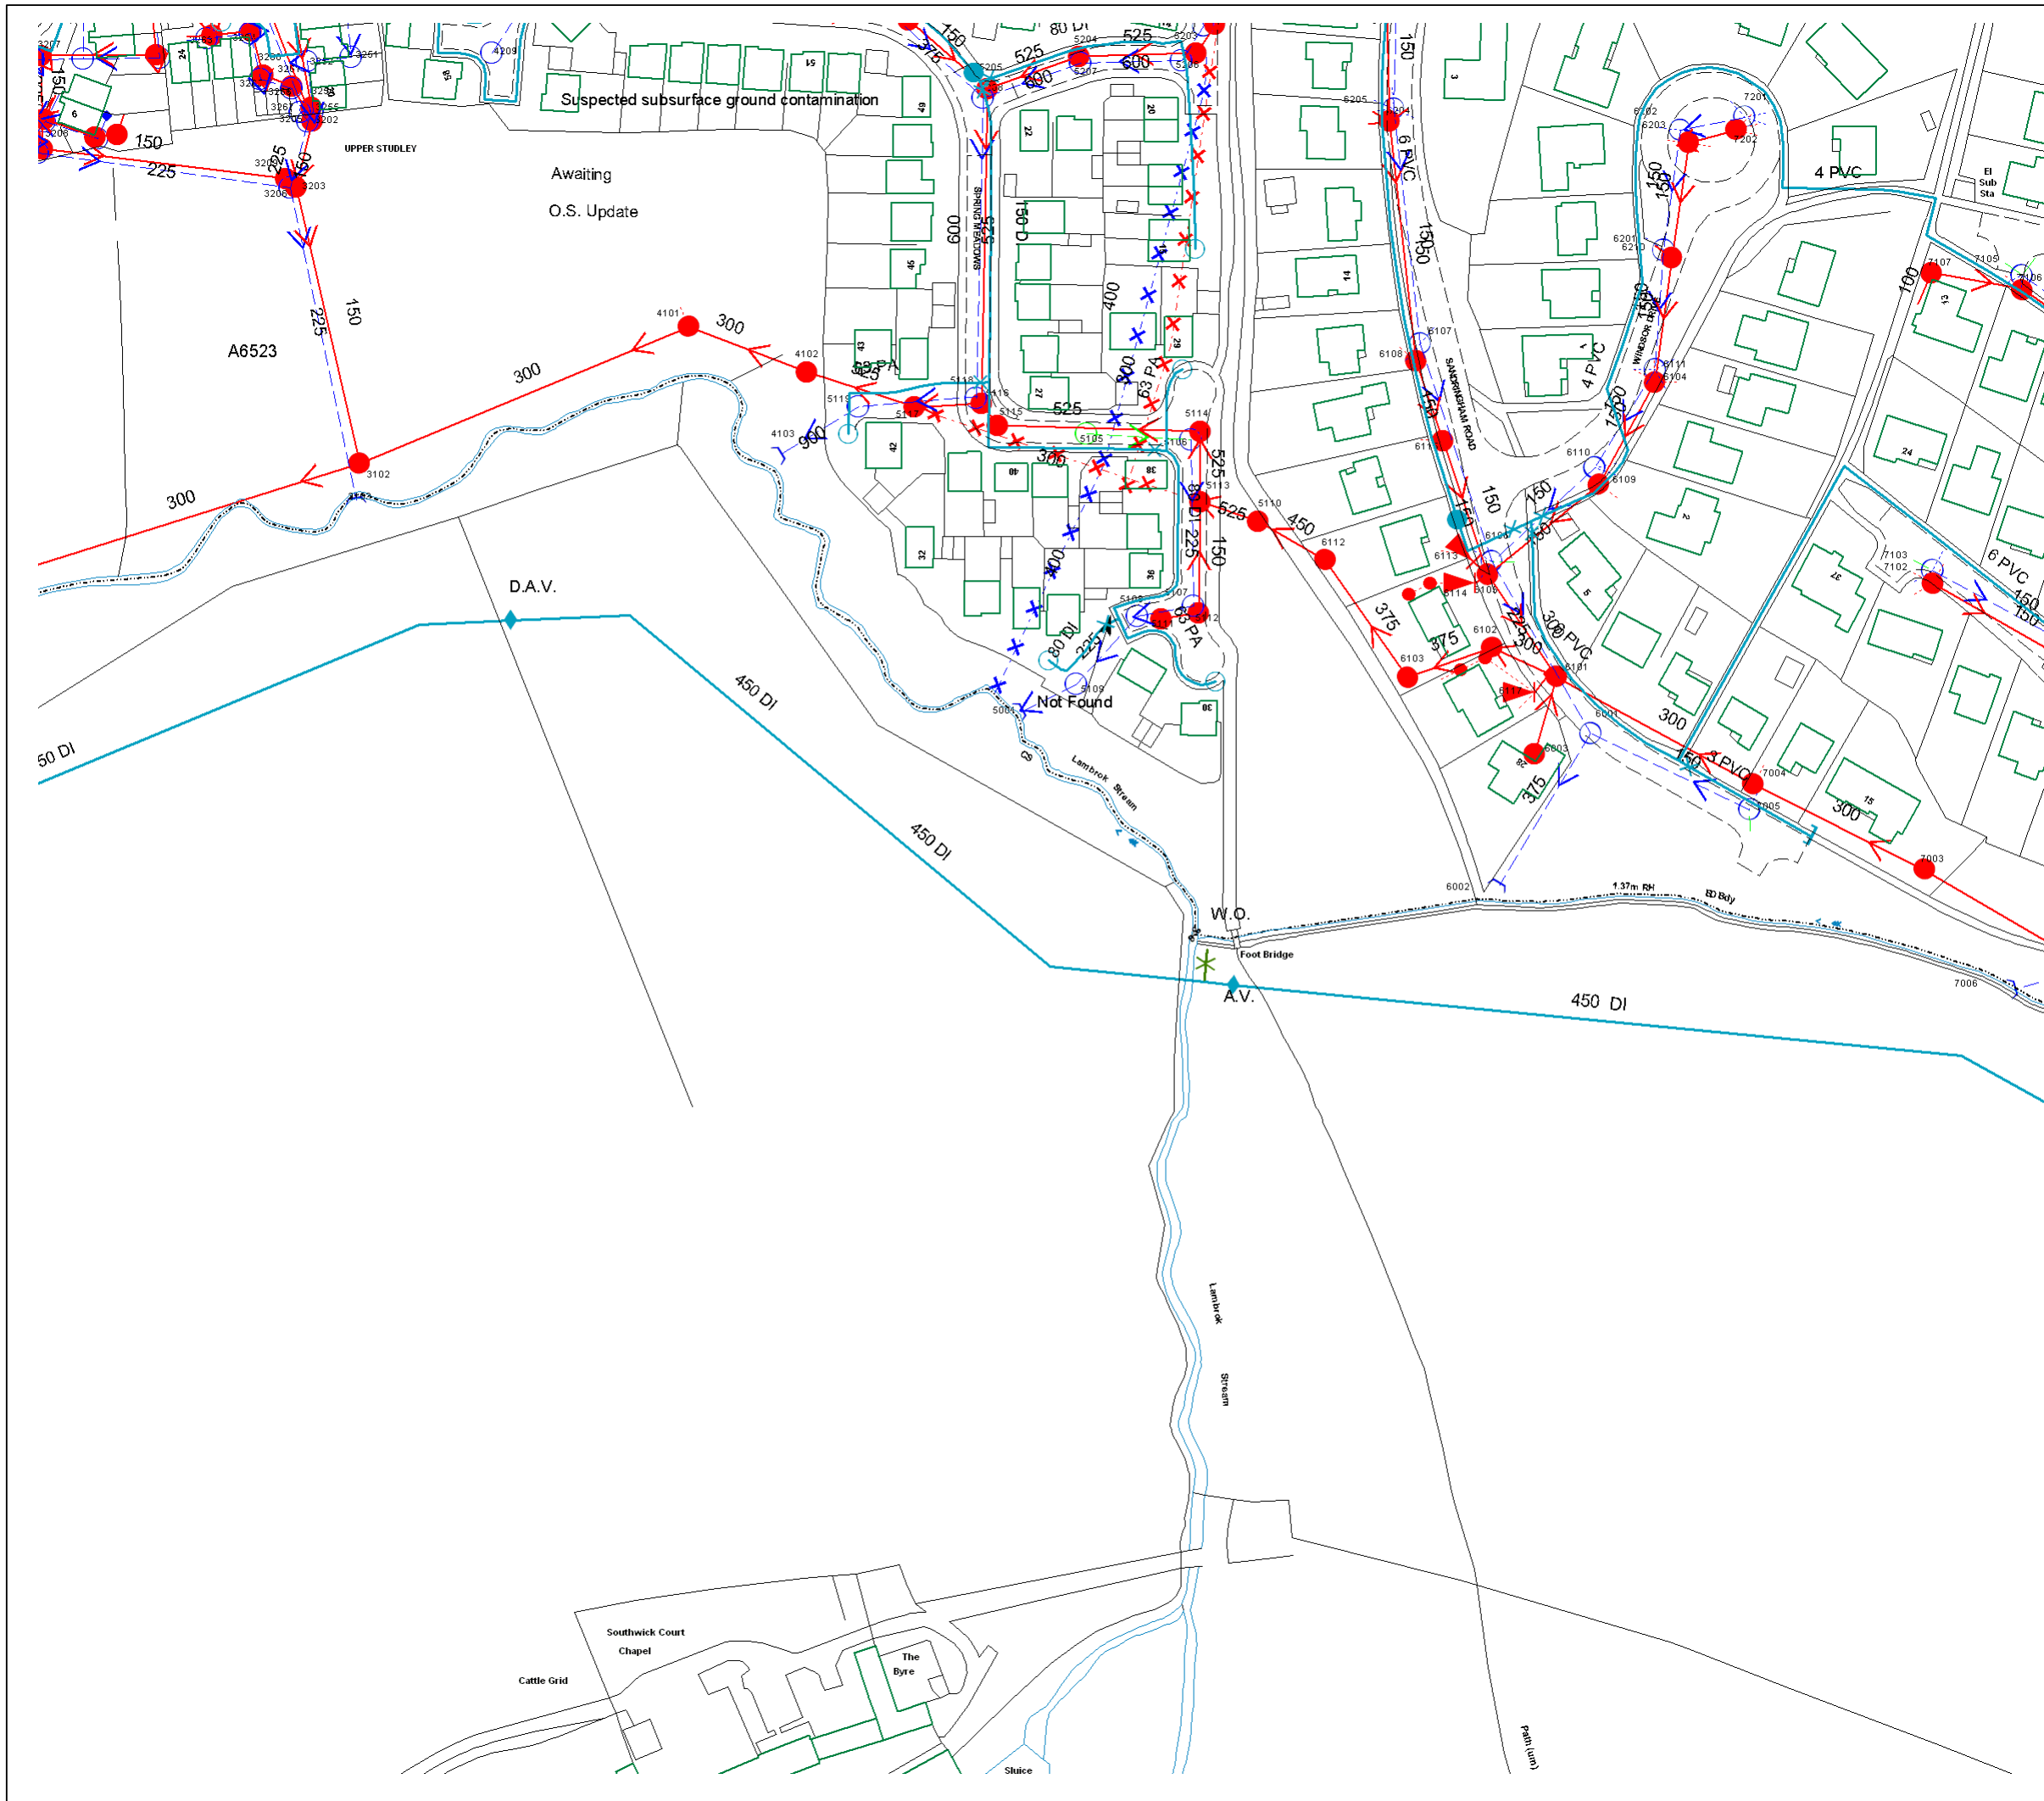

Southwick Court Fm 2

Southwick, Trowbridge

Printed on : 22/01/2016 14:57

WATER MAINS		Public	Private
Public		—————	- - - - -
Raw Water			
Abandoned			
Valve	X	Hydrant	●
		PRV	▲
		Meter	M
SEWERS		Public - Section 104 - Private	
Foul		—————	- - - - -
Combined		—————	- - - - -
Surface		—————	- - - - -
Abandoned sewers			
OTHER WESSEX PIPES			
Rising Mains		—————	—————
Effluent Disposal Main		—————	—————
Overflow		—————	—————
NON-WESSEX PIPES			
Private Rising Mains			
Culverted Water Course		—————	—————
Highway Drain		—————	—————


Information in this plan is provided for identification purposes only. No warranty as to accuracy is given or implied. The precise route of pipe work may not exactly match that shown. Wessex Water does not accept liability for inaccuracies.

Sewers and lateral drains adopted by Wessex Water under the Water Industry (Schemes for Adoption of Private Sewers) Regulations 2011 are to be plotted over time and may not yet be shown.

In carrying out any works, you accept liability for the cost of any repairs to Wessex Water apparatus damaged as a result of your works. You are advised to commence excavations using hand tools only. Mechanical digging equipment should not be used until pipe work has been precisely located.

If you are considering any form of building works and pipe work is shown within the boundary of your property or a property to be purchased (or very close by) a surveyor should plot its exact position prior to commencing works or purchase. Building over or near Wessex Water's apparatus is not normally permitted.

Centre:384545.56 , 156052.23





Southwick Court Fm 3

Southwick, Trowbridge

Printed on : 22/01/2016 14:58

WATER MAINS		Public	Private
Public			
Raw Water			
Abandoned			
Valve		Hydrant	
		PRV	
		Meter	
SEWERS		Public - Section 104 - Private	
Foul			
Combined			
Surface			
Abandoned sewers			
OTHER WESSEX PIPES			
Rising Mains			
Effluent Disposal Main			
Overflow			
NON-WESSEX PIPES			
Private Rising Mains			
Culverted Water Course			
Highway Drain			


Information in this plan is provided for identification purposes only. No warranty as to accuracy is given or implied. The precise route of pipe work may not exactly match that shown. Wessex Water does not accept liability for inaccuracies.


Sewers and lateral drains adopted by Wessex Water under the Water Industry (Schemes for Adoption of Private Sewers) Regulations 2011 are to be plotted over time and may not yet be shown.

In carrying out any works, you accept liability for the cost of any repairs to Wessex Water apparatus damaged as a result of your works. You are advised to commence excavations using hand tools only. Mechanical digging equipment should not be used until pipe work has been precisely located.

If you are considering any form of building works and pipe work is shown within the boundary of your property or a property to be purchased (or very close by) a surveyor should plot its exact position prior to commencing works or purchase. Building over or near Wessex Water's apparatus is not normally permitted.

Centre:384870.60 , 155878.39



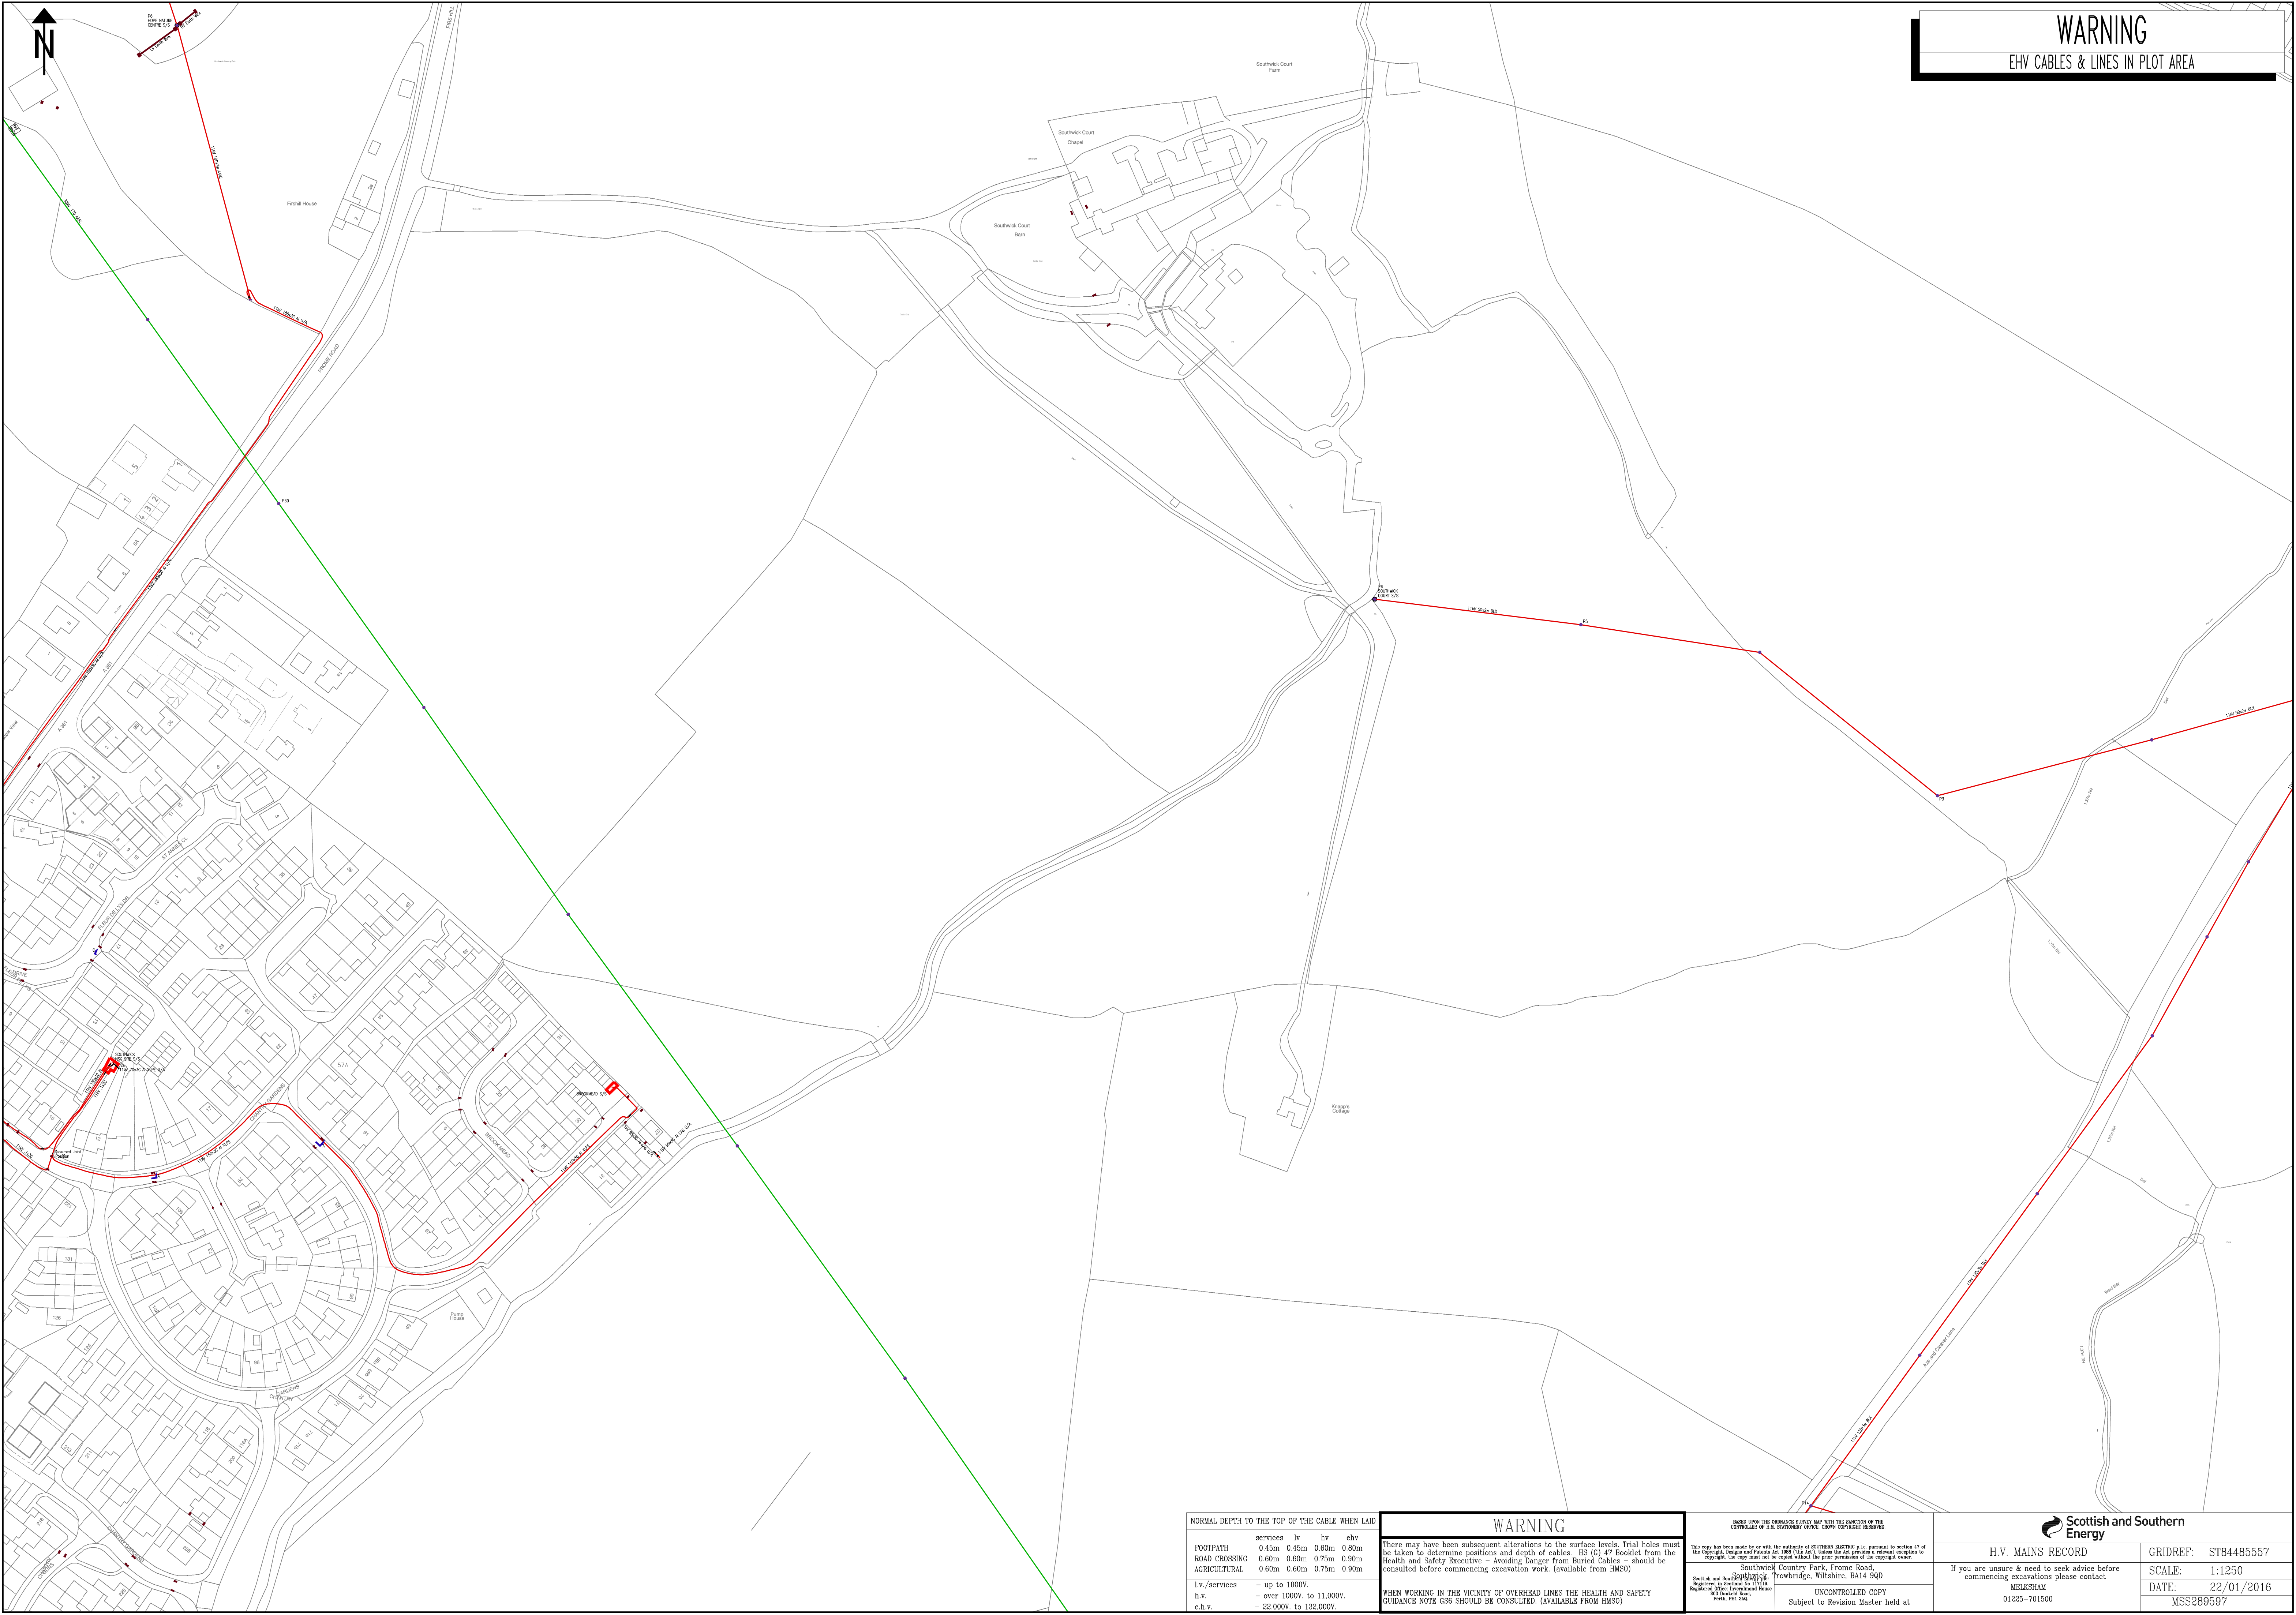

WARNING

EHV CABLES & LINES IN PLOT AREA

NORMAL DEPTH TO THE TOP OF THE CABLE WHEN LAID				
	services	lv	hv	ehv
FOOTPATH	0.45m	0.45m	0.60m	0.80m
ROAD CROSSING	0.60m	0.60m	0.75m	0.90m
AGRICULTURAL	0.60m	0.60m	0.75m	0.90m
l.v./services	- up to 1000V.			
h.v.	- over 1000V. to 11.000V.			
e.h.v.	- 22.000V. to 132.000V.			

WARNING

There may have been subsequent alterations to the surface levels. Trial holes must be taken to determine positions and depth of cables. BS (G) 47 booklet from the Health and Safety Executive - Avoiding Danger from Buried Cables - should be consulted before commencing excavation work. (available from HMSO)

WHEN WORKING IN THE VICINITY OF OVERHEAD LINES THE HEALTH AND SAFETY GUIDANCE NOTE C58 SHOULD BE CONSULTED. (AVAILABLE FROM HMSO)

BASED UPON THE ORDNANCE SURVEY MAP WITH THE SANCTION OF THE CONTROLLER OF A.E. ELECTRONIC OFFICE. OTHER COPYRIGHT RESERVED.

This copy has been made by or with the authority of SOUTHERN ELECTRIC p.l.c. pursuant to section 47 of the Copyright, Designs and Patents Act 1988 (This Act). Unless the Act provides a relevant exception to copyright, the copy must not be copied without the prior permission of the copyright owner.

Southwick Country Park, Frome Road, Trowbridge, Wiltshire, BA14 8QD

Registered in England No. 131710

England Office Registered Name: S&S Electric Ltd

Part 8: P11 346

UNCONTROLLED COPY

Subject to Revision Master held at

Scottish and Southern Energy

H.V. MAINS RECORD

If you are unsure & need to seek advice before commencing excavations please contact

MELKSHAM


01225-701500

GRIDREF: ST84485557

SCALE: 1:1250

DATE: 22/01/2016

MSS289597

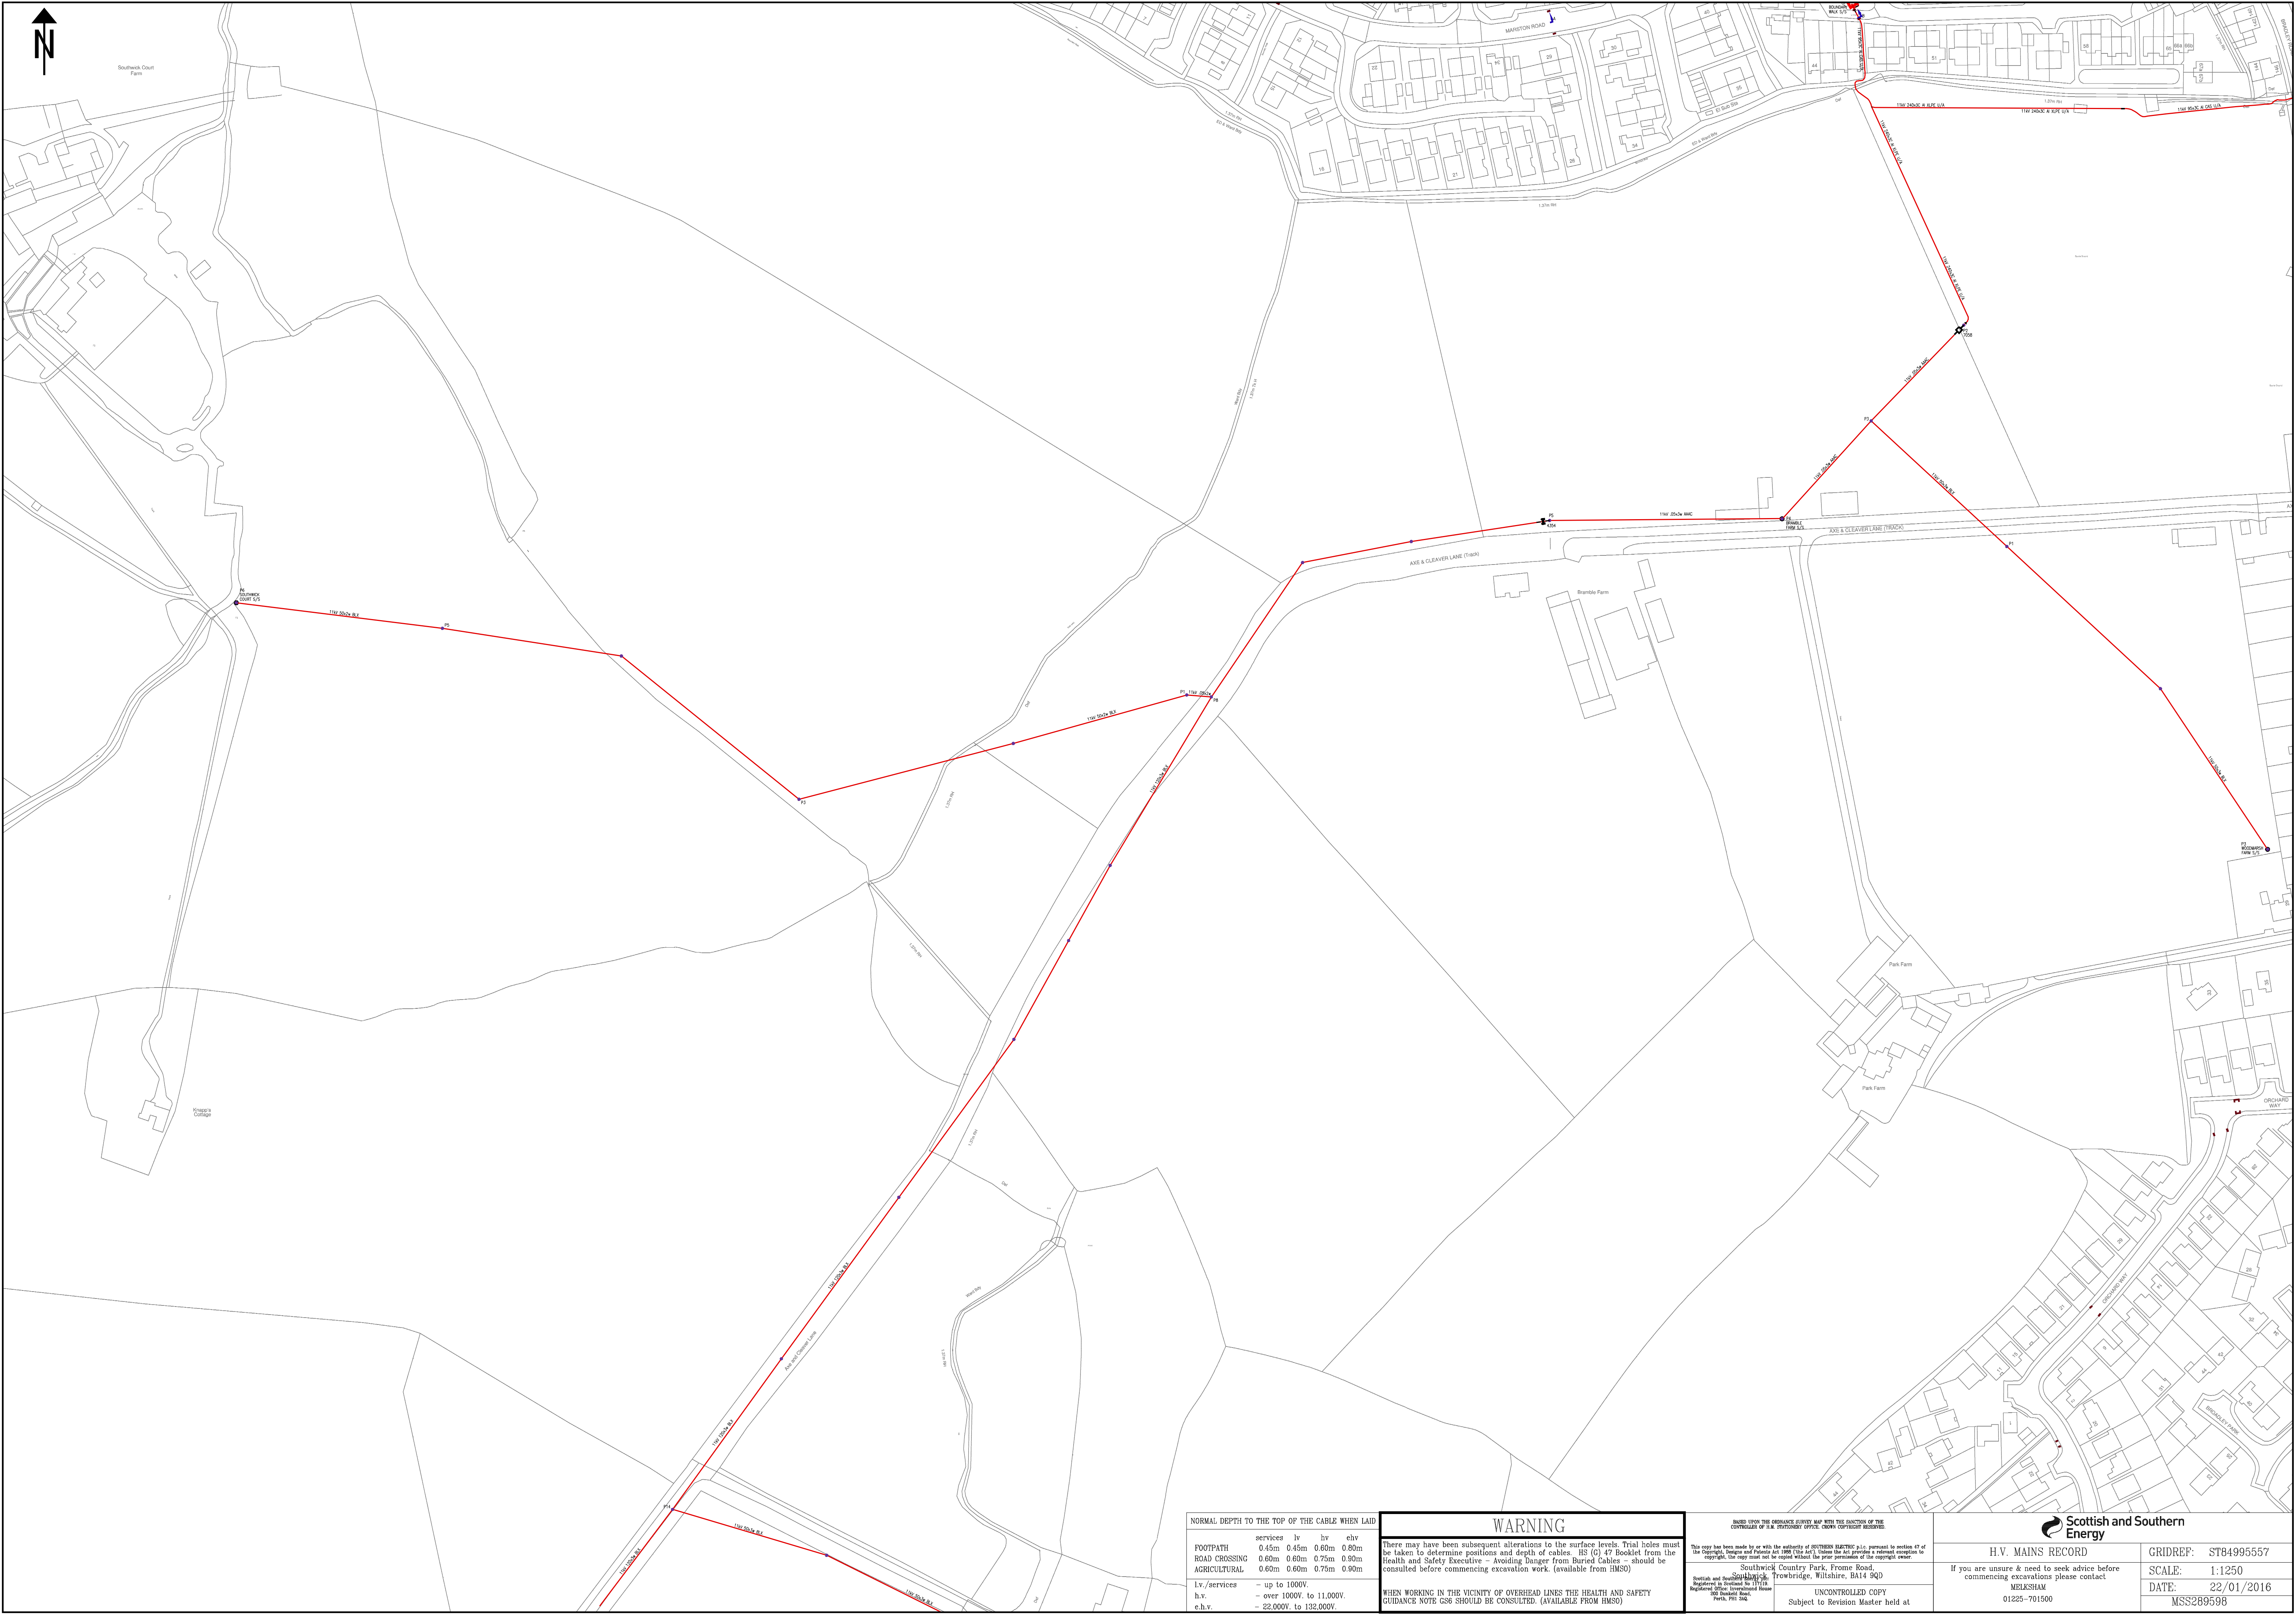

NORMAL DEPTH TO THE TOP OF THE CABLE WHEN LAID				
	services	lv	hv	ehv
FOOTPATH	0.45m	0.45m	0.60m	0.80m
ROAD CROSSING	0.60m	0.60m	0.75m	0.90m
AGRICULTURAL	0.60m	0.60m	0.75m	0.90m
l.v./services	- up to 1000V.			
h.v.	- over 1000V. to 11.000V.			
e.h.v.	- 22.000V. to 132.000V.			

WARNING

There may have been subsequent alterations to the surface levels. Trial holes must be taken to determine positions and depth of cables. HS (G) 47 Booklet from the Health and Safety Executive - Avoiding Danger from Buried Cables - should be consulted before commencing excavation work. (available from HMSO)

WHEN WORKING IN THE VICINITY OF OVERHEAD LINES THE HEALTH AND SAFETY
GUIDANCE NOTE GS6 SHOULD BE CONSULTED. (AVAILABLE FROM HMSO)

BASED UPON THE ORDINANCE SURVEY MAP WITH THE SANCTION OF THE
CONTROLLER OF H.M. STATIONERY OFFICE. CROWN COPYRIGHT RESERVED.

made by or with the authority of SOUTHERN ELECTRIC p.l.c. pursuant to section 41
Patents Act 1956 (the Act). Unless the Act provides a relevant exception
he may not then be copied without the prior permission of the copyright owner.

Scottish and Southern Enterprise plc
Registered in Scotland No 117119
Registered Office: Inverleith House
300 Dunkeld Road,
Perth, PH1 3AQ.

UNCONTROLLED COPY
Subject to Revision Master held at


Scottish and Southern
Energy

H.V. MAINS RECORD

If you are unsure & need to seek advice before
commencing excavations please contact
MELKSHAM
01225-701500

GRIDREF: ST84995557

SCALE: 1:1250
DATE: 22/01/2016
MSS289598

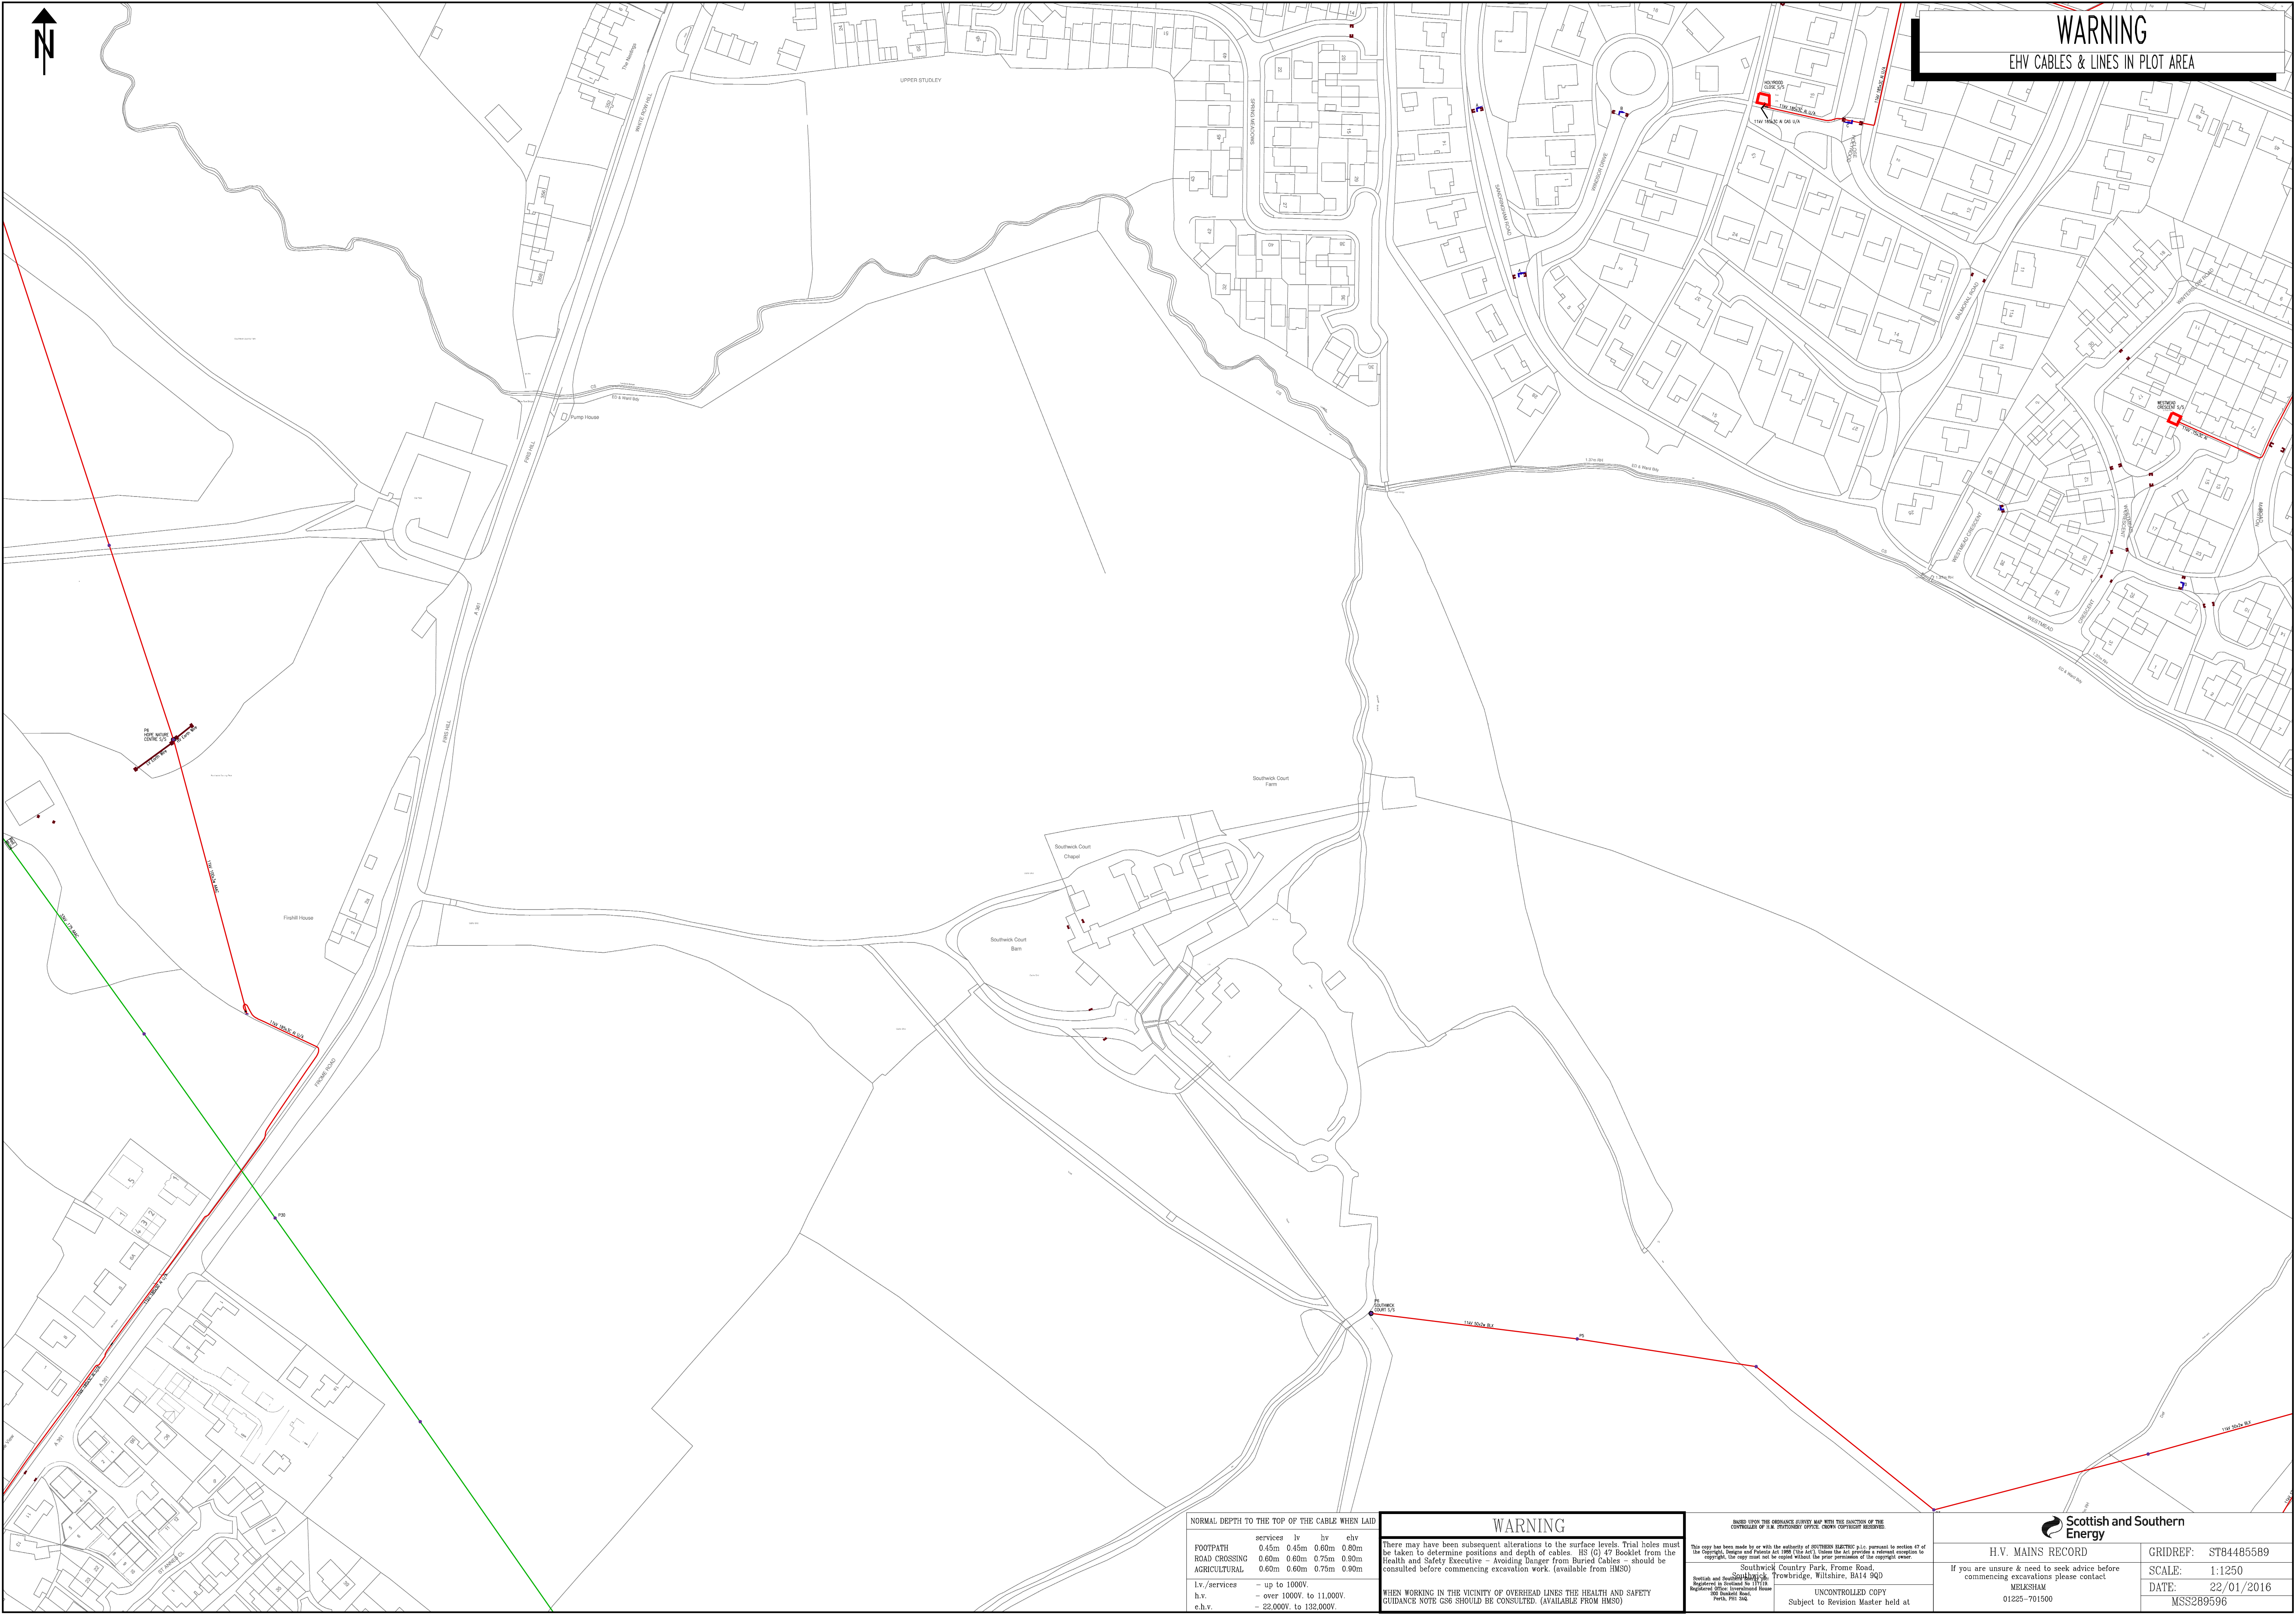


EHV CABLES & LINES IN PLOT AREA

WARNING

There may have been subsequent alterations to the surface levels. Trial holes must be taken to determine positions and depth of cables. BS (C) 47 booklet from the Health and Safety Executive - Avoiding Danger from Buried Cables - should be consulted before commencing excavation work. (available from HMSO)

WHEN WORKING IN THE VICINITY OF OVERHEAD LINES THE HEALTH AND SAFETY GUIDANCE NOTE G56 SHOULD BE CONSULTED. (AVAILABLE FROM HMSO)

 Scottish and Southern Energy	
H.V. MAINS RECORD If you are unsure & need to seek advice before commencing excavations please contact MELKSHAM 01225-701500	GRIDREF: ST84485589
	SCALE: 1:1250
	DATE: 22/01/2016 MSS289596

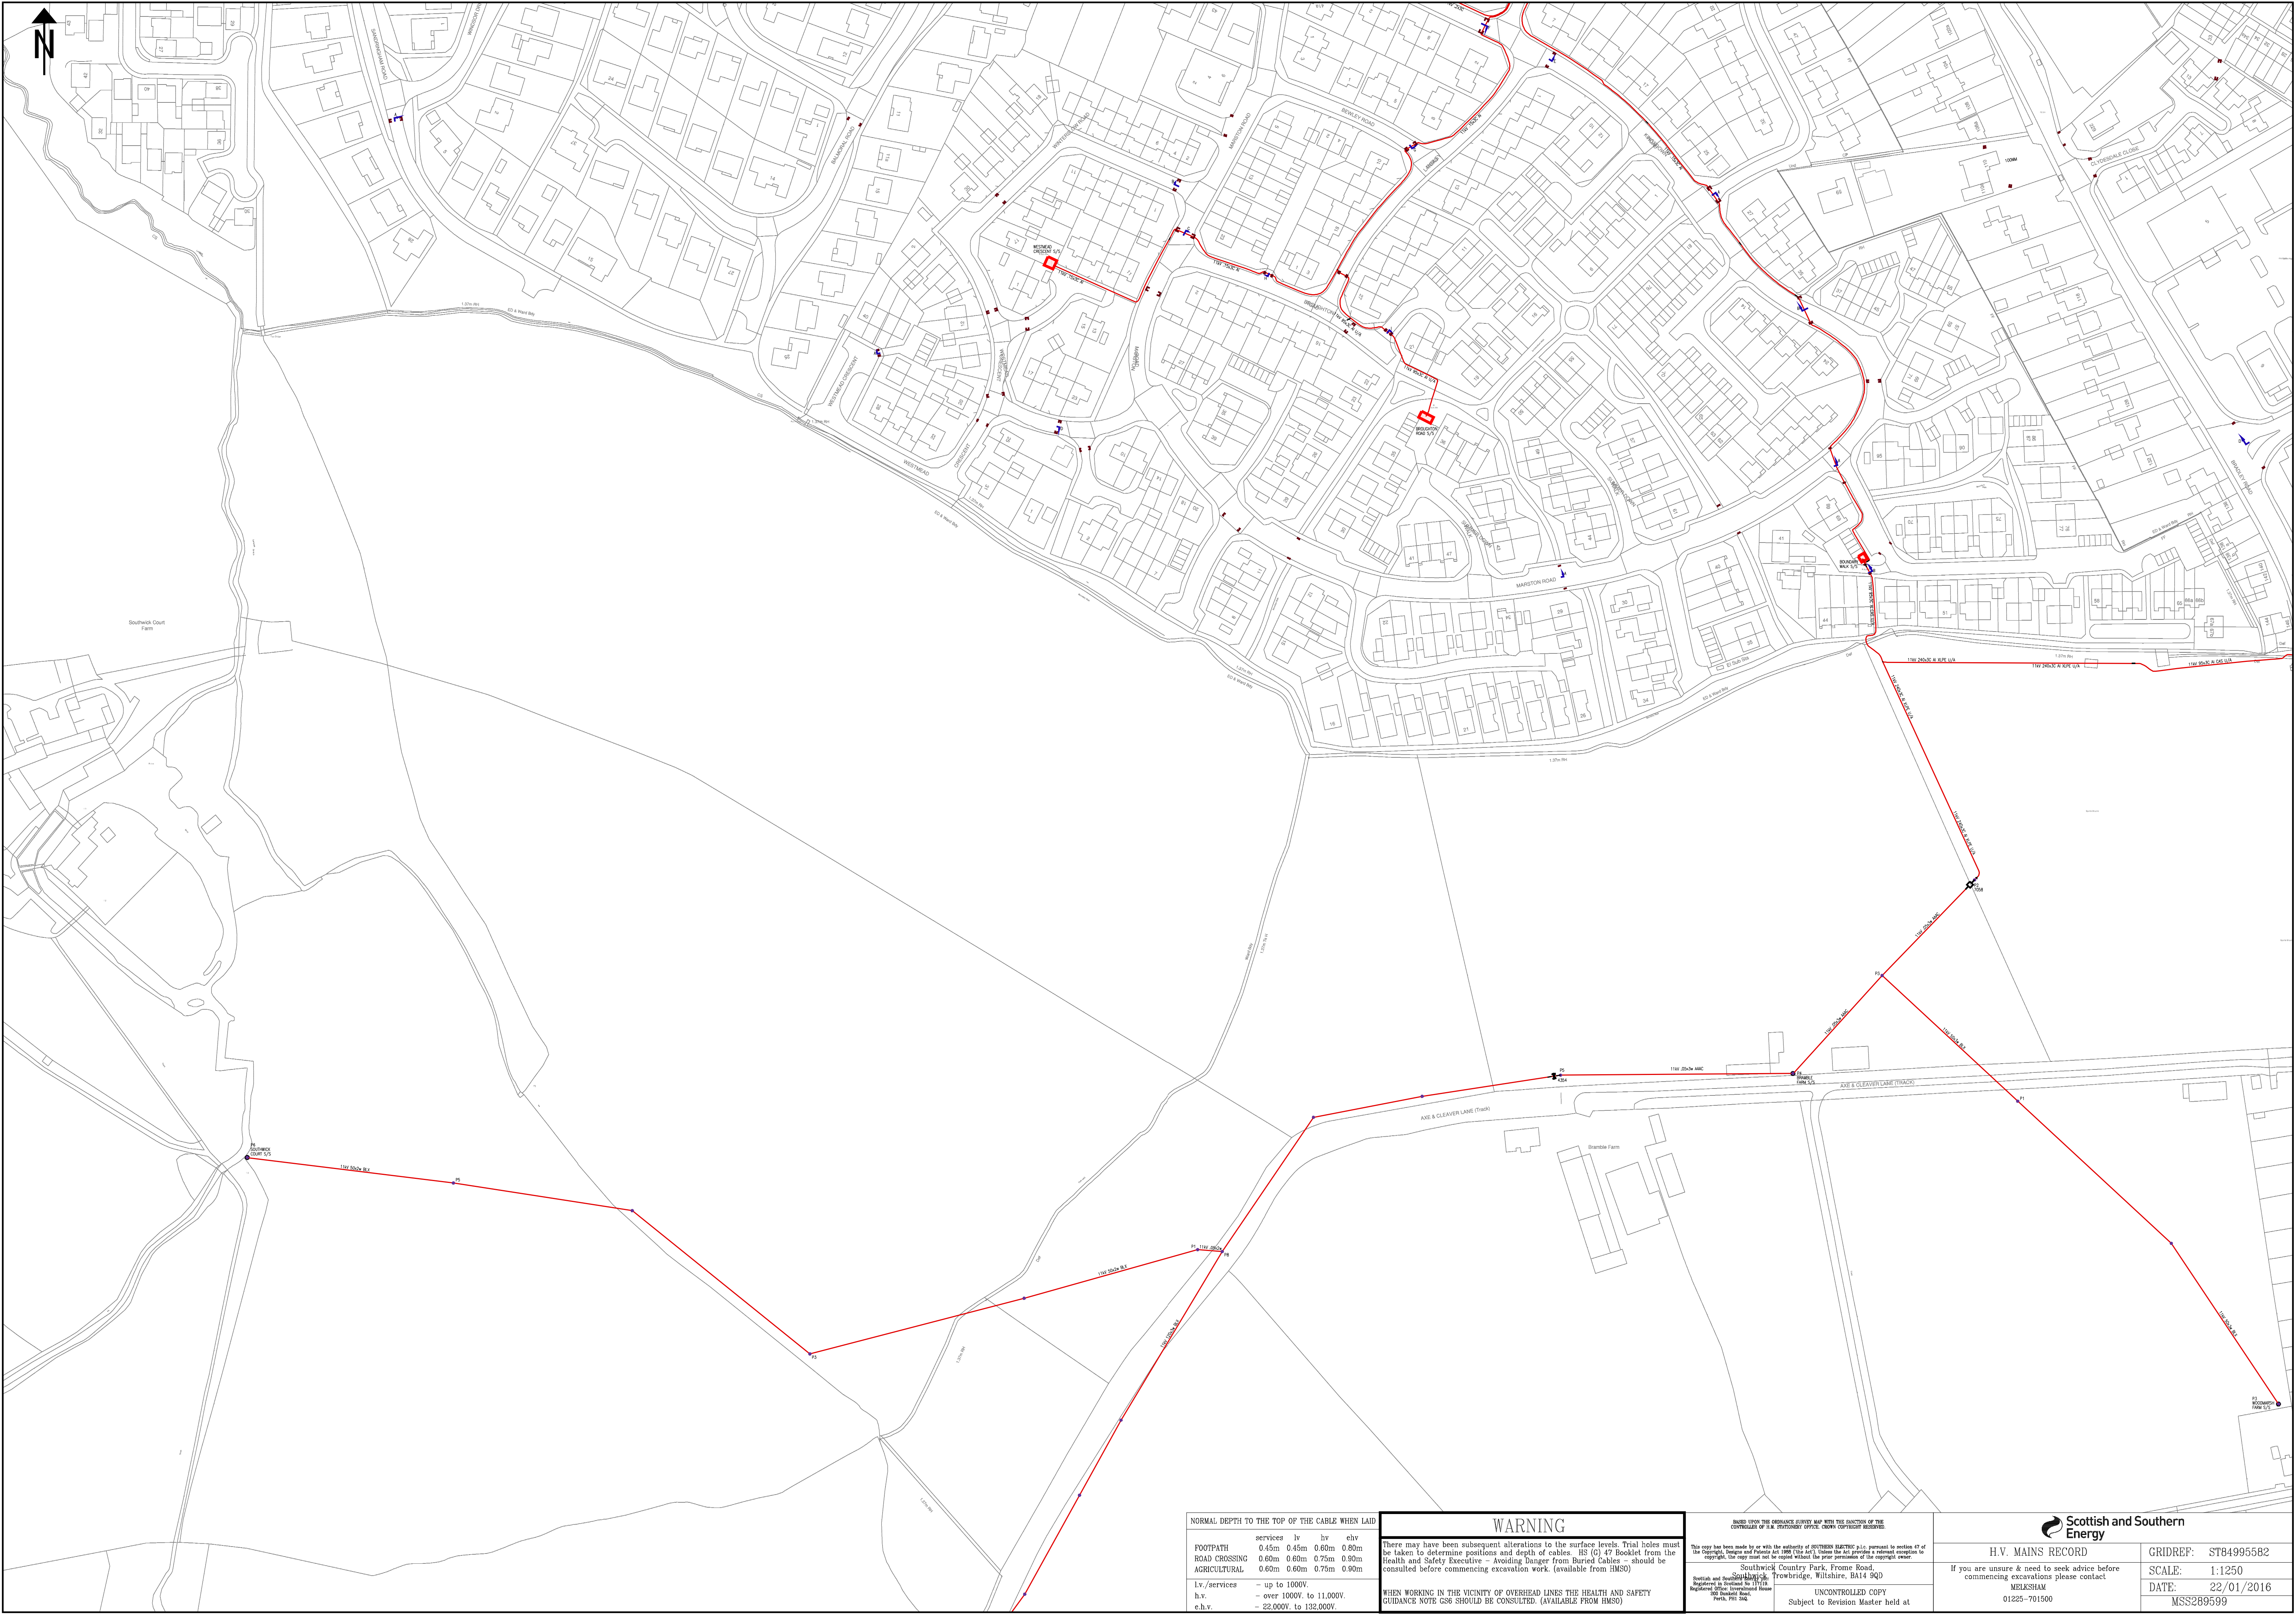

NORMAL DEPTH TO THE TOP OF THE CABLE WHEN LAID				
	services	lv	hv	ehv
FOOTPATH	0.45m	0.45m	0.60m	0.80m
ROAD CROSSING	0.60m	0.60m	0.75m	0.90m
AGRICULTURAL	0.60m	0.60m	0.75m	0.90m

l.v./services	- up to 1000V.
h.v.	- over 1000V. to 11,000V.
e.h.v.	- 22,000V. to 132,000V.

WARNING

There may have been subsequent alterations to the surface levels. Trial holes must be taken to determine positions and depths of cables. HS (2) 47 Booklet from the Health and Safety Executive – Avoiding Danger from Buried Cables – should be consulted before commencing excavation work. (available from HMSO)

WHEN WORKING IN THE VICINITY OF OVERHEAD LINES THE HEALTH AND SAFETY GUIDANCE NOTE G56 SHOULD BE CONSULTED. (AVAILABLE FROM HMSO)

BASED UPON THE GEORGRAPHY SURVEY MAP WITH THE SANCTION OF THE
CONTROLLER OF H.M. STATIONERY OFFICE. CROWN COPYRIGHT RESERVED.

This copy has been made by and for the authority of SOUTHERN ELECTRIC plc pursuant to section 47 of the Copyright, Designs and Patents Act 1988 (The Act). Unless the Act provides a relevant exception to copyright, the copy must not be copied without the prior permission of the copyright owner.

**Southeast Country Park, Frome Road,
Trowbridge, Wiltshire, BA14 9QD**

Scottish and Southern
Registered in Scotland No 11710
Registered Office: Investment House
200, Darnley Road,
Forth, Perth, SMC

UNCONTROLLED COPY
Subject to Revision Master held at

 Scottish and Southern Energy	
H.V. MAINS RECORD If you are unsure & need to seek advice before commencing excavations please contact MELISSA 01225 - 701500	GRIDREF: ST84995582 SCALE: 1:1250 DATE: 22/01/2016 MSS289599



NORMAL DEPTH TO THE TOP OF THE CABLE WHEN LAID				
	services	lv	lv	ehv
FOOTPATH	0.45m	0.45m	0.60m	0.80m
ROAD CROSSING	0.60m	0.60m	0.75m	0.90m
AGRICULTURAL	0.60m	0.60m	0.75m	0.90m

l.v./services	- up to 1000V.
h.v.	- over 1000V. to 11,000V.
e.h.v.	- 22,000V. to 132,000V.

WARNING

There may have been subsequent alterations to the surface levels. Trial holes must be taken to determine positions and depth of cables. BS (G) 47 Booklet from the Health and Safety Executive – Avoiding Danger from Buried Cables – should be consulted before commencing excavation work. (available from HMSO)

WHEN WORKING IN THE VICINITY OF OVERHEAD LINES THE HEALTH AND SAFETY GUIDANCE NOTE C58 SHOULD BE CONSULTED. (AVAILABLE FROM HMSO)

BASED UPON THE ORDNANCE SURVEY MAP WITH THE SANCTION OF THE CONTROLLER OF H.M. STATIONERY OFFICE. OTHER COPYRIGHT RESERVED.

Southwick Country Park, Frome Road,
Southwick, Trowbridge, Wiltshire, BA14 8QD
Registered in England No 131710
Registered Office: Southwick House
Frome Road, Trowbridge, Wiltshire, BA14 8QD

UNCONTROLLED COPY
Subject to Revision Master held at

Scottish and Southern Energy

L.V. MAINS RECORD


If you are unsure & need to seek advice before commencing excavations please contact
MELKSHAM
01225-701500

GRIDREF: ST84485557

SCALE: 1:1250

DATE: 22/01/2016

MSS289597

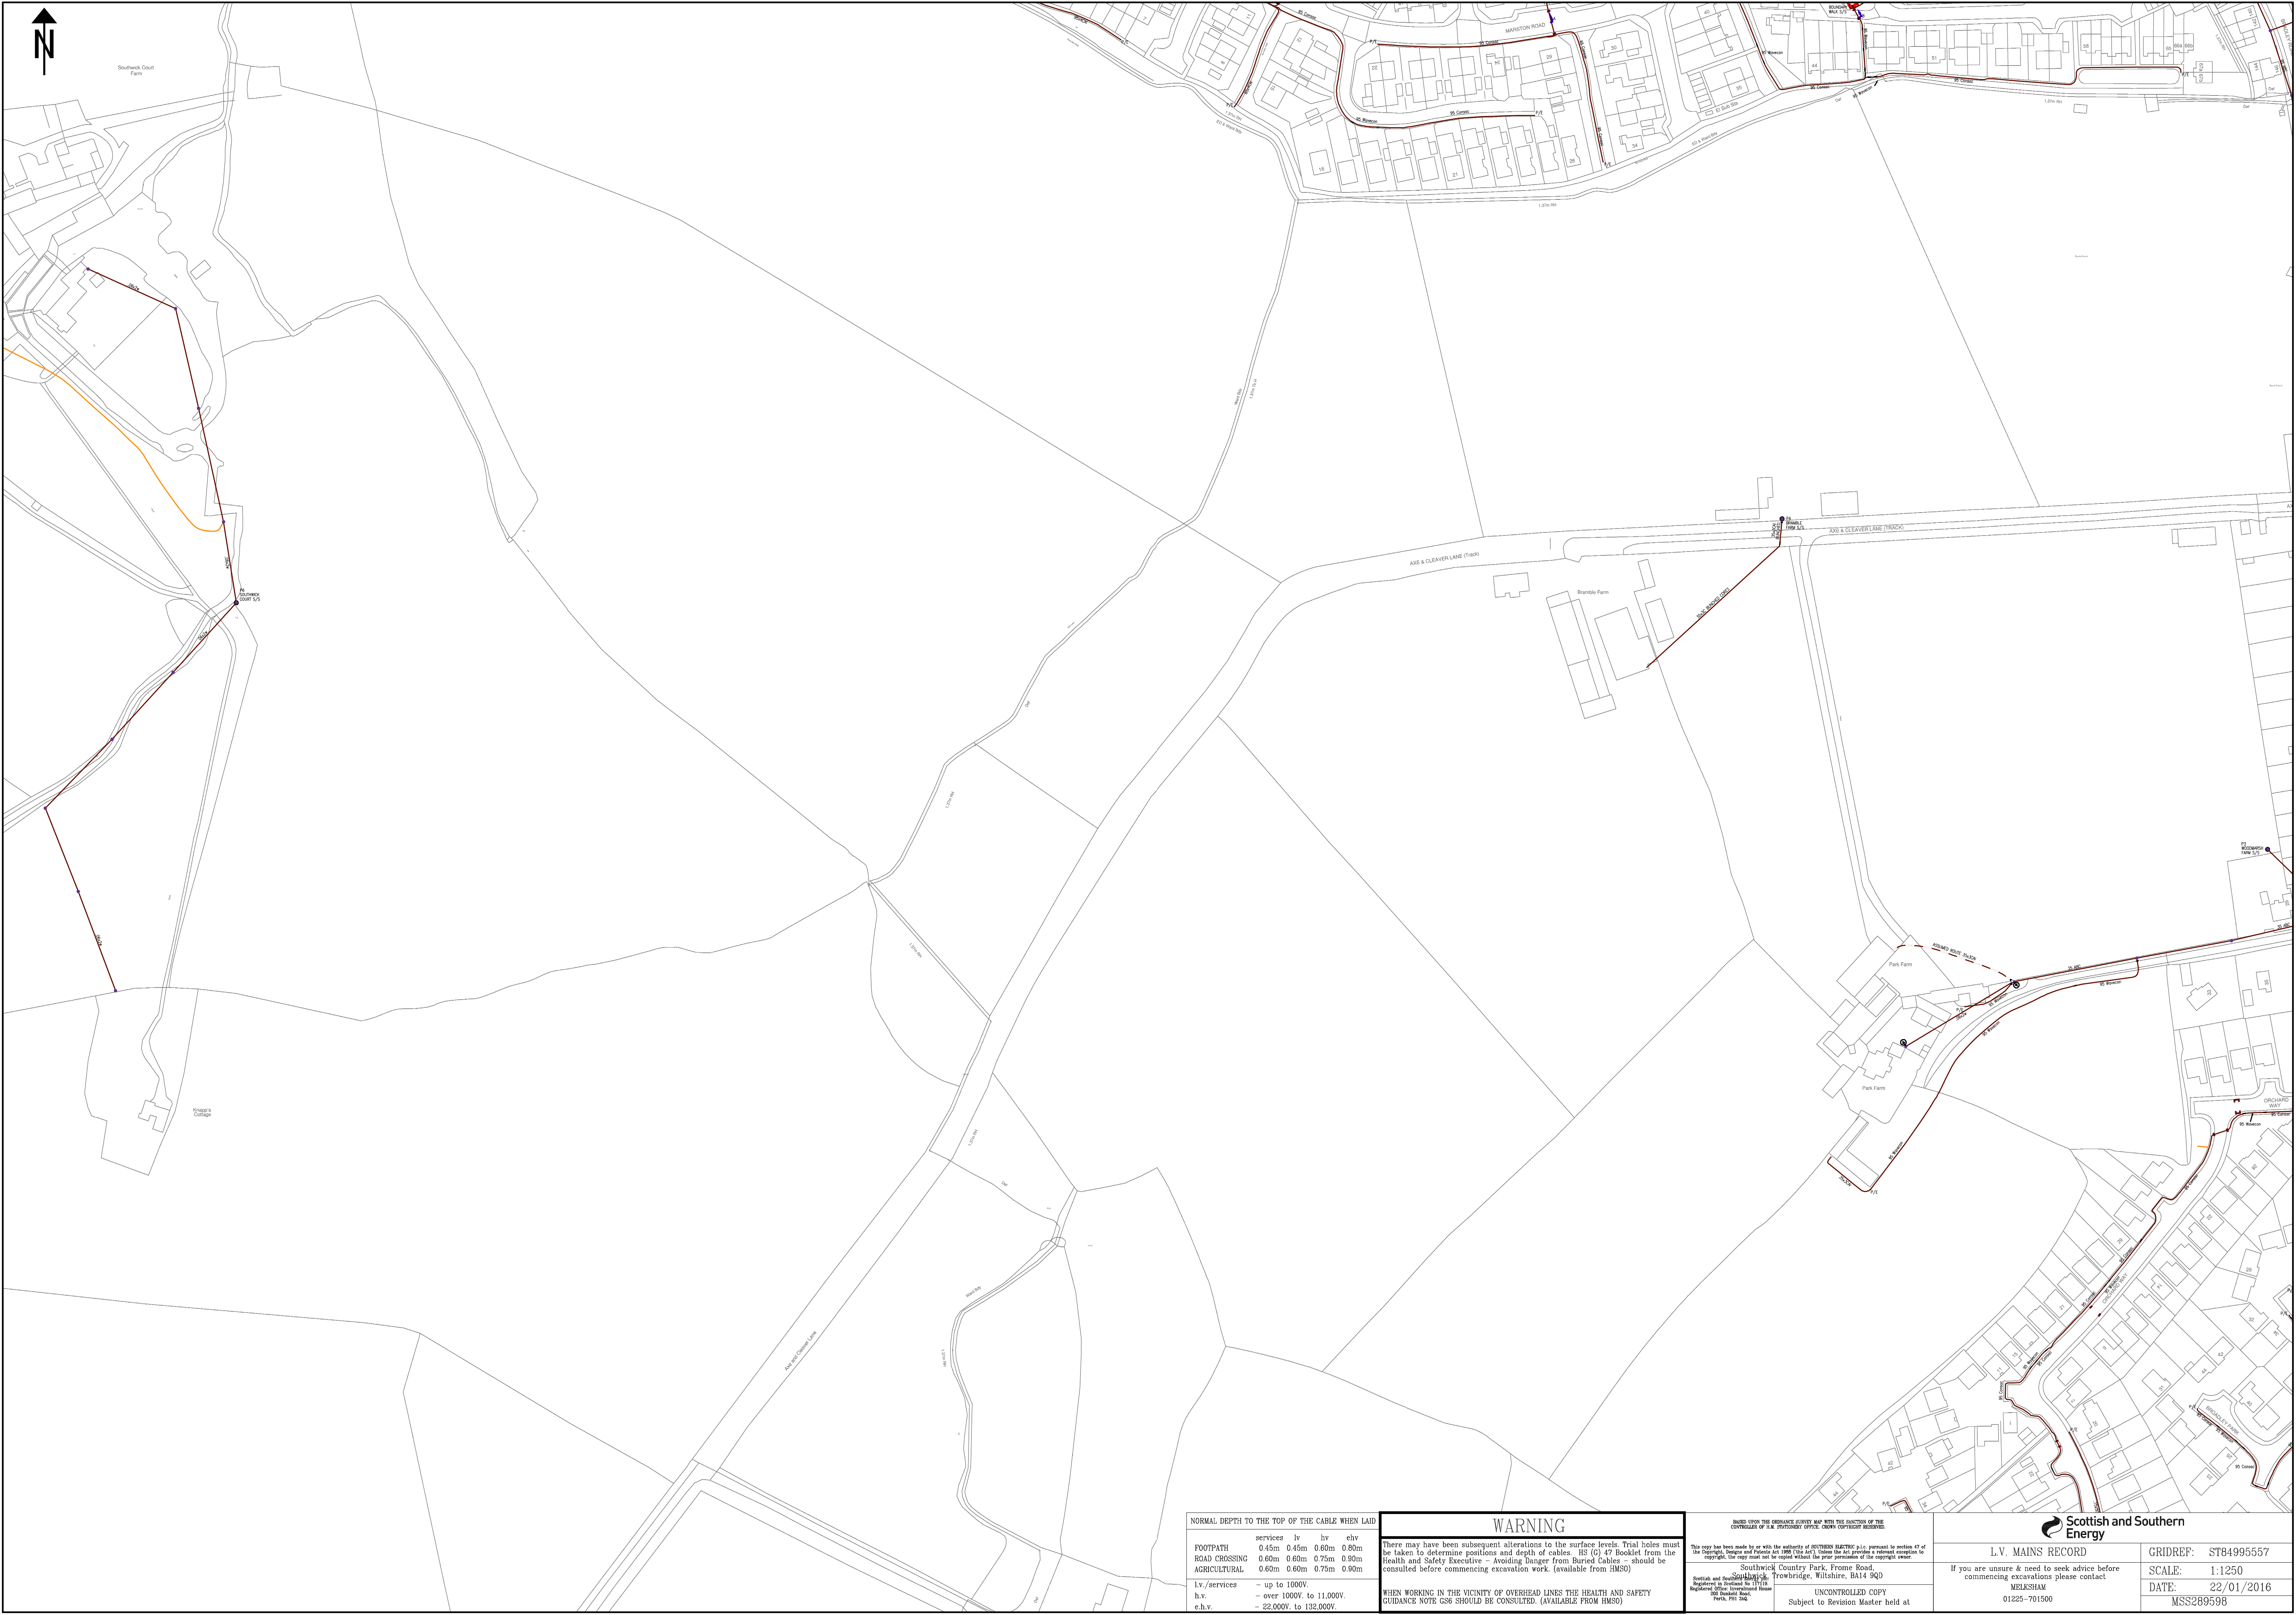

NORMAL DEPTH TO THE TOP OF THE CABLE WHEN LAID				
	services	lv	hv	chv
FOOTPATH		0.45m	0.45m	0.60m 0.80m
ROAD CROSSING		0.60m	0.60m	0.75m 0.90m
AGRICULTURAL		0.60m	0.60m	0.75m 0.90m
L.V./services				
- up to 1000V.				
h.v. - over 1000V. to 11.000V.				
e.h.v. - 22.000V. to 132.000V.				

WARNING

There may have been subsequent alterations to the surface levels. Trial holes must be taken to determine positions and depth of cables. BS (C) 47 booklet from the Health and Safety Executive - Avoiding Danger from Buried Cables - should be consulted before commencing excavation work. (available from HMSO)

WHEN WORKING IN THE VICINITY OF OVERHEAD LINES THE HEALTH AND SAFETY GUIDANCE NOTE C58 SHOULD BE CONSULTED. (AVAILABLE FROM HMSO)

BASED UPON THE ORDNANCE SURVEY MAP WITH THE SANCTION OF THE CONTROLLER OF H.M. STATIONERY OFFICE. OTHER COPYRIGHTS RESERVED.

This copy has been made by or with the authority of SOUTHERN ELECTRIC p.l.c. pursuant to section 47 of the Copyright, Designs and Patents Act 1988 (This Act). Unless the Act provides a relevant exception to copyright, the copy must not be copied without the prior permission of the copyright owner.

Southwick Country Park, Frome Road,
Melksham, Trowbridge, Wiltshire, BA14 8QD

Registered in England No 11710
Registered Office: International House
One Imperial Way,
Farnborough, Hampshire,
GU14 7AB



Scottish and Southern Energy

L.V. MAINS RECORD

If you are unsure & need to seek advice before commencing excavations please contact

MELKSHAM


01225-701500

GRIDREF: ST84995557

SCALE: 1:1250

DATE: 22/01/2016

MSS289598

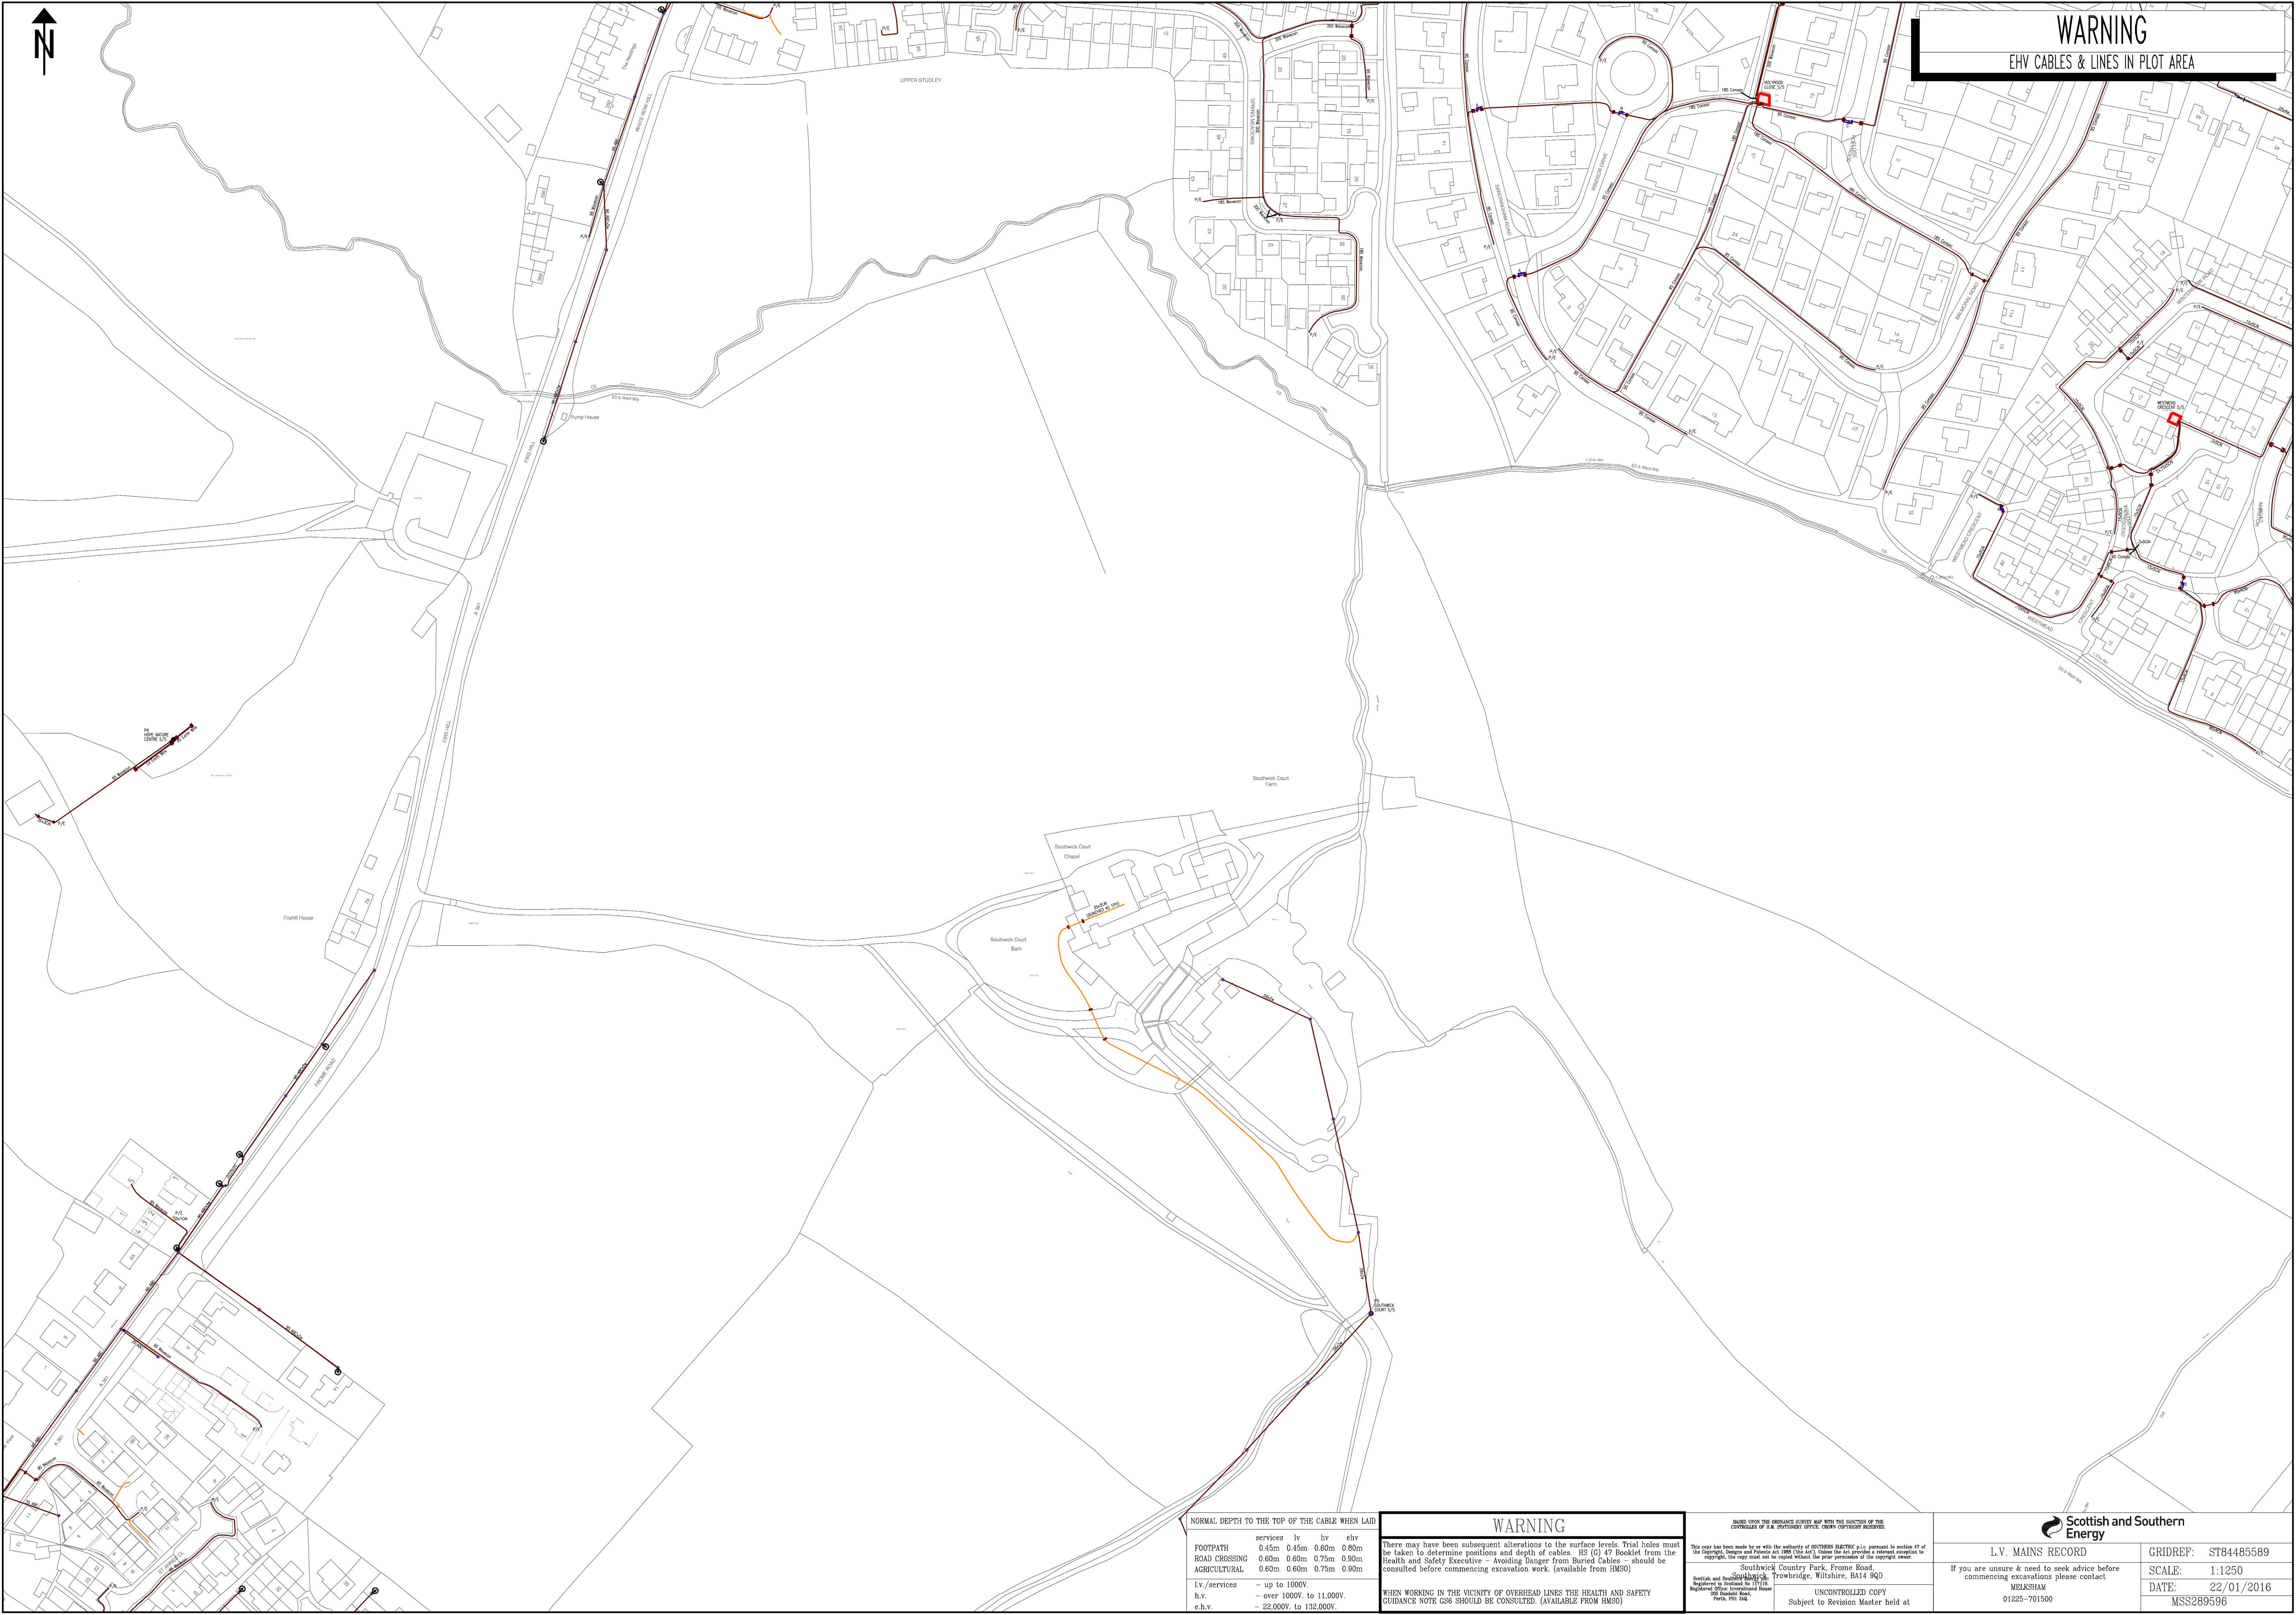

EHV CABLES & LINES IN PLOT AREA

	services	lv	hv	ehv
FOOTPATH	0.45m	0.45m	0.60m	0.80m
ROAD CROSSING	0.60m	0.60m	0.75m	0.90m
AGRICULTURAL	0.60m	0.60m	0.75m	0.90m

There may have been subsequent alterations to the surface levels. Trial holes must be taken to determine positions and depth of cables. HS (G) 47 Booklet from the Health and Safety Executive - Avoiding Danger from Buried Cables - should be consulted before commencing excavation work. (available from HMSO)

WHEN WORKING IN THE VICINITY OF OVERHEAD LINES THE HEALTH AND SAFETY GUIDANCE NOTE GS6 SHOULD BE CONSULTED. (AVAILABLE FROM HMSO)

BASED UPON THE ORDINANCE SURVEY MAP WITH THE SANCTION OF THE

This copy has been made by or with the authority of SOUTHERN ELECTRIC p.l.c. pursuant to section 17 of the Copyright, Designs and Patents Act 1988 (the Act). Unless the Act provides a relevant exception, the copyright in the copy must not be copied without the prior permission of the copyright owner.

Southwick Country Park, Frome Road

Scottish and Southern Energy plc
Registered in Scotland No 11711

rowbridge, Wiltshire, BA14 9QD

UNCONTROLLED COPY
Subject to Revision Master held



L.V. MAINS RECORD

If you are unsure & need to seek advice before


commencing excavation
MELKSHAM
01225-70150

GRIDREF:	ST84485589
----------	------------

SCALE: 1:1250

DATE:	22/01/201
-------	-----------

DATE:	22,
	MSS289596

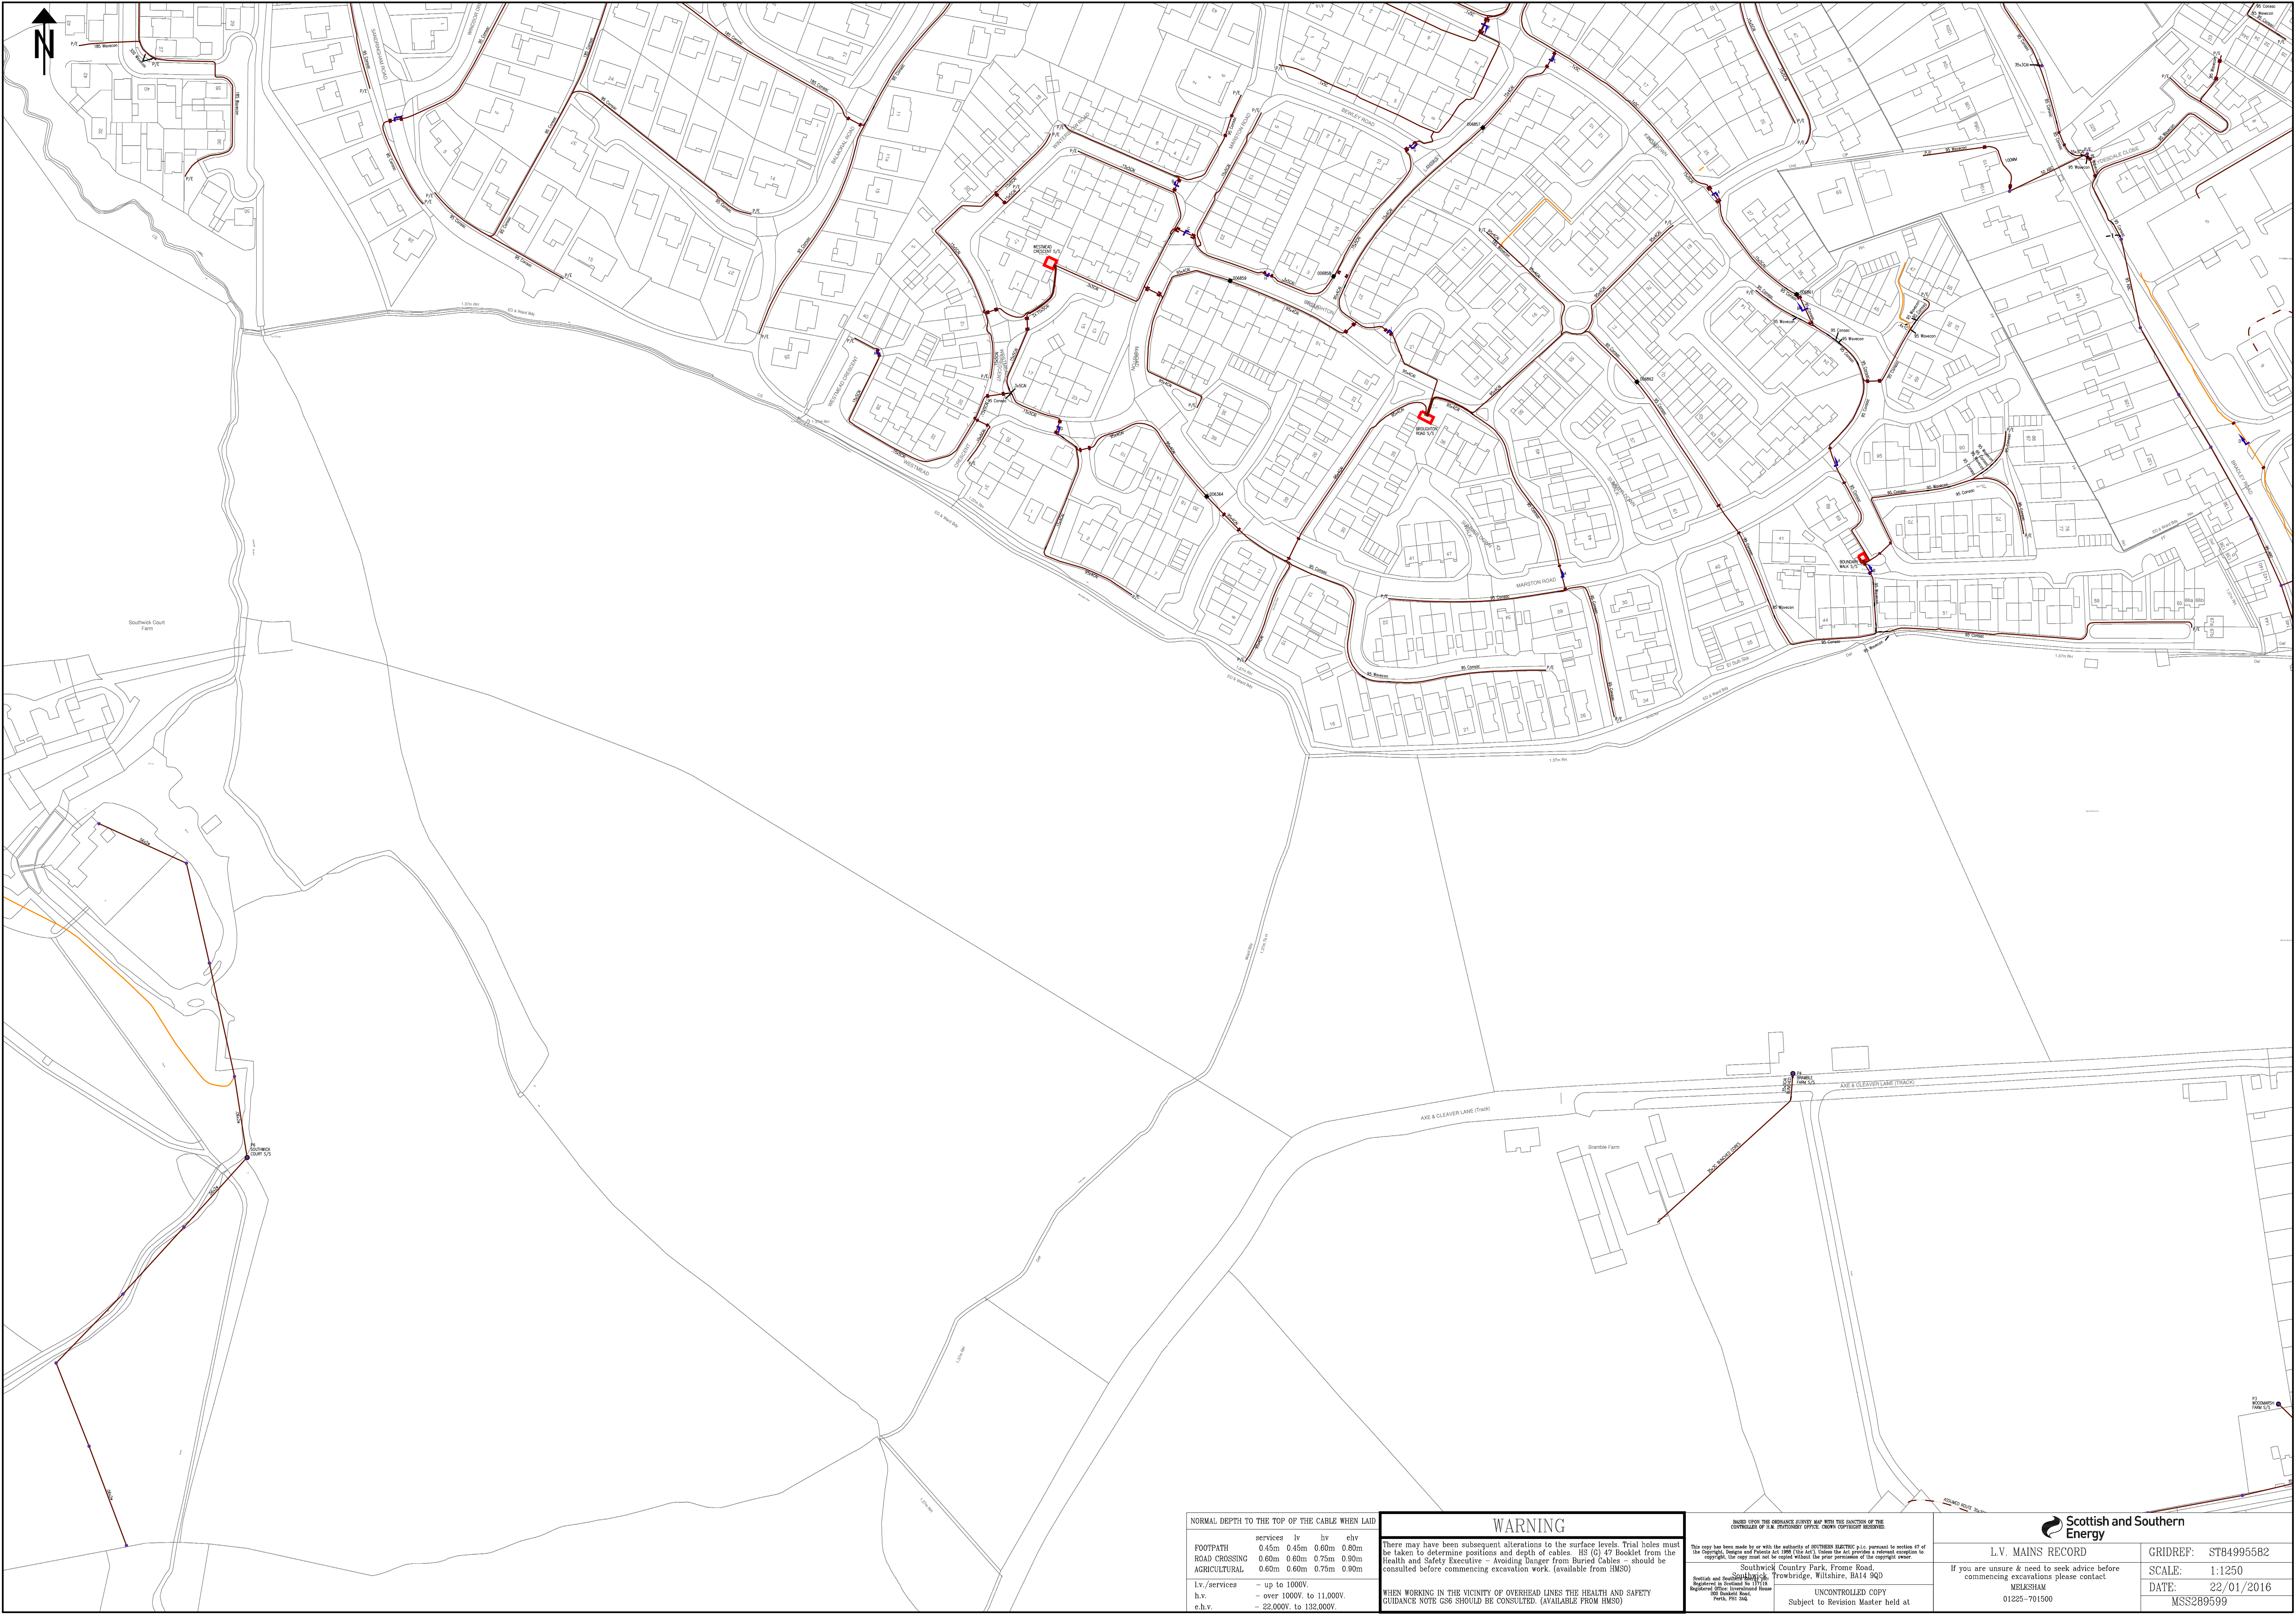

NORMAL DEPTH TO THE TOP OF THE CABLE WHEN LAID			
	services	lv	h.v.
FOOTPATH	0.45m	0.45m	0.60m
ROAD CROSSING	0.60m	0.60m	0.75m
AGRICULTURAL	0.60m	0.60m	0.75m
l.v./services	- up to 1000V.		
h.v.	- over 1000V. to 11.000V.		
e.h.v.	- 22.000V. to 132.000V.		

WARNING

There may have been subsequent alterations to the surface levels. Trial holes must be taken to determine positions and depth of cables. BS (G) 47 booklet from the Health and Safety Executive - Avoiding Danger from Buried Cables - should be consulted before commencing excavation work. (available from HMSO)

WHEN WORKING IN THE VICINITY OF OVERHEAD LINES THE HEALTH AND SAFETY GUIDANCE NOTE C58 SHOULD BE CONSULTED. (AVAILABLE FROM HMSO)

BASED UPON THE ORDNANCE SURVEY MAP WITH THE SANCTION OF THE CONTROLLER OF H.M. STATISTICAL OFFICE. OTHER COPYRIGHTS RESERVED.

This copy has been made by or with the authority of SOUTHERN ELECTRIC p.l.c. pursuant to section 47 of the Copyright, Designs and Patents Act 1988. This Act's. Unless the Act provides a relevant exception to copyright, the copy must not be copied without the prior permission of the copyright owner.

Southwick Country Park, Frome Road,
Melksham, Trowbridge, Wiltshire, BA14 8QD
Registered in England No. 131710
Registered Office (Incorporated in England)
Part 1, 2nd Floor

UNCONTROLLED COPY
Subject to Revision Master held at

Scottish and Southern Energy

L.V. MAINS RECORD

If you are unsure & need to seek advice before commencing excavations please contact

MELKSHAM
01225-701500

GRIDREF: ST04995582


SCALE: 1:1250

DATE: 22/01/2016

MSS289599

GCE00644/ R2v6

Appendix K Gas Main Location Plan

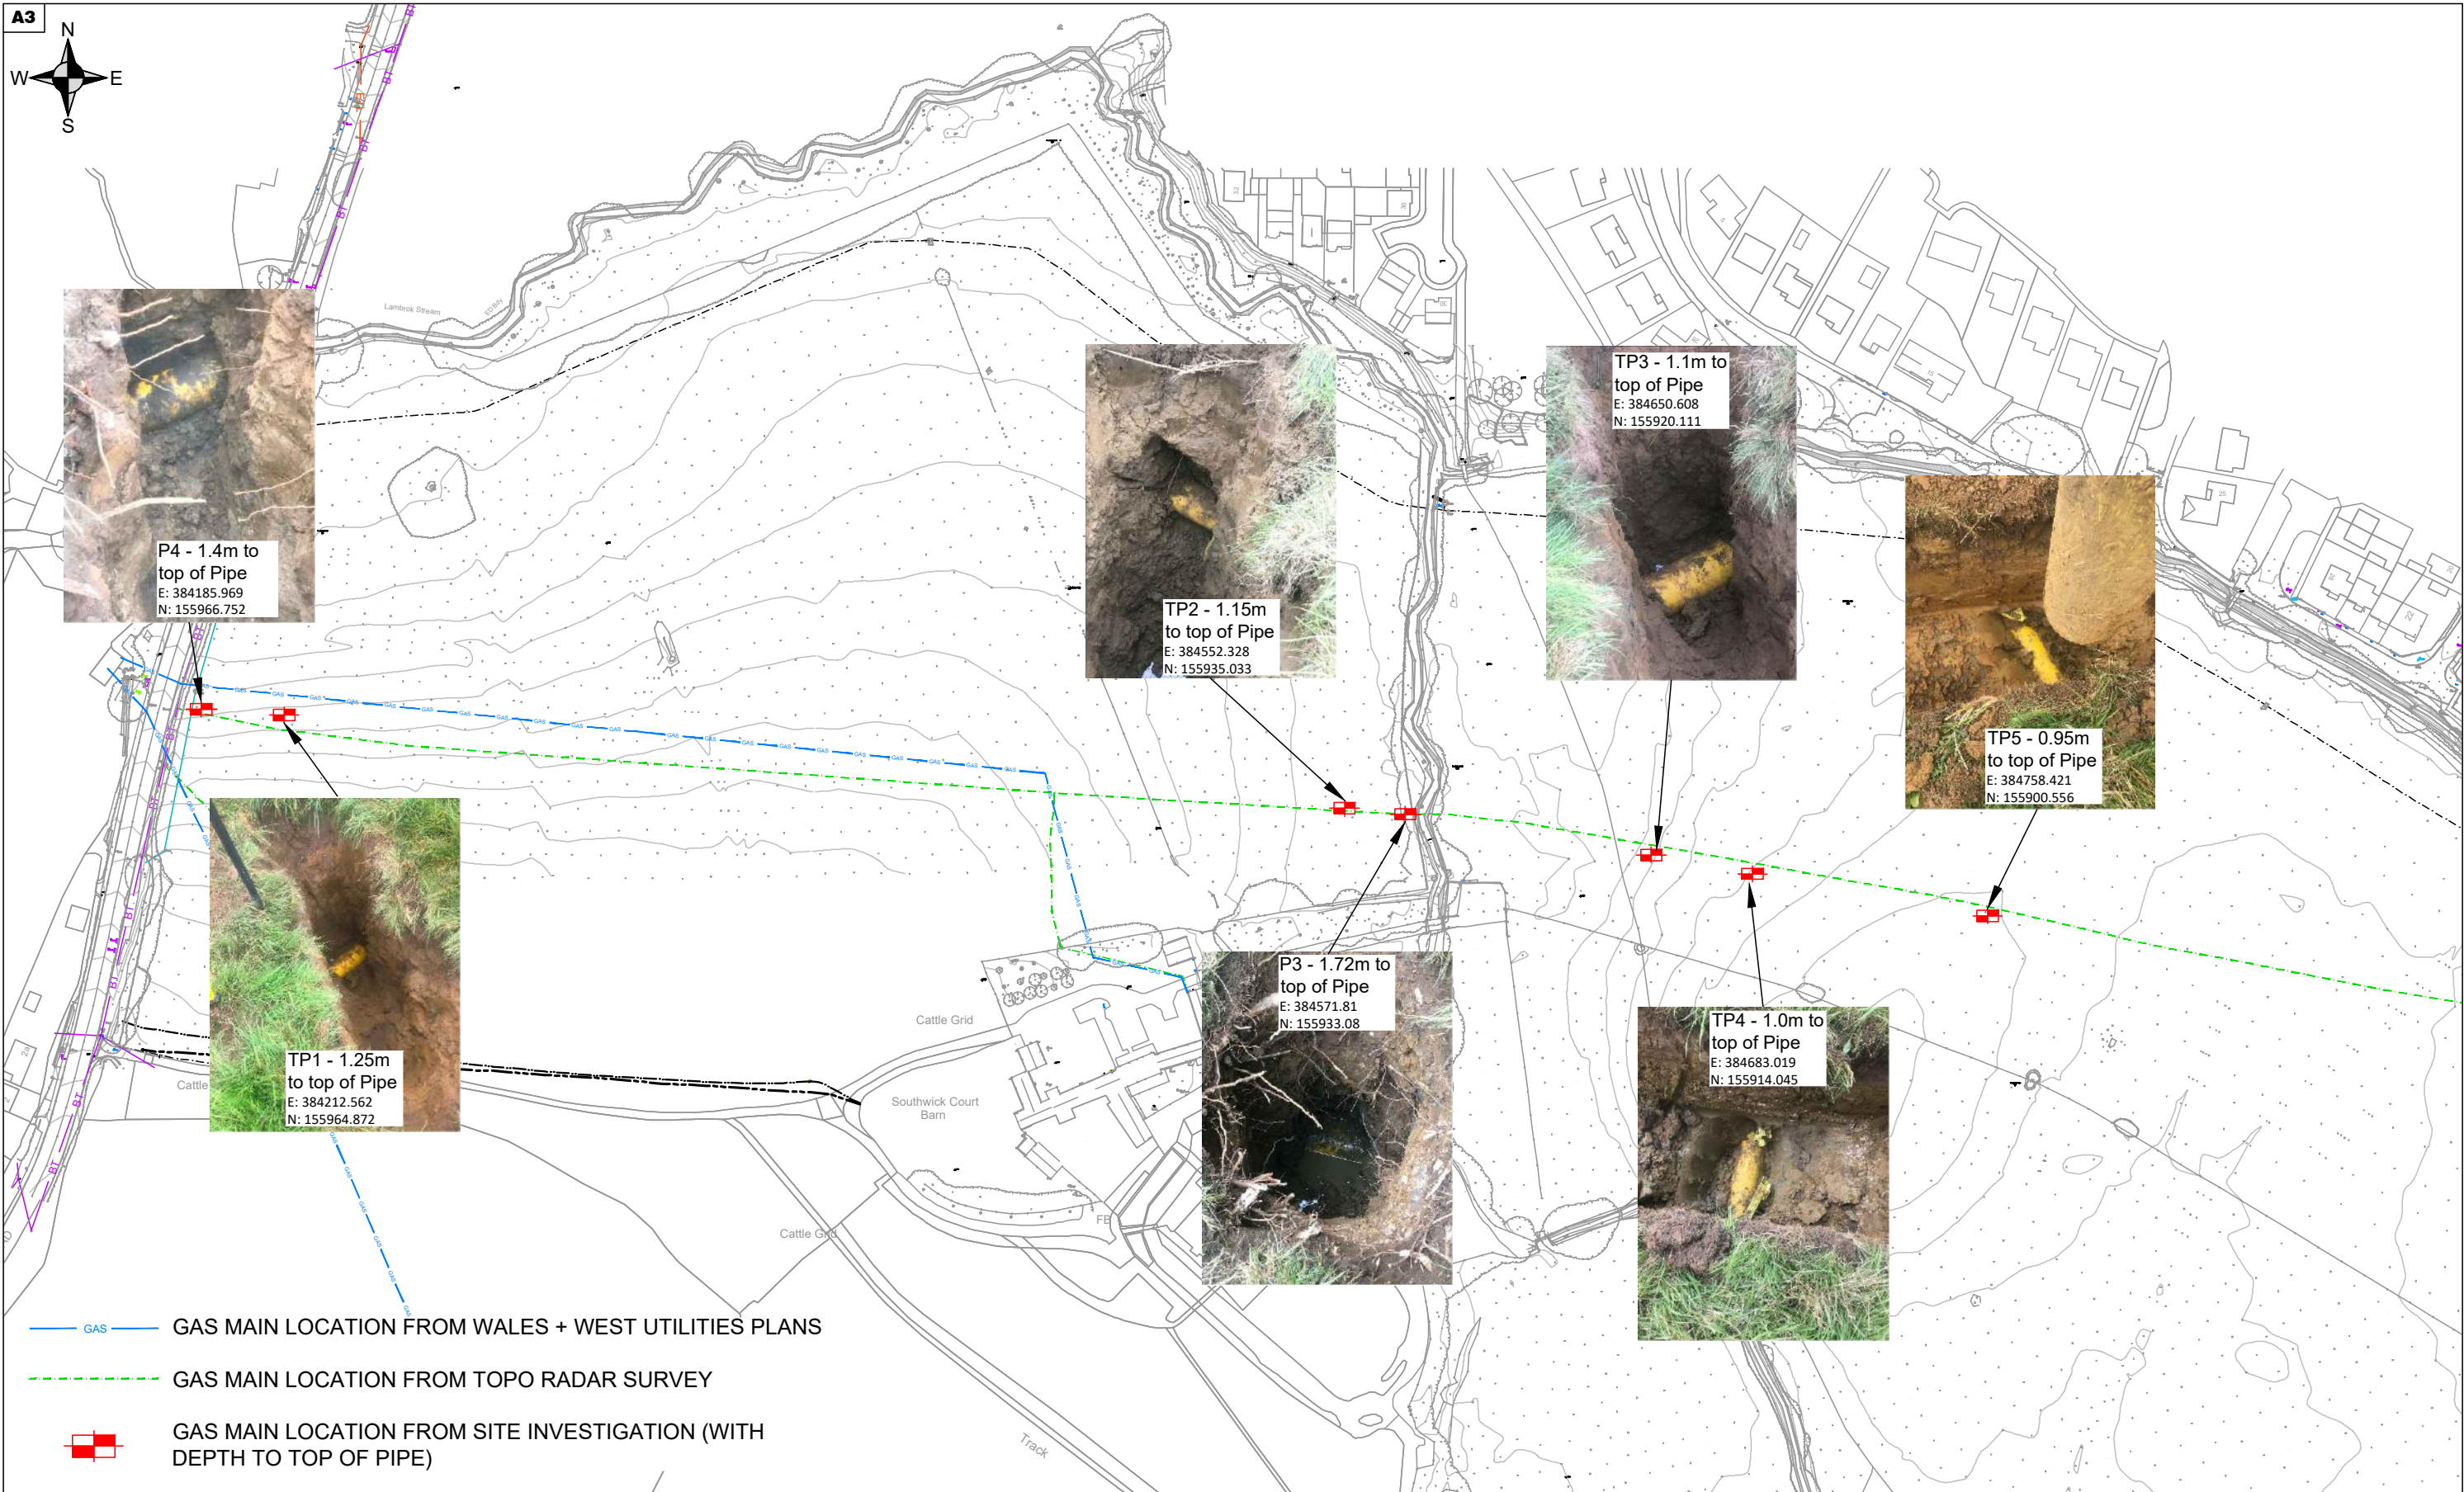

Geo Consulting Engineering Ltd
The Studio, Woodmanton Barns,
Woodbury, Exeter, EX5 1HQ
T: 01395 239977
E: mail@geoconsultingeng.co.uk
W: www.geoconsultingeng.co.uk

Job Title:
**Southwick
Trowbridge
Wiltshire**

Client:
Waddeton Park Ltd

Dwg Title:
**Gas Main
Locations**

Drawing Status
For Information

Scale 1:2000 at A3
Date May 2020
Drawn DLJ
Checked DLJ

Drawing no: **GCE00644-FigA**
Rev -