



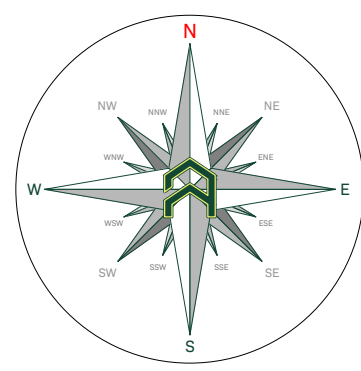

Indicative
only

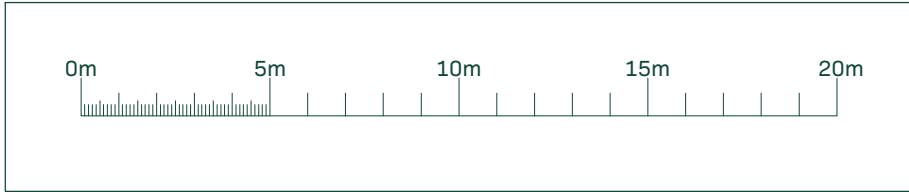

Tree Work Schedule

Ref.	Species	Works	Category
G3	Coast Willow	Partial removal: area shown on AIA, Grind stumps	C2

All tree work is to be undertaken in accordance with British Standards (BS)3968:2010 Tree Work - Recommendations. All arisings are to be removed and the site left as it was found. Care is to be taken to ensure that the ground around retained trees does not become compacted as a result of tree surgery operations. No equipment or vehicles such as (but not limited to) timber lorries, tractors, excavators, or cranes are to be parked or driven beneath the crowns of any retained trees to prevent subsequent compaction and root death.

Arboricultural Supervision

The arboricultural consultant will be required to attend site to directly supervise all demolition and construction works that have to be undertaken within the root protection areas. This will include:

- Pre-commencement site meeting.
- Location of protective measures.
- Any demolition and/or excavations within or adjacent to RPA's, including foundations, hard surfacing or underground services to non-exhaustive list.
- Arboricultural sign off and removal of protective measures.

Referenced Documents

Title	Originator	Drawing Number	Key
Topographical Survey	Peter Baldwin Construction	230055/1	—
Proposed Layout	Ed Brooks	159.P101.E	—

Construction Exclusion Zone

A construction exclusion zone (CEZ) is a designated area where there is to be no construction activity what-so-ever. Access to the area for construction personnel and machinery is strictly prohibited; there is no scope for the storage for materials and/or waste etc.

Protective Fencing (Tress)

Protective fencing is to be erected prior to the commencement of any and all works on site and retained in place for the duration of the development.

default Specification: To comprise of either 2.4m wooden site hoarding, or a 2.3m high scaffold framework comprising of vertical and horizontal framework, well braced to resist impacts, with uprights to be spaced at a maximum of 3.0m intervals and driven into the ground by a minimum of 600mm. On to this, standard anti-climb welded mesh panels are to be securely fixed to each other with at least two scaffold clamps and to the scaffold framework with wire.

Secondary Specification: To comprise of 2m tall welded mesh panels on rubber or concrete feet. Panels are to be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence. The panels should be supported on the inner side by stabiliser studs, which should be attached to a base plate and secured with ground pins.

All weather notices are to be attached at regular intervals on the weld mesh panels with words such as "Construction Exclusion Zone - KEEP OUT".

Tree Protection Area

KEEP OUT

Do not move this fence

(TOWN & COUNTRY PLANNING ACT 1990)

TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING CONDITIONS AND/OR ARE THE SUBJECT OF A TREE PRESERVATION ORDER. CONTAMINATION OF A TREE PRESERVATION ORDER MAY LEAD TO CRIMINAL PROSECUTION.

ANY INCUSSION INTO THE PROTECTED AREA MUST BE WITH THE WRITTEN PERMISSION OF THE LOCAL PLANNING AUTHORITY.

Arboricultural Method Statement

All tree works must be undertaken in accordance with British Standards. Please refer to the Tree Schedule, Arboricultural Method Statement & Tree Protection Plan, for full details of all surveyed trees and how the development may be implemented without detriment to retained trees.

Rev:

Date:

Notes:

G3	13-05-26	Initial arrangement.
----	----------	----------------------

arbtech

Unit 3, Well House Barns, Chester, CH4 0DH
<https://arbtech.co.uk>, 01244 661170

Address:

The Kennels, Spyre Park, Chippenham, Wiltshire, SN15 2PR

Client:

Michaelis Boyd Associates

Drawing:

Tree Protection Plan

Project No.:

46359676

Drawing No.:

TPP01

Revision No.:

01

Date:

May 2026

Scale:

1:200

Drawn:

EK

Tree Key:

Tree/Group Number	Tree Canopies	Trunks
T1		
Root Protection Area:		
Category 'U' Tree Stems		
Category 'A' Tree Groups		
Category 'C' Tree Stems		
Category 'V' Groups		

All dimensions should be checked on site. No dimensions are to be related from this drawing. Please refer to any other drawings in the project. All dimensions should be related to the ground level. This drawing is designed to reflect the principles of the layout or design only, and release only to the protection of the tree. This drawing is not to be used as a definitive part of the engineering or construction design or method statement. An arboricultural or structural engineer should be consulted for any matters of construction, stability or specification and for any standards or regulatory requirements relating to proposed structures, hard surfacing or underground services.

All dimensions should be checked on site. No dimensions are to be related from this drawing. Please refer to any other drawings in the project. All dimensions should be related to the ground level. This drawing is designed to reflect the principles of the layout or design only, and release only to the protection of the tree. This drawing is not to be used as a definitive part of the engineering or construction design or method statement. An arboricultural or structural engineer should be consulted for any matters of construction, stability or specification and for any standards or regulatory requirements relating to proposed structures, hard surfacing or underground services.

© Arbor Consulting Ltd, 2025