



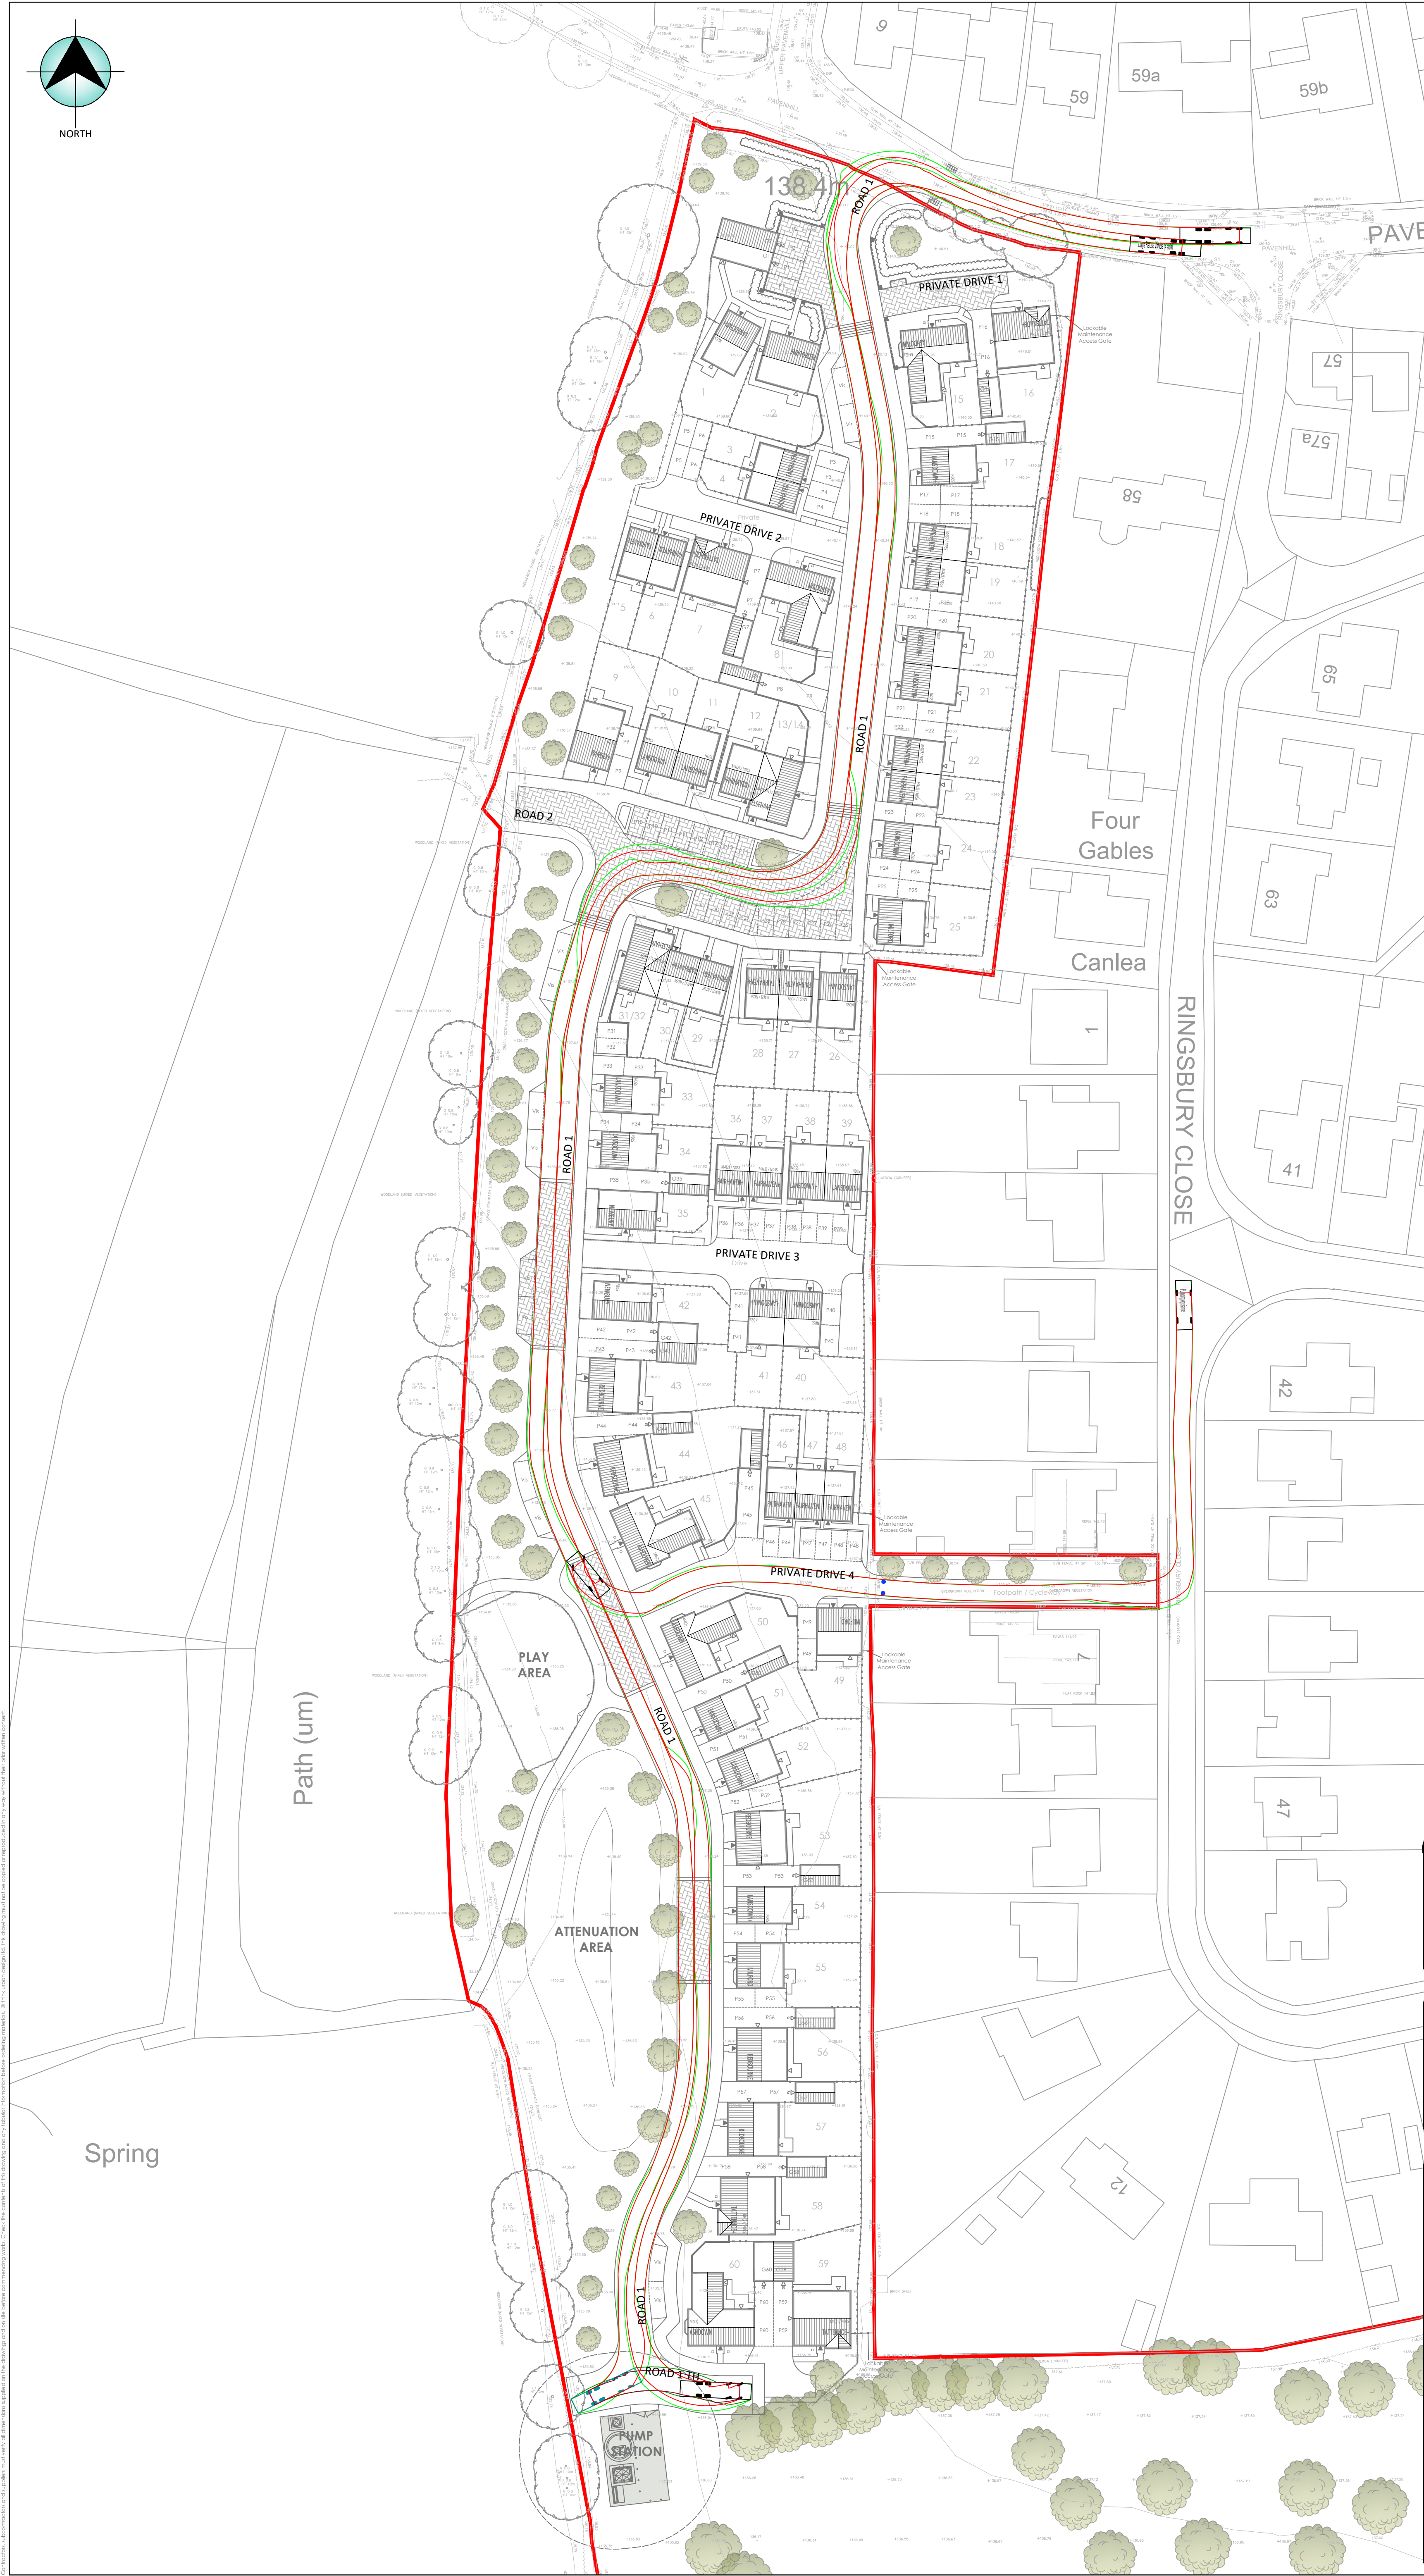


- NOTES:
- DO NOT SCALE FROM THIS DRAWING.
 - ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE STATED. ALL EXTERNAL WORKS ARE SHOWN IN mm.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ENGINEERING AND ARCHITECTS DRAWINGS AND SPECIFICATIONS.
 - THE CONTRACTOR IS TO CHECK & VERIFY ALL SITE DIMENSIONS & LEVELS BEFORE WORKS START ON SITE.
 - ALL EXISTING SERVICES AND DRAINAGE TO BE TRACED AND ASSESSED PRIOR TO SITE CLEARANCE BEING UNDERTAKEN.
 - ALL WORKS SHALL BE CARRIED OUT IN ACCORDANCE WITH THE APPROVED DRAWINGS & SPECIFICATIONS TO THE SATISFACTION THE LOCAL AUTHORITIES.
 - ALL HIGHWAY DESIGN RECOMMENDATIONS ARE ADVISORY & ARE SUBJECT TO APPROVAL FROM THE LOCAL HIGHWAYS AUTHORITY.
 - NO LOOSE CHIPPINGS ARE TO BE USED WITHIN OR NEAR TO THE ADOPTABLE HIGHWAY.
 - FOOTPATH SURFACING TO BE LAID 5mm HIGHER THAN THE ADJACENT KERB.
 - MINIMUM LENGTH OF CUT KERB TO BE 300mm.
 - THE DEVELOPER MUST COMPLY WITH NRSWA 1991, FOR TRAFFIC MANAGEMENT & FOR ANY ROAD WORKS WITHIN THE HIGHWAY.
 - CBR VALUES TO BE VERIFIED ON SITE PRIOR TO AGREEING THE THICKNESS OF ANY CAPPING & SUB-BASE USED.

DETAILS & SPECIFICATIONS SUBJECT TO APPROVAL FROM LOCAL AUTHORITY

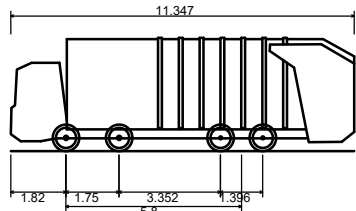

Large Refuse Vehicle (4 axle)

Overall Length	11.347m
Overall Width	2.500m
Overall Body Height	3.751m
Min Body Ground Clearance	0.304m
Track Width	2.500m
Lock to lock time	6.00s
Wall to Wall Turning Radius	11.330m

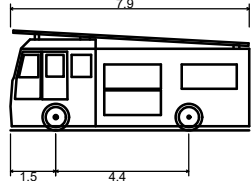

Pumping Appliance

Overall Length	7.900m
Overall Width	2.500m
Overall Body Height	3.300m
Min Body Ground Clearance	0.140m
Track Width	2.500m
Lock to lock time	4.00s
Kerb to Kerb Turning Radius	7.750m

	ISSUED	SJ	LF	29.06.26
Rev	Details	Drawn	Checked	Date



Quest House
St Mellons Business Park
Fortran Road
Cardiff
CF3 0EY
T: 02922 520 219

Client:	Lovell Homes Cardiff		
Project:	Pavenhill Farm Purton		
Drawing:	Refuse & Fire Tender Vehicle Tracking		
Scale:	1:500	Sheet Size:	A1
Drawn:	SJ	Checked:	LF
Date:	26/06/2026		
Drawing Number:	250814_LHC_H_002		
Revision:	-		