


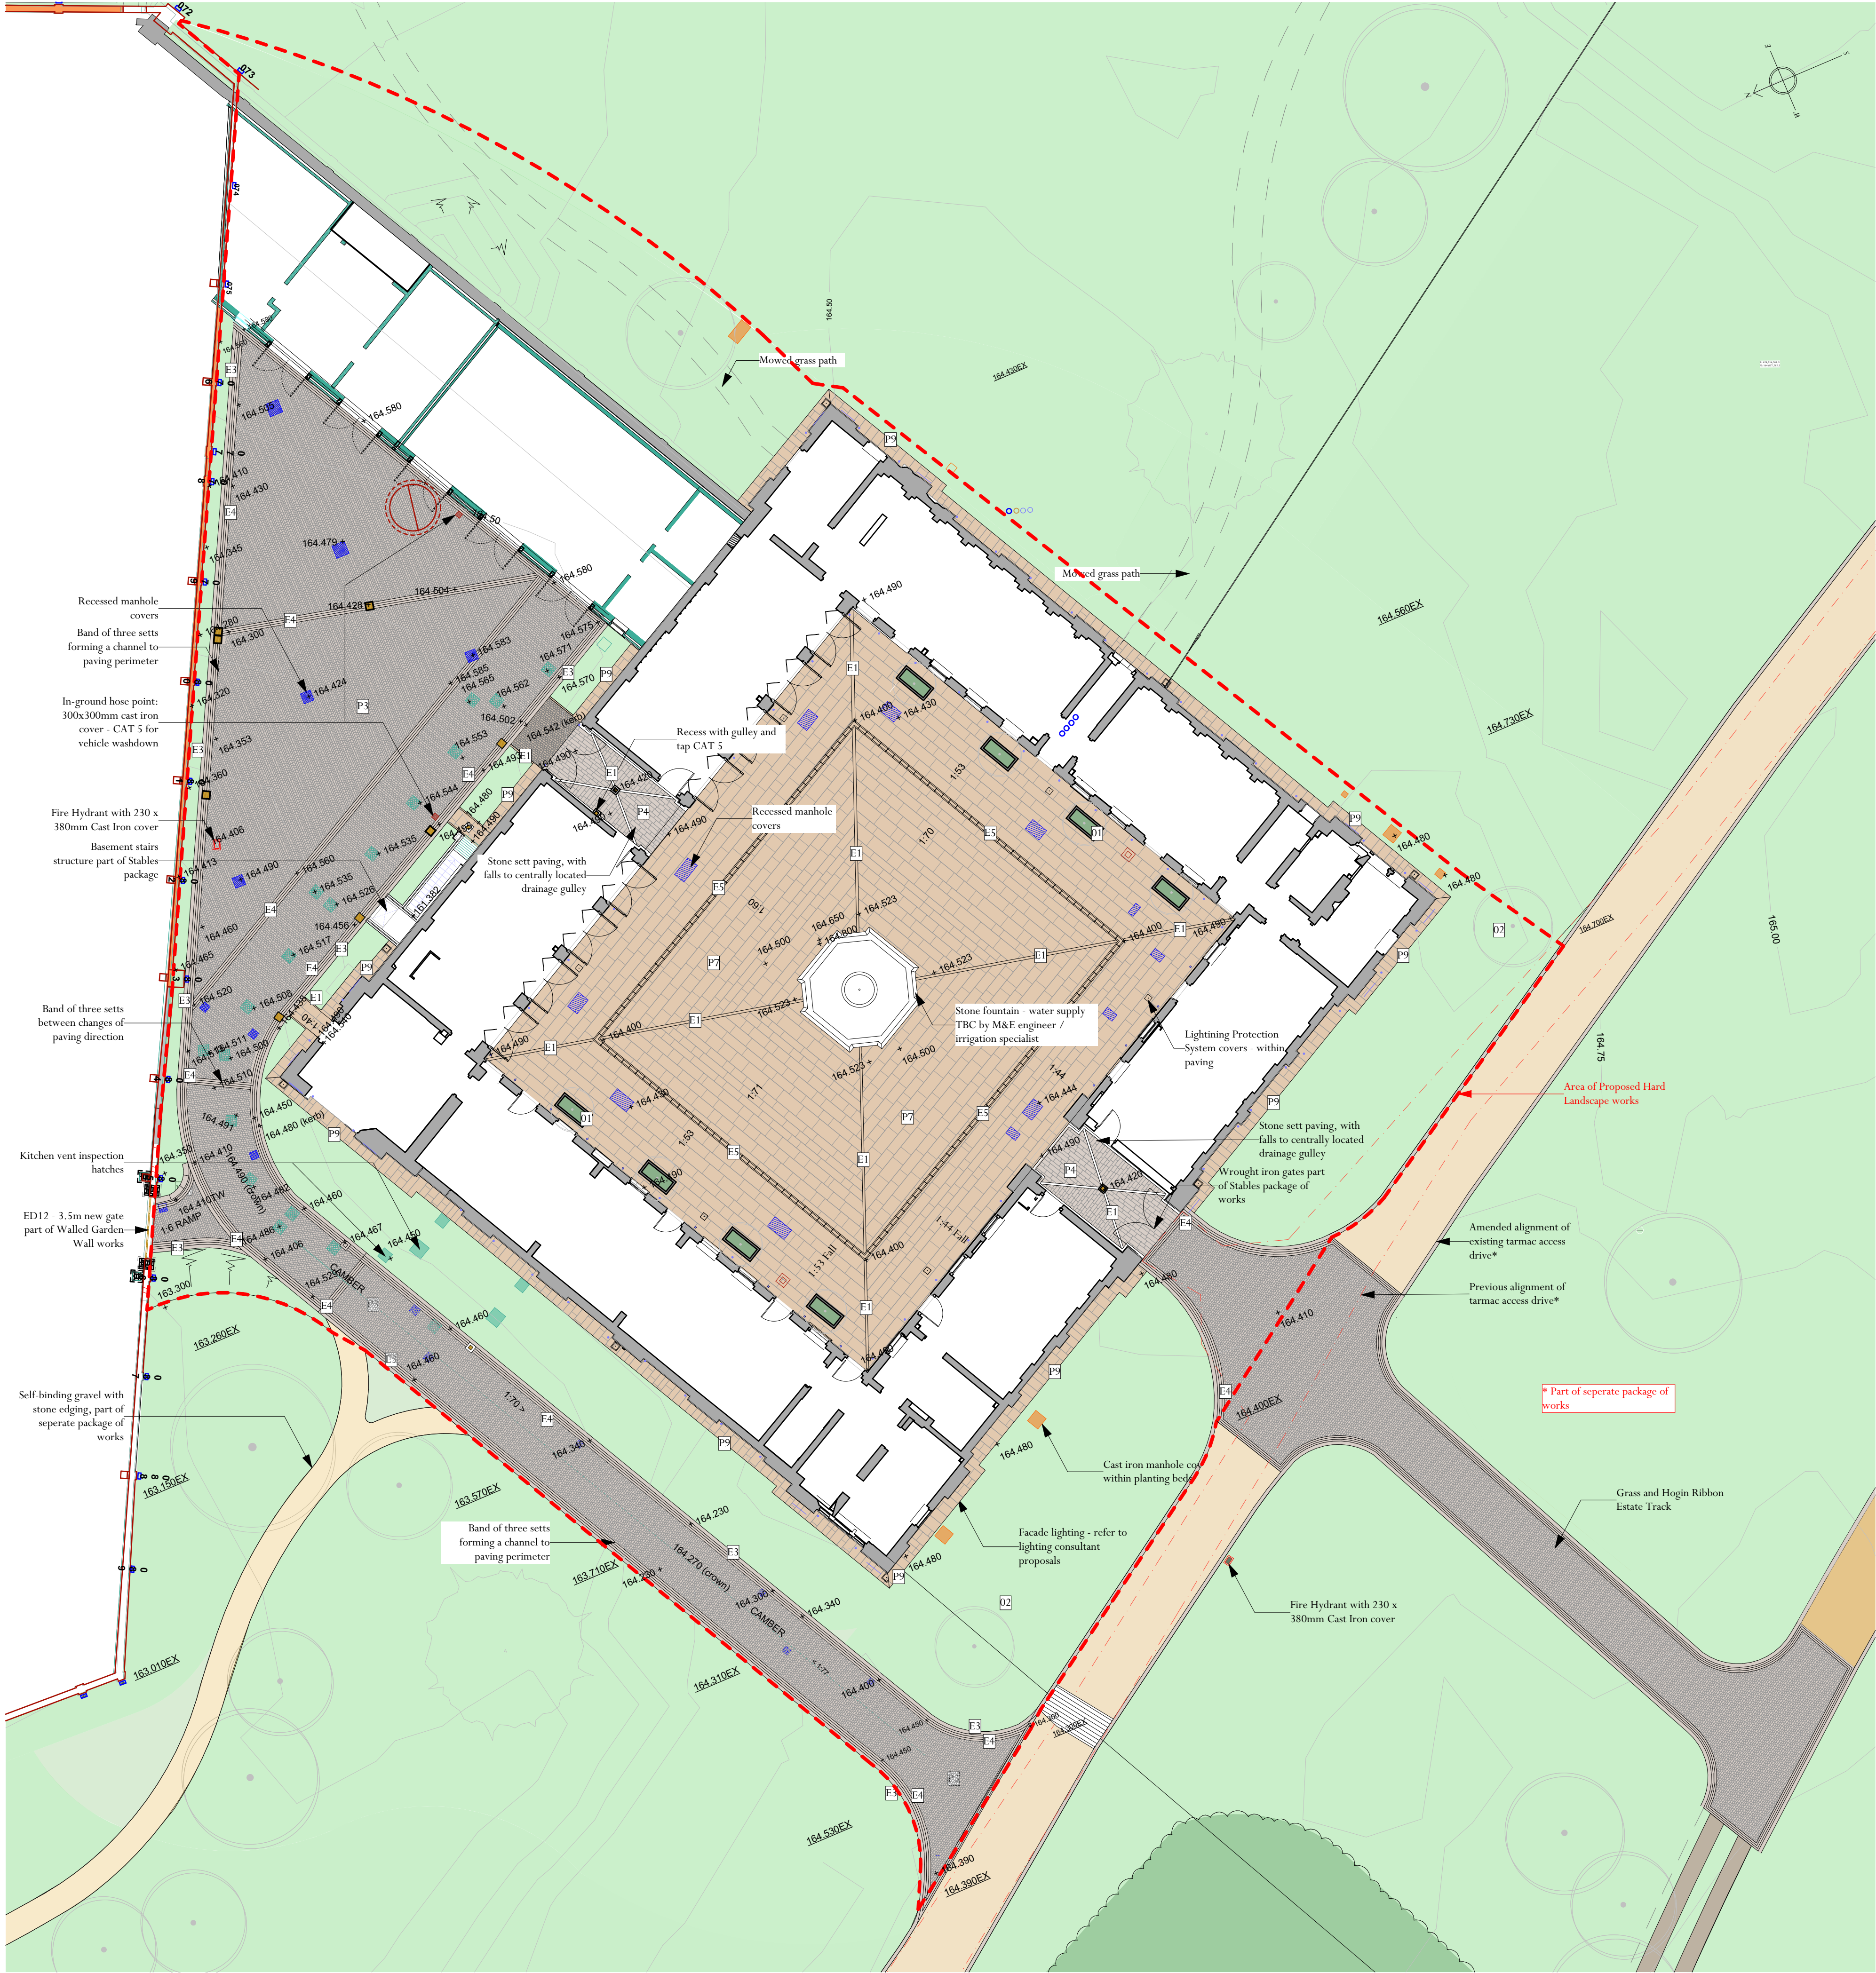

Key

Whixdale Sandstone setts in tumbled finish to parking area and carriageway, and entrances to courtyard. 90-150mm width courses, in 100-300mm random length. 80mm thick for category 5 and lower, 100mm for category 6. For category refer to drawing THL001-ADA-HL-XX-DR-A-0111.

Site-won reclaimed Sarsen setts (originally sourced from the Stable Yard). 90-150mm width courses, random length. 80mm thickness.

Natural Reclaimed Yorkstone flags in Riven finish. 475 / 575 / 675mm bands with 5mm joints. 500-1000mm random length. 60mm thick for category 3 and lower, 80mm for category 4 and 5. For category refer to drawing THL001-ADA-HL-XX-DR-A-0111.

Min. 600mm Reclaimed York Stone Paving perimeter to all buildings with facing Stonework, 450-900mm width

Tar and Chip - Golden Gravel surfacing to tie-in with existing access drive

Sawn Peak Moor Stone edging. 140mm width, random length. Flush edging with flat top.

Peak Moor Sandstone bullnosed stone kerb in Sawn finish with 25-40mm upstand, 200 x 200mm section. 600-900mm length.

Whixdale Sandstone Setts edging 90-150mm widths, 100-300mm random lengths, 80mm thick for category 5 and lower, 100mm for category 6. For category refer to drawing THL001-ADA-HL-XX-DR-A-0111.

Perforated Peak Moor Channel, Dished, over an ACO drain to engineer's design. 300mm width.

Adjacent Properties and Boundaries are shown for illustrative purposes only and have not been surveyed unless otherwise stated.

All areas shown are approximate and should be verified before forming the basis of a decision.

Do not scale other than for Planning Application purposes.

All dimensions must be checked by the contractor before commencing work on site.

No deviation from this drawing will be permitted without the prior written consent of the Architect.

The copyright of this drawing remains with the Architect and may not be reproduced in any form without prior written consent.

Ground Floor Slabs, Foundations, Sub-Structures, etc. All work below ground level is shown provisionally. Inspection of ground condition is essential prior to work commencing.

Reassessment is essential when the ground conditions are apparent, and redesign may be necessary in the light of soil conditions found. The responsibility for establishing the soil and sub-soil conditions rests with the contractor.

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20m

Scale 1:200



P3 Whixdale Sandstone Setts
E4 Whixdale Sandstone Setts edging
E1 Peak Moor Sandstone edging in Sawn finish, laid flush
E3 Peak Moor Sandstone bullnosed stone kerb in Sawn finish
E5 Perforated Peak Moor Channel, Dished, over an ACO drain



P7 Reclaimed Yorkstone flags in Riven finish
P9 Reclaimed Yorkstone flags in Riven finish, 600mm length



P11 Tar and Chip - Golden Gravel



P4 Reclaimed Sarsen Setts

09	30.07.26	Amended as per comments	KG
08	30.07.26	Tender Issue	EH
07	07.07.26	Planning Issue	KG
06	06.07.26	Key amended	KG
05	19.06.26	Amended as per comments	KG
Rev	Date	Description	Initials

PLANNING

PROJECT Tottenham House - Hard Landscape

TITLE: Proposed Stables Paving Materials

SCALE: 1:200 @A1

DATE: August 2025

DRAWING No: THL001-ADA-HL-ZZ-DR-A-0283(09)

DRAWN BY: JWS

ADAM ARCHITECTURE

OLD HYDE HOUSE, 75 HYDE STREET
WINCHESTER, HANTS, SO23 7DW, TEL. 01962 843843

WEST WING, SOMERSET HOUSE, STRAND
LONDON, WC2R 1LA, TEL. 020 7 841 0140

www.adamarchitecture.com contact@adamarchitecture.com