


- NOTES:
- DO NOT SCALE from this drawing as liable to distort
 - This drawing is to be read in conjunction with all other relevant Engineers, Architects and Specialists drawings and specifications
 - Any variations with line, level or specification of the proposed works should be reported to the Engineer prior to commencement

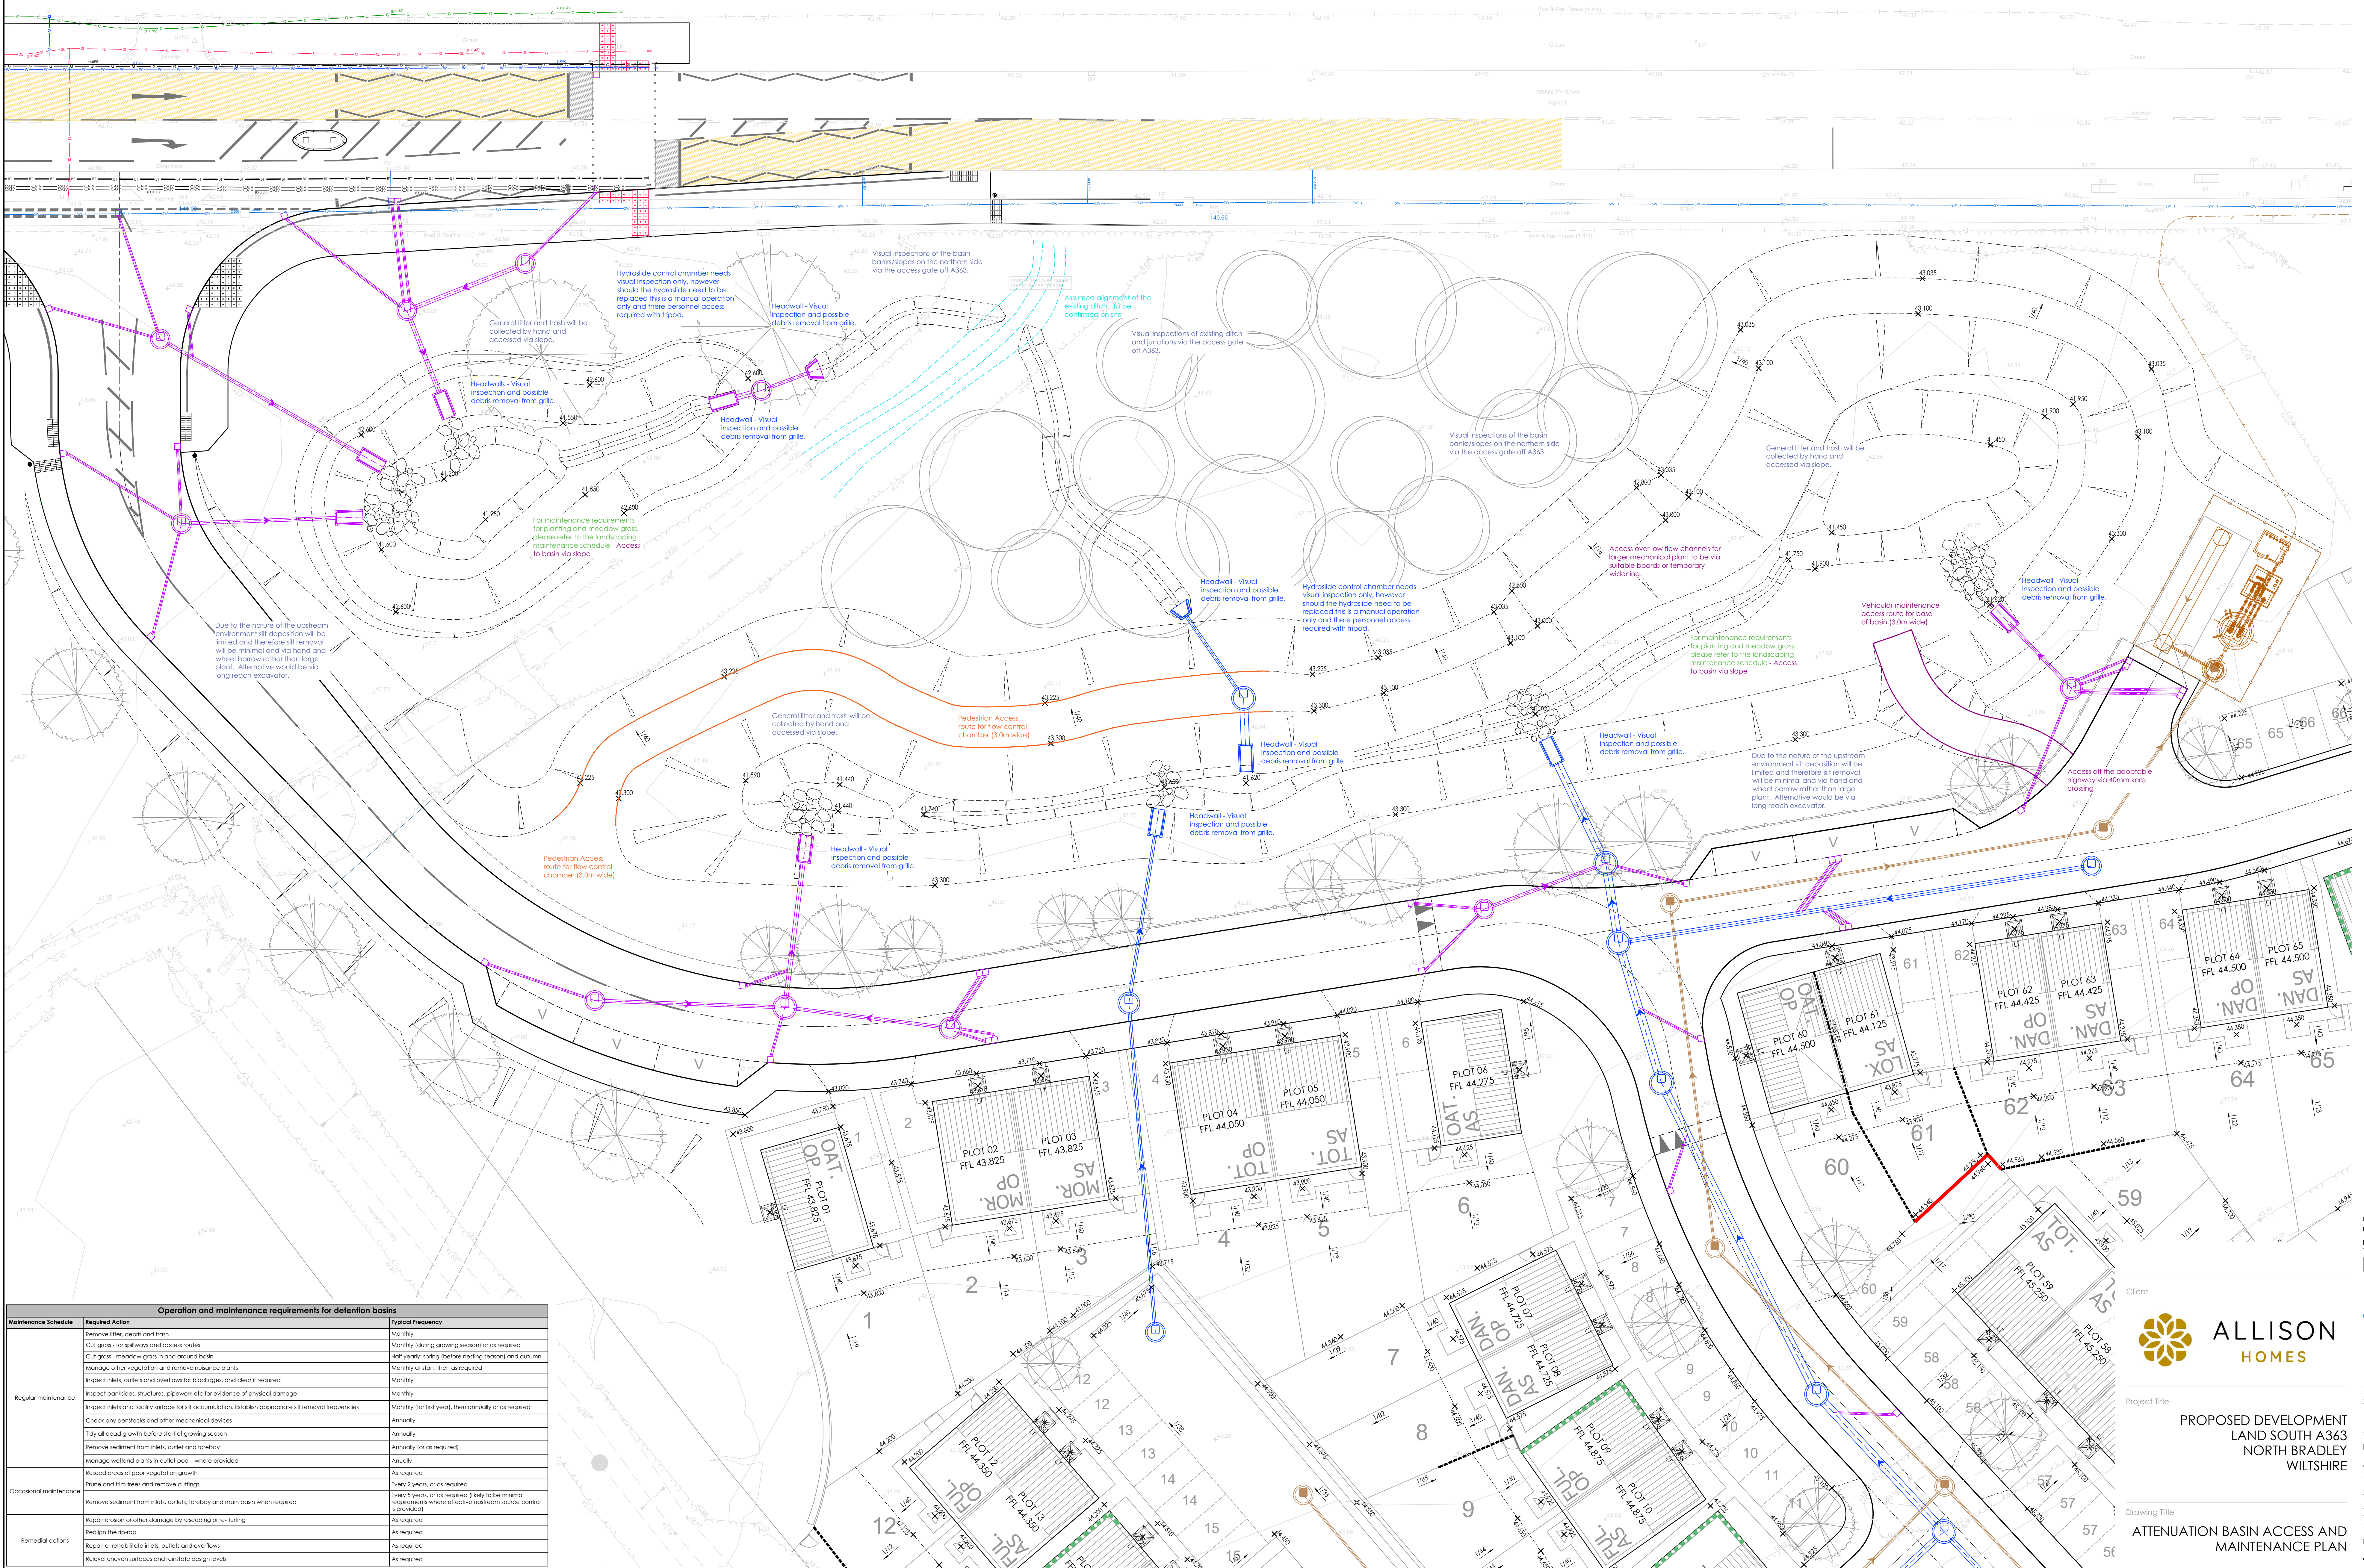

Operation and maintenance requirements for detention basins		
Maintenance Schedule	Required Action	Typical frequency
Regular maintenance	Remove litter, debris and trash	Monthly
	Cut grass - for spillways and access routes	Monthly (during growing season) or as required
	Cut grass - meadow grass in and around basin	Half yearly; spring (before nesting season) and autumn
	Manage other vegetation and remove nuisance plants	Monthly at start, then as required
	Inspect inlets, outlets and overflows for blockages, and clear if required	Monthly
	Inspect basins, structures, pipework etc for evidence of physical damage	Monthly
	Inspect inlets and outfall surface for all accumulation, (season appropriate) all removal frequencies	Monthly (for full year), then annually or as required
	Check any percolators and other mechanical devices	Annually
	Trim all dead growth before start of growing season	Annually
	Remove sediment from inlets, outlet and forebay	Annually (or as required)
Occasional maintenance	Manage wetland plants in outlet pool - where provided	Annually
	Reed areas of poor vegetation growth	As required
	Prune and trim trees and remove cuttings	Every 2 years, or as required
Remedial actions	Remove sediment from inlets, outlets, forebay and main basin when required	Every 5 years, or as required (likely to be minimal requirements where effective upstream source control is provided)
	Repair erosion or other damage by reseed or re-turfing	As required
	Realign the lip-rap	As required
	Repair or rehabilitate inlets, outlets and overflows	As required
	Retest uneven surfaces and reinstates design levels	As required

PO1 05.03.24 Initial Planning Issue
Rev Date Description
Drawing revision denotes the following stages: P - Preliminary, T - Tender, C - Construction, R - Record/As Built.

PRELIMINARY



**ALLISON
HOMES**

**Civil & Structural
Chartered Engineers**
Hens Court, Longbrook Street
Exeter, Devon, EX4 6AP
T: 01392 421600
sands@lands-consultants.co.uk
www.sands-consultants.co.uk



Project Title
**PROPOSED DEVELOPMENT
LAND SOUTH A363
NORTH BRADLEY
WILTSHIRE**

Drawing Title
**ATTENUATION BASIN ACCESS AND
MAINTENANCE PLAN**

Scale/Size
MTS/A0

Date
February 2024

Drawn
Checked
Amber Page/ft
Dove Backway

Sands Project No.
2025.383

Client Project No.
-

Drawing No.
2503

Revision
P01

© This drawing is the copyright of Sands Consultants & must not be copied or reproduced without their permission