

DATED 13 August 2026

between

WILTSHIRE COUNCIL

and

OAKSEY PARK GOLF AND LEISURE LIMITED

and

OAKSEY PARK LIMITED

and

COTSWOLD ECOHOMES LTD

and

JOHN STANLEY COOPER

Deed under Section 106 of the Town and Country Planning Act 1990
and all other enabling powers
relating to Land at Oaksey Park Golf and Leisure, Wick Road, Oaksey,
Malmesbury, Wiltshire, SN16 9SB

Wiltshire Council

Solicitor to the Council
Wiltshire Council
County Hall
Bythesea Road
Trowbridge
Wiltshire BA14 8JN
Ref: Iken 204008

CONTENTS

CLAUSE

1	Definitions	4
2	Construction	13
3	Statutory Provisions	14
4	Commencement	15
5	The Owner's Covenants	15
6	The Council's Covenants	16
7	General	16
8	Notices	17
9	Waiver	17
10	Change In Ownership	18
11	Indexation	18
12	Interest	18
13	Mortgagee 1's consent	18
14	VAT	18
15	Indemnity	18
16	Delivery	19
17	Disputes	19
18	Exclusion of Liability	20

SCHEDULES

SCHEDULES 1-3 COVENANTS TO THE COUNCIL	22
--	----

SCHEDULE 4 COVENANTS BY THE COUNCIL	28
---	----

ANNEX

ANNEX A: PLANS 1-4.....	29
-------------------------	----

THIS DEED is dated 13th August 2026

- (1) **WILTSHIRE COUNCIL** of County Hall Bythesea Road Trowbridge Wiltshire BA14 8JN (**Council**)
- (2) **OAKSEY PARK GOLF AND LEISURE LIMITED** incorporated and registered in England and Wales (Company Registration Number 13098724) whose registered office is at 302 Cirencester Business Park Love Lane Cirencester Gloucestershire GL7 1XD (**Owner 1**)
- (3) **OAKSEY PARK LIMITED** incorporated and registered in England and Wales (Company Registration. Number 2558101) whose registered office is at 302 Cirencester Business Park Love Lane Cirencester, Gloucestershire, GL7 1US (**Owner 2**)
- (4) **COTSWOLD ECOHOMES LTD** incorporated and registered in England and Wales (Company Registration. Number 14062410 whose registered office is at 302 Cirencester Business Park Love Lane Cirencester GL7 1XD (**Owner 3**)
- (5) **JOHN STANLEY COOPER** of Lowfield Farm Oaksey Malmesbury Wiltshire SN16 9SB (**Mortgagee1**)

BACKGROUND

- (A) Owner 1 is the freehold owner of that part of the Land registered at the Land Registry under title numbers WT457330, WT120993 and WT102358 shown for the purposes of identification only edged green yellow and purple on Plan 2
- (B) Owner 2 is the freehold owner of that part of the Land registered at the Land Registry under title number WT236919, shown for the purposes of identification only edged orange on Plan 2
- (C) Owner 3 is the freehold owner of that part of the Land registered at the Land Registry under title number WT467503 shown for the purposes of identification only edged red on Plan 2
- (D) Mortgagee 1 has the benefit of a charge registered under title numbers WT457330, WT102358, and WT120993 against those parts of the Land edged green purple and yellow on Plan 2
- (E) The Council is the local planning authority for the purposes of the Act, the highway authority and the housing authority for the area in which the Land is situated

- (F) Owner 3 has submitted the Planning Application to the Council and the parties have agreed to enter into this Deed in order to secure the planning obligations contained in this Deed without which the Planning Permission would not be granted
- (G) On 3rd December 2025 the Council resolved to grant planning permission for the Development subject to conditions and the prior completion of this Deed to ensure in the interests of the proper planning of the area.

NOW THIS DEED WITNESSES AS FOLLOWS:

1. **Definitions**

The definitions and rules of interpretation in this clause apply in this Deed:

“the Act” means the Town and Country Planning Act 1990

“Affordable Housing” means

- (1) Social Rented Housing;
- (2) – Affordable Rented Housing; and –
- (3) Intermediate Housing

provided to eligible households whose needs are not met by the market. Eligibility is determined with regard to local incomes and local house prices. Affordable Housing should include provision to remain at an affordable price for future eligible households or for the Subsidy to be recycled for alternative Affordable Housing provision

“Affordable Rented Housing” means rented housing which is subject to rent controls that require a rent of no more than 80% of local Market Rent (including service charges, where applicable) at the time of letting which may be increased by no more than the Consumer Price Index plus 1% annually or other such amount as prescribed by the Regulator of Social Housing

“BNG Monitoring Contribution” means the sum of eleven thousand one hundred and sixty five pounds (£11,165) to be paid by the Owner to the Council as a contribution towards the Council monitoring the ongoing maintenance of the BNG Works

“BNG Practical Completion Certificate”

means the certificate or certificates issued (not to be unreasonably withheld) by the Service Head – Natural and Historic Environment once she is satisfied that the BNG Works have been laid out in accordance with the condition 7 of the Planning Permission and paragraphs 1 - 10 of Part 1 of Schedule 2 (On Site Open Space (Management Company) Schedule) have been complied with

“BNG Works”

means those works to be agreed with the Council under the terms of condition 7 of the Planning Permission which are to be carried out on the Land to provide a biodiversity net gain as a result of the carrying out of the Development and shown for illustrative purposes only on Plan 3

“CIL Regulations”

means the Community Infrastructure Levy Regulations 2010

“Commencement of Development”

means the date on which any material operation as defined in section 56(4) of the Act forming part of the Development begins to be carried out with the exception of investigation of ground conditions and remedial work archaeological work demolition and erection of hoardings and in the context of a Residential Unit or Residential Units the material building operation or development in accordance with Section 56 of the Act shall refer to that Residential Unit or Residential Units and Commence and Commenced shall be construed accordingly

“Communal Spaces”

means the communal open spaces driveway amenity areas and planting in perpetuity within that part of the Land to be identified as such on the Landscape Plan

“Communal Spaces Practical Completion Certificate”

means the certificate or certificates issued (not to be unreasonably withheld) by the Service Head – Highway Operations once he is satisfied that any green space within the Communal Spaces have been laid out in accordance with the approved Landscape Plan and

paragraphs 1 - 10 of Part 1 of Schedule 2 (Communal Spaces (Management Company) Schedule) have been complied with

“Completion”	means the date of issue of building regulation completion certificate to the Owner’s architect or other authorised agent of the Owner or in the event that the Development is constructed by a party other than the Owner the date of issue of the building regulation completion certificate to the other party’s architect or other authorised agent (whether by the local authority or an approved inspector) and “Complete” shall be construed accordingly
“Condition Report”	means the report setting out the condition of the Wick Road Active Travel Route to be submitted to the Council and approved under the terms of Part 3 of Schedule 2 including photographic records as appropriate to enable the Wick Road Active Travel Route to be maintained to the same level in Perpetuity
“Contribution”	means each financial contribution payable under this Deed
“Council’s Standards”	means the maintenance provisions in the Standard Specification for the Adoption of Open Space attached as listed in Schedule 3
“Development”	means any development permitted by the Planning Permission
“Director”	means the Corporate Director, Growth, Investment and Place or his appointed representative for the time being of the Council
“Equipped Play Contribution”	means the sum of £10,368.40 (ten thousand three hundred and sixty eight pounds and forty pence) to be used by the Council towards the provision or improvement of equipped play space at Oaksey Playing Field or within the vicinity of the Development
“Index”	means:

- a. the All In Tender Price Index published by the Building Cost Information Service (BCIS) of the Royal Institute of Chartered Surveyors in relation to the Contribution unless otherwise stated in this Deed;
- b. the All Items of Retail Prices issued by the Office for National Statistics in relation to the Equipped Play Contribution the Off-Site Public Open Space Contribution the Sports Pitches Contribution and the BNG Monitoring Contribution and the Strategic Access Management and Monitoring;
- c. the United Kingdom (UK) House Price Index as it applies to the Wiltshire local authority area in relation to the Off-Site Affordable Housing Contribution

and in the event that such indices shall have changed the Council shall select a reasonable alternative index

"Index Linked"

means increased in accordance with the following formula:

Amount payable = the Contribution x (A/B) where:

A = the figure for the Index that applied immediately preceding the date of actual payment and

B = the figure for the Index that applied when the Index was last published prior to the date of this Deed

"Interest"

means interest at the rate of 4% above the base lending rate of the HSBC Bank Plc from time to time

“Intermediate Housing”	means Affordable Housing homes for sale and rent provided at a cost above Social Rented Housing but below open market levels and may include shared equity (Shared Ownership Housing and equity loans) other low cost homes for sale and Intermediate Rent but not Affordable Rented Housing
“Intermediate Rent”	means the Intermediate Housing which is subject to rent controls that require a rent of no more than 80% of local Market Rent (including service charges, where applicable) at the time of letting which may be increased by no more than the Consumer Price Index plus 1% annually or such other amount as prescribed by the Regulator of Social Housing from time to time
“Land”	means the Land at Oaksey Park Golf and Leisure, Wick Road Oaksey Malmesbury Wiltshire, SN16 9SB shown edged red on the Plan
“Land Compensation Act”	in relation to clause 15 means the Land Clauses Consolidation Act 1845 the Land Compensation Act 1961 the Compulsory Purchase Act 1965 the Land Compensation Act 1973 and the Planning and Compensation Act 1991 and includes the Human Rights Act 1998 and any variation or enactment of the Land Compensation Acts on a date on or after the date of execution of this Deed which confers a right of compensation for the compulsory acquisition of land and/or the diminution in value of land as a result of the carrying out of or the use of public works
“Landscape Plan”	means the plans and documents providing details for the laying out, construction, and landscaping of the Communal Spaces that are agreed under the terms of condition 4 of the Planning Permission
“Management Company”	means the private limited company Oaksey Park Limited which shall manage and maintain the Communal Spaces the BNG Works and the Wick Road Active Travel Route or such other private

limited company as may have been set up for the purpose and agreed in writing by the Council

“Management Scheme”

means the scheme setting out the detailed arrangements for the management and maintenance of the Communal Spaces and the BNG Works as agreed under the terms of conditions 5 and 7 respectively of the Planning Permission and the Wick Road Active Travel Route

“Market Rent”

means the estimated amount for which an interest in real property should be leased on the valuation date between a willing lessor and a willing lessee on appropriate lease terms in an arm’s length transaction, after proper marketing and where the parties had each acted knowledgeably, prudently and without compulsion, as defined in the International Valuation Standards (IVS) 104 Paragraph 40.1 of the Royal Institution of Chartered Surveyors Red Book Global Standards 2021 or any subsequent document which amends or replaces it

“Monitoring Fee”

means the sum of £4,030.38 (four thousand and thirty pounds and thirty eight pence) to be paid by the Owner as a contribution towards the cost of the council in monitoring compliance with the terms of this Deed

“National Rent Regime”

means the rent policy set out for Social Rent within the Rent Standard Guidance as published by the Ministry of Housing Communities and Local Government and the Regulator of Social Housing in April 2020 and updated in December 2020 and any other guidance issued by the Regulator of Social Housing or its successors in relation to this document

“Occupation” and “Occupied”

means occupation for the purposes permitted by the Planning Permission but not including occupation by personnel engaged in construction and “Occupy” shall be construed accordingly

“Off-Site Affordable Housing Contribution”	means the sum of £347,734.55 (three hundred and forty seven thousand seven hundred and thirty four pounds and fifty five pence) to be used by the Council towards the provision of Affordable Housing directly related to the Development
“Off-Site Public Open Space Contribution”	means the sum of £25,106.40 (twenty five thousand one hundred and six pounds and forty pence) to be used by the Council towards the upgrading or provision of open space at Oaksey Playing Field and/or within the vicinity of the Development
“Owner”	means together Owner 1 Owner 2 and Owner 3
“Plan 1”	means the plan or drawing attached to this Deed with Annex A showing the location of the Land and referenced 1630.120 which plan is to be used for the purposes of identification only
“Plan 2”	means the plan or drawing attached to this Deed at Annex A and referenced “Oaksey Park Golf and Leisure, Wiltshire, SN16 9SB” showing the different land ownerships which plan is to be used for the purposes of identification only
“Plan 3”	means the plan or drawing attached to this Deed with Annex A and referenced “On-Site Post-Development Habitat Plan Contract 3192 February 2025” which plan is to be used for the purposes of identification only
“Plan 4”	means the plan or drawing attached to this Deed at Annex A and referenced Oaksey Park Golf and Leisure, Wiltshire, SN16 9SB showing the Wick Road Active Travel Route which plan is to be used for the purposes of identification only
“Planning Application”	means the planning application for the Change of Use of land and proposed buildings

associated with Implemented Phase IV holiday accommodation to Class C3 Residential Use, together with formalisation of footpath connection, car parking and associated works (alteration to previously approved phase IV) registered by the Council on 16 April 2025 and allocated reference number PL/2025/02874

"Planning Permission"	means the planning permission for the Development that may be granted pursuant to the Planning Application
"Practical Completion"	means the issue of a certificate of practical completion by the Owner's architect or in the event that the Development is constructed by a party other than the Owner the issue of a certificate of practical completion by the other party's architect
"Regulator of Social Housing"	means the Regulator of Social Housing as referred to in s80A Housing and Regeneration Act 2008
"Remedial Notice"	means the notice or notices issued by Service Head – Highways Operations and/or the Service Head – Natural and Historic Environment (as appropriate) requiring the Owner to carry out any works that he considers (at his absolute reasonable discretion) to be necessary for the any green space within the Communal Spaces and/or the BNG Works to be provided in accordance with the approved details including (without limitation) re-planting of unhealthy dead diseased or dying plants and trees and a timescale within which those works are to be completed
"Rent Charge/Management Charge"	means the perpetual yearly variable estate management charge to be imposed on each Residential Unit to cover the annual costs of the Management Company complying with the obligations of the Management Scheme in accordance with Schedule 2 of this Deed

“Residential Unit(s)”	means all residential units forming part of the Development
“Section 73 Permission”	means a planning permission granted by the Council pursuant to an application made under Section 73 of the Act or Section 73A of the Act in respect of the Planning Permission.
“Service Head – Highway Operations”	means the head of the service with responsibility for adoption of open spaces play areas and amenities or such replacement head of service as determined by the Council or his appointed representative for the time being of the Council
“Service Head – Natural and Historic Environment”	means the head of the service with responsibility for ecology or such replacement head of service as determined by the Council or her appointed representative for the time being of the Council
“Shared Ownership Housing”	means the Affordable Housing to be managed by a Registered Provider as defined by Section 80 of the Housing and Regeneration Act 2008 from the Council’s list of preferred development partners or as otherwise agreed in writing by the Council and to be disposed of in accordance with the Council’s policy for allocating Affordable Housing on a lease which includes clauses as defined by Homes England’s Affordable Homes Capital Funding Guide produced by the Homes and Communities Agency and current at the date of this Deed (or such document as shall succeed or replace it)
“Social Rented Housing”	means the housing for which guideline target rents are determined through the National Rent Regime or as otherwise agreed in writing by the Council
“Sports Pitches Contribution”	means the sum of three thousand three hundred and twelve pounds (£3,312.00) to be paid by the Owner to the Council for the upgrade of Oaksey Playing Field

and/or sports pitch or ancillary provision within the vicinity of the Development

“Strategic Access Management and Monitoring Contribution”

means the sum of three thousand, nine hundred and eighty one pounds (£3,981) as a contribution towards the mitigation of the impacts of the Development on the North Meadow and Clattinger Farm SAC.

“Subsidy”

means any grant funding from the Council Homes England the Transferee's Recycled Capital Grant Fund the Private Finance Initiative or other form of state aid or grant subsidy

“Waste and Recycling Contribution”

means the sum of one thousand three hundred and eighty pounds (£1,380.00) as a contribution towards the provision of waste and recycling equipment for the Residential Units

“Wick Road Active Travel Route”

means the existing permissive footpath between the Land and Wick Road shown in green on Plan 4 4

“Working Day(s)”

means days on which clearing banks in the City of London are open to the public and for the avoidance of doubt such days shall not include any Saturday or Sunday New Year's Day Good Friday Easter Monday May Day Christmas Day and Boxing Day

2. Construction of this Deed

- 2.1. Words importing the masculine include the feminine and neuter gender and vice versa
- 2.2. Words importing the singular include the plural and vice versa
- 2.3. Words importing persons include companies corporations and vice versa and all such words shall be construed interchangeably in that manner
- 2.4. Wherever there is more than one person named as a party and where more than one party undertakes an obligation (including by becoming a successor in title) all their obligations can be enforced against all of them jointly and against each individually
- 2.5. Insofar as different parts of or interests in the Land are owned by different persons each person covenants with the Council and with one another to co-operate insofar as they

are able to ensure that the Covenants herein on behalf of "the Owner" are fulfilled as expeditiously as possible

- 2.6. The headings throughout this Deed are for convenience only and shall not be taken into account in the construction and interpretation of this Deed
- 2.7. Any reference to a clause paragraph schedule or plan is to one in to or attached to this Deed and any reference to this Deed includes any schedule, plan, annexure or other attachment to this Deed
- 2.8. In the absence of contrary provision any reference to a Council document to be completed which is annexed or referred to in this Deed shall be the Council document which is current and in force at the date of its completion
- 2.9. In the absence of contrary provision any reference to a statute or statutory instrument includes any statute or statutory instrument amending consolidating or replacing them respectively from time to time and for the time being in force and reference to a statute includes any statutory instrument direction or specification made or issued under the statute or deriving validity from it
- 2.10. References to any party to this Deed shall include the successors in title to that party and to any deriving title through or under that party and successors to any statutory functions of the Council
- 2.11. Covenants to do or not to do an action shall include respectively a covenant to permit or not to permit that action to be done

3. Statutory Provisions

- 3.1 This Deed is made pursuant to the following:

- 3.1.1 Section 106 of the Act
- 3.1.2 Section 111 of the Local Government Act 1972
- 3.1.3 Section 93 Local Government Act 2003
- 3.1.4 Section 1 Localism Act 2011
- 3.1.5 and all other enabling powers

and has been entered into by the Council pursuant to those powers

- 3.2 The covenants restrictions and requirements created by this Deed are planning obligations for the purposes of Section 106 of the Act to the intent that it shall bind the

parties and their respective successors in title to each and every part of the Land and are enforceable by the Council as local planning authority

3.3 It is acknowledged that the obligations contained in this Deed are:

- 3.3.1 necessary to make the Development acceptable in planning terms;
- 3.3.2 directly related to the Development; and
- 3.3.3 fairly and reasonably related in scale and kind to the Development

in accordance with the requirements of Regulation 122 of the CIL Regulations

4. Commencement

4.1 The obligations contained in this Deed are conditional upon the grant of the Planning Permission and this Deed takes effect on the Commencement of Development save for those obligations hereinafter contained that expressly or by necessary implication require compliance prior to Commencement of Development which are conditional only upon the grant of the Planning Permission or as otherwise stated in this Deed

4.2 The Owner shall notify the Council of:

- the Commencement of Development
- the date of Occupation of the first, fourth and eighth Residential Units
- the date of Occupation of 70% of the Residential Units
- the date of Occupation of 90% of the Residential Units

and the Owner agrees that no time shall run to the detriment of the Council if and so long as the Owner has failed to serve notice

4.3 If the Owner has not provided the information referred to in clause 4.24.2 above within twenty (20) Working Days of its becoming available the Council shall have the right to obtain this information by other reasonable means and to charge the Owner its costs in obtaining this information subject to a maximum of one thousand pounds (£1,000) **PROVIDED THAT** the information is in fact obtained as aforesaid and reasonable evidence of this is provided by the Council to the Owner

4.4 In the event the Council grants a subsequent Section 73 Permission or if a Section 73 Permission is granted following an appeal under Section 78 of the Act, any such Section 73 Permission shall be deemed to be granted subject to the covenants and provisions of this Deed and to apply in equal terms to it save that where the Council in its determination of the application for a Section 73 Permission requires consequential

amendments to this Deed to reflect the impact of the application for a Section 73 Permission in such circumstances a separate deed pursuant to section 106 of the Act will be required to secure relevant planning obligations relating to the Section 73 Permission.

5 The Owner's Covenants

The Owner will observe and perform the obligations set out in this Deed and the Schedules

6 The Council's Covenants

The Council covenants with the Owner as set out in this Deed and Schedule 4

7 General

The parties agree that:

- 7.1 Nothing in this Deed constitutes an obligation to grant planning permission or any other approval consent or permission required from the Council in the exercise of any other statutory function and nothing in this Deed constitutes and such approval, consent or permission
- 7.2 This Deed does not and is not intended to confer a benefit on a third party within the meaning of the Contracts (Rights of Third Parties) Act 1999 (other than any replacement body of the Council)
- 7.3 No person shall be liable for any breach of any of the planning obligations or other provisions of this Deed after it shall have parted with its entire interest in the Land or that part of the Land in relation to which such breach occurs but without prejudice to liability for any subsisting breach arising prior to parting with such interest
- 7.4 Insofar as any clause or clauses or any part thereof of this Deed are found (for whatever reason) to be invalid illegal or unenforceable then such invalidity illegality or unenforceability shall not affect the validity or enforceability of the remaining provisions of this Deed
- 7.5 If before Commencement of Development the Planning Permission:
 - a) expires within the meaning of Sections 91 92 or 93 of the Act; or
 - b) is revoked, quashed or modified without the consent of the Owner;

this Deed shall cease to have effect

7.6 The Owner shall pay to the Council:

7.6.1 its proper and reasonable legal costs incurred in negotiating preparing and entering into this Deed upon completion of this Deed and in relation to any transaction arising therefrom upon completion of the same

7.6.2 the Monitoring Fee upon completion of this Deed

7.7 The Owner shall pay to the Council its proper and reasonable legal costs incurred in respect of the transfer or other disposal of any land or facility as required by this Deed.

7.8 This Deed shall be registerable as a local land charge by the Council

7.9 If required by the Council the Owner shall secure registration of this Deed in the Charges Register of the Registered Title to the Land at the Land Registry

7.10 Where the agreement approval consent or expression of satisfaction is required by the Owner from the Council under the terms of this Deed such agreement approval or consent or expression of satisfaction shall not be unreasonably withheld or delayed and any such agreement consent approval or expression of satisfaction shall be given in writing on behalf of the Council by the Director

7.11 Nothing in this Deed shall prohibit or limit the right to develop any part of the Land in accordance with a planning permission (other than the Planning Permission) granted (whether or not on appeal) after the date of this Deed

7.12 Nothing contained or implied in this Deed shall prejudice affect fetter or restrict the rights powers duties and obligations of the Council in the exercise of its functions as Local Planning Authority or any other statutory function rights duties powers and obligations under all public and private statutes byelaws and regulations

7.13 This Deed is governed by and interpreted in accordance with the law of England and Wales and the parties submit to the non-exclusive jurisdiction of the Courts of England and Wales.

8 Notices

Any notice or other communication given or made under this Deed shall be in writing and (unless otherwise herein provided) shall be deemed to be sufficiently served if sent by pre-paid first class post or other next working day delivery service to the address of the party specified in this Deed or to such other address (in substitution thereof) as may be notified in writing by that party from time to time for this purpose and in the case of the Council shall be addressed to the Head of Legal Services and quote reference Iken 204008 and copied to the Section 106 and Community Infrastructure Levy Officer

9 Waiver

No waiver (whether expressed or implied) by the Council of any breach or default in performing or observing any of the covenants terms or conditions of this Deed shall constitute a continuing waiver and no such waiver shall prevent the Council from enforcing any of the relevant terms or conditions or for acting upon any subsequent breach or default

10 Change in Ownership

The Owner agrees with the Council to give the Council immediate written notice of any change in ownership of any of its interests in the Land occurring before all the obligations under this Deed have been discharged. Such notice to give details of the transferee's name and registered office (if a company or usual address if not) together with the area of the Land or unit of occupation transferred by reference to a plan PROVIDED THAT this clause shall not apply to the disposal of an individual Residential Unit

11 Indexation

All financial contributions payable to the Council under this Deed shall be Index Linked

12 Interest

If any payment due under this Deed is paid late Interest will be payable from the date payment is due to the date of actual payment compounded annually

13 Mortgagee 1's Consent

Mortgagee 1 acknowledges and declares that this Deed has been entered into by the Owner with its consent and that the Land shall be bound by the obligations contained in this Deed and that the security of their mortgages over the Land shall take effect subject

to this Deed PROVIDED THAT Mortgagee 1 shall otherwise have no liability under this Deed unless they take possession of the Land in which case they too will be bound by the obligations as if they were a person deriving title from the Owner

14 VAT

14.1 All consideration given in accordance with the terms of this Deed shall be exclusive of any value added tax properly payable in respect thereof

14.2 If at any time VAT becomes chargeable in respect of any supply made in accordance with the terms of this Deed then to the extent that VAT had not previously been charged in respect of that supply the person making the supply shall have the right to issue a VAT invoice to the person to whom the supply was made and the VAT shall be paid accordingly

15 Indemnity

15.1 The Owner hereby undertakes and agrees with the Council that in the event of any claim or claims being made against the Council for any one or more of the following payments:

- a) Compensation (including any claim arising under the Land Compensation Act)
- b) Damages
- c) Costs
- d) Charges
- e) any other payment

such claim arising in connection with or incidental to or in consequence of any failure on the part of the Owner to comply with its obligations under this Deed the Owner will hold the Council fully indemnified from and against each and every said claim

15.2 The Owner shall not be liable under this clause to indemnify the Council in respect of any claim only insofar as and to the extent that the said claim is found to have resulted from the negligent act or omission of the Council or its servants or agents save that for the purpose of this clause the Owner or persons acting on behalf of the Owner shall not be regarded as servants or agents of the Council

16 Delivery

The provisions of this Deed (other than this clause which shall be of immediate effect) shall be of no effect until this Deed has been dated

17 Disputes Procedure

- 17.1 SUBJECT ALWAYS TO CLAUSE 5 ABOVE in the event of any dispute or difference arising between the parties to this Deed in respect of any matter contained in this Deed such dispute or difference shall be referred to an independent and suitable person holding appropriate professional qualifications to be appointed (in the absence of agreement) by the president (or equivalent person) for the time being of the professional body chiefly relevant in England with such matters as may be in dispute and such person shall act as an expert whose decision shall be final and binding on the parties to the dispute or difference and any costs shall be payable by the parties to the dispute in such proportion as the expert shall determine and failing such determination shall be borne by the parties to the dispute or difference in equal shares
- 17.2 In the absence of agreement as to the appointment or suitability of the person to be appointed pursuant to Clause 17.1 or as to the appropriateness of the professional body then such question may be referred by either part to the president for the time being of the Law Society for him to appoint a solicitor to determine the dispute such solicitor acting as an expert and his decision shall be final and binding on all parties in the absence of manifest error and his costs shall be payable by the parties to the dispute in such proportion as he shall determine and failing such determination shall be borne by the parties in equal shares
- 17.3 Any expert howsoever appointed shall be subject to the express requirement that a decision was reached and communicated to the relevant parties within the minimum practicable timescale allowing for the nature and complexity of the dispute and in any event not more than twenty-eight (28) Working Days after the conclusion of any hearing that takes place or twenty-eight (28) Working Days after he has received any file or written representation
- 17.4 The expert shall be required to give notice to each of the said parties requiring them to submit to him within ten (10) Working Days of notification of his appointment written submissions and supporting material and the other party will be entitled to make a counter written submission within a further ten (10) Working Days
- 17.5 The provisions of this clause shall not affect the ability of the Council or to apply for and be granted any of the following: declaratory relief, injunction, specific performance, payment of any sum, damages, any other means of enforcing this Deed and consequential and interim orders and relief

18 Exclusion of Liability

This Deed shall not be enforceable against:

- 18.1 any individual owner of any Residential Units comprised within the Development unless that individual owner is also the Owner or a party deriving title from the Owner otherwise than as a purchaser of a completed Residential Unit (except for the provisions of Part 2 of Schedule 2 of this Deed)
- 18.2 any mortgagee or chargee of a Residential Unit, or any Receiver appointed by such mortgagee or chargee, or any person deriving title through such mortgagee or Receiver, unless and until such person takes possession of these Residential Unit(s) for purposes other than securing repayment of the loan, in which case the planning obligations of this Deed will be enforceable
- 18.3 any statutory undertaker or utility company (including but not limited to providers of electricity, gas, water, telecommunications, or sewerage services) contained herein solely by virtue of their ownership, occupation, or use of any part of the Development for the purposes of providing or maintaining utility infrastructure or services

This document has been executed as a deed and is delivered and takes effect on the date stated at the beginning of it

SCHEDULE 1 – CONTRIBUTIONS

The Owner covenants with the Council as follows:

1. BNG Monitoring Contribution

- 1.1. To pay to the Council the BNG Monitoring Contribution before the issue of the BNG Practical Completion Certificate that relates to the BNG Works

2. Public Open Space Contributions

- 2.1. Prior to the Occupation of the first Residential Unit to pay to the Council the
 - 2.1.1. Equipped Play Contribution
 - 2.1.2. Off-Site Public Open Space Contribution and the
 - 2.1.3. Sports Pitches Contribution
- 2.2. Not to permit the Occupation of the first Residential Unit until the Contributions set out in paragraph 2.1 have been paid to the Council

3. Off Site Affordable Housing Contribution

- 3.1. To pay to the Council the Off Site Affordable Housing Contribution in the following manner:
 - 3.1.1. As to the first £173,867.27 (one hundred and seventy three thousand eight hundred and sixty seven pounds and twenty seven pence) Index Linked of the Off-Site Affordable Housing Contribution prior to Occupation of four (4) Residential Units and not to allow Occupation of more than four (4) Residential Units until £173,867.27 (one hundred and seventy three thousand eight hundred and sixty seven pounds and twenty seven pence) Index Linked of the Off-Site Affordable Housing Contribution has been paid to the Council;
 - 3.1.2. As to the balance of the Off-Site Affordable Housing Contribution prior to Occupation of eight (8) Residential Units and not to allow Occupation of more than eight (8) Residential Units until the balance of the Off-Site Affordable Housing Contribution has been paid to the Council

4. The Strategic Access Management and Monitoring Contribution

- 4.1. To pay to the Council the Strategic Access Management and Monitoring Contribution upon the Commencement of Development
- 4.2. Not to Commence the Development until the Strategic Access Management and Monitoring Contribution has been paid to the Council

5. Waste and Recycling Contribution

- 5.1. To pay to the Council the Waste and Recycling Contribution before the Commencement of Development
- 5.2. Not to Commence the Development until the Waste and Recycling Contribution has been paid to the Council

SCHEDULE 2 – COMMUNAL SPACES BNG WORKS AND WICK ROAD ACTIVE TRAVEL ROUTE (MANAGEMENT COMPANY)

The Owner covenants with the Council:

Part 1

1. Not remove uproot destroy lop or damage any tree or shrub on the Land unless and until the Landscape Plan, the Management Scheme and the BNG Works have been approved as required by conditions 4 5 6 7 and 8 respectively of the Planning Permission
2. Following approval of the Landscape Plan the Management Scheme and the BNG Works the Owner shall lay out the Communal Spaces and BNG Works in accordance with the approved Landscape Plan and BNG Works
3. Notify the Council in writing within seven (7) Working Days of completion of the laying out of the Communal Spaces and/or BNG Works of the details of their designated contact for queries regarding the Communal Spaces and BNG Works and request an inspection by the Service Head – Highway Operations
4. Not allow more than 70% of the Residential Units to be Occupied until:
 - 4.1. the Communal Spaces Practical Completion Certificate and BNG Practical Completion Certificate have been issued;
 - 4.2. the Communal Spaces have been made available for use by the residents of and visitors to the Development; and
 - 4.3. the Owner has erected a prominent sign on the Communal Spaces and BNG Works indicating who is responsible for maintaining the Communal Spaces and the BNG Works such sign to be kept in a good and legible condition at all times
5. After the construction and laying out of the Communal Spaces and as soon as the planting season permits to plant in the Communal Spaces plants and trees in accordance with the approved Landscape Plan
6. Not adjust the actual area of Communal Spaces so as to include and/or exclude land that abuts the boundary of the curtilages of individual Residential Units or adopted or adoptable highway UNLESS such adjustment has been agreed in writing with the Service Head – Highway Operations

7. Not to use or allow the Communal Spaces or the BNG Works to be used for any other purpose other than as Communal Spaces for the use by and for the enjoyment of the residents of or visitors to the Development in perpetuity or as BNG mitigation (as appropriate)
8. Pay the Council's costs in taking any action to remedy the failure to comply with the Remedial Notice within twenty one (21) Working Days of the Service Head – Highways Operations and/or the Service Head – Natural and Historic Environment (as appropriate) serving notice of the amount due
9. To insure and maintain or procure the maintenance of the Communal Spaces and the BNG Works in accordance with the approved Management Scheme to the satisfaction of the Service Head – Highway Operations until completion of its transfer to the Management Company and to comply with any Remedial Notice issued by the Service Head – Highway Operations and/or the Service Head – Natural and Historic Environment (as appropriate) within twenty eight (28) Working Days
10. Not to allow more than 90% of the Residential Units to be Occupied until the Communal Spaces and the BNG Works have been transferred to the Management Company and the Communal Spaces and BNG Works shall thereafter be maintained in perpetuity in accordance with the approved Management Scheme (unless otherwise agreed in writing with the Council)

PART 2 - Management Company Provisions Operation of the Management Company

1. The Owner hereby covenants;

to
 - 1.1. procure that the Management Company is responsible for the upkeep and on-going maintenance of Communal Spaces the BNG Works and the Wick Road Active Travel Route in accordance with the approved Landscape Plan and the obligations under this Deed;
 - 1.2. ensure that upon the transfer of any Residential Units that all freehold and registrable leasehold owners of the Residential Units are Members of the Management Company and eligible to vote at any Annual General and Special Company Meetings;
 - 1.3. ensure that the MC Manager will ensure that their contact details including his name address and telephone number are regularly updated and distributed to the owners and occupiers of all of the Residential Units;

- 1.4. ensure that the Rent Charge/ Management Charge is secured on the first transfer or disposal of any Residential Units and that covenants are contained on the transfer to procure that on any subsequent transfer or disposal the Rent Charge/Management Charge is secured in favour of the Management Company

Part 3 - Wick Road Active Travel Route

1. The Owner covenants that prior to the Occupation of the first Residential Unit the Owner shall carry out a survey of the Wick Road Active Travel Route and submit the Condition Report to the Council for its approval in writing and the Owner shall provide such further information as is reasonably required by the Council until such Condition Report is approved
2. Following the approval of the Condition Report by the Council the Owner covenants with the Council that the existing Wick Road Active Travel Route shall be maintained in accordance with the Condition Report and shall remain open for public use at all times in perpetuity (subject to any necessary limited periods required for ongoing management and maintenance) for the avoidance of doubt it is not the intention of the Owner to dedicate the Wick Road Active Travel Route as a highway or as a public right of way

SCHEDULE 3 – Standard Specification for the Adoption of Open Space

**STANDARD SPECIFICATION
FOR
ADOPTION OF PUBLIC OPEN SPACES**

WILTSHIRE COUNCIL
County Hall
Bythesea Road
Trowbridge
Wiltshire
BA14 8JN

Ver.4 Jan 2012
(Standard Specification for Adoption of Landscape Areas)

CONTENTS

PAGE

1	GENERAL CONDITIONS	1, 2
2	GRASS SEEDING	3, 4, 5
3	GRASS TURFING	6, 7, 8, 9, 10, 11
4	PLANTING MATERIALS	12, 13
5	SHRUBS	14, 15, 16
6	CREATING A WILD LIFE MEADOW (FROM SEED)	17, 18, 19, 20, 21, 22
7	MATERIALS	23, 24, 25, 26, 27, 28,29, 30, 31, 32, 33,34,35
8	TREES	36, 37, 38, 39, 40, 41,42
9	WHIP OR FEATHERED TREES	43, 44
10	FENCING	45
11	HARD LANDSCAPING DETAIL	46
12	EQUIPPED PLAY SPACES	47
-	APPENDICES A-K	

1 GENERAL CONDITIONS

- 1.1 The Developer will undertake to ensure that all areas to be offered for adoption to Wiltshire Council shall comply with the conditions and requirement of the planning approval, and the conditions and standards contained within this document.
- 1.2 The Developer will also ensure that all areas to be offered for adoption are as defined on the Contract Landscape Drawings, duplicate copies of which shall be supplied (free of charge) to the Technical Services Manager suitably marked to highlight the areas offered.
- 1.3 The Contract Landscape Drawings will include schedules of all works offered for adoption including any hedges, trees, fences and highlight areas of suitable access for subsequent maintenance. The drawings should include sufficient information to enable Wiltshire Council to determine any onerous slopes or changes in level.
- 1.4 Any surface obstacles, within areas to be formally adopted are to be included in these details, in particular details of underground drainage chamber covers and frames.
- 1.5 Any miscellaneous structures (retaining or otherwise) offered for adoption will be subject to separate (and specific) negotiations and subsequent agreement.
- 1.6 Any play space equipment (including surface covering, fencing, gates etc.) offered for adoption will be subject to separate (and specific) negotiations and subsequent agreement.
- 1.7
 - (a) It is required that any footpath/cycle way including all associated works, offered to Wiltshire Council for adoption and not forming part of any adoption with the Council will be constructed to a standard strictly in accordance with the latest Wiltshire Council Specification for 'Highway works by developers under agreement'.
 - (b) Where features occur in grass areas i.e. manhole, valve covers etc, these will be to the same standard as if they were appearing in the carriageway.
 - (c) These works will be subject to separate negotiations relating to commuted sums.
- 1.8 It will be the sole responsibility of the Developer to maintain the areas to be offered for adoption, to the satisfaction of the planning approval during the period prior to official hand-over to the Technical Services Manager.

1.9 Acceptance of those areas offered for adoption will be finalised when:-

- (i) An agreed commuted sum has been paid to Wiltshire Council.
- (ii) The District Secretary & Solicitor of Wiltshire Council confirms that all legal matters are satisfactorily completed.
- (iii) The areas to be adopted have been constructed/prepared in accordance with this Specification and maintained to the satisfaction of the Technical Services Manager.

1.10 Due regard to any implications of restrictions imposed by seasonal work/maintenance should be considered by the Developer when planning landscape preparation and anticipating completion/handover.

1.11 Where non-standard landscape designs (including lighting, seating, walls etc.) have been agreed during the planning process (i.e. in specific areas of local distinctiveness), separate approval of submitted details should be secured, from the Technical Services Manager, prior to construction/installation.

1.12 Where other features (e.g. ponds, ditches and other watercourses) are included in the scheme to be offered for adoption, separate approval of submitted details must be secured from the various specialist departments at Wiltshire Council, prior to construction/installation.

1.13 It is intended that the following are minimum standards, although, when the Developer can agree with the Technical Services Manager other details, (prior to construction/installation) those will take priority.

1.14 Attention is drawn to the publication entitled 'Landscaping for New Developments' obtainable from the Development Control and Conservation Section at Wiltshire Council.

2 GRASS SEEDING

2.1 General

The Developer will carry out all work in this Specification in accordance with BS 4428 General Landscape Operations, using materials and appropriate grass seed mixtures approved by the Technical Services Manager.

2.2 Initial Ground Preparation

- (1) The topsoil will be cultivated to a depth of 125mm avoiding the disturbance of the subsoil, by mechanical means approved by the Technical Services Manager or by hand cultivation on banks or confined areas. All stones, weeds, roots and other deleterious material which is brought to the surface shall be removed from site and disposed of.
- (2) Soil must be cultivated to a friable tilth by treading, firming and raking or by methods to be approved by the Technical Services Manager. Where applicable the degree of accuracy in determining a level profile shall be determined by boning rods after firming in accordance with BS 4428.
- (3) Operations must not be carried out during periods of inclement weather, i.e. when the ground is wet, frosty or waterlogged. Timing of operations will generally be confined to the Spring and Autumn periods.

2.3 Fertiliser Application

All areas to be seeded will have a base dressing of an approved granular pre-seeding fertiliser in the ratio of 12:12:15 (N:P:K) applied at the rate of 40g per sq.m. The dressing will be applied by means of approved fertiliser distributor machinery or by hand in small or confined areas, and then lightly worked into the surface with a harrow or rake.

2.4 Final Cultivation

- (1) Prior to seeding, the areas will be brought to a fine tilth by approved mechanical means or by hand raking, and if necessary regrading of the surface will be carried out to conform to the prescribed finished levels. The Developer will remove all stones over 30mm in diameter. The final level will be 10mm above any adjacent hard surface area.

(2.4 Cont'd)

- (2) After cultivation operations have been carried out, the area will be sown with grass seed specified by the Technical Services Manager and of an appropriate mix for the site. Seed will be sown at the rate of 35g per sq.m. by either hand or mechanical means, ensuring an even distribution.
- (3) Grass seed will be stored off the ground in a clean, dry place free from vermin. The Developer will be required to submit certificates for all grass seed stating the seed source, mixture, percentage, percentage purity and percentage germination.
- (4) The Technical Services Manager will be entitled to take samples of the grass seed mixture for testing. The seed mixture must meet the requirements for germination and purity laid down in BS 4428, 1989.
- (5) Following an even distribution of seed, the Developer will carry out a light raking or light harrowing of the area and ensure consolidation of seed with soil by use of a light roller.
- (6) All reasonable precautions shall be taken to ensure that pedestrian and other traffic does not cross areas during cultivation, nor until the grass is established.
- (7) Grass areas will only be 'accepted' by the Technical Services Manager as reaching practical completion when germination has proved satisfactory and all weeds have been removed.
- (8) Where in the opinion of the Technical Services Manager excessive subsidence of seeded areas arises, such subsidence must be made good, raising all depressions with good quality topsoil, carrying out the necessary cultivations, fertilising and seeding as previously specified. The Developer will allow for re-seeding any bare patches with previously specified mixture. In instances where re-seeding will not be successful, the Technical Services Manager will require the area to be turfed.

2.5 Maintenance

- (1) The Developer will establish a good sward of the specified grass mixture free from pernicious weeds. If directed by the Technical Services Manager, the Developer will apply an approved selective weedkiller, mixed and applied in accordance with the manufacturer's instructions.
- (2) During the Spring following seeding, and before the application of any selective weedkiller, the grass areas will be dressed with an approved granular post-seeding fertiliser in the ratio of 15:10:10 (N.P.K.) applied at the rate of 35g per sq.m.
- (3) During the period of establishment, all newly grassed areas will be cut twice, each cut reducing the growth height by one third. The first and second cuts will take place when the growth height reaches 75mm. Cutting must be undertaken using an approved mowing machine when conditions are not excessively wet or damp. The Developer will avoid any root pulling and prevent grass cuttings collecting in rows or other ways likely to affect adversely grass growth. The Developer must remove all stones and other deleterious matter from site prior to grass cutting operations.
- (4) Cutting will be continued at appropriate intervals during the season to maintain a close sward until the grass areas are formally adopted.

2.6 Grass Seed Mixtures

- (a) See Clause 7.17 of the Materials Specification for grass seed mixtures.
- (b) Mixtures for conservation areas and/or areas identified for rural management techniques must be approved by the Technical Services Manager.

3 GRASS TURFING

3.1 General

The Developer will carry out all work in this Specification in accordance, at least, with BS 3969 (1990) Turf and BS 4428 (1989) Turfing using materials approved by the Technical Services Manager.

3.2 Turf

- (1) All turf mixes will comprise certified cultivars of the appropriate species (as listed) in accordance with required use.

Turf for general landscaping purposes will consist of (mixes specified by % weight of grass seed used to produce turf):

30% Chewings Fescue
40% Slender Creeping Red Fescue
30% Dwarf Perennial Rye Grass

- (2) Turf supplied will be free from injurious and perennial weeds, e.g. Annual Meadow-grass, Creeping soft grass, Meadow Barley, Yorkshire Fog, Couch grass, Cocksfoot, Clover, Dandelion, Yarrow or/and perennial weeds, and will have been treated with an appropriate selective herbicide not less than four weeks prior to lifting.
- (3) Turf supplied will be free from pests and diseases; have a close texture, uniform density and colour.
- (4) The turf will have been closely mown to a maximum height of 25mm, minimum height 15mm no more than three days prior to lifting. Turf with excess fibre or thatch will not be accepted.
- (5) The soil base of the turf will be of a medium loam texture and free from stones over 15mm gauge. Turf will be cut to a uniform thickness not less than 25mm and no greater than 30mm and will be supplied in widths of 300mm. The turf will not disintegrate whilst handling.
- (6) Turf will not be lifted in frosty weather or when ground is water-logged.

(3.2 Cont'd)

- (7) To avoid drying out whilst in transit, turf will be packed onto transporter either rolled or laid but not folded.
- (8) Turf will be delivered within 36 hours of lifting and will be off-loaded by hand unless arranged on pallets for mechanical handling.
- (9) For large areas, supplies of turves should be delivered at appropriate intervals throughout the work so as to avoid as far as possible stacking turves for long periods. Where it is not possible, they should be unloaded and conveniently stacked on clear ground to a maximum height of 1.0m unless arranged on pallets for mechanical handling. Turves must be placed grass to grass. After four days, stacked turves should be inspected at frequent intervals; turves showing signs of deterioration should be used without delay, or laid out.
- (10) In certain circumstances the Technical Services Manager may request samples or to inspect the turf source prior to lifting. Where samples are provided all turf supplied will be of a similar quality.
- (11) Any turf, whether laid or not, that does not conform to this Specification or the required standard of the approval sample will be removed by the Developer and replaced by turn to an acceptable quality entirely at the Developer's own expense.

3.3 Initial Ground

- (1) The Topsoil will be cultivated to a depth of 125mm avoiding the disturbance of the sub-soil, by mechanical means approved by the Technical Services Manager or by hand cultivation off planks on confined areas. All stones, weeds, roots and other deleterious material which are brought to the surface will be removed from site and disposed of to a previously agreed tip.
- (2) Soil must be cultivated to a friable tilth by treading, firming and raking or by methods to be approved by the Technical Services Manager.

Prior to turfing, the areas will be brought to a fine tilth by approved mechanical means or by hand raking, and if necessary regarding of the surface will be carried out to conform to the prescribed finished levels. The Developer will remove all stones over 30mm in diameter. The final soil level will be 10mm above any adjacent hard surface area.

(2) Turves from the stack or store will be wheeled to the turfing areas of wooden planks so laid to support work people, barrows and provide ease of access.

(3) Turves will be laid on the prepared bed stretcher bond format, closely butted and to the correct levels. Turf will be laid off wooden planks working over turves previously laid.

(4) Laid turves will be slightly and evenly firmed using wooden turf beaters, the bottoms of which to be kept constantly clean of soil or mud.

(5) A dressing of finely screened topsoil or fine peat, to a depth of 10mm will be applied evenly over the whole of the turved areas and be well bushed into all joints.

(3.5 Cont'd)

- (6) Any unevenness in finished levels due to variations in turf thickness or inconsistent firming of the soil, will be adjusted by raking out and/or packing screened topsoil under the appropriate turf/turves.
- (7) Turf will not be laid to within 300mm of any tree trunk or 200mm of any fence or wall. Whole turves will be laid to all edges or margins.
- (8) As necessary, according to prevailing weather conditions, the Developer will carry out appropriate irrigation using sprinklers or oscillating sprays ensuring soil is not washed out of joints. Failure of the turf to establish due to lack of watering will be the responsibility of the Developer who will replace such turf at his own expense.
- (9) The Developer shall at his expense take all reasonable precautions to ensure that pedestrians and other traffic do not cross the turved areas during cultivation, nor until the grass is established.
- (10) Turved areas will only be accepted by the Technical Services Manager as reaching practical completion when all turf has satisfactorily bonded and established.
- (11) Where in the opinion of the Technical Services Manager excessive subsidence of the turved area arises, such subsidence must be made good, raising all depressions with good quality topsoil, carrying out the necessary cultivations, fertilising and where appropriate returfing as previously specified at the Developer's expense and as requested by the Technical Services Manager. The Developer will allow for returfing any failed turves with previously specified turf mixtures and all turf so replaced will be at the Developer's own expense.

3.6 Turfing on Banks
Exceeding 30°

- (1) Stability, and the retention of soil and seed may be a problem when turfing to banks with a gradient exceeding 30°. Turfing should not be undertaken until the bank has been satisfactorily graded.

(3.6 Cont'd)

- (2) Turves should comply with BS 3969. It is important that turves to be used on banks should be sufficiently fibrous to withstand handling conditions.
- (3) Season -Turving on banks should preferably be carried out during the autumn and early winter period. Spring operations should be avoided due to the harmful effects of prolonged dry weather and drying winds.
- (4) Laying- Sufficient timber planks and ladders should be used to ensure safe and efficient working. The turves may be laid diagonally or horizontally. They should be laid to stretcher bond pattern, butt-jointed, firmed and secured by stout wooden pegs 200mm in length or by 4mm galvanised wire pins, bent or hairpin pattern, at least 200mm long. Finely sifted topsoil should be worked well into the joints. On very steep banks or where stability is a major problem, netting should be laid over the turf and pegged down. Where necessary the wire netting should be reinforced at the top and bottom immediately, with stout wire cable threading the mesh.

3.7 Completion and Maintenance

- (1) The Developer will establish a good sward, free from pernicious weeds. If directed by the Technical Services Manager, the Developer shall apply an approved selective weedkiller mixed and applied strictly in accordance with the manufacturer's written instructions. During the Spring following turving, and before the application of any weedkiller, the turfed areas shall be dressed with approved granular post-seeding fertiliser, in the ratio of 15:10:10 (N.P.K.) applied at the rate of 35 grammes per Square meter.
- (2) During the period of establishment, all turfed areas shall be cut twice, each cut reducing the growth height by half. The first and second cuts shall take place when the growth height reaches 75mm. All cutting will be undertaken using an approved mowing machine when conditions are not excessively wet or damp. The Developer will avoid any root pulling and prevent grass

(3.7 Cont'd)

cuttings collecting in rows or other ways likely to adversely offset grass growth. Immediately before the second establishment cut, the Developer shall remove all stones and other deleterious matter.

- (3) Cutting shall be continued at appropriate intervals during the growing season to maintain a close sward until the grass areas are handed over for formal adoption.**

4 PLANTING MATERIAL (SUPPLY OF)

- 4.1 General When the Developer supplies plant material it must be in accordance with BS recommendations (BS 3936 Nursery Stock) Part 1 -Trees and Shrubs, Part 4- Forest Trees.
- 4.2 Plant Procedure
- (1) Plants will comply with the requirements of BS 3936 – Nursery Stock: General.
 - (2) The Developer must ensure that all plant material is free of all pests and diseases.
 - (3) The Developer will bear the cost of any plant losses for whatever reason and will replace materials or plants considered unsatisfactory by the Technical Services Manager with identical species. The liability period for this condition will be until formal adoption.
- 4.3 Bedding Plants All bedding plants supplied by the Developer will be:
- Pest and disease free
 - True to type
 - Floriferous (where appropriate)
 - Of Good Foliage colour
 - On a well developed and undamaged root system
 - Not root-bound
 - Vigorous and of a habit appropriate to type.
- 4.4 Trees and Shrubs All trees and shrubs supplied by the Developer will be:
- Pest and disease free
 - True to type
 - Transplanted nursery stock on healthy, vigorous and sound roots with well formed heads and to have been grown at or grown on, at the supply nursery
 - Without torn and lacerated roots which shall be pruned before despatch
 - Plants to be materially undamaged
 - Healthy and containerised subjects must not be root bound
 - Vigorous and of a habit appropriate to type
 - Without evidence of 'circling' in the root system
 - Subjects will have a well-defined leader (as appropriate)

**4.5 Coniferous
Subjects**

All conifers supplied by the Developer, unless specified otherwise by the Technical Services Manager will be well furnished evenly to the ground on all sides; there are exceptions, e.g., Cedrus. A single natural leader is required for most conifers unless required for hedging or if the natural form is branching.

**4.6 Other Plant
Material**

All plant material will conform with the requirements of BS 3936.

5 SHRUBS

5.1 Plant Procurement and Preparation for Planting

- (1) General All work specified in this section will be carried out in accordance with BS 4428, General Landscape Operations, Section 7 and 8.
- (2) Condition Where applicable the trees and shrubs will comply in all respects with Section 1 of BS 3936, Part 1, All plants will have good fibrous root systems, carefully preserved in good condition when lifted from the nursery and adequately protected in transit. On delivery to the site, trees and shrubs will be free from pests and disease and materially undamaged.
- (3) Time of Planting Unless otherwise agreed, planting will take place during favourable weather conditions in the dormant season which will generally be from the first week in October to the first week in April, inclusive.
- (4) Temporary Storage Upon arrival on site, trees and shrubs will be planted in their respective positions without delay. On no account will roots be exposed to drying wind or sun for longer than is necessary. Planting will not take place during periods of frosty weather, or cold winds, or when the ground is excessively wet.
- (5) Cultivation
 - (a) All weeds on areas to be planted must be cleared prior to being cultivated.
 - (b) Topsoil to be cultivated to a depth of 150mm in areas to be planted with shrubs or groundcover, using cultivators, rotovators or similar approved equipment (taking care not to bring up the subsoil) to provide a medium to fine tilth. Cultivation by hand to the same standard will be carried out where machinery cannot be used.

(5.1 Cont'd)

- (c) The soil will be worked in reasonable weather conditions and not in conditions that could result in serious damage to the soil structure. All stones, builders rubbish, weeds, roots or other deleterious matter over 25mm diameter, in any direction, which are brought to the surface will be moved from site on to an agreed tip. Totally remove all plaster products.

5.2 Shrub Planting

(2) Cultivation

- (a) The beds for all shrubs will be cultivated as previously described. All planting areas are to be topdressed with 80g per m² of bonemeal or 100g per m² of Enmag fertiliser, or similar approved by the Technical Services Manager, raked into the surface. (Fertiliser dressing to be approved by the Technical Services Manager).
- (b) Any compaction of the areas following this and prior to planting will be removed by re-cultivation.

(3) Planting

- (a) Positions of shrubs to be planted will be marked out in accordance with the planting schedule/plan or as specified. When shrubs are set out, precautions will be taken to prevent roots drying out.
- (b) Planting holes will be excavated 150mm wider than the root spread. Polythene and other non-perishable containers will be removed and any badly damaged roots carefully pruned. Each shrub will be placed upright in the centre of a hole large enough to accommodate the roots without restriction or damage. Shrubs will be set at nursery level with due allowance for settlement. The hole will be backfilled to half its depth and firmed by treading. Care

(5.2 Cont'd)

will be taken not to crush the root ball. The remainder of the soil will be returned and again firmed by treading.

(4) Replacement Planting

The Developer will be responsible for the maintenance of all planted shrubs and will be required to replace all dead, dying or otherwise unsatisfactory plants with a similar species and in the same manner as detailed above.

5.3 Maintenance

(1) Weed and Litter Removal

- (a) All permanent shrub planted areas will be maintained clear of weeds and litter by the Developer until formal adoption has been completed.

(2) Mulching (New Beds)

- (a) All beds required to be mulched will receive a mulch dressing of either coarse peat or medium grade bark to a depth of 75mm – 100mm. On each maintenance visit this will be topped up and levelled to maintain the required depth.

6 CREATING A WILDFLOWER MEADOW (FROM SEED)

6.1 General

This represents a culturally simple method of establishing a wildflower meadow.

6.2 Ground Preparation

- (1) The Developer will provide evidence of the soils nutrient ratio.
- (2) Ground preparation will be carried out in mid-summer, unless instructed otherwise by the Technical Services Manager.
- (3) The soil will be spread to specified levels using machinery appropriate to the scale of the project approved by the Technical Services Manager.
- (4) The final grading will be completed by the end of the growing season and cultivated to an even medium tilth. The surface must be formed to avoid subsequent settlement by a method to be approved by the Technical Services Manager.

6.3 Weed Control

Where the soil contains weed seeds of an undesirable species which may create difficulties for the establishment of a meadow, *Rumex obtusifolius* (Dock) for example, the young weed shoots must be sprayed with an approved contact herbicide. The Developer will allow a minimum of one month (mid-August to mid-September) for as many weed seeds to germinate as possible.

6.4 Seed Sowing

- (1) The Developer will sow the seed during early autumn or as specified by the Technical Services Manager thus facilitating the vital exposure to frost which breaks the dormancy of many seeds and therefore ensures a high percentage germination.
- (2) The Developer will sow an approved Seed Mixture.
- (3) The wild flower seed should be sown at the rate of 4 grams per sq metre (36 kg per ha).
- (4) In order to facilitate an even distribution of seed the Developer will use a 'carrier' to bulk up the seed. The carrier may be either silver sand or sawdust of untreated timber.

(6.4 Cont'd)

- (5) The Developer will sow seed by hand or an approved mechanical distributor and the site lightly raked afterwards (chain harrowed on large areas).
- (6) The Developer will firm the seed bed with a roller.

6.5 First Year

- (1) The meadow seedbed should be well established by late May or early June. When the sward is 100mm high the Developer will roll and cut. (Rolling to be carried out with a light roller approved by the Technical Services Manager). In carrying out the rolling operation the Developer will ensure that the plants are firmed into the soil reducing the risk of mower blades uprooting them.
- (2) The site will be mown using either a wheeled rotary mower or a mower with reciprocating blades to a height of 50mm. The cuttings to be removed. The sward should be subsequently cut to the same height using the same machinery with cuttings removed, each time the sward reaches 100mm.
- (3) From early June the Developer must not cut the sward for a period of five weeks to allow the Poppies and Corn Marigold to flower.
- (4) The Developer must avoid the use of chemicals and fertilisers, any undesirable broad leaved species which persist must be removed by hand. Where the problem is of a large scale such undesirable species must be cut down and the remaining leaves/stem treated with a gel-based non-selective systemic herbicide.

6.6 Wildflower Seed Mix

- (1) Wildflower seed mixes will comprise seed of native British origin, of ecotypes adapted to the environment in which the seed shall be sown and retaining genetic variation during the seed production process.

(6.6 Cont'd)

- (2) Wildflower seed will be used within four weeks after receipt from the supplier. Where seed is stored during this period it will be kept in dry, cool conditions, where the moisture content is 5% and the temperature 3°C.
- (3) Wildflower seed mixes used will reflect the following species composition:

(a) **Wildflower Mix W1 (Meadow Clay - short to medium)**

% wt	Species	Common Name
1.0	Briza media	
5.0	Cynosurus cristatus	
5.0	Festuca pratensis	
40.0	Festuca rubra ssp commutata	
20.0	Festuca rubra ssp purinosa	
1.0	Hordeum secalinum	
5.0	Poa trivialis	
3.0	Trisetum flavescens	
0.5	Achilles Millefolium	Yarrow
0.5	Centaurea nigra	Common/Lesser
0.5	Dactylorhiza fuchsii	Spotted Orchid
1.0	Daucus carota	Wild Carrot
0.5	Filipendula vulgaris	Dropwort
1.0	Galium verum	Lady's Bedstraw
1.0	Geranium pratense	Meadow
1.0	Knautia arvensis	Field Scabious
0.5	Lathyrus nissolia	Grass Vetchling
1.0	Lathyrus pratensis	Meadow
1.0	Leucanthemum vulgare	Oxeye Daisy
1.0	Lotus corniculatus	Birds Foot
0.5	Lotus uliginosus	Greater Birds
1.0	Plantage lanceolata	Ribwort Plantain
1.5	Primula veris	Cowslip
1.0	Prunella vulgaris	Self Heal
1.0	Ranunculus acris	Meadow
0.5	Rhinanthus minor	Yellow Rattle
0.5	Rumex acetosa	Common Sorrel
0.5	Saxifraga granulata	Meadow
0.5	Tragopogon pratensis	Goat's Beard
1.0	Trifolium campestre	Hop-Meadow
1.0	Veronica chamaedrys	Germander
0.5	Vicia cracca	Tufted Vetch
1.0	Vicia sativa	Common Vetch
100.0	Sown @ 36 Kg/ha	(4gtm2)

(6.6.Cont'd)

(b)

Wildflower Mix W2 (Hedgerow)

% wt	Species	Common Name
5.0	<i>Alopecurus pratensis</i>	
5.0	<i>Cynosurus cristatus</i>	
10.0	<i>Festuca pratensis</i>	
15.0	<i>Festuca rubra ssp commutata</i>	
5.0	<i>Festuca rubra ssp purinosa</i>	
30.0	<i>Poa nemoralis</i>	
10.0	<i>Poa pratensis</i>	
0.5	<i>Achillea millefolium</i>	Yarrow
1.0	<i>Agrimonia eupatoria</i>	Agrimony
1.0	<i>Campanula trachelium</i>	Nettle Leaf
		Bellflower
0.5	<i>Clematis vitalba</i>	Traveller's Joy
1.0	<i>Geranium robertianum</i>	Herb Robert
0.5	<i>Geum urbanum</i>	
0.5	<i>Hypericum perforatum</i>	Perforated St
1.0	<i>Leucanthemum vulgare</i>	Oxeye Daisy
1.0	<i>Malva moschata</i>	Musk Mallow
1.5	<i>Primula vulgaris</i>	Primrose
1.5	<i>Prunella vulgaris</i>	Self Heal
1.0	<i>Silene alba</i>	White Campion
1.0	<i>Silene dioica</i>	Red Campion
1.0	<i>Stachys officinalis</i>	Betony
1.0	<i>Stachys silvatica</i>	Hedge
1.0	<i>Stellaria holostea</i>	Great Stitchwort
0.5	<i>Taraxacum officinale</i>	Dandelion
0.5	<i>Tussilago farfara</i>	Coltsfoot
1.0	<i>Vicia cracca</i>	Tufted Vetch
1.0	<i>Vicia sepium</i>	Bush Vetch
2.0	<i>Viola odorata</i>	Sweet Violet

100.0

Sown @ 36Kg/ha

(4gtm2)

(c)

Wildflower Mix W3 (Meadow General- medium)

% wt	Species	Common Name
10.0	<i>Festuca pratensis</i>	
20.0	<i>Festuca rubra ssp commutata</i>	
20.0	<i>Festuca rubra ssp purinosa</i>	
20.0	<i>Festuca rubra ssp rubra</i>	
10.0	<i>Poa pratensis</i>	
2.0	<i>Leucanthemum vulgare</i>	Oxeye Daisy
4.0	<i>Plantago lanceolata</i>	Ribwort Plantain
1.0	<i>Primula veris</i>	Cowslip
3.0	<i>Prunella vulgaris</i>	Self Heal
3.0	<i>Ranunculus acris</i>	Meadow
1.0	<i>Rumex acetosa</i>	Common Sorrel

(6.6 Cont'd)

% wt	Species	Common Name
4.0	Sanguisorba minor alba	Salad Burnet
2.0	Silene alba	White Campion

100.0	Sown @ 36 Kg/ha	(4gtm2)
-------	-----------------	---------

(d) **Wildflower Mix W4 (Cornfield Annuals)**

% wt	Species	Common Name
40.0	Agrosemma githago	
10.0	Cenaurea Cyanus	
20.0	Chrysanthemum segetum	
15.0	Papaver rhoeas	
15.0	Tripleurospermum inodorum	

100.0	Sown @ 24 Kg/ha	(3gtm2)
-------	-----------------	---------

(e) **Wildflower Mix W5 (Woodland)**

% wt	Species	Common Name
10.0	Cynosurus cristatus	
5.0	Deschampsia flexuosa	
25.0	Festuca rubra ssp purinosa	
40.0	Poa nemoralis	
0.5	Alliaria petiolata	
1.0	Allium ursinum	
1.0	Campanula trachelium	Nettle Leaf Bellflower
2.5	Digitalis purpurea	
1.5	Filipendula ulmaria	
1.0	Gallium mollugo	
0.5	Geum urbanum	
1.0	Hyacinthoides non-scripta	
0.5	Hypericum montanum	
0.5	Lychnis flos-cuculi	
0.5	Meconopsis cambrica	
1.0	Primula vulgaris	Primrose
0.5	Scrophularia nodosa	
4.0	Silene dioica	Red Campion
0.5	Stachys sylvatica	Hedge

(6.6 Cont'd)

% wt	Species	Common Name
------	---------	-------------

1.0	Stellaria holostea	Greater
0.5	Taraxacum officinale	Dandelion
2.0	Teucrium scorondonia	

100.0	Sown @ 36 Kg/ha	(4g/m ²)
-------	-----------------	----------------------

(f) **Wildflower Mix W6 (Wetland Meadow)**

% wt	Species	Common Name
------	---------	-------------

5.0	Alopecurus pratensis	
5.0	Cynosurus cristatus	
30.0	Festuca pratensis	
25.0	Festuca rubra ssp rubra	
10.0	Poa trivialis	
5.0	Trisetum flavescens	
1.5	Angelica sylvestris	
2.0	Filipendula ulmaria	
1.0	Galeopsis tetrahit	
1.0	Geum rivale	
3.0	Iris pseudacorus	
0.5	Lychnis flos-cuculi	
0.5	Lycopus europaeus	
0.5	Lythrum salicaria	
1.5	Prunella vulgaris	Seaf Heal
2.0	Ranunculus acris	Meadow
2.0	Ranunculus sceleratus	
0.5	Scrophularia auriculata	
3.0	Silene dioica	Red Campion
1.5	Stellaria holostea	Great Stitchwort
1.0	Succisa pratensis	

100.0	Sown @ 36 Kg/ha	(4g/m ²)
-------	-----------------	----------------------

7 MATERIALS

- 7.1 General (1) All materials will conform to no less than the minimum standard of the latest edition of the appropriate British Standard if not specified to a higher standard herein.
- 7.2 Manufacturer's Recommendations The Developer will handle, store and apply all products exactly in accordance with the manufacturer's recommendations unless specified otherwise.
- 7.3 Defects/Death of Plants Any material defects that appear within the maintenance period, unless agreed otherwise, will be remedied immediately at the Developer's own expense and to the entire satisfaction of the Technical Services Manager.
- 7.4 Topsoil
- (1) Topsoil will consist only of the natural original surface layer (to 300mm maximum), when the vegetation has been removed, of grassland or cultivated agricultural land. Topsoil acquired from woodland, heath, moorland or bog or from those areas impaired by industrial activity or contaminated by heavy metals or other pollutants will not be used.
 - (2) Topsoil will be fertile, but free from excessive quantities of weed seed, roots of perennial plants, living vegetation or other extraneous material.
 - (3) Topsoil will be of uniform composition throughout and will contain at least 6% organic matter, intimately mixed with mineral matter. Topsoil will be free from subsoil.
 - (4) Topsoil will be of a medium loam texture, friable with a crumb structure and will display a reasonable degree of porosity. Reaction will be between pH 6.0 – 7.5 unless otherwise specified.
 - (5) The chemical composition of the topsoil will be as follows
 - (a) Total Nitrogen (N) content not less than 0.2%.

(7.4 Cont'd)

- (b) Available Phosphorus (P) not less than 70ppm when extracted with 4.2% NaHC03 at pH 8.5.
 - (c) Available Potassium (K) not less than 300ppm when extracted with 8% ammonium Nitrate.
- (6) Topsoil will have no more than 10% stone content by dry weight. The presence of any stones exceeding 25mm diameter will be unacceptable.
- (7) Where volumes of topsoil in excess of 500 cubic metres are to be provided the place of origin will be stated and the source will be inspected by the Technical Services Manager, in situ, for approval prior to importation.
 - (a) Screened Topsoil

Where screened topsoil is specified, in addition to the Specification relating to topsoil generally, this will be graded accordingly to screen sizes:-

3/16" or 1/4" or 1/2" or 3/4" or 1"; whereby 95% of component material passes through the specified screen.
 - (b) Topsoil for general sports grounds or special facilities use:

Technical Services Manager will supply details of requirement in line with most recent recommendation as applied by the Sports Council or other approved official bodies.

7.5 Peat

Peat will be minimum grade Irish Moss peat to minimum British Standard BS 4156 ; 1990. Peat will be delivered to site in bales, each bale marked with volume content.

Where sustainable alternatives are available these are preferred.

7.6 Sand and Aggregates

- (1) Sand will conform to the following specification:
 - (a) Sand - very fine 0.050 to 0.125mm.
 - (b) Sand - fine 0.125 to 0.250mm.
 - (c) Sand - medium 0.250 to 0.500mm.
 - (d) Sand - coarse 0.500 to 1.000mm.
 - (e) Sand - very coarse 1.000 to 2.000mm.
- (2) Where clean washed sharp sand is specified this will have particle sizes within the range 0.050mm to 0.250mm. Silica sand will be regarded as sand with particle sizes within the range 0.125mm to 0.500mm.
- (3) All sand will be lime free.
- (4) Sand for amelioration will be exactly according to the particle sizes specified, confirmed by the supplier's authorised certificate.

7.7 Manure

Manure will be well rotted (for a minimum of six months) cow or other farmyard manure with a minimum admixture of straw. Poultry manure will not be allowed.

7.8 General Purpose Compost

- (1) Composts will consist of well decomposed vegetable material and leaves, conditioned in storage piles for at least two years. Compost will be moist, but not waterlogged and of medium texture.
- (2) Grass clippings will not exceed 25% of the total volume. Compost will be free from injurious chemicals, other extraneous materials detrimental to plant growth and perennial weedroots.

7.9 Interior Compost Mix C1 (Loam Based)

- (1) Interior compost referenced C1 will comprise:

Medium grade Irish Moss peat 20% by volume. Sterilised sandy loam topsoil 60% by volume. Medium pulverised bark 20% by volume. Osmocote 17:10:10 Regular at 0.50Kg/m³. Superphosphate at 0.50Kg/m³. Fritted Trace Elements FTE253A at 0.75Kg/m³. Ground Limestone at *2.40Kg/m³. Dolomitic Limestone at *2.40Kg/m³.

(7.9 Cont'd)

* Quantities marked will be adjusted to ensure the compost has a pH value in the range of 5.5 to 4.5 unless otherwise specified.

7.10 Interior Compost (1)
Mix C2 (Peat Based)

Interior compost reference C2 will comprise:

Medium grade Irish Moss peat 75% by volume. Sharp washed sand 25% by volume. Osmocote 17:10:10 Regular at 0.60Kg/m³. Superphosphate at 0.60Kg/m³.

Fritted Trace Elements FTE253A at 0.75Kg/m³. Calcium Carbonate at *2.40Kg/m³. Dolomitic Limestone at *3.00Kg/m³.

* Quantities marked will be adjusted to ensure the compost has a pH value in the range of 5.5 to 6.5 unless otherwise specified.

7.11 Perlite

Perlite will be Silvaperl medium grade.

7.12 Tree Planting
Compost

Tree planting compost will be Fison's TPMC unless specified otherwise.

7.13 Mulching Material

(1) Mulching material will be graded tree bark. All mulching material will have been composted for at least six weeks at a minimum temperature of 60°C. All resinous toxins will have been removed and the mulch reduced to a near neutral pH. All mulching material will be free from weeds, pests and disease and will contain a minimum number of wood particles, in no circumstances greater than 5% by weight or volume.

(2) All graded bark will be of consistent particle size and free from dust and fines.

(3) Mulching materials will be graded as follows:

(a) Coarse bark - will comprise matured conifer bark with at least 75% of particles in excess of 60mm in size, ranging to a maximum of 150mm.

(7.13 Cont'd)

- (b) Graded bark flakes - will comprise matured conifer bark with particle size distribution between 15mm to 125mm. A minimum of 50% of all particles will be within the range 50mm to 100mm.
 - (c) Bark nuggets - will comprise matured conifer bark with uniform particle size distribution between 15mm to 65mm.
 - (d) Ornamental bark - will comprise matured conifer bark with uniform particle size distribution between 5mm to 35mm.
 - (e) Pulverised bark - will comprise matured conifer bark that has been pulverised so that all particles will pass through a 36mm screen.
 - (f) Shredded bark - will comprise matured conifer bark with a maximum particle size of 45mm.
- (4) Straw, sawdust, spent hops, processed or digested sludge will not be allowed.

7.14 Pesticides

- (1) All pesticides will be used entirely in accordance with the manufacturer's recommendations. The Control of Pesticides Regulations 1986 and any relevant Code of Practice issued by MAFF regarding the application of pesticides will be complied with at all times.

7.15 Fertilisers

- (1) The Developer shall submit a list of fertilisers for approval and use exactly in accordance to the manufacturer's recommendations, unless specified otherwise, and approved by the Technical Services Manager for specified items. Substitute products will not be permitted.

7.16 Soil Conditioners

The following soil conditioner will be approved for use exactly according to the manufacturer's recommendations unless specified otherwise and as determined by the Technical Services Manager.

Alginure Granulate S.

7.17 Grass Seed

(1) All grass seed will be fresh, clean and certified where applicable under the 1976 E.C. Seed Regulations concerning statutory standards for germination purity. All seed will be treated with a bird repellent and appropriate fungicide.

(2) Seed Mixes will be used exactly as specified by reference to the following specifications. All mixes will be expressed as:

% weight by: species: cultivar:
seed category.

(a) Grass Seed Mix G1 (Amenity)

<u>% wt</u>	<u>Species</u>	<u>Cultivar</u>	<u>Seed Category</u>
30	Perennial Rye-grass	'Eika'	Certified
20	Chewings Fescue	'Center'	Certified
15	Creeping Red Fescue	'Dawson'	Certified
15	Creeping Red Fescue	'Pernille'	Certified
10	Smooth Stalked Mdw. Grass		
5	Browntop Bent	'Highland'	Certified
5	Browntop Bent	'Saboval'	Certified
100			

(b) Grass Seed Mix G2 (Shade)

<u>% wt</u>	<u>Species</u>	<u>Cultivar</u>	<u>Seed Category</u>
40	Chewings Fescue	'Center'	Certified
40	Creeping Red Fescue	'Dawson'	Certified
10	Browntop Bent	'Highland'	Certified
10	Browntop Bent	'Saboval'	Certified
100			

(7.17 Cont'd)

(c) Grass Seed Mix G3 (Winter Sports/Outfield)

<u>% wt</u>	<u>Species</u>	<u>Cultivar</u>	<u>Seed Category</u>
50	Creeping Red Fescue	'Dawson'	Certified
20	Perennial Ryegrass	'Arno'	Certified
20	Perennial Ryegrass	'Eika'	Certified
10	Browntop Bent	'Highland'	Certified
100			

(d) Grass Seed Mix G4 (Fine Turf)

<u>% wt</u>	<u>Species</u>	<u>Cultivar</u>	<u>Seed Category</u>
40	Chewings Fescue	'Dawson'	Certified
40	Creeping Red Fescue	'Waldorf'	Certified
10	Browntop Bent	'Highland'	Certified
10	Browntop Bent	'Holifior'	Certified
100			

- (3) All seed packs will bear an official label, showing intended use of the seed mixture, reference number of the seed lot, packers number, brand name or the mixture or the constituent species/varieties and the net weight.
- (4) In the event of the incorrect seed mixture being used, the Developer will eradicate all seedlings by use of a translocated herbicide and reinstate the area with the correct seed mixture at no extra cost.

7.18 Grass Turf

See Clause 3.2 of the Specification.

7.19 Plant Material

- (1) Except where otherwise stated all plant material will be grown in the British Isles for at least one growing season and will conform at least to the latest edition of BS 3936 Specification of Nursery Stock (Parts (i) to (ix) inclusive).

(7.19 Cont'd)

- (2) In addition, container grown plant material will meet the minimum standards defined in the latest edition of the British Container Growers Publication 'Specification of Standards for the Production of Hardy Container Grown Plants'.
- (3) All plants will:
 - Be true to name.
 - Be accurately labelled in bundles or individually according to size with the full botanical name.
 - Have a well balanced root: shoot ratio.
 - Be supplied with a dense, fibrous root system as is possible according to species.
 - Container plants must have a root system well established in the present container, i.e. active root growth since potting, but not restricted, conflicted or suffering from the root curl. Plants without adequate root systems will be discarded.
 - Be free from physical damage throughout.
 - Be free from pests and diseases.
 - Be free from physiological disorders and from contamination by perennial weeds or pollutants.
 - Have been undercut or transplanted within the last 24 months.
 - Be grown under soil and climatic conditions that do not substantially differ from that of the Contract Area.

7.20 Handling

- (1) All plant material will be handled according to the recommendations of the latest edition of the 'Code of Practice for Plant Handling' published by the 'Joint Liaison Council on Plant Supplies'. The Code of Practice covers Lifting, Bundling, Packaging, Labelling. Temporary Storage and Transport. These conditions will apply entirely to the Developer when requested to supply plants.
- (2) The Developer will give the Technical Services Manager not less than two working days notice of delivery of plants to a site.

7.21 Lifting

- (1) Bare-rooted or root-balled deciduous plants will be lifted only when the plants exhibit dormant characteristics, generally from October to March or later where local conditions or season permit. Evergreen plants will be lifted between the first week in September and the last week in October inclusive or the first week in April and the last week in May inclusive only. Plants will not be lifted if severe ground conditions prevail or during periods of high winds, drought or frost. Bare-rooted material will not be lifted more than five days prior to delivery and all plants shall receive adequate protection from drying out, waterlogging, heating-up, frosting or physical damage. The roots of bare-root stock will be immersed in Alginure Root Dip immediately after lifting.
- (2) Container grown - deciduous or evergreen plants, will be moved at any provided that the root system is well established in the container and the plants are fully hardened off. However, plants moved outside the normal planting period will be adequately irrigated throughout the whole of the first growing season.

7.22 Bundling

- (1) Where appropriate bundles will consist of graded plants with all shoots facing in the same direction. Foliage will be surface dry. Bundles of plants will be tied securely with string or twine which will not by its nature of tension cause damage to the plants. Container grown or bare-rooted plants will not be bundled.
- (2) Plants up to 2.5m tall - each consignment will be tied in bundles of equal numbers. The maximum number of plants within each bundle will depend on the size and nature of the plants, but in all circumstances the bundle will be of a manageable size.
- (3) Trees in excess of 2.5m height- the maximum quantity in each bundle will be as follows:

40/60mm girth – 15 per bundle
60/80mm girth – 10 per bundle
80/100mm girth – 5 per bundle
100/120mm girth – 3 per bundle

(7.22 Cont'd)

- (4) Trees in excess of 10/12 cm girth will not be bundled. In addition these guidelines will be reduced where large heads would be subject to damage. Laterals will be drawn in and securely tied during transit.

7.23 Packaging

- (1) The foliage of all plants will be surface dry before packing and the contact between foliage and bare roots minimised.
- (2) Container grown plants or bare-rooted trees (up to 14 cm girth), will not normally receive additional packaging, except in certain selective species.
- (3) Trees up to 450mm tall excluding forestry transplants will be entirely enclosed in 250 gauge plastic film bags, securely tied at the top. Plants will not be packed too tightly, but loosely bundled within the bag. Plants with thorns or spines will have their roots only enclosed in the bag, which will be securely tied at the base of the stems.
- (4) Root-balled plants will be adequately supported to prevent collapse or disintegration of the root-ball. The root-ball will be protected against drying out by firmly wrapping in hessian or other recommended material. Wrapping will be secured by tying over the top of the root-ball.
- (5) Bare-rooted trees over 14 cm girth will be supplied without soil adhering to the roots unless specified otherwise, but will have their roots packed in moist compost and enclosed in hessian or 500 gauge plastic film, securely tied to the stem at nursery soil level. Trees so wrapped will be kept shaded at all times.

7.24 Labelling

- (1) All plants will be adequately labelled. Each individual tree, bag or lot of one species/cultivar will bear a securely attached durable primary label stating:

The genus, species and cultivar of the plant concerned.

The grade and quantity in the bundle or lot.

The total quantity in the whole consignment.
The Supplier's name.

- (7.24 Cont'd) (2) At least 10% of each consignment of particular plants will bear a secondary label related to the primary label and clearly identifying the plant in question.

7.25 Temporary Storage (1) Every effort will be made to limit the time period between lifting and despatch and the time period between receipt and planting. Container grown material will be maintained upright in their containers and watered as required by local conditions.

- (2) On receipt bare-rooted plants will be immediately heeled-in to moist friable topsoil or compost or placed *in* an indirect humidified cold store. Where heeled-in the plants will be well firmed to exclude air pockets, (particularly on the inside of bundles), and will be watered periodically as local conditions require. Protection will be given against damage by small mammals.

- (3) Root-balled plants will be kept moist and will be protected from direct sunlight. If root-balled plants are to be stored for more than three days they will be placed on a well-drained surface and the root-balls entirely covered with peat, bark or compost.

7.26 Transport (1) All plants will be protected from drying out during loading and transport. Plants will be stacked in such a way to avoid damage or crushing by weight from plants above.

(2) All consignments will be completely sheeted irrespective of length of journey. Where more than one delivery destination *is* involved additional sheeting will be used between each consignment to limit the period of exposure of the plants.

- (3) Any plants damaged in transit will be discarded and replaced at the Developer's own expense. Bare-rooted material will be heeled in immediately on delivery to planting site.

7.27 Trees (1) Trees will have a straight stem with a well developed, evenly balanced crown, free from crossing branches. Where appropriate, according to species, trees will have a well-defined central leader. Standard trees will have all temporary

(7.27 Cont'd)

feathering removed flush with the stem. Feathered trees will be furnished evenly with well-balanced lateral shoots to ground level. The orientation of trees will be marked on the north side prior to lifting.

- (2) Where trees are budded or grafted they will be bottom worked unless specified otherwise. The root stock will be named. Such trees will have no more than a slight bend at the union.

7.28 Tree Stakes

- (1) Tree stakes will be softwood, 75mm to 100mm top diameter, round, peeled, pointed at the base. Stakes will be treated with a vacuum pressure impregnated preservative using a copper chrome arsenate formula to BS 4072, (to a minimum net dry salt retention of 6.4Kg/m²). All timber over 30% moisture content will be kiln dried.
- (2) Lengths of stakes will be exactly as described in the specification for particular uses.
- (3) Where graded posts are specified these will be as per the standard stake but machine turned to produce cylindrical straight posts, chamfered at the top and graded.

7.29 Tree Ties

- (1) Tree ties will be:
 - (a) Belt for standard trees 80/190mm or greater,
 - (b) Standard width ties for whips, feathered, half-standard or trees 6/8 cm or less.

7.30 Tree Shelters

- (1) Tree shelter will be reinforced PVC laminate with a minimum life expectancy of at least six years; either 0.6m, 0.9m or 1.2m in height as specified. Tree shelters will be attached to an external timber stake, treated with vacuum pressure impregnated preservative, secured using nylon ratchet action ties as follows:

0.6m shelter 0.79m x 25mm x 25mm stake.

0.9m shelter 1.05m x 25mm x 25mm stake.

1.2m shelter 1.35m x 25mm x 25mm stake.

7.31 Tree Guards

Tree guards will be 1.8m, tall 25 x 75mm x 10swg galvanised weld mesh.

7.32 Canes

- (1) Bamboo canes will have 10mm top diameter, 1.5m length.
- (2) Split canes will be 5mm green obtained from an approved supplier.

8 TREES

8.1 Origin

Except where otherwise specified the plants shall be obtained from approved reputable nurserymen within approximately 200 miles radius of the planting sites where they shall have been growing for at least one year immediately preceding the time of supply in climatic conditions substantially similar to those prevailing in the planting site. In good time before planting the Technical Services Manager may require to inspect in the nursery or as agreed a selection of all plant material for approval. All plant material subsequently delivered to the site shall be at least the same standard in all respects as those approved.

8.2 Condition

Where applicable the trees and shrubs shall comply in all respect with Section 1 of BS 3936, Part 1. All plants shall have good fibrous root systems, carefully preserved in good condition when lifted from the nursery and adequately protected in transit. On delivery to site, trees and shrubs shall be free from pest and diseases and materially undamaged. In good time before planting, if subjects have been budded or grafted this shall be stated and the name of the rootstock shall be supplied if requested by the Technical Services Manager.

8.3 Tree Care

Unwanted dead, diseased and damaged branches shall be pruned back flush with the stem. In the case of crossed rubbing branches, one branch should be removed, the developer shall endeavour to maintain the desired shape of the trees. Bark wounds shall have the ragged edges cut back to healthy tissue in order to reduce the likelihood of infection and encourage the growth of callous tissue. Newly planted trees shall be inspected for insect and fungal attack, and treated if necessary with an approved insecticide and fungicide in accordance with the manufacturer's instructions. Spirals shall be applied for protection against vermin if required. The Developer shall ensure that those trees planted as standard shall be kept free of stem side growth in accordance with the relevant BS. If in doubt, the Developer shall contact the Technical Services Manager.

8.4 Disposal of Dead Trees and Debris

During the replacement of dead trees, any dead trees and used and damaged tree planting/ mulching mats shall be disposed of.

- 8.5 Soil The Developer shall inspect the soil area around the base of each tree. Any lift of the soil caused by frost shall be gently firmed and forking shall be carried out to relieve areas of severe compaction. Minor washouts shall be repaired and areas of standing water shall be drained and measures taken to prevent its re-occurrence.
- 8.6 Method of Planting In carrying out the replacement of trees, the Developer may be requested to carry out any of the following treatments:
- (1) Plant trees in a mix of 50/50 Soil and Mulching Compost, the material to be well mixed, (covering the planting area with a tree planting/mulching mat retained by partial burying. Mats will be of an approved material 1m x 1m).
 - (2) Plant whips adding the planting medium
 - (a) slow release fertiliser tablet(s)
 - (b) slow release fertiliser both to be in accordance with manufacturer's recommendations.
 - (3) Plant trees using a rutch planting method, using a Schlick or other suitable forest spade.
- 8.7 Watering In periods of particular dry weather, the Developer shall be required to water newly planted trees to ensure the survival of the plants.
- 8.8 Ties All missing ties shall be replaced by the Developer of the type specified and positioned in accordance with the planting diagram, reposition existing ties if necessary. Ties shall be checked for constriction and loosened to allow for the natural expansion of the stem. Tighten ties, which appear to be too loose, or if there are signs of chafing. Replace damaged or worn ties. All ties should be removed to see if tree still requires support. If weak reposition, it may be possible to shorten stake by 50% and re-tie.
- 8.9 Stake Inspection/ Where required the Developer shall inspect stakes for signs of damage, rot or fungal attack, such stakes shall be removed and replaced in the same position with a new stake of the size and type specified. Under no circumstances is the old stake end to be left in the ground. Stakes which show

(8.9 Cont'd)

movement or indicate instability shall be secured or repositioned if necessary. When the tree is no longer in need of staking, the ties shall be cut and the stake carefully removed from the ground and all removed from site. Where the Developer is required to completely remove the tree stake, he shall backfill the stake hole with topsoil consolidated by hand.

8.10 Weeding

In order to reduce competition, attack from pest and disease and maintain a neat and tidy appearance, grass and weed growth around the base of trees shall be controlled by the Developer. A radius of 150mm shall be treated with an approved herbicide around the base of each tree. Newly created borders up to two years shall be treated with a contact herbicide, applied at regular intervals to maintain a neat and tidy appearance between the periods between March and November. Established trees planted over two years shall be treated with an approved residual herbicide in February. Street trees and the like in small defined edged areas shall have the whole soil areas around the base treated. All herbicides shall be applied strictly in accordance with the suppliers specification. Adequate protection must be provided prior to the use of strimmers. All climbing plants such as Ivy and Honeysuckle, etc., shall be removed from the tree and base.

IMMATURE TREES

8.11 Definition

For the purpose of this Specification an Immature tree is one, which has not attained a height of 5.0m at the commencement of the Development.

8.12 Time of Planting

Unless otherwise agreed planting will take place during favourable weather conditions in the dormant season, which shall generally be from the first week in November to the last week in March inclusive. Evergreen shrubs shall, however, generally be planted between the first week in September and the last week in October inclusive, or the first week in April to the last week in May inclusive.

8.13 Temporary Storage

Upon arrival on the site all trees shall be planted in their respective positions without delay. On no account will roots be exposed to drying wind or sun for longer than is necessary. Planting will not take place during periods of frosty weather or cold winds, or when the ground is excessively wet. If trees cannot be planted immediately after delivery

(8.13 Cont'd)

they shall be heeled-in firmly packing soil well around the plant roots, in a suitable location agreed with the Technical Services Manager. The Developer shall ensure that no damage occurs to the plants on heeling-in and until the time of planting shall take all reasonable precautions where necessary, or as directed, watering and straw coverage to protect the plants from drying out and undue exposure to the sun and/or frost.

8.14 Initial Cultivation

The topsoil shall be cultivated to a depth of 150mm avoiding the disturbance of the subsoil, by approved mechanical means, or by hand cultivation on banks or confined areas. All stones, builder's rubbish, weeds, roots or other deleterious matter over 50mm diameter which is brought to the surface shall be removed from the site.

8.15 Planting of Trees/
Removal of Dead
Trees

On receipt of instruction from the Technical Services Manager, the Developer will replant dead or damaged trees. All trees will be pit planted into a medium of 50/50 Soil and Mulching Compost, which will be well mixed. The pit shall be of dimensions such that the free spread of roots is not affected and the depth shall be 50% deeper than the vertical extent of roots from the 'root collar'. During back filling, the planting medium shall be well trodden and the tree shall be kept vertical. The tree shall be supported in the following manner:

Tree will be of a bare-root, open ground or root ball type unless otherwise agreed with the Technical Services Manager.

<u>Size of Tree</u>	<u>No. of Stakes</u>	<u>No. of Ties</u>
Standard	1No.	2No.
Tall Standard	1No.	3No.
(or 2No. depending on location)		
Semi-mature Method by Agreement		
Small Whips	1No.	2No.
Whips & Feathered		
Trees	1No.	2No.
Large Whips	1No.	2No.

8.16 Semi-Mature Trees
and Advanced
Nursery Stock

The planting of semi-mature trees and advanced nursery stock is not covered in this Specification. All such work must be carried out in accordance with BS 4043 : 1989 "Recommendations for Transplanting root-balled trees" and a complete

(8.16 Cont'd)

specification for preparation of the tree, planting and aftercare must be agreed.

8.17 Standard Trees -
Extra Heavy

Unless otherwise specified, standard trees shall be advanced nursery stock having a minimum overall height above ground of 2.75m above ground level. They shall be vigorous with a reasonably straight stem having a minimum circumference of 100mm when measured 600mm to 900mm above ground level, and shall be free from side growths to a height of 1.8m to 2m above ground level. According to species, standard trees shall have either a well-balanced branching head or a well defined straight and upright central leader with branches growing out from the stem with reasonable symmetry.

8.18 Tall/Heavy Standard

Unless otherwise specified, tall standard trees shall be advanced nursery stock having a minimum overall height above ground of 4.5m above ground level. They shall be vigorous with a reasonable straight stem having a minimum circumference of 125mm when measured 600mm to 900mm above ground level, and shall be free from side growths to a height of 2m to 2.4m above ground level. According to species standard trees shall have either a well balanced branching head or a well defined straight and upright central leader with branches growing out from the stem with reasonable symmetry.

8.19 Planting

Prior to planting all damaged roots and branches shall be cleanly removed and the cuts and wounds coated with an approved tree wound paint in accordance with BS 3998 (Recommendations for Tree Work).

Excavate planting holes for standard trees at least 75mm greater than the depth of the root system and wide enough to accommodate all of the roots without restriction. Holes shall be a minimum of 1m in diameter and 600mm in depth below finished ground level. On no account shall tree holes be left unfilled overnight.

The size of the planting pit will be such that no root has to be bent, folded or cut to accommodate the tree. The turf cut to allow for planting will be placed in the base of the hole after the bottom of the pit has been broken up using a fork inserted to a full spit depth. On areas that are box mown, all surrounding turf will be protected during the planting operation by the use of sheets or boards

(8.19 Cont'd)

and the tree planted in a circular pit, cut using a half moon iron. After planting, the sides of the pit will be earthed up and the surrounding turf swept clean. Planting will not take place whilst there is frost in the ground. In carrying out the planting operation, the Developer will ensure that the root collar of the tree is not buried and that the planting depth of the tree corresponds with its growth in the nursery.

Excavated subsoil shall be removed but excavated topsoil shall be returned into the bottom of the planting holes and two large shovels of tree and shrub planting compost incorporated by hand forking. Prior to planting sufficient additional topsoil to completely backfill the planting hole shall be obtained. Before any topsoil is placed in tree planting holes the exposed subsoil shall be loosened to a full spit depth and any compaction of the sides scarified.

Each tree shall be planted upright in the centre of the hole with the roots spread evenly outwards and downwards without restriction, and set at nursery level with due allowance for settlement. Having covered the roots with finely broken up soil, the remainder of the hole will be filled with topsoil into which has been incorporated 200 grammes per tree of fertiliser in the ratio of 12:18:12, (N:P:K) and which shall be trodden down to consolidate, and watered in dry weather.

8.20 Staking (Standard Trees)

Each standard tree shall be supported by a minimum 65mm diameter and 3m long (average) unpeeled larch stake pointed on one end and drive into each hole before planting to a depth of at least 900mm below finished level. Peeled larch and sweet chestnut stakes may be used, the lower 1 – 1.2m having been coated with a non-injurious wood preservative (not creosote or tar), allowing at least 150mm above ground level. The stake, which shall be on the windward side of the tree and as near the tree as possible, shall not interfere with the free movement of the branches. After planting the stake shall be reduced in height where necessary, and should not be higher than 60% of the overall height of the tree.

Tall standard trees may require double staking, particularly in exposed positions. Two stakes as above shall be driven firmly on either side of the tree with a cross bar or webbing strip to which the stem is attached.

8.21 Tying

Each tree shall be securely fixed with "Tom's" reinforced rubber tree ties or other approved, two ties for each standard tree and three for each tall standard tree, positioned to prevent any abrasion of the main stem. Tree ties should be positioned 25mm from top of stake and half way down stake. Nail through tie, into stake to secure and prevent slipping.

8.22 Tree Guards

Where required, each standard tree shall be protected after planting by a 1.8m high tree guard of galvanised weldmesh (25 x 75mm x 10 s.w.g.) as approved. The guards shall be secured to the stakes with galvanised staples in an approved manner which allows easy adjustment of the ties, does not impede natural movement or restrict growth, and which leaves a 100mm gap between the base of the guard and the finished ground level.

8.23 Specimen Trees in Paved Areas

Where required excavate a pit 2.5m x 2.5m x 1m deep and backfill with topsoil and consolidate. Drainage may be required to the bottom of the pit in certain site conditions, and should be connected to the surface water drainage system. Trees shall then be planted as described above. They will require guards for protection, which may need to be more substantial and permanent than the above (e.g. wrought iron). All paving surrounding the tree shall be such as to allow free passage of air and water to the soil beneath. This may be by means of purpose made tree grill (e.g. precast concrete or cast iron) or by using small unit paving (e.g. bricks) with open joints and left ungrouted.

8.24 Existing Trees

Where existing trees are to be incorporated within the approved landscape design, all associated work is to be with the agreement of the Wiltshire Council Forestry and Countryside Officer.

9 WHIPS OR FEATHERED TREES

- 9.1 Small Whips Small whips shall have a defined straight and upright stem to a height of between 1m and 1.2m above ground level. They shall be well furnished with lateral shoots and shall have been transplanted to encourage fibrous root systems.
- 9.2 Staking (Whips or Feathered Trees) Each large whip shall be supported by a minimum 40mm diameter average 2.2m long unpeeled larch stake pointed at one end and driven into each hole before planting to a depth of at least 900mm below the finished level. The stake shall be on the windward side of the whip and as near the whip as possible, but where necessary and where directed, any side growths, which obstruct effective attachment to the stake, shall be cleanly removed and the cuts painted with an approved tree wound paint. Each whip shall be securely fastened with at least one approved tree tie positioned in such a manner as to prevent any abrasion of the main stem.
- 9.3 Planting (Small Whips and Feathered Trees) Each whip shall be placed upright in the centre of a hole large enough to accommodate the roots without restriction or damage. The whips shall be set at nursery level with due allowance for settlement and with roots spread evenly outwards and downwards. Having covered the roots well with finely broken up soil, the remainder of the excavated soil into which has been incorporated 100 grammes per whip of fertiliser in the ratio of 12:18:12 (N:P:K), shall be returned, trodden down to consolidate and watered in dry weather.
- 9.4 Large Whips Large whips shall have a defined straight and upright stem to a height of between 1.5m and 1.8m above ground level. They shall be well furnished with lateral shoots and shall have been transplanted to encourage fibrous root systems.
- 9.5 Planting Excavate planting holes for large whips at least 75mm greater than the depth of the root system and wide enough to accommodate all the roots without restriction. Holes shall be a minimum of 600mm in diameter and 600mm in depth below finished ground level. On no account shall tree holes be left unfilled overnight. Excavated subsoil shall be removed as previously specified but excavated topsoil shall be returned into the bottom of the planting holes and two large shovels of well

(9.5 Cont'd)

matured straw farmyard manure incorporated by hand forking. Prior to planting sufficient additional topsoil to completely backfill the planting hole shall be obtained. Before any topsoil is placed in tree planting hole, the exposed subsoil shall be loosened to a depth of one full spit and any compaction of the sides scarified. Each whip shall be planted upright in the centre of the hole with the roots spread evenly outwards and downwards without restrictions and set at nursery level with due allowance for settlement. Having covered the roots with finely broken up soil, the remainder of the hole shall be filled with topsoil into which has been incorporated 100mm grammes per whip of fertiliser in the ratio of 12:18:12 (N:P:K), and which shall be trodden down to consolidate, and watered in dry weather.

9.6 Replacement Trees

The Developer shall be responsible for maintaining all planted trees and for the replacement of failures or unsatisfactory plants during the first year with similar species in the same manner as detailed above at a suitable season at his own expense.

Trees will be bare-root, open ground or root ball type trees.

MATURE TREES

9.7 Definition

Mature trees for the purposes of this Specification are those that have exceeded 5.0m in height.

10 FENCING (INCLUDING GATES)

Approved types of fence construction acceptable for adoption include the following:-

- (i) Close board fence 1.8m high.
- (ii) Timber palisade fence 1.8m high.
- (iii) Chain link fence 1.8m high.
- (iv) Low timber palisade gate.

Typical acceptable details of the above are attached as Appendices A-D.

Where the Developer wishes to use a different style or standard of fence/gate the details must be submitted to the Technical Services Manager for approval at the submission stage and agreement reached prior to construction/installation.

Details of other similar items to be offered for adoption must be presented in a similar format and agreement (in writing) reached prior to construction/installation.

11 HARD LANDSCAPING DETAILS

Approved forms of construction acceptable for adoption include the following:

- (i) Sealed gravel paving.
- (ii) Compact hoggin paving.
- (iii) Pre-cast concrete flat paving.
- (iv) Mono slab grass/concrete paving.
- (v) Precast concrete edging.
- (vi) Granite sett trim.
- (vii) Timber board edging.
- (viii) Brick on edge edging.
- (ix) Cast iron free surround.


Where the Developer wishes to use different surface treatments or provide differing surface features then detail must be submitted to the Technical Services Manager for approval at the submission stage and agreement reached prior to construction/installation.

Typical acceptable details of the above are attached as Appendices E-K incl.

12 EQUIPPED PLAY SPACES

Where the requirement for equipped play spaces have been identified in the Supplementary Planning Guidance:- 'Recreation space, Public open space and Private amenity spaces in Residential areas', they should be installed in accordance with the Wiltshire Council Equipped Play Space Specification.

APPENDIX A

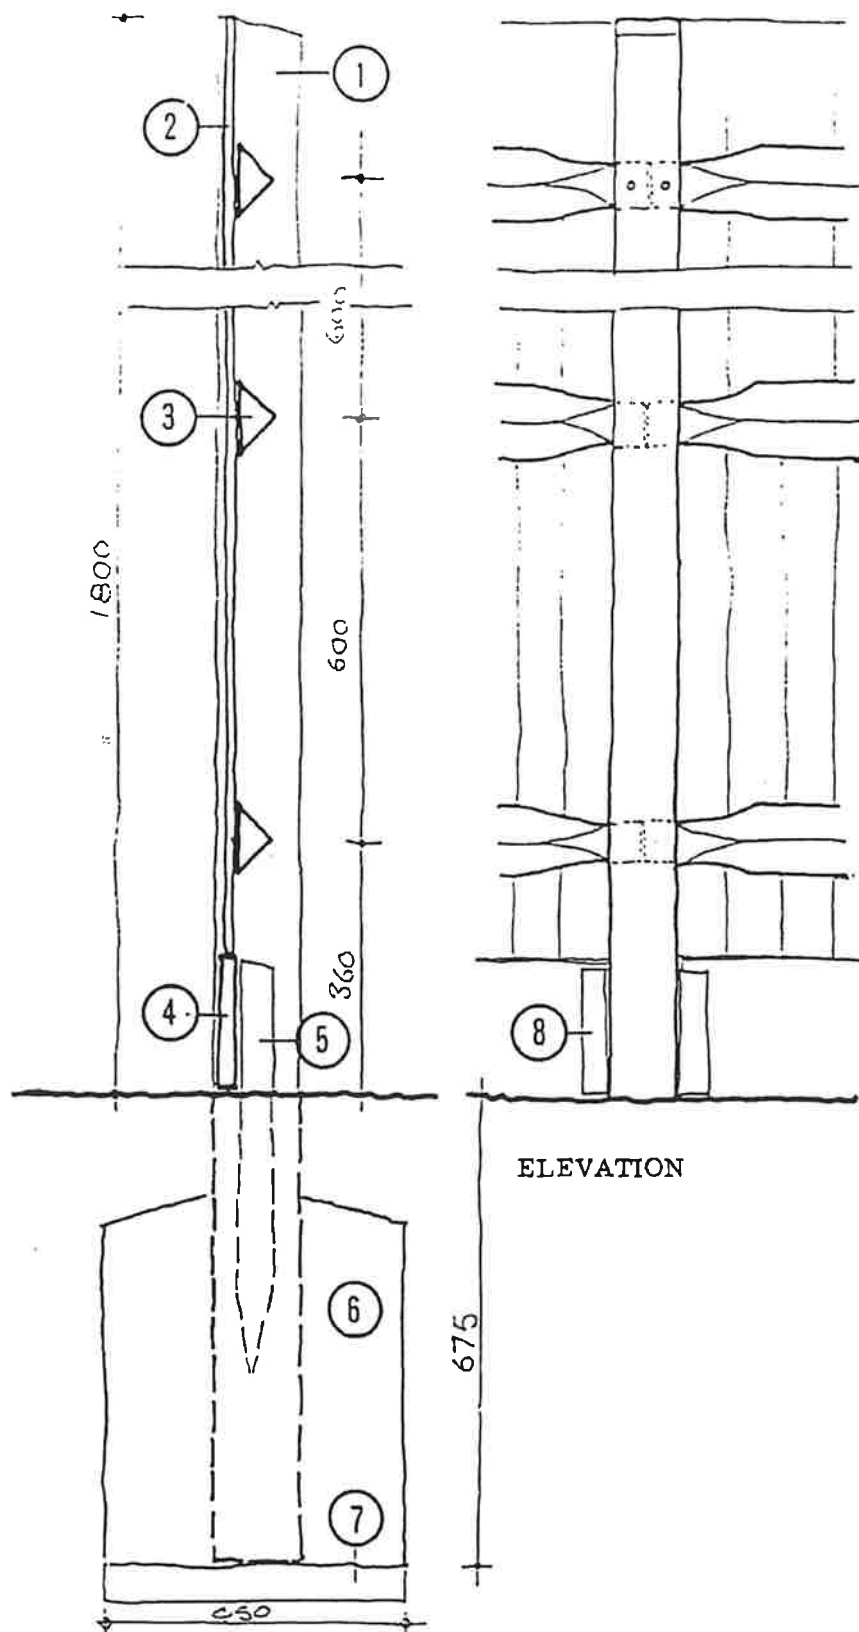

ELEVATION


1. 100 x 100 mm oak post at 2.7 m max. centres morticed as required by BS 1722, pt 5.
2. 90 x 14 mm tapered to 7 mm oak boarding. 50 mm galv. nail fixing.
3. 75 x 75 mm triangular arris rail shaped to fit mortices. Top rail only to have 15 mm oak peg fixing.
4. 200 x 25 mm gravel board.
5. 50 x 50 x 600 mm stump let into ground at centre of gravel board.
6. 450 x 450 x 525 mm concrete surround to post. Concrete mix 1:6.
7. 50 mm coarse aggregate.
8. 50 x 38 mm bearers nailed to post and gravel board.

NOTE: All timber shall be pressure impregnated with preservative as specified.

Timber quality shall be as noted in BS 1722, pt 5, Appendix N.

Ground slopes accommodated by inclining the arris rails in their mortices up to a maximum of 15 degrees


project		
drawing		
EXTERNAL WORKS DETAIL Close board fence 1.8 m high		
scale	approved	date

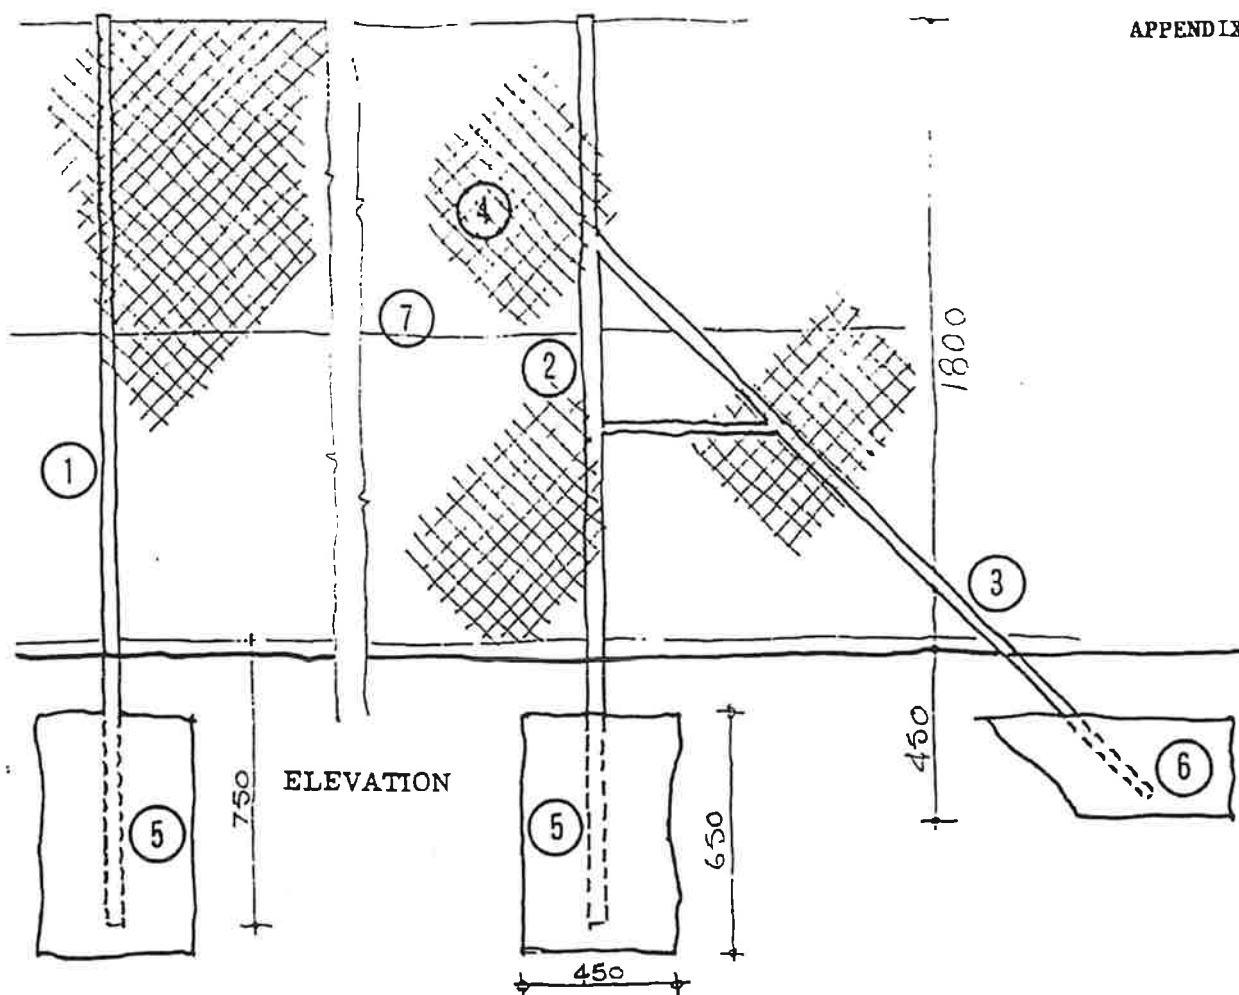


1. 38 x 38 mm RHS 2.6 mm thick intermediate post, 3.0 m spacing, galvanised mild steel paint finish. Posts to be drilled to receive stirrup wire.
2. 50 x 50 mm RHS x 3.2 mm thick straining post at corners, ends and changes of direction and 150 m intervals on straight runs.
3. 25 mm x 25 mm RHH x 20 mm thick strut and brace.
4. Chain link fence wire to comply with BS 4102, plastic coated, 50 mm mesh. Heavy grade.
5. 450 x 450 x 650 mm concrete foundation to posts, concrete mix 1:6.
6. 450 x 300 x 300 concrete foundation to strut concrete mix 1:6.
7. Plastic coated line wire 3.0 mm diameter core.

Note Winding brackets, stretcher bars, and other fittings and materials shall be as specified in BS 1722 Part 1.

project		
drawing		
EXTERNAL WORKS DETAIL Chain link fence 1.8 m high		
scale	approved	date
1:20		

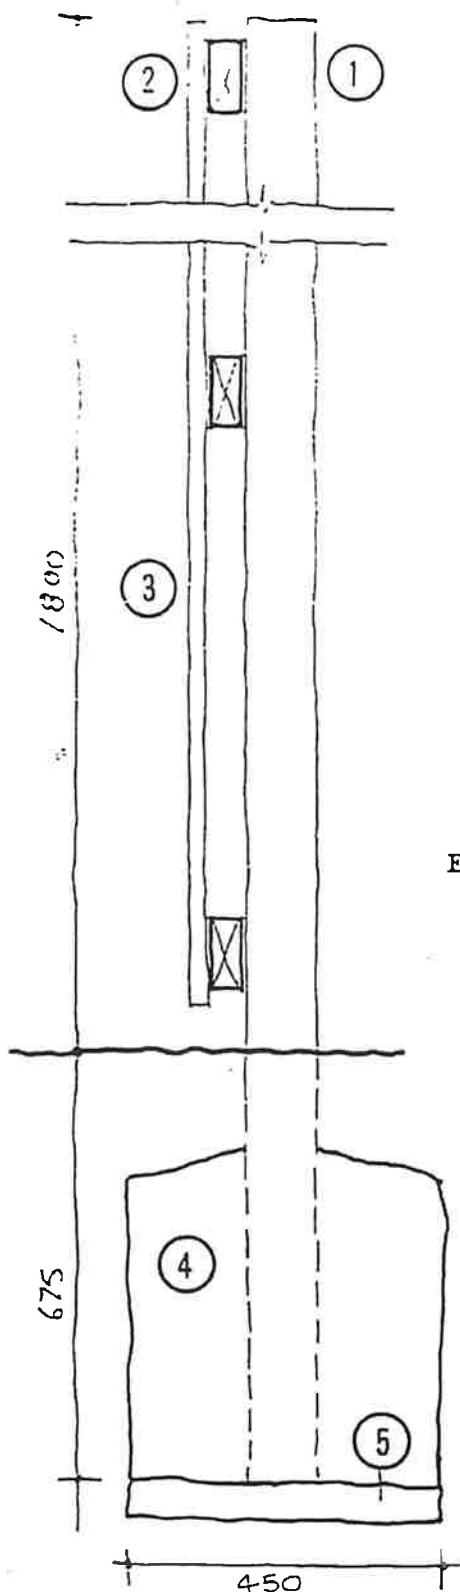


ELEVATION

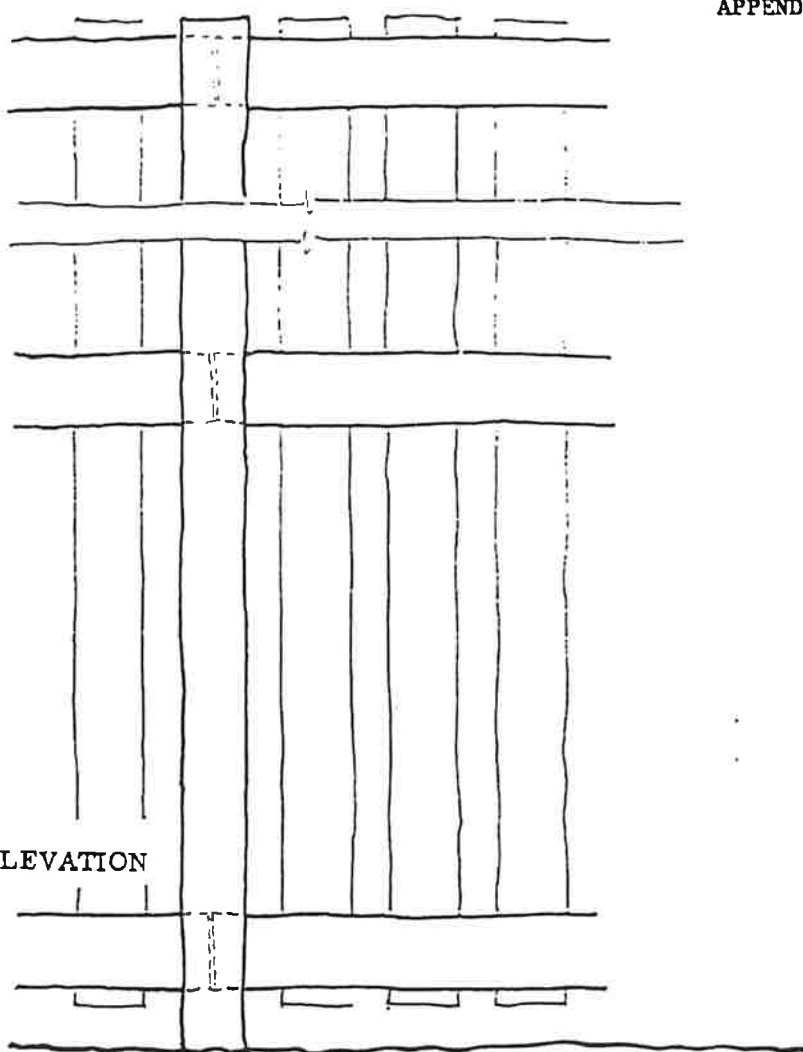

1. 100 x 125 mm oak post 1.8 m centres.
2. 100 x 50 mm s.w. rail fixed to posts with 2 no. 125 mm galvanised nails per end.
3. 100 x 25 mm s.w. pale fixed to rails at 150 mm centres with 2 no. 65 mm galvanised nails per rail.
4. 450 x 450 mm 1:6 concrete surround to post.
5. 50 mm coarse aggregate.


NOTE: All timber to be pressure impregnated with preservative as specified. Finish to be 2 coats wood dye as specified.

project		
drawing		
EXTERNAL WORKS DETAIL Timber palisade fence 1.8 m high		
scale	approved	date
1:10		

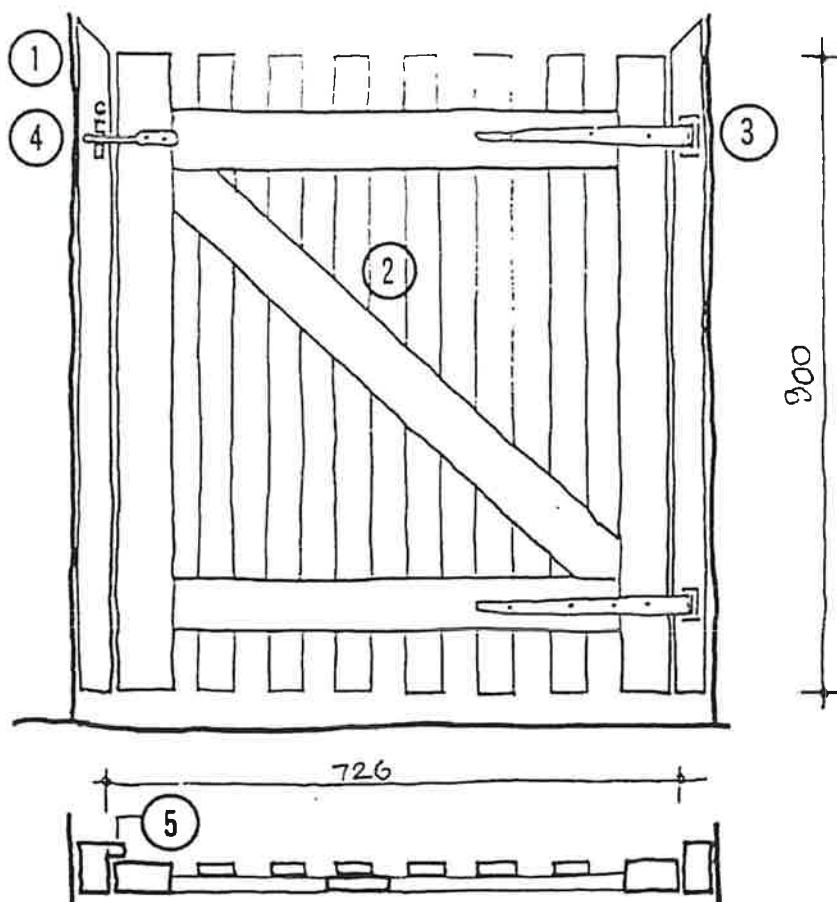


1. 44 x 69 mm wrot softwood gate posts, weathered top ends, bolted to brickwork with 2 no. 10 mm x 100 mm expanding bolts, bolt heads recessed. Paint finish.
2. Wrot softwood gate constructed in accordance with BS 4092, pt 2, 1966. Pales to be 19 mm x 71 mm wrot softwood fixed at 100 mm centres.
3. 1 pair 300 mm galvanized mild steel tee hinges to BS 1227. 35 mm sherardized screw fixing.
4. Automatic gate latch, galvanized finish 25 mm sherardized screw fixing.
5. 25 x 25 mm softwood planted gate stop. 50 mm sherardized screw fixing 450 mm centres.

project		
drawing	EXTERNAL WORKS DETAIL Low timber palisade gate	
scale	1:10	approved
		date

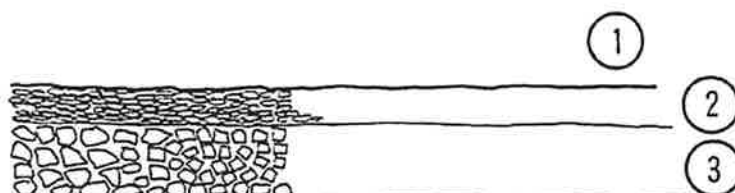


1. 6 mm rolled gravel topping with binder of cut-back bitumen to BS 3690.
2. 45 mm bitumen macadam, 20 mm aggregate.
3. 100 mm hardcore well consolidated with a 508 kg vibrating roller or equivalent.

project		
drawing EXTERNAL WORKS DETAIL Sealed gravel paving		
scale 1:10	approved	date




1. 100 mm compacted clean furnace clinker rolled with a 508 kg vibrating roller. Top surface blinded with fine hoggin, watered and rolled to a compacted thickness of 12 mm with a 508 kg vibrating roller.
2. Hoggin with maximum particle size of 50 mm, watered and rolled to a compacted thickness of 100 mm with a 508 kg vibrating roller.

project		
drawing EXTERNAL WORKS DETAIL Compact hoggin paving		
scale 1:10	approved	date

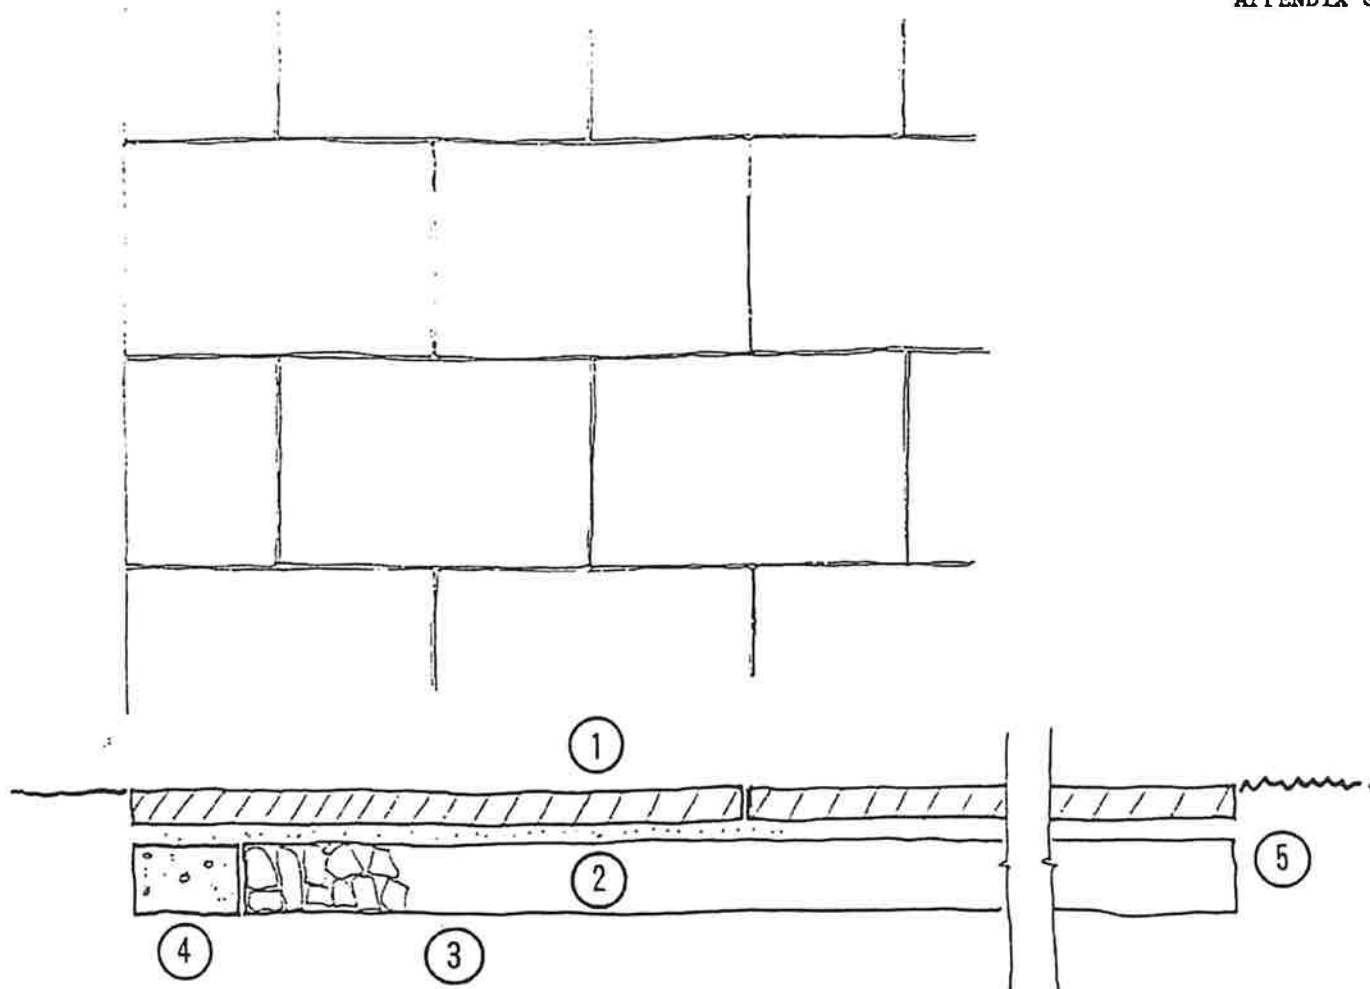


1. 50 mm x 600 x 900 mm precast concrete flags to BS 368: 1971, natural finish, butt joints.
2. 25 mm sand bed
3. 100 mm hardcore well consolidated with a 508 kg vibrating roller or equivalent.
4. 100 x 150 mm concrete edging to cultivated areas only
5. Detail of paving adjoining turfed area.

project		
drawing		
EXTERNAL WORKS DETAIL Pre-cast concrete flag paving		
scale	approved	date
1:10		

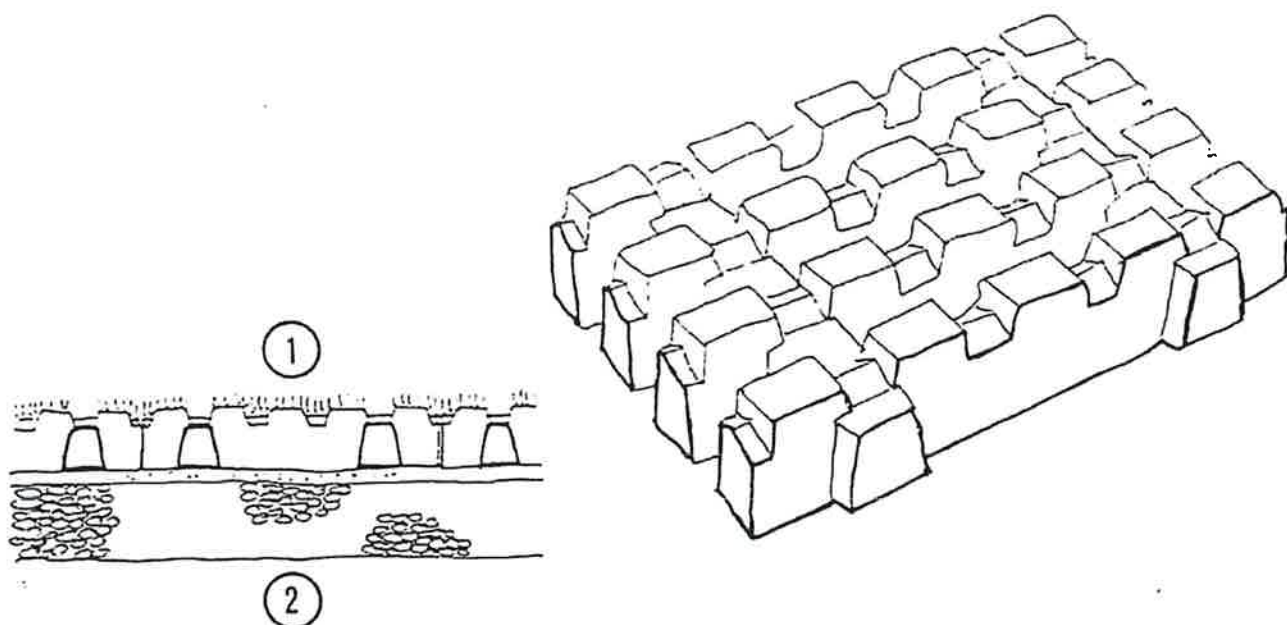


1. Monoslabs Type G, manufactured by Mono Concrete Limited and laid on 20 mm sand in accordance with their recommendations. Interstices to be filled with topsoil to a level of 25 mm below the upper surface of the slab and seeded with grass seed to BS 4428:1969 as specified.
2. 125 mm sub base granular material MOT Type 2 (Specification 1969 cl. 804).

project		
drawing		
EXTERNAL WORKS DETAIL Monoslab grass/concrete paving		
scale	approved	date
1:10		




1. 50 x 250 mm precast concrete edging.
2. 75 mm concrete surround 1:2:4 mix.

project		
drawing EXTERNAL WORKS DETAIL Pre-cast concrete edging		
scale 1:10	approved	date




1. Single course second hand 100 x 100 x 100 mm granite setts.
2. 75 mm concrete bed 1:2:4 mix.

project		
drawing EXTERNAL WORKS DETAIL Granite sett trim		
scale 1:10	approved	date




1. 150 x 38 mm softwood board pressure impregnated with preservative as specified, nailed to pegs with 65 mm galvanised nails.
2. 50 x 50 mm softwood pegs pressure impregnated with preservative as specified, driven into the ground at 1.2 m centres

project:		
drawing EXTERNAL WORKS DETAIL Timber board edging		
scale	approved	date
1:10		



1. Brick on edge on 1:3 cement mortar bed and mortar haunching. All joints mortar pointed.
2. 75 mm concrete foundation 1:2:4 mix.

project:		
drawing EXTERNAL WORKS DETAIL Brick on edge edging		
scale	approved	date
1:10		

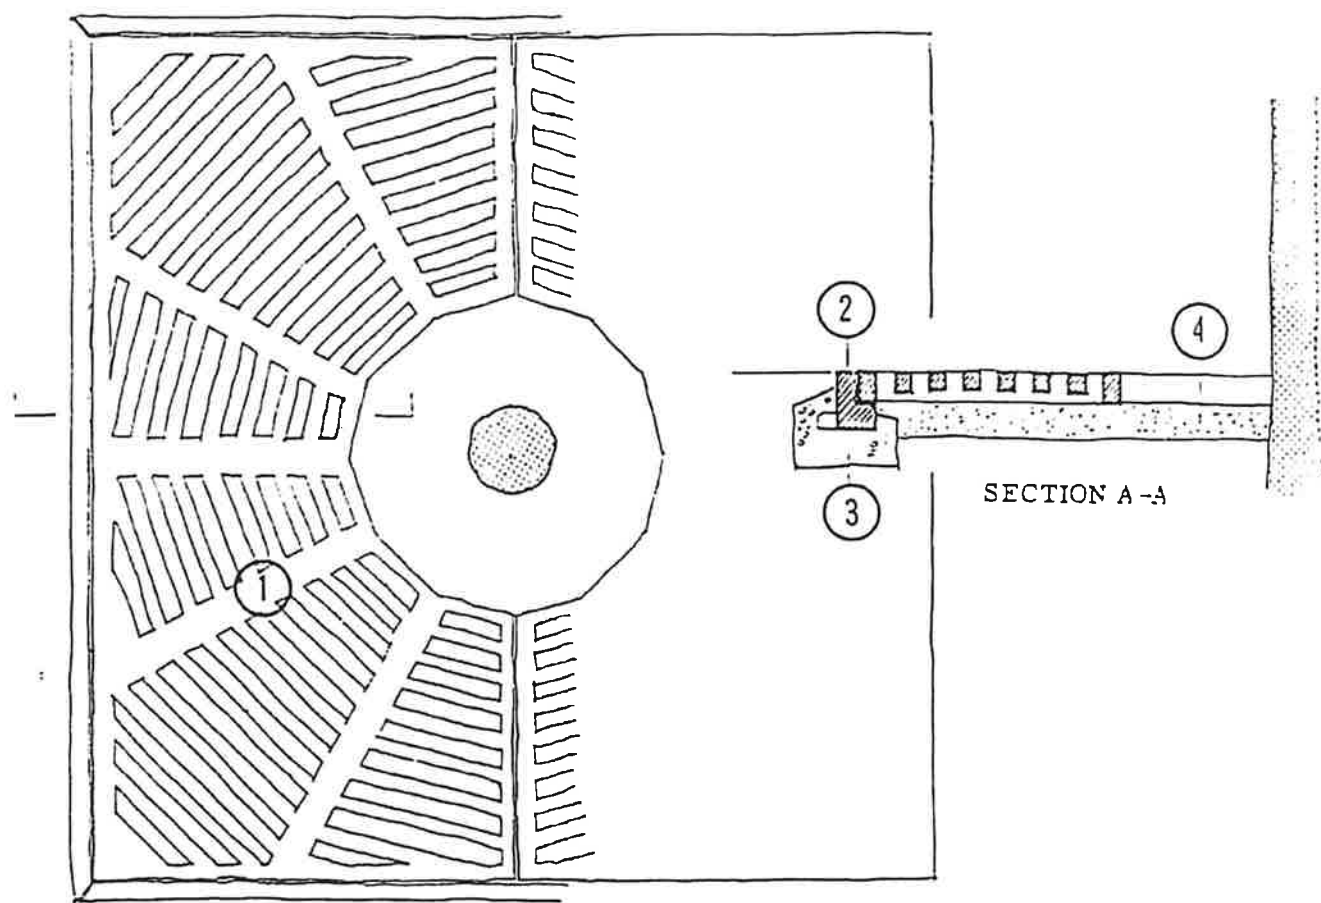

1. Cast iron tree grid 1219 mm square as specified.
2. Cast iron angle surround supplied with grid.
3. 75 mm concrete bed and haunching to surround
4. 50 mm hoggin.

project		
drawing	EXTERNAL WORKS DETAIL Cast iron tree surround	
scale	1:10	approved
		date

SCHEDULE 4 - COVENANTS BY THE COUNCIL

The Council covenants with the Owner:

Repayment of Contributions

1. To use all sums received from the Owner under the terms of this Deed for the purposes specified in this Deed for which they are to be paid
2. To pay to the paying party such amount of any payment made by the Owner to the Council under this Deed which has not been expended or committed in accordance with the provisions of this Deed within ten (10) years of the date of receipt by the Council of such payment on receipt of a written request from the Owner to do so

Communal Spaces and BNG Works

3. To inspect any green space within the Communal Spaces and/or the BNG Works within a reasonable period of having received notification from the Owner under Schedule 2 of this Deed or in the event that no such notification has been received at the Council's discretion to determine whether to issue the Communal Spaces Practical Completion Certificate and the BNG Practical Completion Certificate (as the case may be)
4. If appropriate following an inspection referred to under paragraph 3 above either:-
 - 4.1. issue the Communal Spaces Practical Completion Certificate and the BNG Practical Completion Certificate or
 - 4.2. issue a Remedial Notice
5. Inspect any green space within the Communal Spaces and/or the BNG Works (as appropriate) in the event that a Remedial Notice is issued
6. If a Remedial Notice is issued then the timetable for issuing the Communal Spaces Practical Completion Certificate and/or the BNG Practical Completion Certificate (as appropriate) under this Deed shall be deemed amended accordingly in order for compliance of the Remedial Notice to be achieved and further inspections are to be carried out by the Council as appropriate
7. In the event that a Remedial Notice is not complied with within a reasonable period agreed with the Council then the Communal Spaces Practical Completion Certificate

and/or the BNG Practical Completion Certificate (as appropriate) shall not be issued until the Remedial Notice has been complied with to the reasonable satisfaction of the Council


Annex A.

Plan 1 Location Plan - 1630.120

Plan 2 Oaksey Park Golf and Leisure, Wiltshire, SN16 9SB – land ownership

Plan 3 On-Site Post-Development Habitat Plan Contract 3192 February 2025

Plan 4 Oaksey Park Golf and Leisure, Wiltshire, SN16 9SB – Active Travel Link to Wick Road

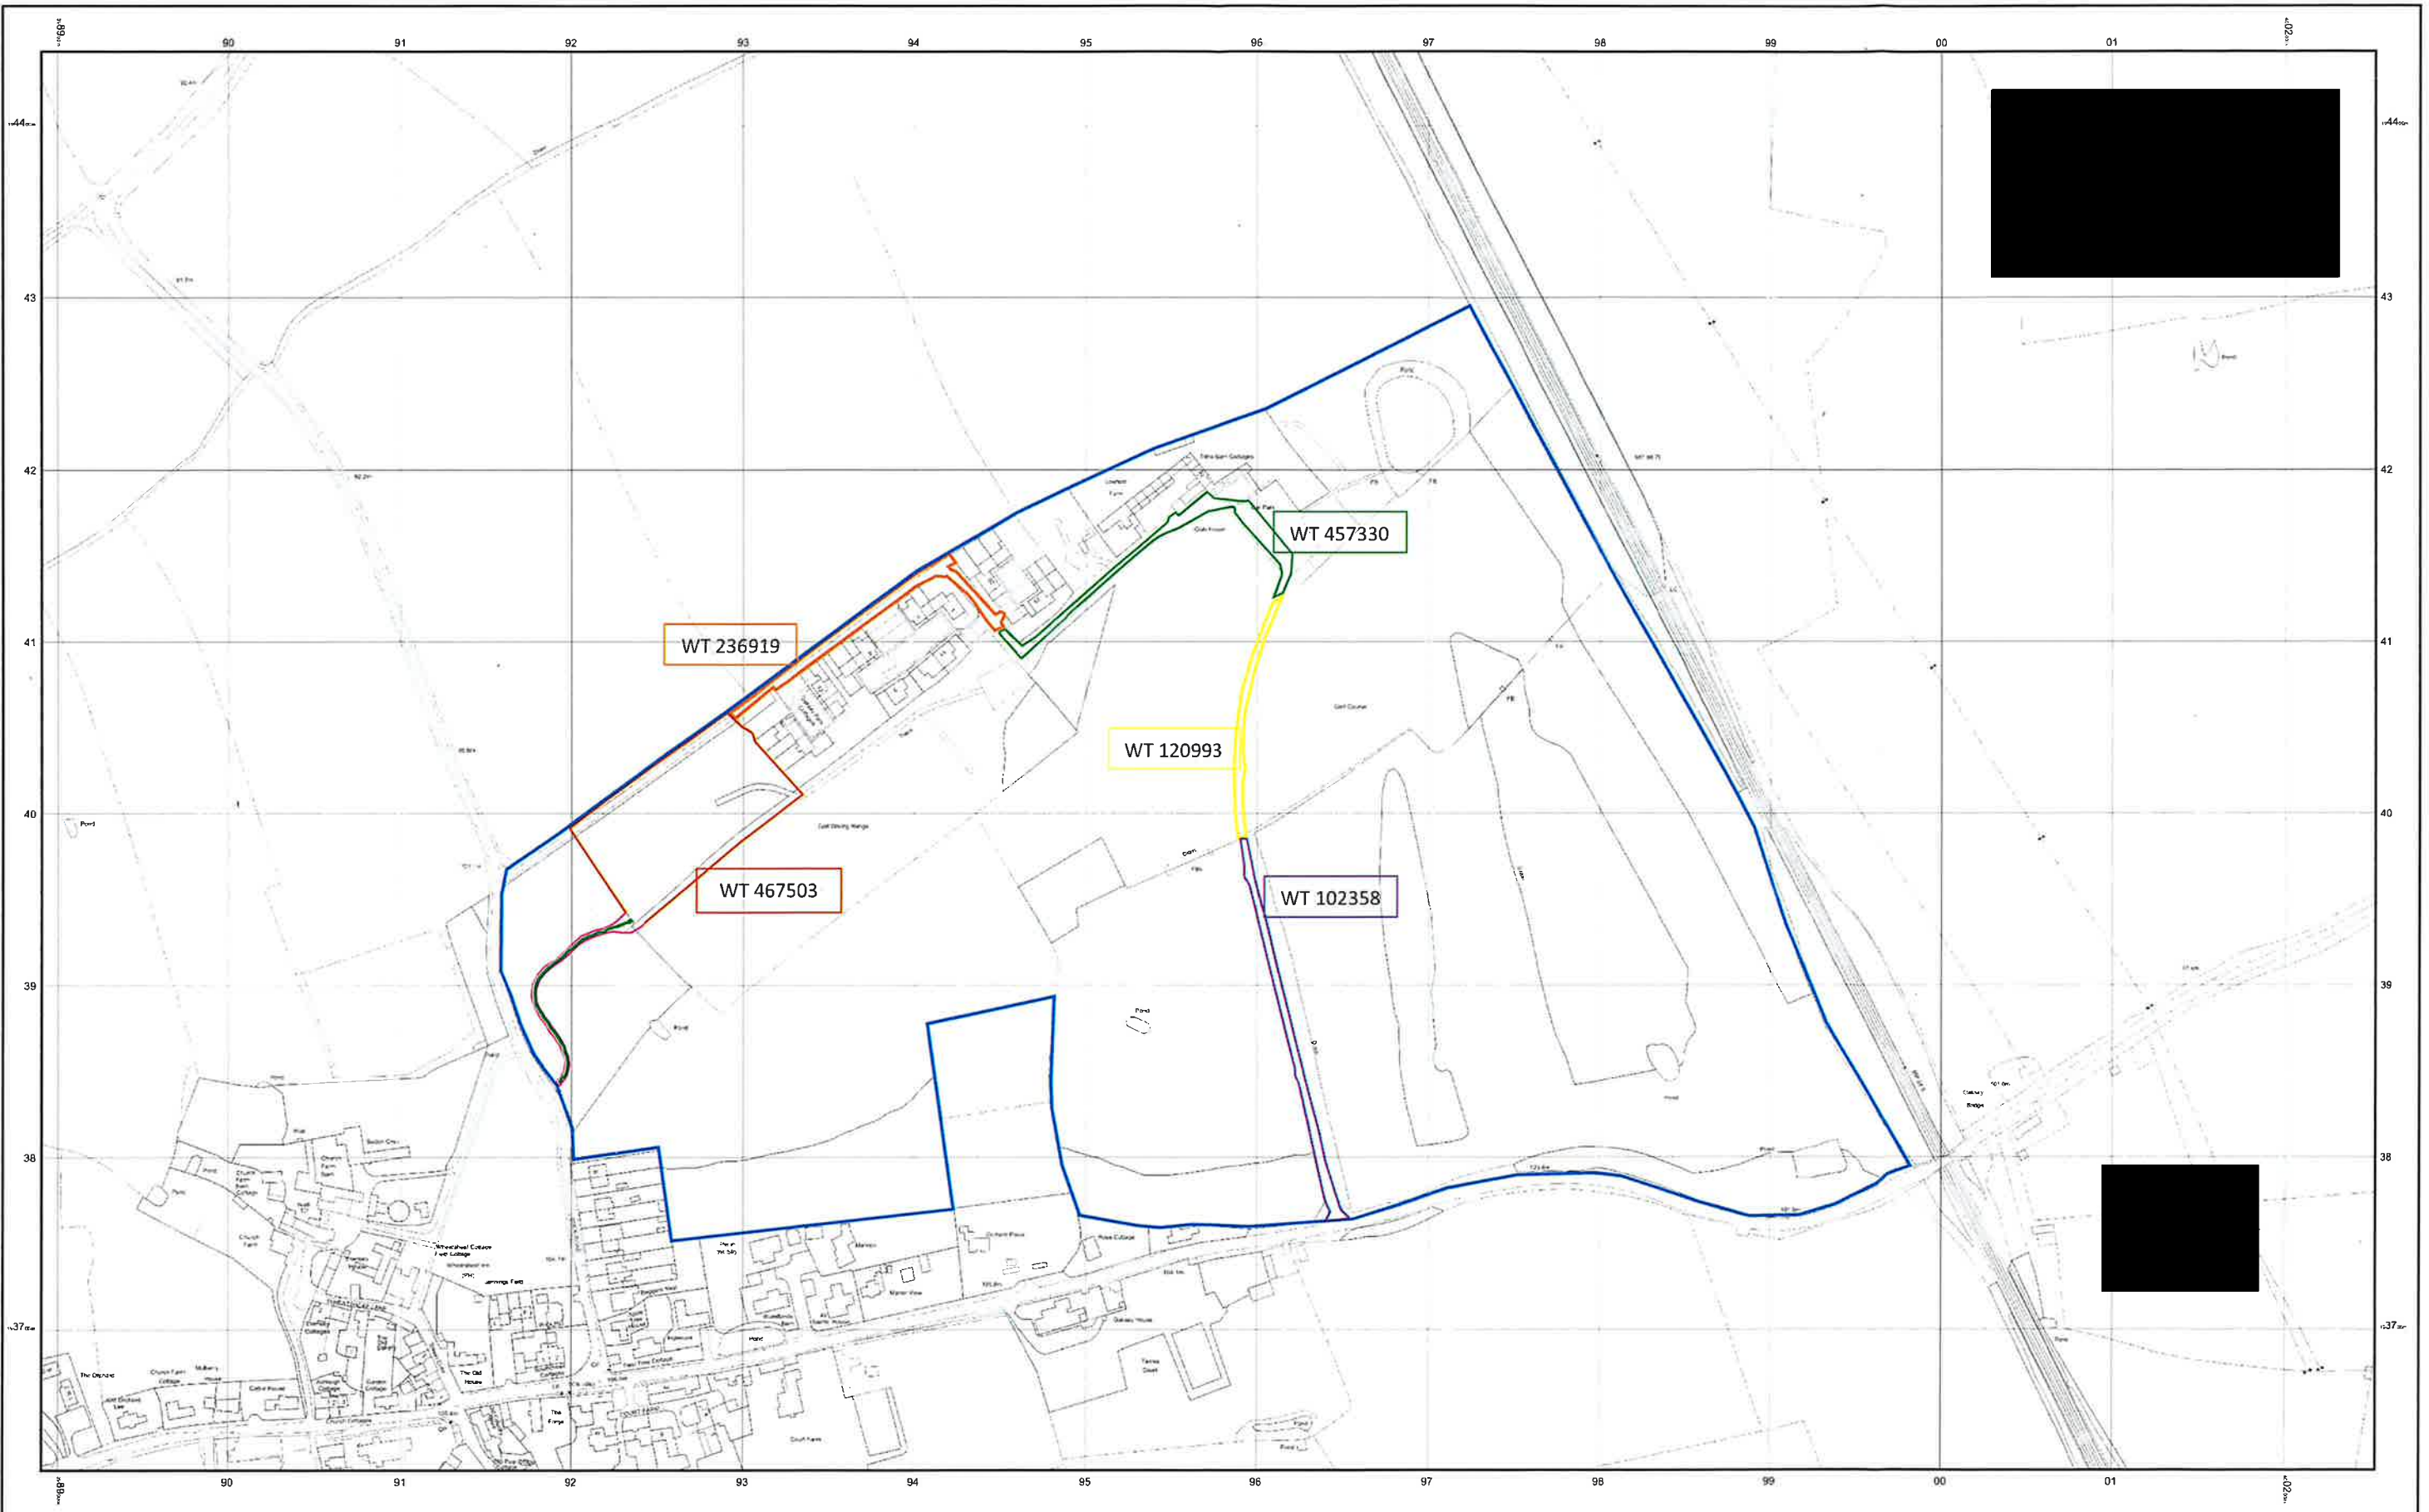


© Crown copyright and database rights 2022 Ordnance Survey 100048957. The representation of road, track or path is no evidence of a boundary or right of way. The representation of features as lines is no evidence of a property boundary.



0m 1cm = 25m 250m
Scale 1:2500




5.1.4 On-site Post-development Habitat Plan

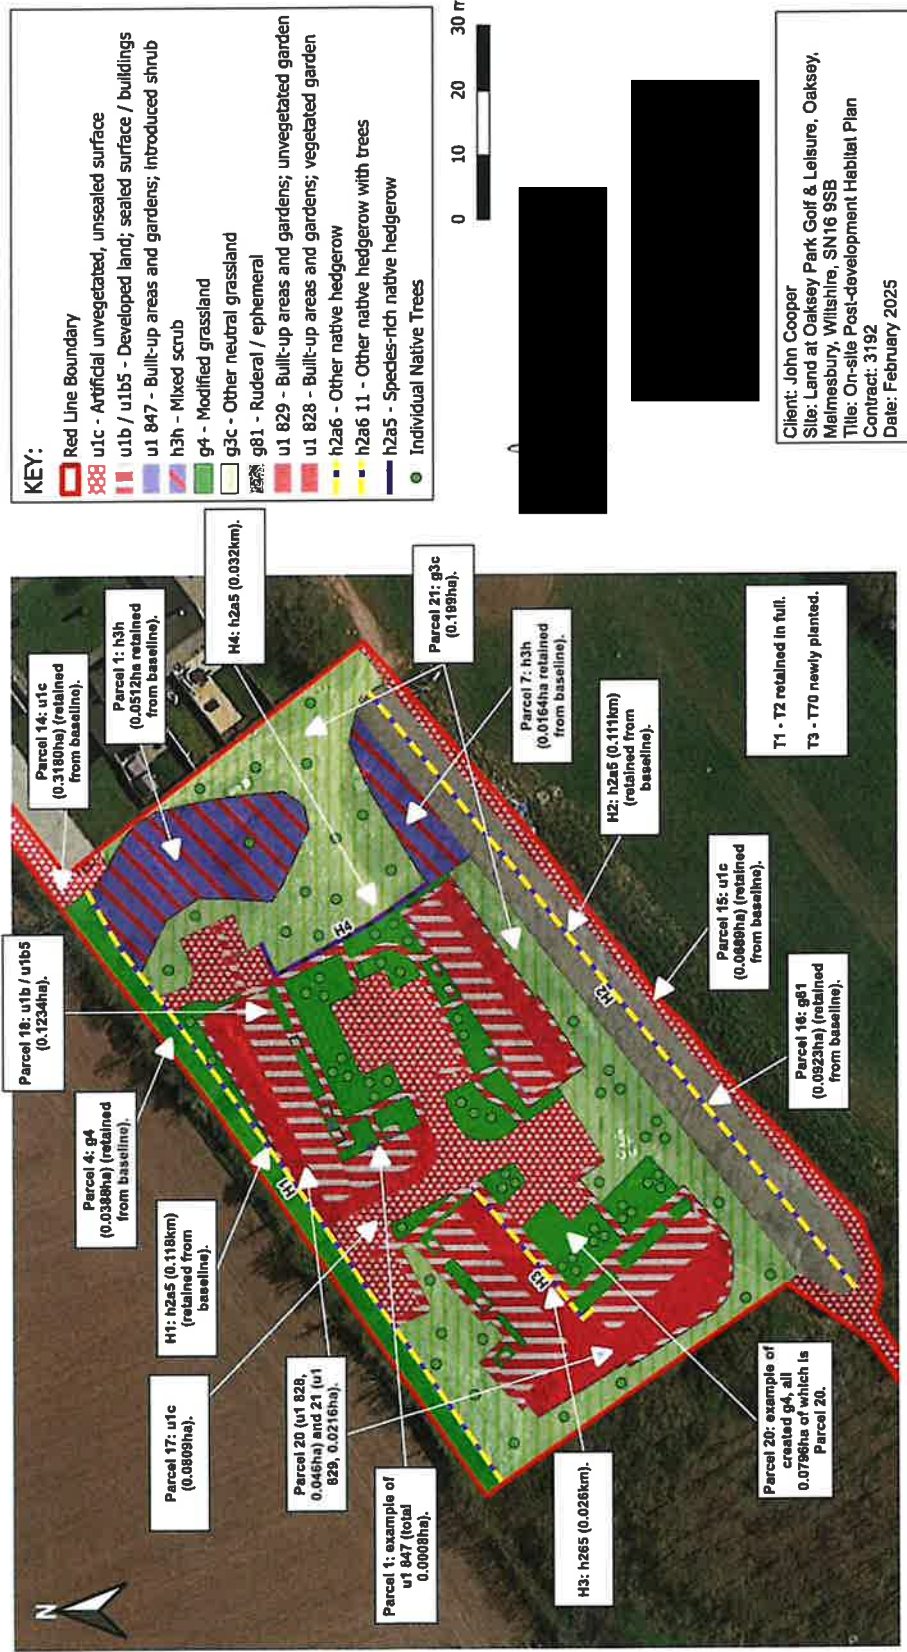

Contains Ordnance Survey data © Crown copyright and database right 2025. Unauthorised reproduction infringes Crown Copyright and may lead to prosecution or civil proceedings. Please note this plan is intended only to indicate the approximate location of features and should therefore, not be treated as an accurate scale plan.

OAKSEY PARK GOLF AND LEISURE, WILTSHIRE, SN16 9SB

Supplied by: www.ukmapcentre.com
Serial No: 239556
Centre Coordinates: 399572,194031
Production Date: 05/05/2022 12:01:09

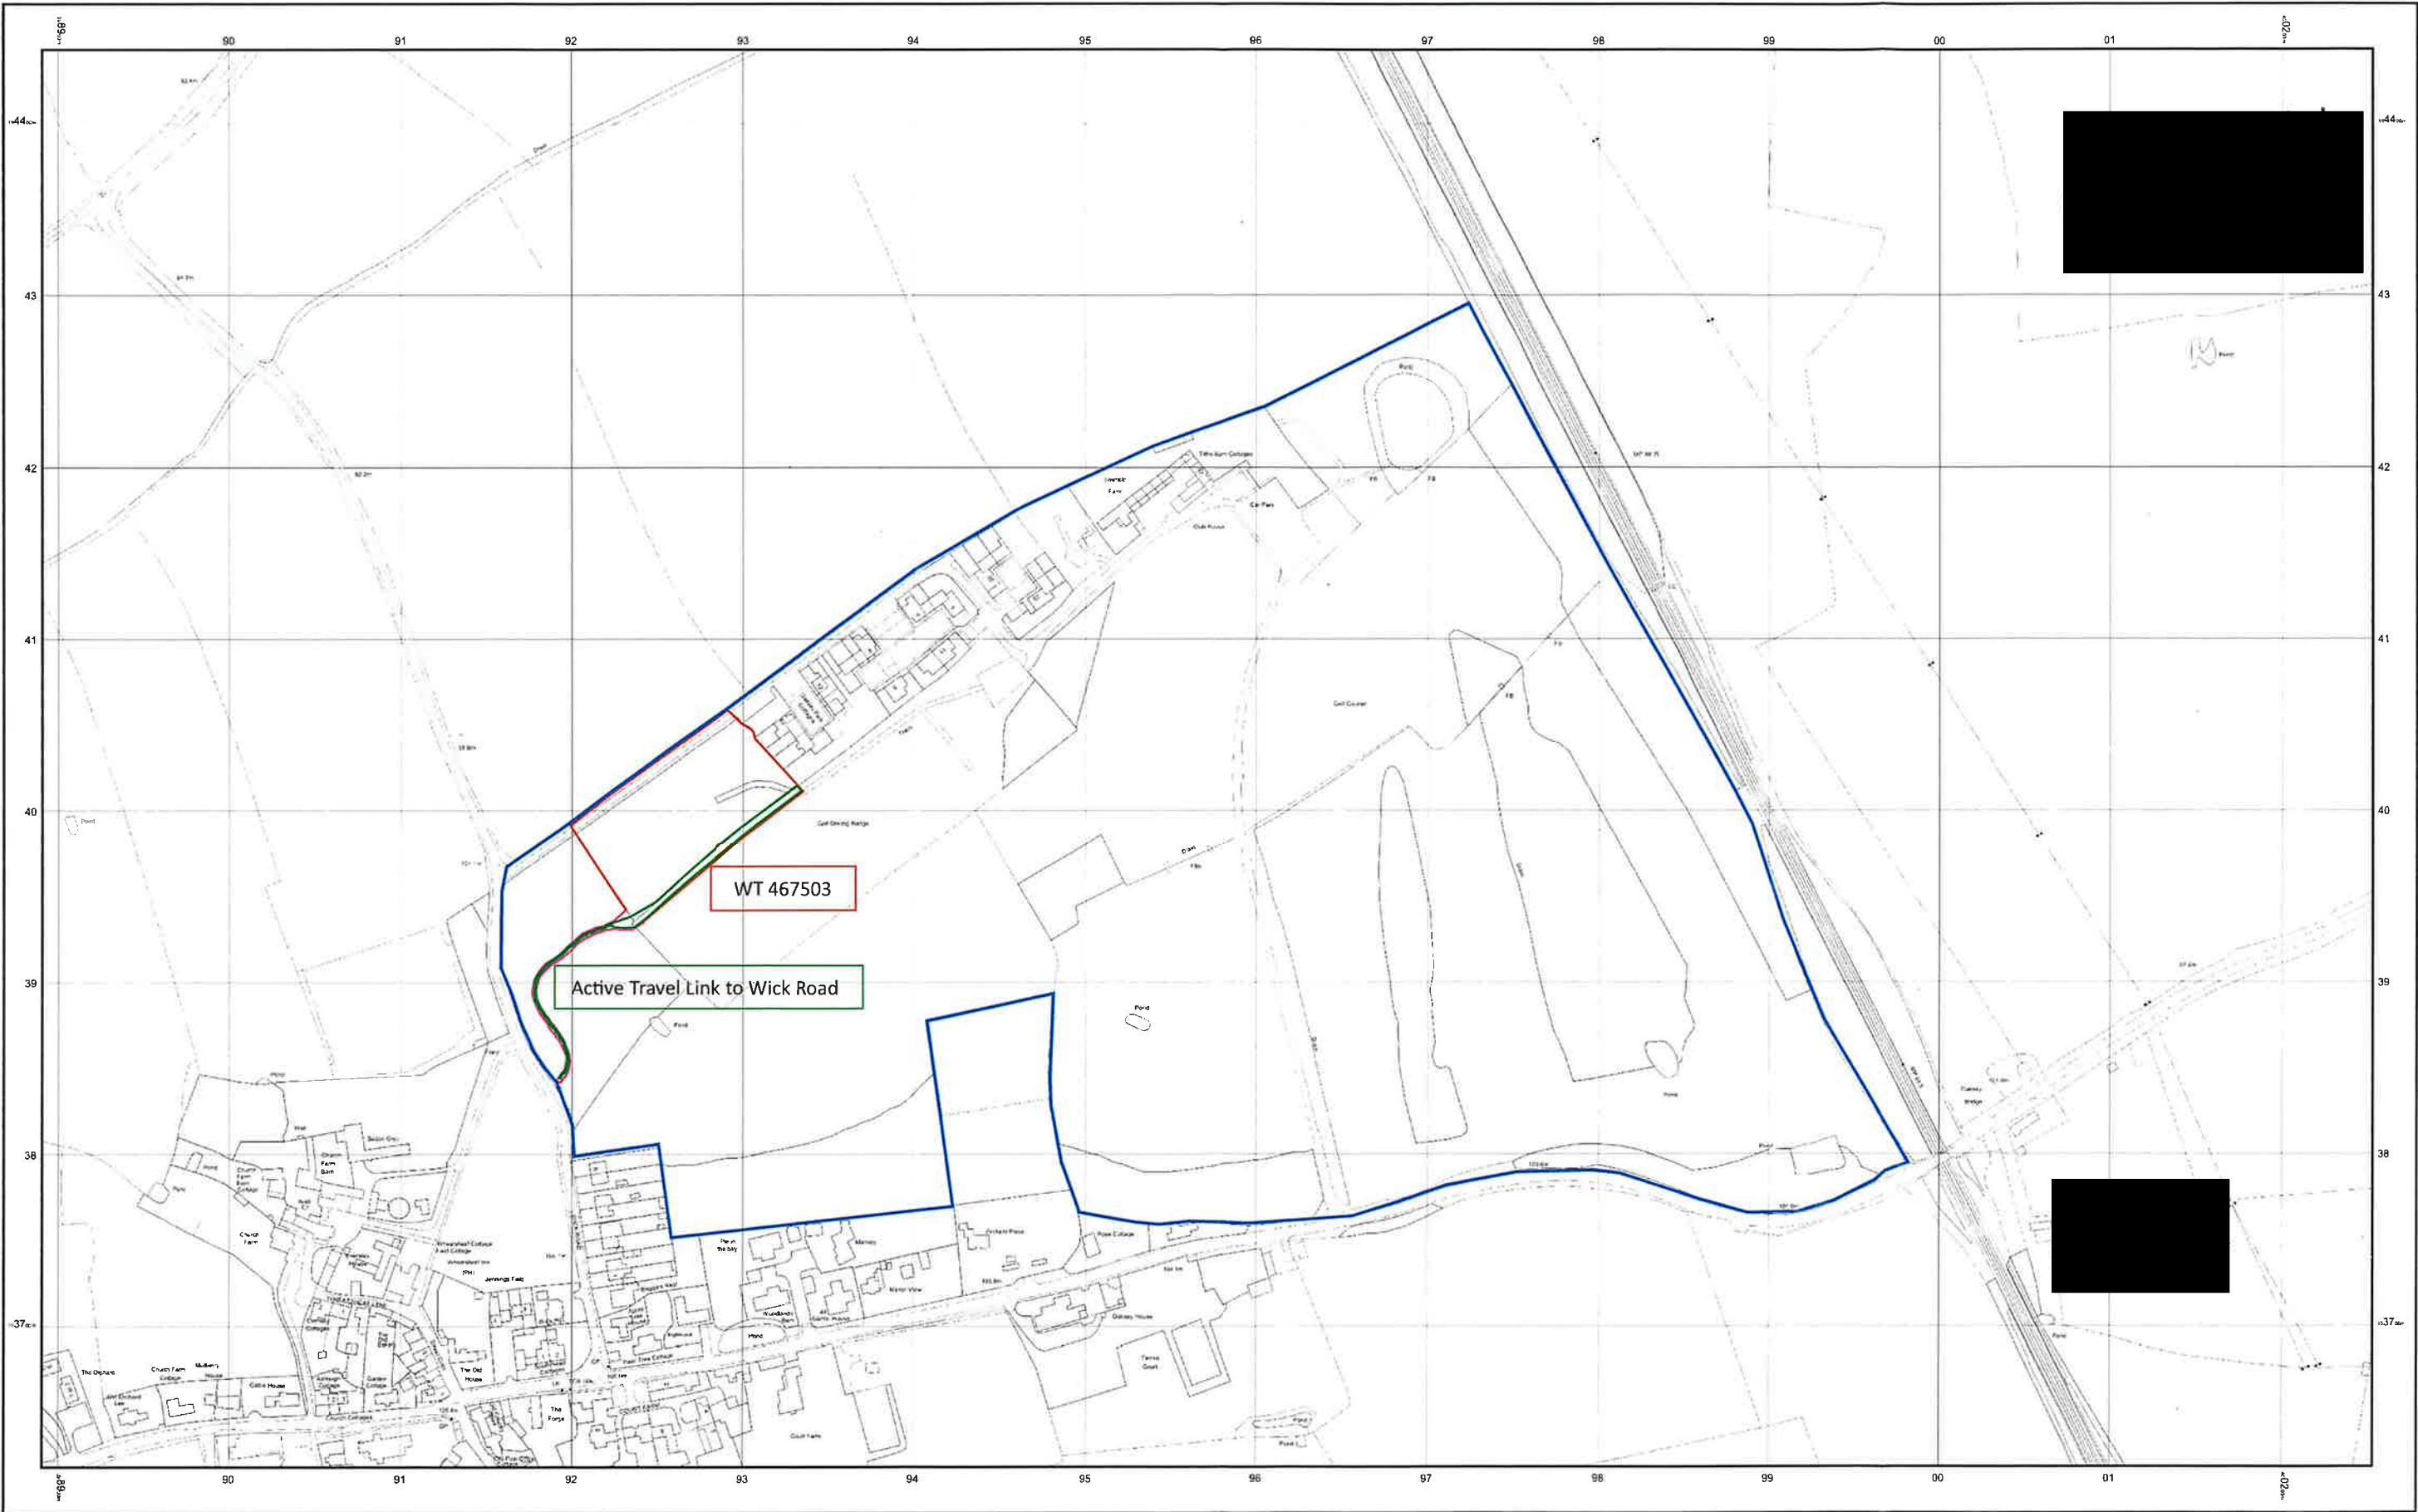

© Crown copyright and database rights 2022 Ordnance Survey 100048957. The representation of road, track or path is no evidence of a boundary or right of way. The representation of features as lines is no evidence of a property boundary.



0m 1cm = 25m 250m
Scale 1:2500



Executed as a deed by affixing
The common seal of **WILTSHIRE**
COUNCIL
in the presence of:




31041

Authorised Signatory
Wiltshire Council

CHAIRE LOVELL PRINCIPAL FCILEX
Authorised signatory

Executed as a deed by)
OAKSEY PARK GOLF AND)
LEISURE LIMITED acting by)
one director in the presence of)




.....
Signature Of Witness

Witness Name
Witness Address

JOHN MICHAEL HENRY
65 CASTLE STREET
CIRENCESTER
GLOUCESTERSHIRE
GL7 1QD

Executed as a deed by)
OAKSEY PARK LIMITED acting by)
one director in the presence of)

.....
Director

.....
Signature Of Witness

Witness Name
Witness Address

JOHN MICHAEL HENRY
65 CASTLE STREET
CIRENCESTER
GLOUCESTERSHIRE
GL7 1QD

Executed as a deed by)
COTSWOLDS ECOHOMES
LIMITED acting by)
one director in the presence of)


.....
Director

.....
Signature Of Witness

Witness Name
Witness Address

JOHN MICHAEL HENRY
65 CASTLE STREET
CIRENCESTER
GLOUCESTERSHIRE
GL7 1QD

Signed as a deed by)
JOHN STANLEY COOPER)
in the presence of:)



Signature Of Witness

Witness Name
Witness Address

JOHN MICHAEL HEARY
65 CASTLE STREET
CIRENCESTER
GLOUCESTERSHIRE GL7 1QD

Witness Occupation

CHARITABLE ACCOUNTANT

