


PROPOSED
REAR ELEVATION

PROPOSED
LEFT
ELEVATION

PROPOSED
RIGHT
ELEVATION

PROPOSED
FRONT ELEVATION

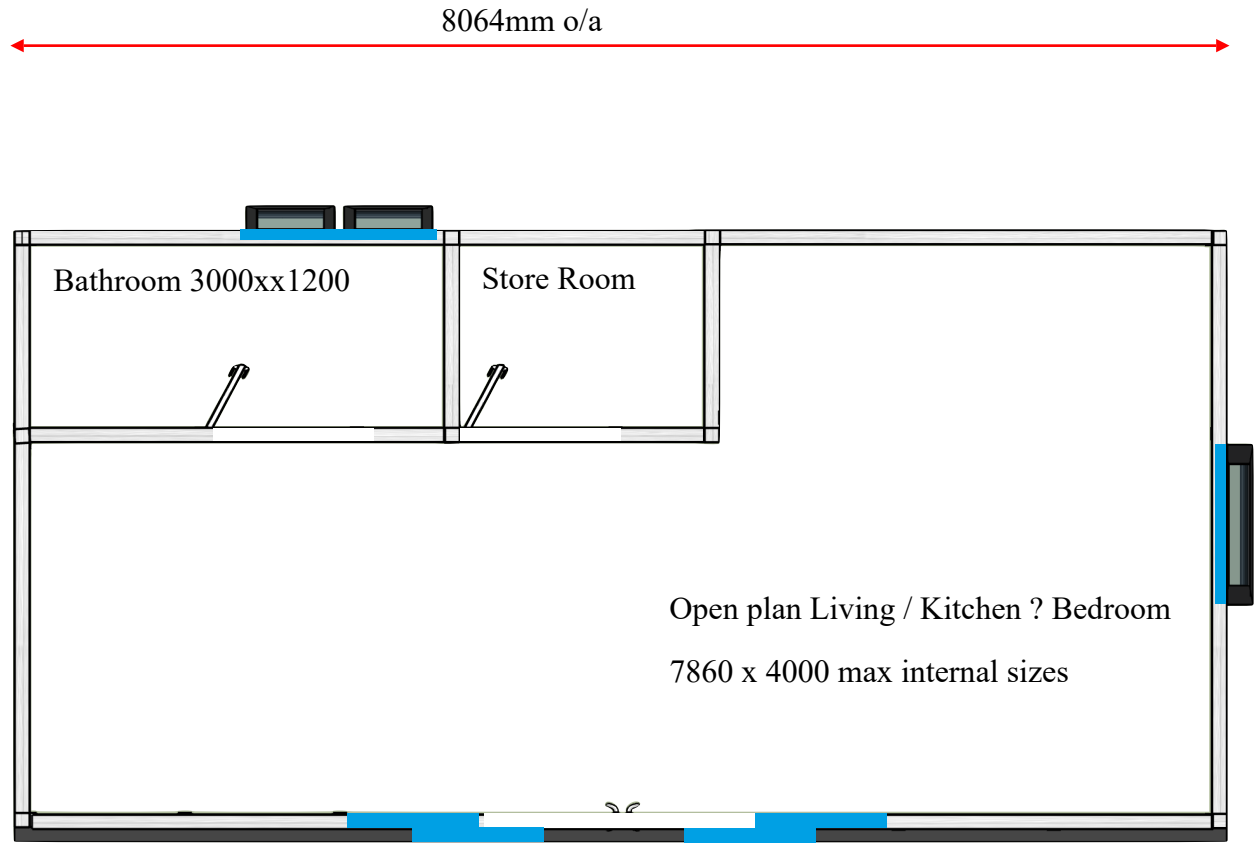

MOBILE HOME SPECIFICATIONS

Roof

Black EPDM on piece rubber roof
Black Roof Trims / Grey Fascias
100mm insulation between roof joists

Walls

70mm thick insulated COMPOSITE WOOD
External Finish : Grey woodgrain
Internal finish : Grey woodgrain
Bathroom internal walls Grey

Corner Posts and Joiners

Grey

Windows and Doors

PVC u in Anthracite grey woodgrain in&out
Double Glazed : 4mm Toughened Low E
glass/argon fill
Grey Cills

Floor

43mm insulated chipboard sub floor
finished floor TBC

Base Frame

150x45mm C24 timber frame supported on
concrete posts.
Room raised off ground level by 200mm, with
Black skirting scribed all round the base.

Electrics - see quote for full details

18th edition fuse board
LED downlighters
White flush double sockets
White light switches
All electrics carried out by approved
contractors, and tested with EIC .

Client	Steve Horne
Job Number	8040
Site address	21, Coppershell Gastard, Corsham, Wiltshire. SN13 9PZ
title	Proposed mobile home annexe FLOOR PLAN
Client approval	Steve Horne
Date :	19/7/27



Scale	1to50	Dwg. Size	A3
Dwg. No.	2614/ 2	Date	16/07/26
Dwg by	D Price		

Scale Bar 1:50 Not to scale if printed on A4 paper

