

Option 1 - British Gypsum


- GypWall Single Frame A206027 (B) (EN)
FR30, 50 Rw (db) sound insulation, 7600 max height, Severe duty
- GypWall Single Frame A206027 (B) (EN)
50 Rw (db) sound insulation, 7600 max height, Severe duty
- GypWall Single Frame A206003 MR2 (EN)
42 Rw (db) sound insulation, 3400 max height, Severe duty.
Tiled finish to WCs
- Non Load-Bearing Blockwork Partition

Option 2 - Fermacell

- Fermacell 1 S 11 - 100mm studs with mineral wool insulation and 1no. layer 12.5mm board either side
FR30, 52 Rw (db) sound insulation, 5900 max height, Severe duty
- Fermacell 1 S 15 - 100mm studs with 1no. layer 12.5mm board either side
43 Rw (db) sound insulation, 7760 max height for NFR, Severe duty
- Fermacell 1 S 15 - 75mm studs with 1no. layer 12.5mm board either side
43 Rw (db) sound insulation, 5370 max height for NFR, Severe duty.
Tiled finish to WCs
- Non Load-Bearing Blockwork Partition

Floor Finishes Key

- Forbo Coral Brush Entrance
Matting, Colour Asphalt (LRV 2)
- Power floated concrete floor
- Steel Grey Textured Tile,
300x300x9mm
- Vinyl Floor Covering - Spec TBC

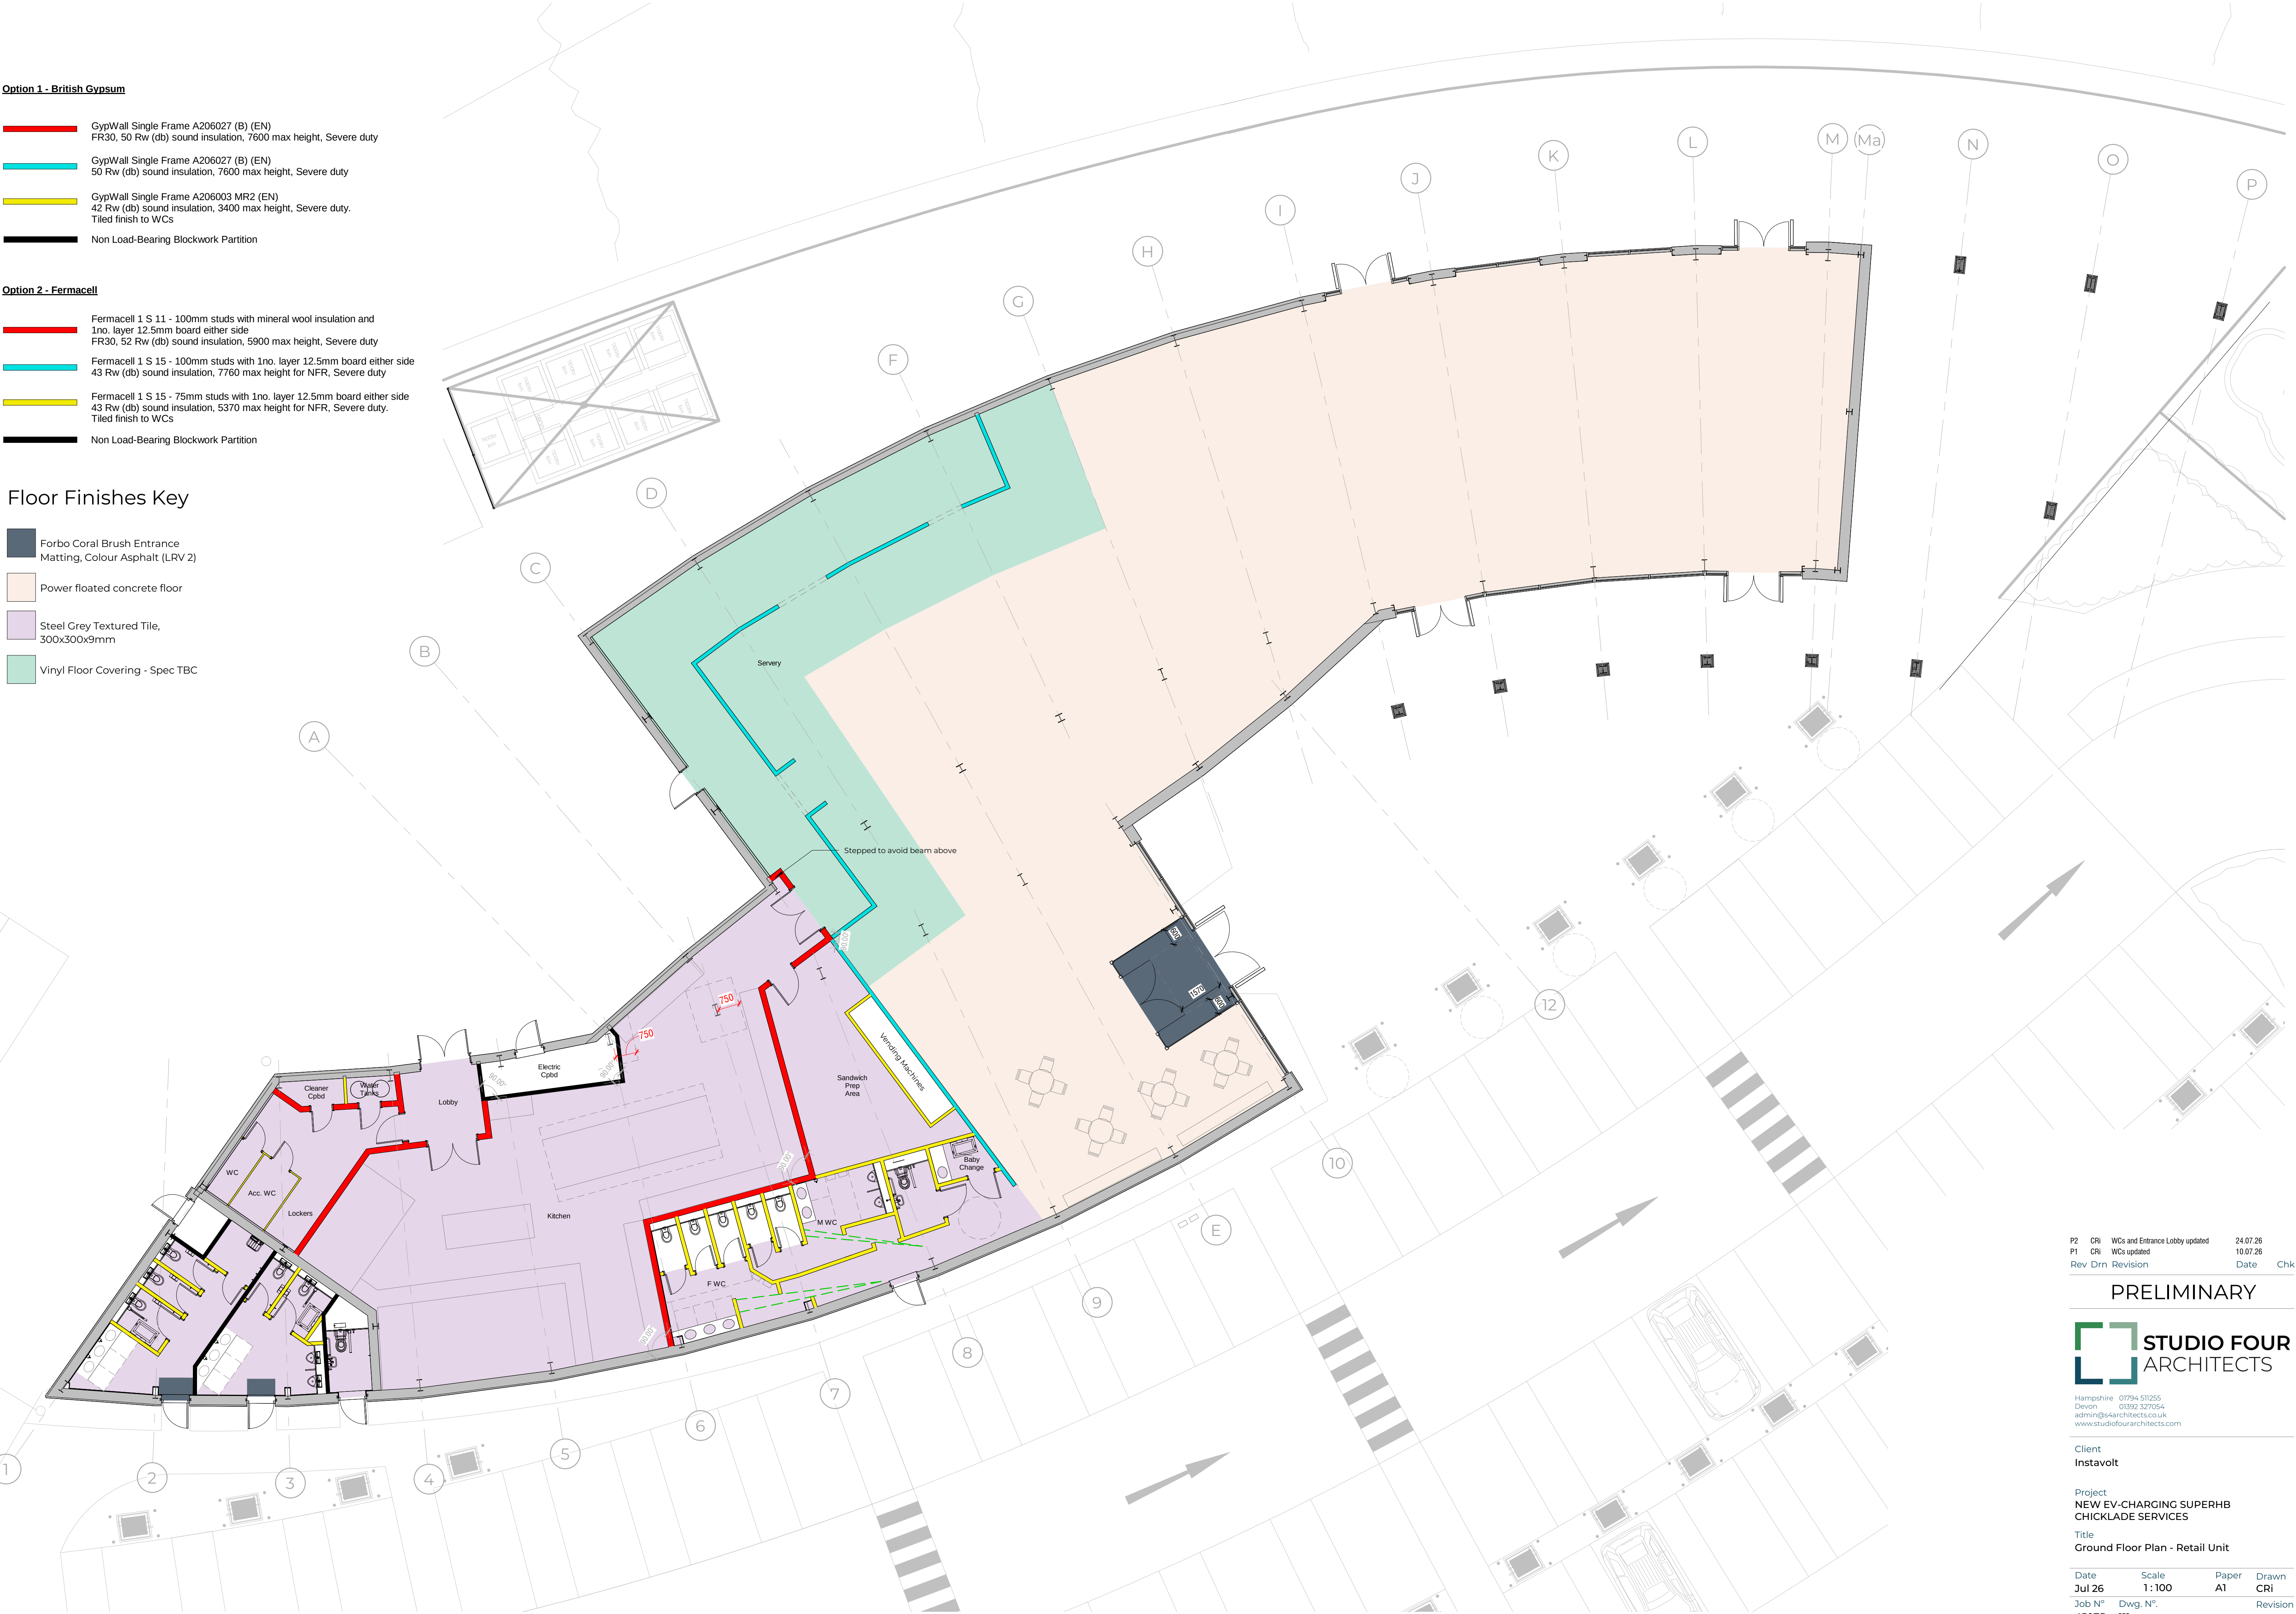

P2	CRI	WCs and Entrance Lobby updated	24.07.26
P1	CRI	WCs updated	10.07.26
Rev	Drn	Revision	Date Chk

PRELIMINARY



Hampshire 01794 510255
Devon 01392 327054
admin@saarchitects.co.uk
www.studiofourarchitects.com

Client
Instavolt

Project
NEW EV-CHARGING SUPERHB
CHICKLADE SERVICES

Title
Ground Floor Plan - Retail Unit

Date	Scale	Paper	Drawn
Jul 26	1:100	A1	CRI
Job N°	Dwg. N°	Revision	
45075	111	P2	

\\desk\TOPSERVICE\sa\Organisation\00204\Users\Chantous\RAH_00204\My Documents\Projects\45075 - Chicklade Services\Drawings\02\01.dwg